BEDFORD CENTRAL DISTRICT

DISTRICT ADMINISTRATION OFFICES

632 SOUTH BEDFORD ROAD, BEDFORD, NY 10506

PHASE 2 - BOND IMPROVEMENTS

AT

FOX LANE HIGH SCHOOL

632 SOUTH BEDFORD ROAD, BEDFORD, NY 10506

DETAILS

PANEL SCHEDULES

PANEL SCHEDULES

FOX LANE MIDDLE SCHOOL

SOUTH BEDFORD ROAD BEDFORD, NY 10506 SED No.: 66-01-02-06-0-007-013 (23-131b)

ADMINISTRATION BUILDING

632 SOUTH BEDFORD ROAD BEDFORD, NY 10506 SED No.: 66-01-02-06-1-008-014 (23-131c)

STAIR FOUNDATION and FRAMING PLANS - SECTIONS and DETAILS

PARTIAL ROOF FRAMING PLAN - AREA'A'


FOUNDATION SECTIONS and DETAILS

SED No.: 66-01-02-06-0-003-024 (23-131a)

FOX LANE	HIGH SCHOOL	FOX LANE	HIGH SCHOOL (CONT.)			FOX LANE	MIDDLE SCHOOL (CONT.)
CIP0.01	SITE PLAN - CONTRACTOR ACCESS and TEMPORARY FACILITIES	MECHANIC	<u>CAL</u>	TECHNOL	OGY	MECHANIC	<u>CAL</u>
CIP0.02	CONSTRUCTION IMPLEMENTATION PLANS	M0.01	GENERAL NOTES, SYMBOLS and LEGENDS	E0.00	GENERAL NOTES, LEGENDS and ABBREVIATIONS	M0.01	GENERAL NOTES, LEGENDS, ETC.
CIVII		M1.01	FIRST FLOOR DUCT WORK and EQUIPMENT DEMOLITION PLAN - AREA 'A'	E9.00 E9.01	FIRST FLOOR TECHNOLOGY PLANS	M1.01	DEMOLITION PLANS
CIVIL		M1.02	BASEMENT HYDRONIC PIPING DEMOLITON PLAN - AREA 'A'	E9.02	FIRST FLOOR SECURITY PLANS	M2.01	PROPOSED FIRST and SECOND FLOOR PLANS
CS0.01	TOPOGRAPHIC SURVEY	M1.03	FIRST FLOOR DUCT WORK and EQUIPMENT DEMOLITION PLAN - AREA 'B'	E9.02	FIRST FLOOR TECHNOLOGY PLAN - AREA 'C'	M2.02	PROPOSED THIRD FLOOR and ROOF PLANS
CS2.01	SITE ALIGNMENT and SCHEDULE PLAN	M1.04	FIRST FLOOR HYDRONIC PIPING DEMOLITION PLAN - AREA 'B'	E10.01	TECHNOLOGY DETAILS	M6.01	SCHEDULES and DETAILS
CS2.02	SITE PLAN - FIELD No. 4 RESTROOM BUILDING	M1.05	ROOF DEMOLITION PLAN - AREAS 'A and B'	E10.02	SECURITY DETAILS	M6.02	SCHEDULES and DETAILS
CS6.01	SITE DETAILS	M1.06	BASEMENT DUCTWORK and EQUIPMENT DEMOLITION PLAN - AREA 'C'	210.02	OLOGINI I BETTALO	M6.03	SCHEDULES and DETAILS
CS6.02	SITE DETAILS	M1.07	BASEMENT HYDRONIC PIPING DEMOLIT ON PLAN - AREA 'C'	FOX LANE	MIDDLE SCHOOL	M6.04	SCHEDULES and DETAILS
S6.03	SITE DETAILS	M1.08	FIRST FLOOR DUCT WORK and EQUIPMENT DEMOLITION PLAN - AREA 'C'	1 0 / 2 / 11 / 1		M6.05	SCHEDULES and DETAILS
S6.04	SITE DETAILS	M1.09	ROOF DEMOLITION PLAN - AREA 'C'	CIVIL			
		M2.01	FIRST FLOOR DUCT WORK LAYOUT PLAN - AREA 'A'			PLUMBING	;
RCHITEC	TURAL	M2.02	FIRST FLOOR HYDRONIC PIPING PLAN - AREA'A'	CS0.01	TOPOGRAPHIC SURVEY		-
		M2.03	FIRST FLOOR VRF and CONDENSATE PIPING PLAN - AREAS 'A and B'	CS0.02	EROSION and SEDIMENT CONTROL PLAN - NEW ADDITION AREA	P0.01	GENERAL NOTES, LEGENDS, ETC.
0.01	FIRST FLOOR CODE COMPLIANCE KEYPLAN	M2.04	FIRST FLOOR DUCTWORK LAYOUT PLAN - AREA 'B'	CS1.01	EXISTING CONDITIONS and DEMOLITION PLANS	P1.01	DEMOLITION PLANS
0.02	BASEMENT CODE COMPLIANCE KEY PLAN	M2.05	FIRST FLOOR HYDRONIC PIPING PLAN - AREA'B'	CS1.02	EXISTING CONDITIONS and DEMOLITION PLANS - SOFTBALL PARKING AREA	P2.01	PROPOSED PLANS
0.03	SECOND FLOOR CODE COMPLIANCE KEY PLAN	M2.06	FIRST FLOOR VRF and CONDENSATE PIPING PLAN - AREA 'B'	CS2.01	ALIGNMENT and SCHEDULE PLAN	P6.01	SCHEDULES and DETAILS
.01	DEMOLITION PLAN - AREA'A'	M2.07	FIRST FLOOR DUCT WORK LAYOUT PLAN - AREAS 'A and B'	CS2.02	ALIGNMENT and SCHEDULE PLAN - SOFT BALL PARKING AREA ACCESS		
1.02	DEMOLITION PLAN - AREA'B'	M2.08	BASEMENT DUCTWORK LAYOUT PLAN - AREA 'C'	CS2.03	SITE PLAN - SOFTBALL FIELD RESTROOM BUILDING	ELECTRO	<u>AL</u>
.03	DEMOLITION PLAN - AREA 'C'	M2.09	BASEMENT HYDRONIC PIPING PLAN - AREA 'C'	CS3.01	ENLARGED PLANS - NEW ADDITION and NORTH SIDE SECURITY FENCING		
.04	DEMOLITION ROOF PLAN - AREA 'A' and AREA 'B'	M2.10	FIRST FLOOR DUCTWORK LAYOUT PLAN - AREA 'C'	CS3.02	ENLARGED PLANS - COURT YARD AMPIT HEATER and WALKWAY RAMP	E0.01	GENERAL NOTES, LEGENDS and ABBREVIATIONS
.05	DEMOLITION ROOF PLAN - AREA 'C'	M2.11	FIRST FLOOR HYDRONIC PIPING PLAN - AREA 'C'	CS3.03	GRADING, DRAINAGE and SEWER ENLARGEMEMT PLANS	E0.02	SWIT CHGEAR, PANELS and RISER DIAGRAMS
.06	DEMOLITION SECTIONS	M2.12	ROOF PLAN - AREA 'C'	CS3.04	GRADING, DRAINAGE ENLARGEMEMT PLANS - COURTYARD AMPITHEATER	E1.01	DEMOLITION PLANS
.07	DEMOLITION SECTIONS	M6.01	MECHANICAL DETAILS	CA6.01	SITE DETAILS	E1.02	DEMOLITION PLAN - WALKWAY CANOPY
.08	DEMOLITION DETAILS	M6.02	ROOFTOP UNIT and DOAS UNIT SCHEDULES and DETAILS	CS6.02	SITE DETAILS	E2.01	SITE PLAN - SOFT BALL FIELD RESTROOM BUILDING and TRAFFIC G
.00	PARTITION TYPES	M6.03	ROOFTOP UNIT SCHEDULES and DETAILS	CS6.03	SITE DETAILS	E3.01	PROPOSED LIGHTING PLANS
.01	PROPOSED PLAN - AREA 'A'	M6.04	ROOFTOP UNIT SCHEDULES and DETAILS	CS6.04	SITE DETAILS	E3.02	PROPOSED LIGHTING PLAN - WALKWAY CANOPY
.02	PROPOSED PLAN - AREA 'B'	M6.05	HOT WATER COIL SCHEDULES			E4.01	PROPOSED POWER PLANS
.03	PROPOSED PLAN - AREA 'C'	M6.06	HEATING and VENTILATING SCHEDULES	ARCHITEC	TURAL	E4.02	PROPOSED POWER PLANS - COURTYARD AMPITHEATER
.04	PLAN DET AILS	M6.07	CABINET HEATER and UNIT HEATER SCHEDULES and DETAILS	40.04	LOWER LEVEL CORE COMPLIANCE KEVELAN	E4.03	PROPOSED MECHANICAL POWER PLANS
.05	PLAN DET AILS	M6.08	FIN TUBE and ELECTRIC CABINET HEATER SCHEDULES and DETAILS	A0.01	LOWER LEVEL CODE COMPLIANCE KEY PLAN	E4.04	PROPOSED ROOF PLANS
.01	ROOF PLAN - AREA 'A' and AREA 'B'	M6.09	OUT DOOR AIR DEMAND CALCULATIONS	A0.02	FIRST FLOOR CODE COMPLIANCE KEY PLAN	E5.01	PROPOSED SPECIAL SYSTEMS PLANS
02	ROOF PLAN - AREA 'C'	M6.10	GRILLE SCHEDULES	A0.03	SECOND FLOOR CODE COMPLIANCE KEY PLAN	E7.01	DETAILS
.03	ROOF DETAILS	M6.11	VRF SYSTEMS, PIPING SCHEMATICS, SCHEDULES and DETAILS	A0.04	THIRD AND FOURTH FLOOR CODE COMPLIANCE KEY PLANS	E7.02	DETAILS
.01	BUILDING SECTIONS	M6.12	VRF SYSTEMS, EQUIPMENT and CUTSHEETS	A1.01	DEMOLITION FLOOR PLANS	E8.01	PANEL SCHEDULES
.02	BUILDING SECTIONS WALL SECTIONS and DETAILS	PLUMBING	·	A2.00	PARTITION TYPES	TECHNOLO	00V
.01	WALL SECTIONS and DETAILS WALL SECTIONS and DETAILS	PLUMBING	<u>-</u>	A2.01 A2.02	PROPOSED FLOOR PLANS ENLARGED ADDITION PROPOSED FLOOR PLAN and PLAN DETAILS	TECHNOL	001
5.02 5.03	WALL SECTIONS and DETAILS WALL SECTIONS and DETAILS	P0.01	GENERAL NOTES, LEGENDS, ETC.	A2.02 A2.03	PLAN DETAILS	E9.00	GENERAL NOTES, LEGENDS and ABBREVIATIONS
5.04	WALL SECTIONS and DETAILS WALL SECTIONS and DETAILS	P1.01	DOMESTIC WATER DEMOLITION PLANS	A2.03 A3.01	ROOF PLAN and DETAILS	E9.00	DATA and SECURITY PLANS
7.01	ENLARGED STAIR PLAN and DETAILS	P1.02	SANITARY WASTE. VENT and STORM WATER DEMOLITION PLANS	A3.02	TAPERED INSULATION PLAN	E9.02	TECHNOLOGY PLAN - SECURITY GATE
3.01	DOOR SCHEDULE	P2.01	PROPOSED DOMESTIC WATER PIPING PLANS	A4.01	EXTERIOR ELEVATIONS	E10.01	TECHNOLOGY DETAILS
.02	DOOR SCHEDULE and STOREFRONT ELEVATIONS	P2.02	PROPOSED SANITARY, VENT and STORM WATER PLANS	A5.01	BUILDING SECTIONS	E10.02	SECURITY DETAILS
.03	DOOR DETAILS	P6.01	SCHEDULES and DET AILS	A6.01	WALL SECTIONS and DETAILS	L10.02	OLOGINI I BETTILLO
.04	DOOR DETAILS	1 0.01	CONTEDUCES and DETAILED	A6.02	WALL SECTIONS and DETAILS	ADMINIST	RATION BUILDING
3.05	VISION-LITE ELEVATIONS and DETAILS	ELECTRCI	Al	A6.03	WALL SECTIONS and DETAILS	7.5	<u> </u>
.00	FINISH SCHEDULE			A6.04	WALL SECTIONS and DETAILS	CIVIL	
.01	FINISH FLOOR PLAN - AREA 'A'	E0.01	GENERAL NOTES, LEGENDS and ABBREVIATIONS	A6.05	WALL SECTIONS and DETAILS	<u> </u>	
.02	FINISH FLOOR PLAN - AREA 'B'	E0.02	SWIT CHGEAR, PANELS and RISER DIAGRAMS	A7.01	ENLARGED RAMP and WALKWAY CANOPY PLANS	CS0.01	TOPOGRAPHIC SURVEY
03	FINISH FLOOR PLAN - AREA 'C'	E1.01	DEMOLITION PLAN - AREA'A'	A7.02	RAMP and CANOPY SECTIONS and DETAILS	CS4.01	SITE SEWER PLAN
.04	INTERIOR ELEVATIONS	E1.02	DEMOLITION PLAN - AREA 'B'	A8.01	DOOR SCHEDULE and ELEVATIONS		
.05	INTERIOR ELEVATIONS	E1.03	DEMOLITION PLAN - AREA'C'	A8.02	DOOR DETAILS	ARCHITEC	TURAL
.06	INTERIOR ELEVATIONS	E1.04	DEMOLITION PLAN - AREAS 'A','B','C'	A9.00	FINISH SCHEDULE and DETAILS		
.07	FINISH DETAILS	E2.01	SITE PLAN - FIELD #4 RESTROOM BUILDING	A9.01	FINISH FLOOR PLANS	A2.00	OVERALL KEY PLAND and PARTITION TYPE DETAILS
0.01	REFLECTED CEILING PLAN - AREA 'A'	E3.01	PROPOSED LIGHTING PLAN - AREA'A'	A10.01	REFLECTED CEILING PLANS	A2.01	TOILET ROOM PLANS and DETAILS
0.02	REFLECTED CEILING PLAN - AREA 'B'	E3.02	PROPOSED LIGHTING PLAN - AREA'B'	A11.01	ENLARGED TOILET ROOM PLANS and DETAILS	A8.01	DOOR SCHEDULE and DETAILS
0.03	REFLECTED CEILING PLAN - AREA 'C'	E3.03	PROPOSED LIGHTING PLAN - AREA'C'	A11.02	CASEWORK PLANS	A9.01	REFLECTED CEILING PLAN and FINISH FLOOR PLAN
0.04	CEILING DETAILS	E4.01	PROPOSED POWER PLAN - AREA 'A'	A11.03	CASEWORK ELEVATIONS		
0.05	CEILING DETAILS	E4.02	PROPOSED POWER PLAN - AREA 'B'	A12.01	MISCELLANEUOUS DETAILS	MECHANIC	CAL
1.01	ENLARGED TOILET ROOM PLANS and DETAILS	E4.03	PROPOSED POWER PLAN - AREA 'C'				
1.02	ENLARGED LOCKER ROOM PLANS and DETAILS	E4.04	PROPOSED MECHANICAL POWER PLAN - AREA 'A'	STRUCTU	RAL	M2.01	LOWER LEVEL MECHANICAL PLAN
1.03	ENLARGED LOCKER ROOM PLANS and DETAILS	E4.05	PROPOSED MECHANICAL POWER PLAN - AREA 'B'				
.04	CASEWORK and FURNITURE PLAN	E4.06	PROPOSED MECHANICAL POWER PLAN - AREA 'C'	S0.01	DESIGN DATA and GENERAL NOTES	PLUMBING	
.05	CASEWORK ELEVATIONS	E4.07	PROPOSED MECHANICAL POWER PLAN - ROOF AREAS 'A' and 'B'	S0.02	DESIGN DATA and GENERAL NOTES		
1.06	FIT NESS CENT ER PLAN and ELEVATIONS	E4.08	PROPOSED MECHANICAL POWER PLAN - ROOF AREA 'C'	S0.03	SPECIAL INSPECTION NOTES and SCHEDULE	P2.01	TOILET ROOM PLANS and DETAILS
2.01	MISCELLANEOUS DETAILS	E4.09	PROPOSED MECHANICAL POWER PLAN - BASEMENT AREA 'C'	S1.00	FOUNDATION PLAN	P6.01	PLUMBING DEMOLITION / NEW PLUMBING WORK
		E4.10	PROPOSED SMOKE DAMPER POWER PLAN - AREA 'A'	S1.01	CANOPY FOUNDATION and ROOF FRAMING PLANS		
RUCTU	RAL	E5.01	PROPOSED SPECIAL SYSTEMS PLAN - AREA 'A'	S2.00	HIGH and LOW ROOF FRAMING PLANS	ELECTRICA	<u>AL</u>
		E5.02	PROPOSED SPECIAL SYSTEMS PLAN - AREA 'B'	S3.00	FOUNDATION SECTIONS and DETAILS		
.01	DESIGN DATA and GENERAL NOTES	E5.03	PROPOSED SPECIAL SYSTEMS PLAN - AREA 'C'	S3.01	FOUNDATION SECTIONS, PIER and BASEPLATE DETAILS	E0.01	GENERAL NOTES, SYMBOLS and ABBREVIATIONS
02	GENERAL NOTES, SCHEDULES and DETAILS	E5.04	PROPOSED SPECIAL SYSTEMS ROOF PLAN - AREA S 'A', 'B'	S3.02	CANOPY FOUNDATION SECTIONS, PIER and BASEPLATE DETAILS	E1.01	PROPOSED FLOOR PLAN
.03	SPECIAL INSPECTION NOTES and SCHEDULE	E5.05	PROPOSED SPECIAL SYSTEMS ROOF PLAN - AREA 'C'	S4.00	MASONRY ELEVATIONS, SECTIONS and DETAILS	E6.01	SCHEDULES
.00	PARTIAL ROOF FRAMING PLAN at LIBRARY	E5.06	PROPOSED SPECIAL SYSTEMS BASEMENT PLAN - AREA 'C'	S5.00	STEEL FRAMING SECTIONS and DETAILS		
	PARTIAL ROOF FRAMING PLANS - AREAS 'A', 'B', 'C'	E7.01	DETAILS	S5.01	STEEL FRAMING SECTIONS and DETAILS		
31.01	, , -						

STEEL FRAMING SECTIONS and DETAILS

LOCATION MAP

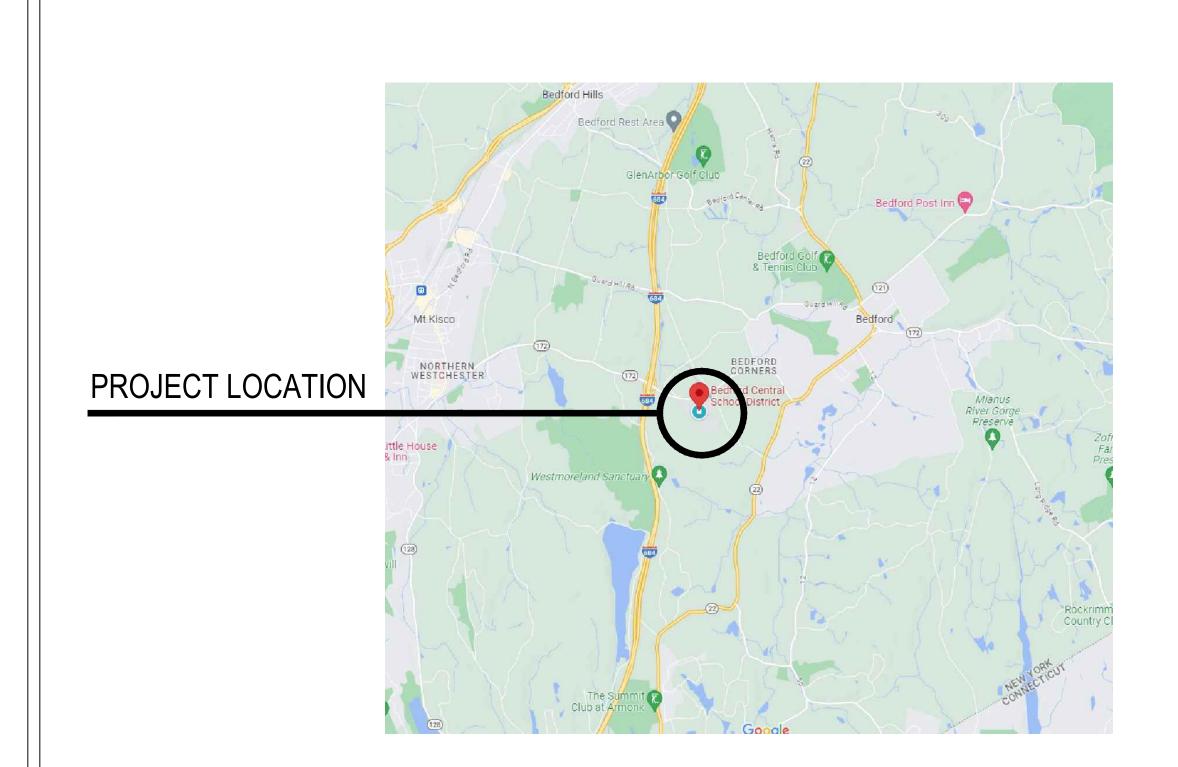

MAP DATA © GOOGL



244 EAST MAIN STREET | PATCHOGUE | NEW YORK 11772 | T. 631.475.0349 | F. 631.475.0361 100 GREAT OAKS BLVD., SUITE 115 | ALBANY | NEW YORK 12203 | T. 518.621.7650 | F. 518.621.7655

www.BBSARCHITECTURE.COM


ARCHITECTS CERTIFICATION THE UNDERSIGNED CERTIFIES THAT TO THE BEST OF HIS KNOWLEDGE, INFORMATION, AND BELIEF, THE PLANS AND SPECIFICATIONS ARE IN ACCORDANCE WITH APPLICABLE REQUIREMENTS OF THE NEW YORK STATE UNIFORM FIRE PREVENTION AND BUILDING CODE, THE NEW YORK STATE ENERGY CONSERVATION CONSTRUCTION CODE, THE CONSTRUCTION STANDARDS OF THE EDUCATION DEPARTMENT, NEW YORK STATE DEPARTMENT OF LABOR RULE 56, EPA AND AHERA REQUIREMENTS.


LAWRENCE SALVESEN, A.I.A. LIC. No. 020623

BBS FILE No. 23-131 a-c BID PACKAGE No. 1: FEBRUARY 24, 2025






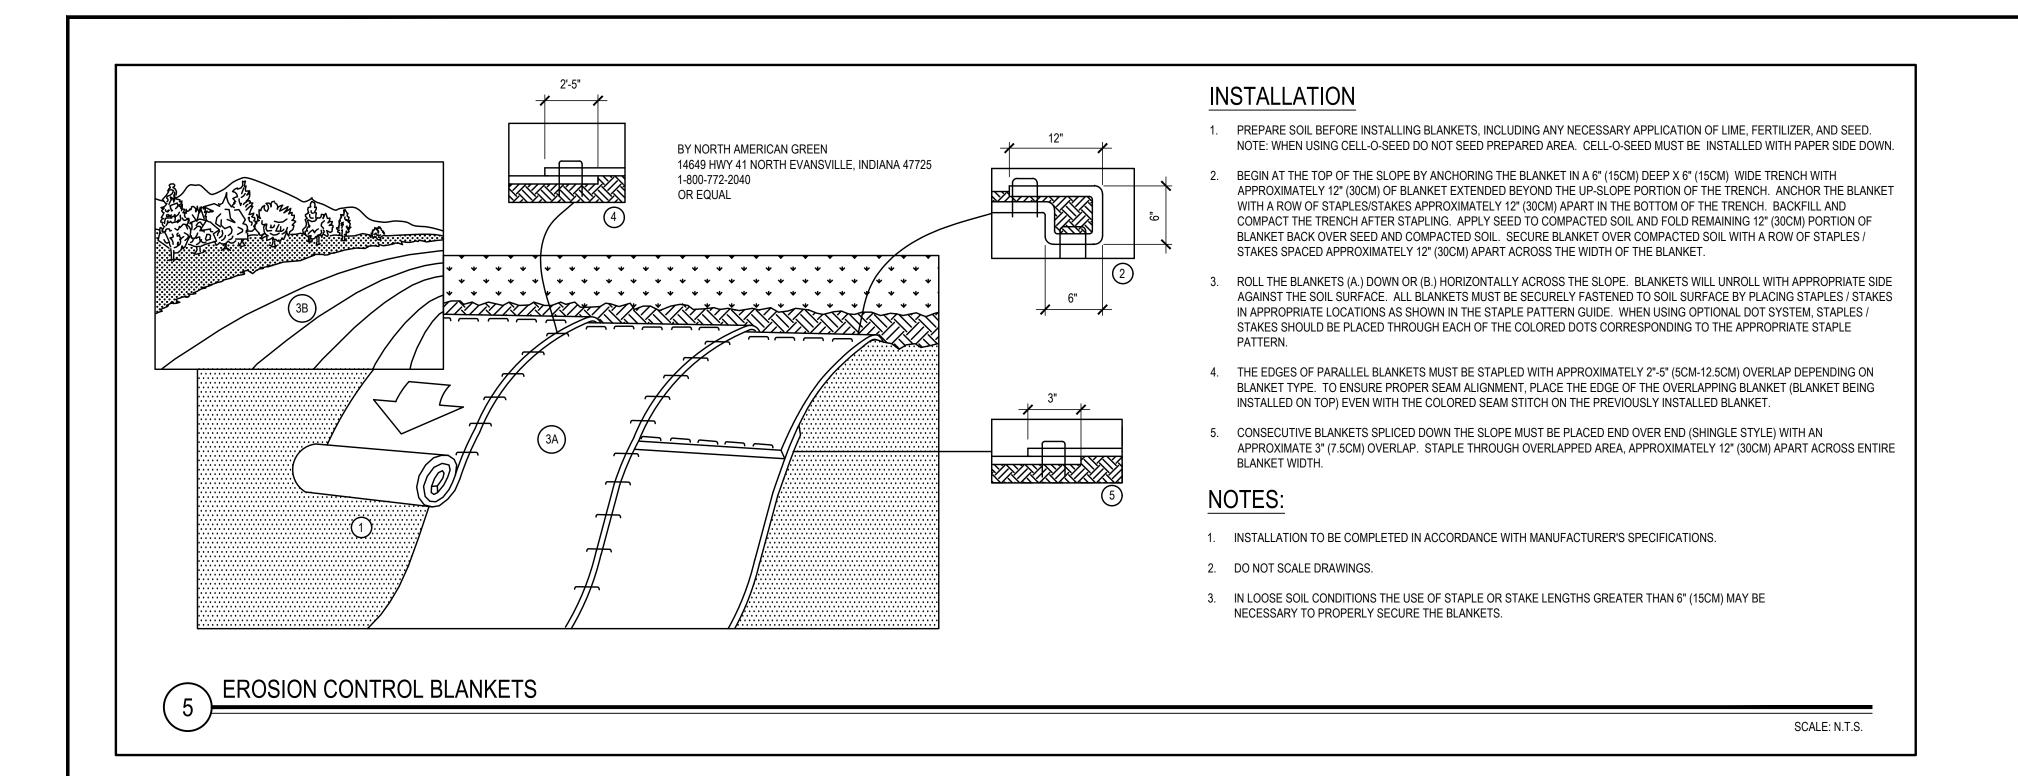

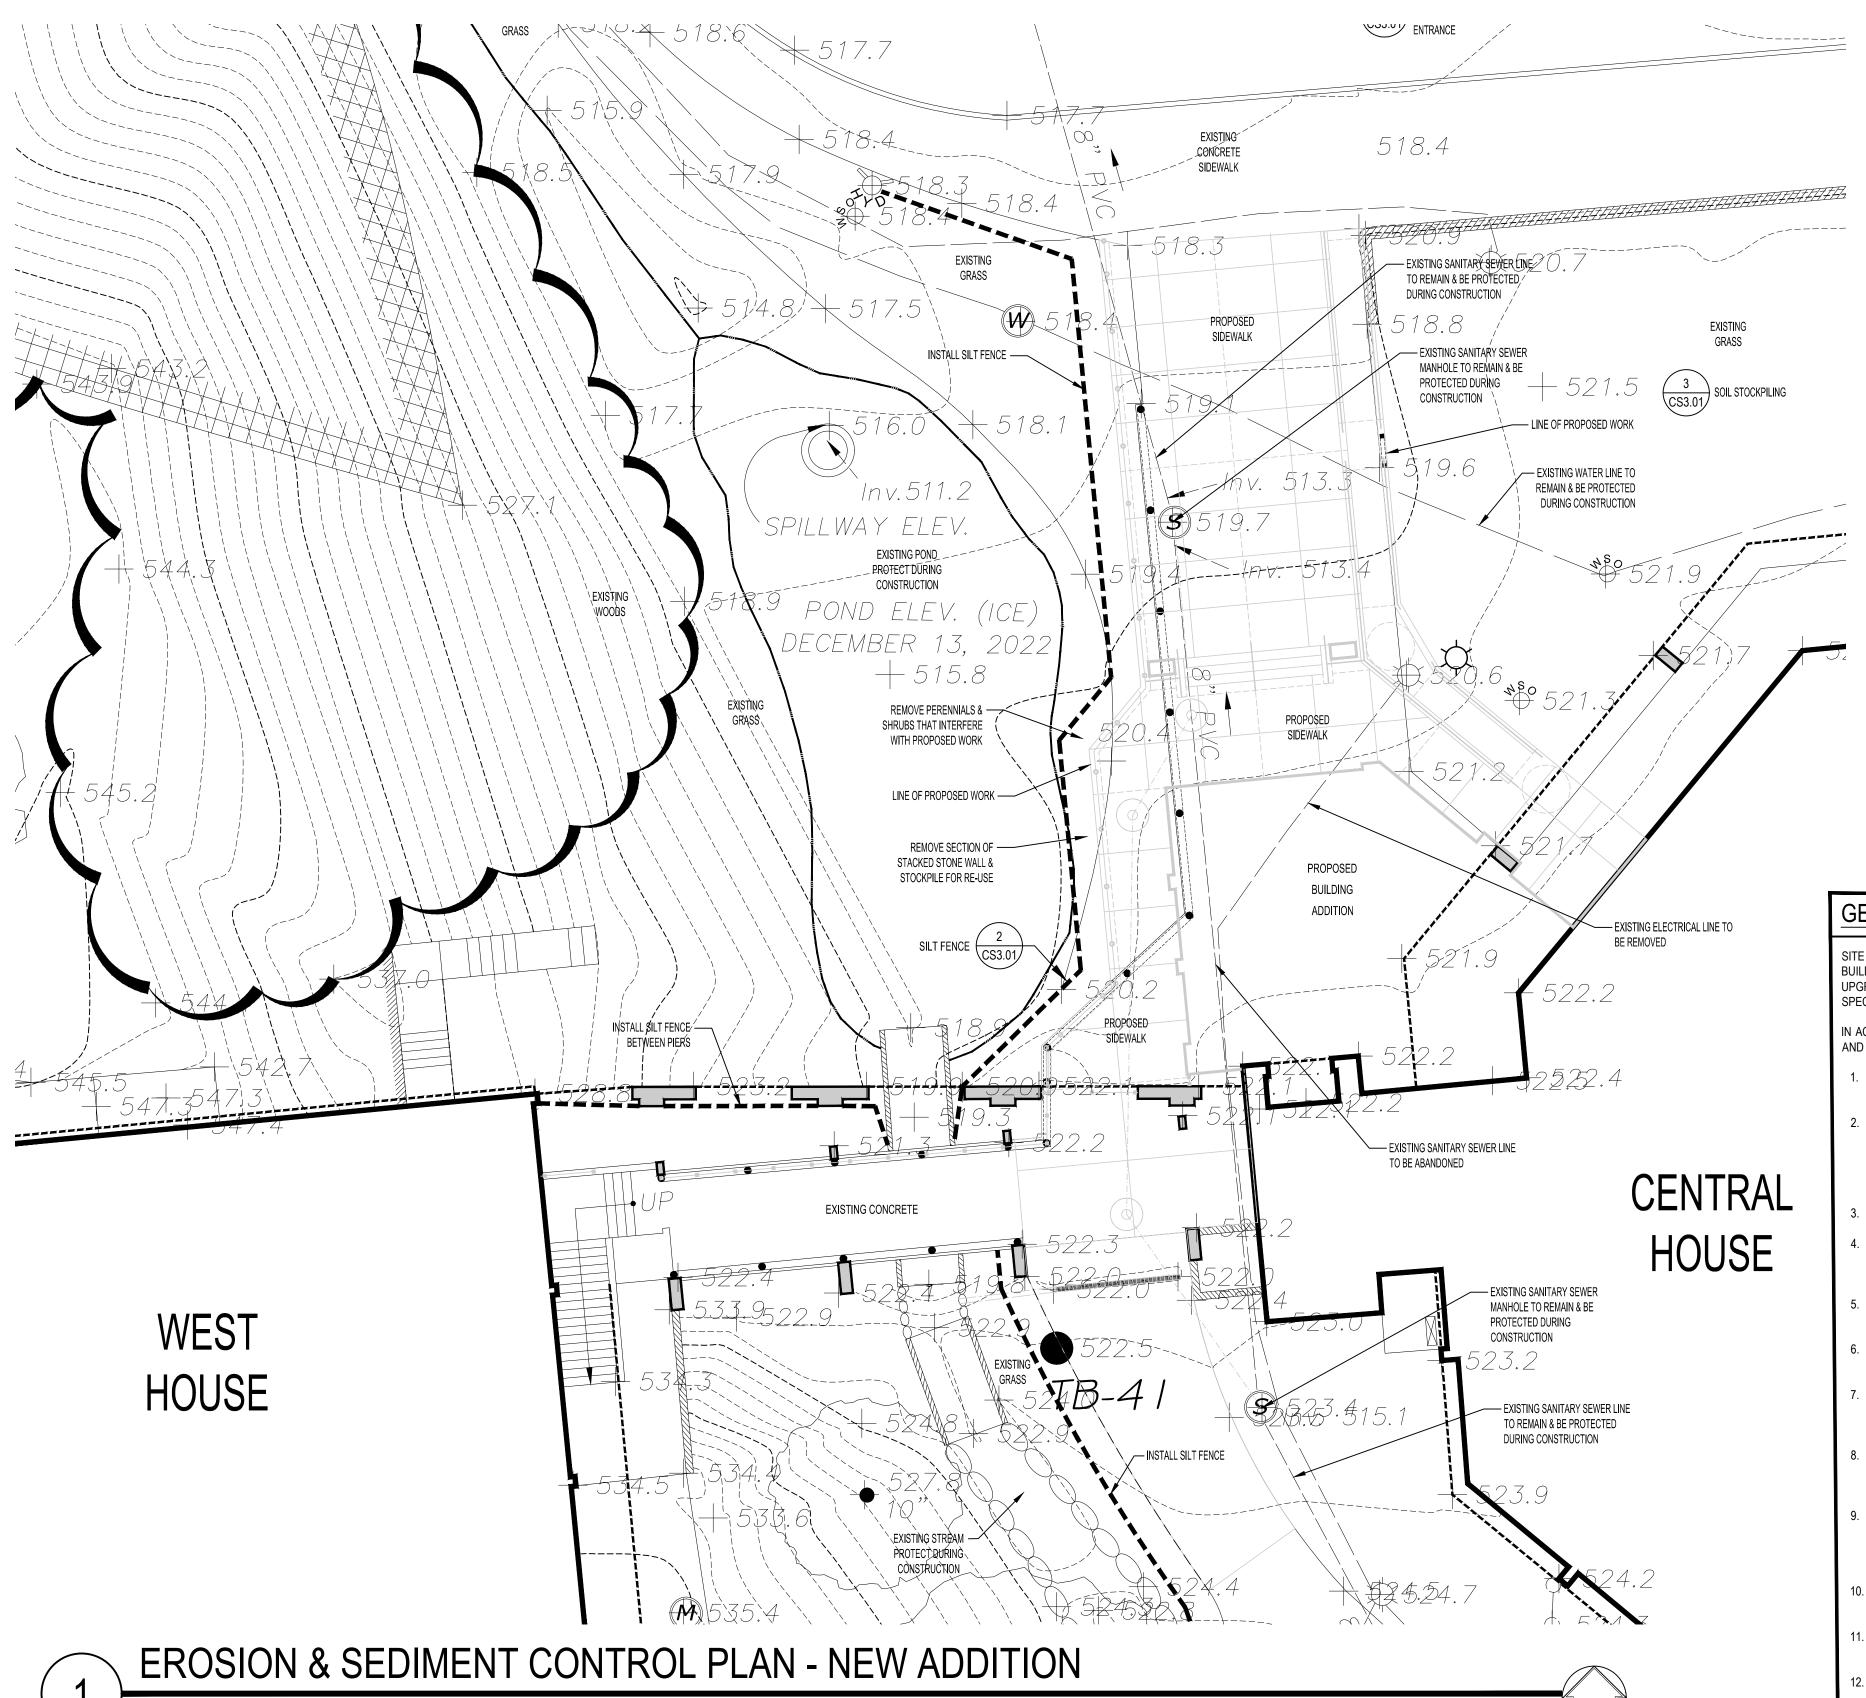

SCALE: 1"=10'-0"

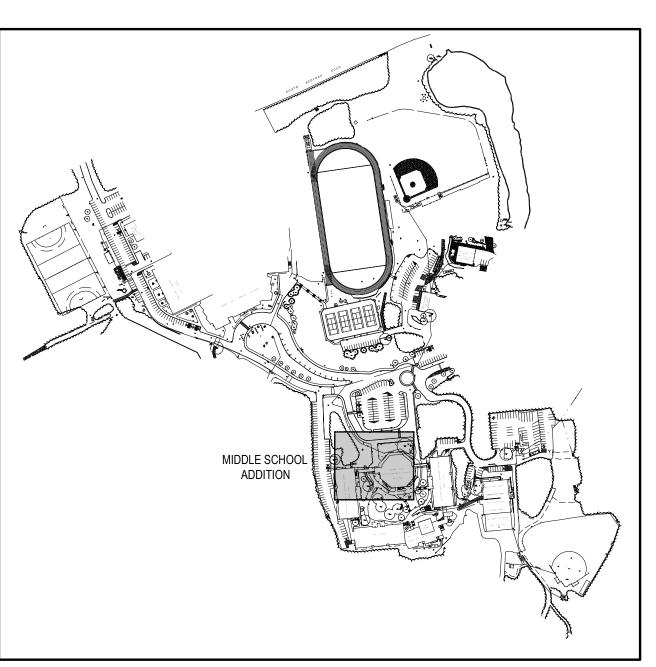


SITE KEY PLAN


GENERAL NOTES - EROSION & SEDIMENT CONTROL

ITE DESCRIPTION: THE PROJECT CONSTRUCTION ACTIVITY INCLUDES THE CLEARING, GRADING, STABILIZATION AND CONSTRUCTION OF BUILDING ADDITION & RELATED SITE IMPROVEMENTS ALONG WITH THE ASSOCIATED STORM DRAINAGE COLLECTION SYSTEM AND PUBLIC UPGRADES REQUIRED FOR SUSTAINABILITY. ALL IMPROVEMENT TO CONFORM WITH STATE, COUNTY AND LOCAL STANDARDS AND

AND SEDIMENT CONTROL MEASURES INCLUDING, BUT NOT LIMITED TO THE FOLLOWING SHALL BE EMPLOYED DURING CONSTRUCTION.

- EXISTING VEGETATION TO REMAIN SHALL BE PROTECTED (BY INSTALLATION OF CONSTRUCTION FENCE OR OTHER APPROVED
- CLEARING AND GRADING SHALL BE SCHEDULED SO AS TO MINIMIZE THE EXTENT OF PROPOSED AREAS AND THE LENGTH OF TIME THAT AREAS ARE EXPOSED, GRADED OR STRIPPED. AREAS SHALL BE KEPT STABILIZED THROUGH THE USE OF TEMPORARY SEEDING AS REQUIRED. SEED MIXTURES SHALL BE IN ACCORDANCE WITH SOIL CONSERVATION SERVICE RECOMMENDATIONS. IN AREAS WHERE SOIL DISTURBANCE HAS TEMPORARILY OR PERMANENTLY CEASED, TEMPORARY AND/OR PERMANENT SOIL STABILIZATION MEASURES SHALL BE INSTALLED AND/OR IMPLEMENTED WITHIN SEVEN DAYS.
- THE LENGTH AND STEEPNESS OF CLEARED SLOPES SHALL BE DIVERTED AWAY FROM CLEARED SLOPES.
- DRAINAGE SYSTEMS. SEDIMENT BARRIERS SHALL BE INSTALLED ALONG THE LIMITS OF DISTURBANCE PRIOR TO THE START OF CONSTRUCTION AND SHALL BE MAINTAINED UNTIL THE SITE HAS BEEN PERMANENTLY STABILIZED.
- ONTO LOCAL ROADS. THE CONSTRUCTION ENTRANCE SHALL BE MAINTAINED UNTIL THE SITE HAS BEEN PERMANENTLY STABILIZED
- ALL RUNOFF SHALL BE RETAINED ON-SITE IN ACCORDANCE WITH LOCAL REGULATIONS AND APPROVALS. DRAINAGE INLETS INSTALLED ON-SITE SHALL BE PROTECTED FROM SEDIMENT BUILDUP THROUGH THE USE OF APPROPRIATE INLET PROTECTION.
- THE FOLLOWING MEANS SHALL BE USED TO CONTROL DUST DURING CONSTRUCTION: A WATER DOWN ACCESS WAYS, STOCKPILES, AND MATERIAL PRIOR TO LOADING: B. LIMIT ON SITE VEHICULAR SPEEDS TO 5 MPH: C. PROPERLY COVER TRUCKS CARTING LOOSE MATERIAL AND CONSTRUCTION DEBRIS.
- SEDIMENT BARRIERS AND OTHER EROSION CONTROL MEASURES SHALL REMAIN IN PLACE UNTIL UPLAND DISTURBED AREAS ARE PERMANENTLY STABILIZED. FOLLOWING PERMANENT STABILIZATION, PAVED AREAS SHALL BE CLEANED OF SOIL AND DEBRIS AND DRAINAGE SYSTEMS SHALL BE CLEANED AND FLUSHED AS NECESSARY.
- PROPER MAINTENANCE OF EROSION CONTROL MEASURES IS TO BE PERFORMED AS INDICATED BY PERIODIC INSPECTION AND AFTER HEAVY OR PROLONGED STORMS. MAINTENANCE MEASURES ARE TO INCLUDE, BUT NOT BE LIMITED TO CLEANING OF RECHARGE BASINS, SEDIMENT TRAPS AND DRYWELLS, CLEANING AND REPAIR OF SEDIMENT BARRIERS, REPAIR OF BERMS AND RUNOFF DIVERTERS, AND CLEANING AND REPAIR OF INLET PROTECTION DEVICES.
- DURING CONSTRUCTION THE CONTRACTOR SHALL COMPLY WITH ALL LOCAL REGULATIONS CONCERNING THE DISPOSAL OF SOLID WASTE AND DEBRIS AND TOXIC AND HAZARDOUS WASTE AS WELL AS SANITARY SEWER AND SEPTIC SYSTEM REGULATIONS.
- CONCRETE WASH-OUT OF READY-MIX TRUCKS SHOULD NOT BE PERMITTED AT THIS SITE. APPROPRIATE CONCRETE WASHOUT TO BE PROVIDED, IF PERMITTED.
- UNLESS OTHERWISE DIRECTED BY THE OWNER THE CONTRACTOR IS RESPONSIBLE FOR MAINTAINING THE NECESSARY RECORDS OF CONSTRUCTION ACTIVITIES, PREPARATION OF INSPECTION REPORTS, AND REPORTING RELEASE OF POLLUTANTS TO THE PROPER AUTHORITIES AS NECESSARY TO COMPLY WITH THE NYSDEC GENERAL STORMWATER PERMIT. THE CONTRACTOR SHALL REPORT ANY REQUIRED MODIFICATIONS TO THE ESC PLAN NECESSITATED BY FIELD CONDITIONS OR CONSTRUCTION ACTIVITIES TO THE ENGINEER FOR REVISION OF THE SWPPP WHERE APPROPRIATE.

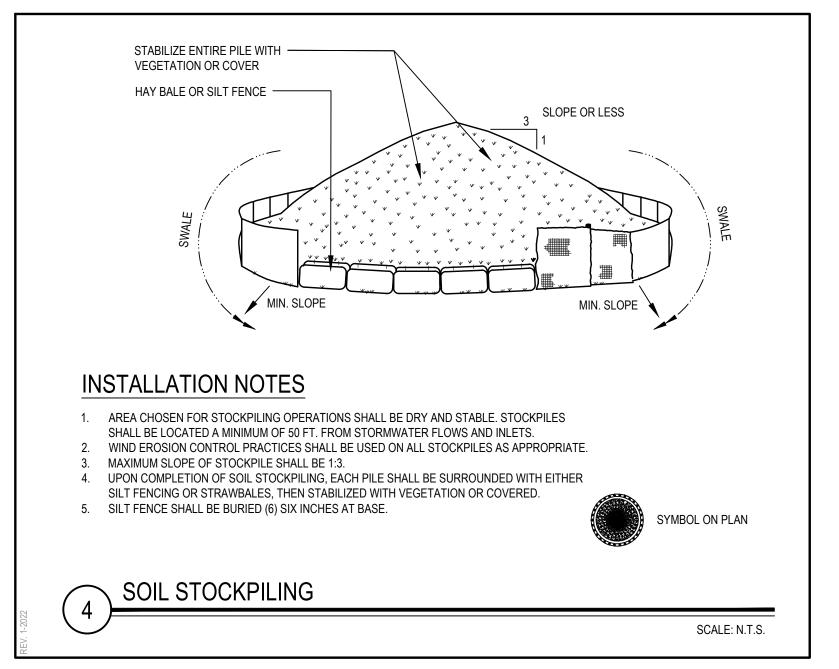

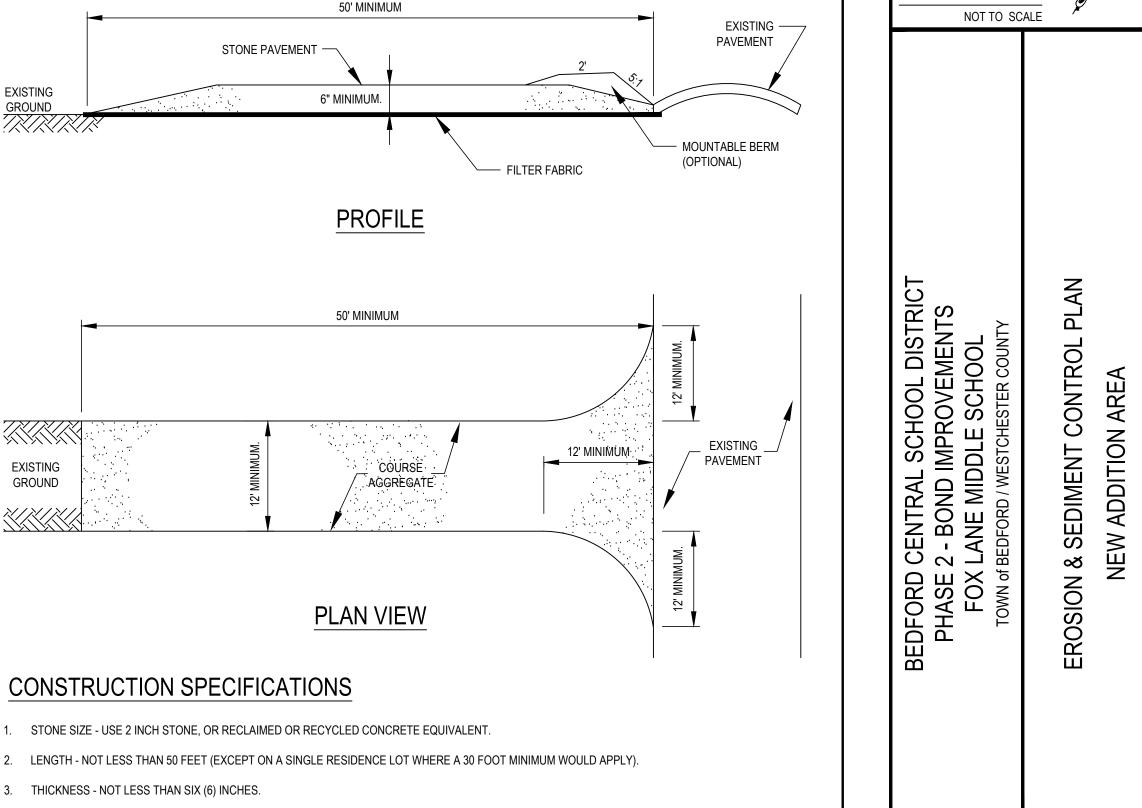

4. WIDTH - TWELEVE (12) FEET MINIMUM. BUT NOT LESS THAN THE FULL WIDTH AT POINTS WHERE INGRESS OR EGRESS OCCURS. TWENTY-FOUR (24) FOOT IF SINGLE ENTRANCE TO SITE.

5. FILTER FABRIC SHALL BE PLACED OVER THE ENTIRE AREA PRIOR TO PLACING OF STONE.

SURFACE WATER - ALL SURFACE WATER FLOWING OR DIVERTED TOWARD CONSTRUCTION ENTRANCES SHALL BE PIPED ACROSS THE ENTRANCE. IF PIPING IS IMPRACTICAL, A MOUNTABLE BERM WITH 5:1 SLOPES WILL BE PERMITTED.

- MAINTENANCE THE ENTRANCE SHALL BE MAINTAINED IN A CONDITION WHICH WILL PREVENT TRACKING OR FLOWING OF SEDIMENT ONTO PUBLIC RIGHTS-OF-WAY. ALL SEDIMENT SPILLED, DROPPED, WASHED OR TRACKED ONTO PUBLIC RIGHTS-OF-WAY MUST BE REMOVED IMMEDIATELY.
- 8. WHEN WASHING IS REQUIRED, IT SHALL BE DONE ON AN AREA STABILIZED WITH STONE AND WHICH DRAINS INTO AN APPROVED SEDIMENT TRAPPING DEVICE.
- 9. PERIODIC INSPECTION AND NEEDED MAINTENANCE SHALL BE PROVIDED AFTER EACH RAIN.

SCE SYMBOL ON PLAN

STABILIZED CONSTRUCTION ENTRANCE (S.C.E)

26" HIGH FABRIC SILT FENCE, 48" T-POSTS, WIRE BACKED, BURIED AND FASTENED WIRE OR ZIP TIES TO -SECURE FABRIC TO POST FABRIC FASTENED AT TOP AND MID SECTION. 24" O.C. MAX. STAKE SPACING 10 FT. MAX ON CENTER DIRECTION OF FLOW GEOTEXTILE FILTER FABRIC (MIRAFI 100X OR EQUAL) EMBEDDED MINIMUM BURIED 2" OF 6" INTO GROUND WITH A MINIMUM OF 8" OF FABRIC BELOW GRADE - 14 GA WOVEN WIRE FENCE, OPENING 6" X 6" MAX.

SILT FENCE SHALL BE CONSTRUCTED BEFORE UPSLOPE GROUND COVER IS REMOVED. CLEARING, GRUBBING, AND STUMPING CAN OCCUR BEFORE SILT FENCE INSTALLATION IF GROUND COVER IS NOT REMOVED. 2. WHERE POSSIBLE, SILT FENCE SHALL BE PLACED ON THE FLATTEST

- 3. A RUN OF SILT FENCE SHOULD FOLLOW THE CONTOUR AS CLOSE AS POSSIBLE WITH THE ENDS TURNED UPSLOPE TO POND WATER BEHIND
- 4. THE STAKES SHALL BE PLACED ON THE DOWN SLOPE SIDE OF THE
- 5. UNROLL A SECTION AT A TIME AND POSITION THE POSTS AGAINST THE BACK (DOWNSTREAM) WALL OF THE TRENCH (NET SIDE AWAY FROM
- DIRECTION OF FLOW). WHERE TWO SILT FENCE SECTIONS ARE COMBINED INTO ONE RUN THE
- END STAKES SHALL BE CONNECTED TOGETHER, NOT SIMPLY 7. IF RUNOFF OVERTOPS THE SILT FENCE, FLOWS AROUND THE ENDS, OR IN ANY OTHER WAY BECOMES A CONCENTRATED FLOW, ONE OF THE

FOLLOWING SHALL BE PERFORMED, AS APPROPRIATE:

- AN ADDITIONAL RUN OF SILT FENCE SHALL BE PLACED UPSTREAM - THE LAYOUT OF THE SILT FENCE SHALL BE CHANGED. - ACCUMULATED SEDIMENT SHALL BE REMOVED - OTHER PRACTICES SHALL BE IMPLEMENTED. 8. THE CONTRACTOR SHALL SUBMIT TECHNICAL DATA FROM MANUFACTURER STATING THAT IT MEETS THE SPECIFICATIONS IN

GRAB TENSILE STRENGTH 90 LBS ASTM D 4632 GRAB TENSILE ELONGATION 50% ASTM D 4632 TRAPEZOID TEAR STRENGTH 50 LBS ASTM D 4533 MULLEN BURST STRENGTH 225 PSI ASTM D 3786 CBR PUNCTURE STRENGTH 406 LBS AS 3706.4-2001 UV RESISTANT AFTER 500 HOURS 70 % ASTM D 4355 APPARENT OPENING SIZE 70 US SIEVE ASTM D 4751 PERMITTIVITY 1.8 SEC ASTM D 4491 PERMEABILITY 0.21 CM/SEC ASTM D 4491

FLOW RATE 135 GAL/MIN/FT SQUARED ASTM D 4491

PROJECT MANUAL SECTION


SCALE: N.T.S.

IFORMATION AS THEY MAY NOT HAVE BEEN BUILT AND DETAILS PER THE ORIGINAL DOCUMENTS OR PER THE OWNER'S INFORMATION DRAWING BY: CHECK BY: IIS DRAWING, PREPARED FOR THE SPECIFIC PROJECT INDICATED AN INSTRUMENT OF SERVICE AND THE PROPERTY OF BI ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, F NFRINGEMENT OR ANY USE OF THIS DRAWING FOR ANY OTHER PROJECT IS PROHIBITED. ANY ALTERATION OR REPRODUCTION O THIS DOCUMENT IS ALSO PROHIBITED WITHOUT THE WRITTI CONSENT OF THE ARCHITECT OR ENGINEER. LANDSCAPE ARCHITECT **ENGINEERS** SUITE 115, ALBANY PATCHOGUE NFW YORK 11772 NEW YORK 12203 T 631 475 0349 T. 518.621.7650 F. 631.475.0361 F. 518.621.7655 www.BBSARCHITECTURE.com 66-01-02-06-0-007-013 DISTRICT BEDFORD CENTRAL SCHOOL DISTRICT PROJECT PHASE 2 -BOND IMPROVEMENTS DWG TITLE SEDIMENT AND EROSION SCALE: AS NOTED DATE: APRIL 2024 BID PICK-UP: FEBRUARY 24, 2025 FILE No: 23-131b CS0.02

REV. DATE

HESE DRAWINGS ARE BASED ON CONSTRUCTION DRAWINGS NO PREPARED BY BBS ARCHITECTS, LANDSCAPE ARCHITECTS AN ENGINEERS, PC. AND, THEREFORE, MAY NOT REPRESENT TH

NDITIONS AS CONSTRUCTED AT THE TIME. ALL EXIS ONDITIONS SHOWN ARE REPRESENTED AS SUGGEST

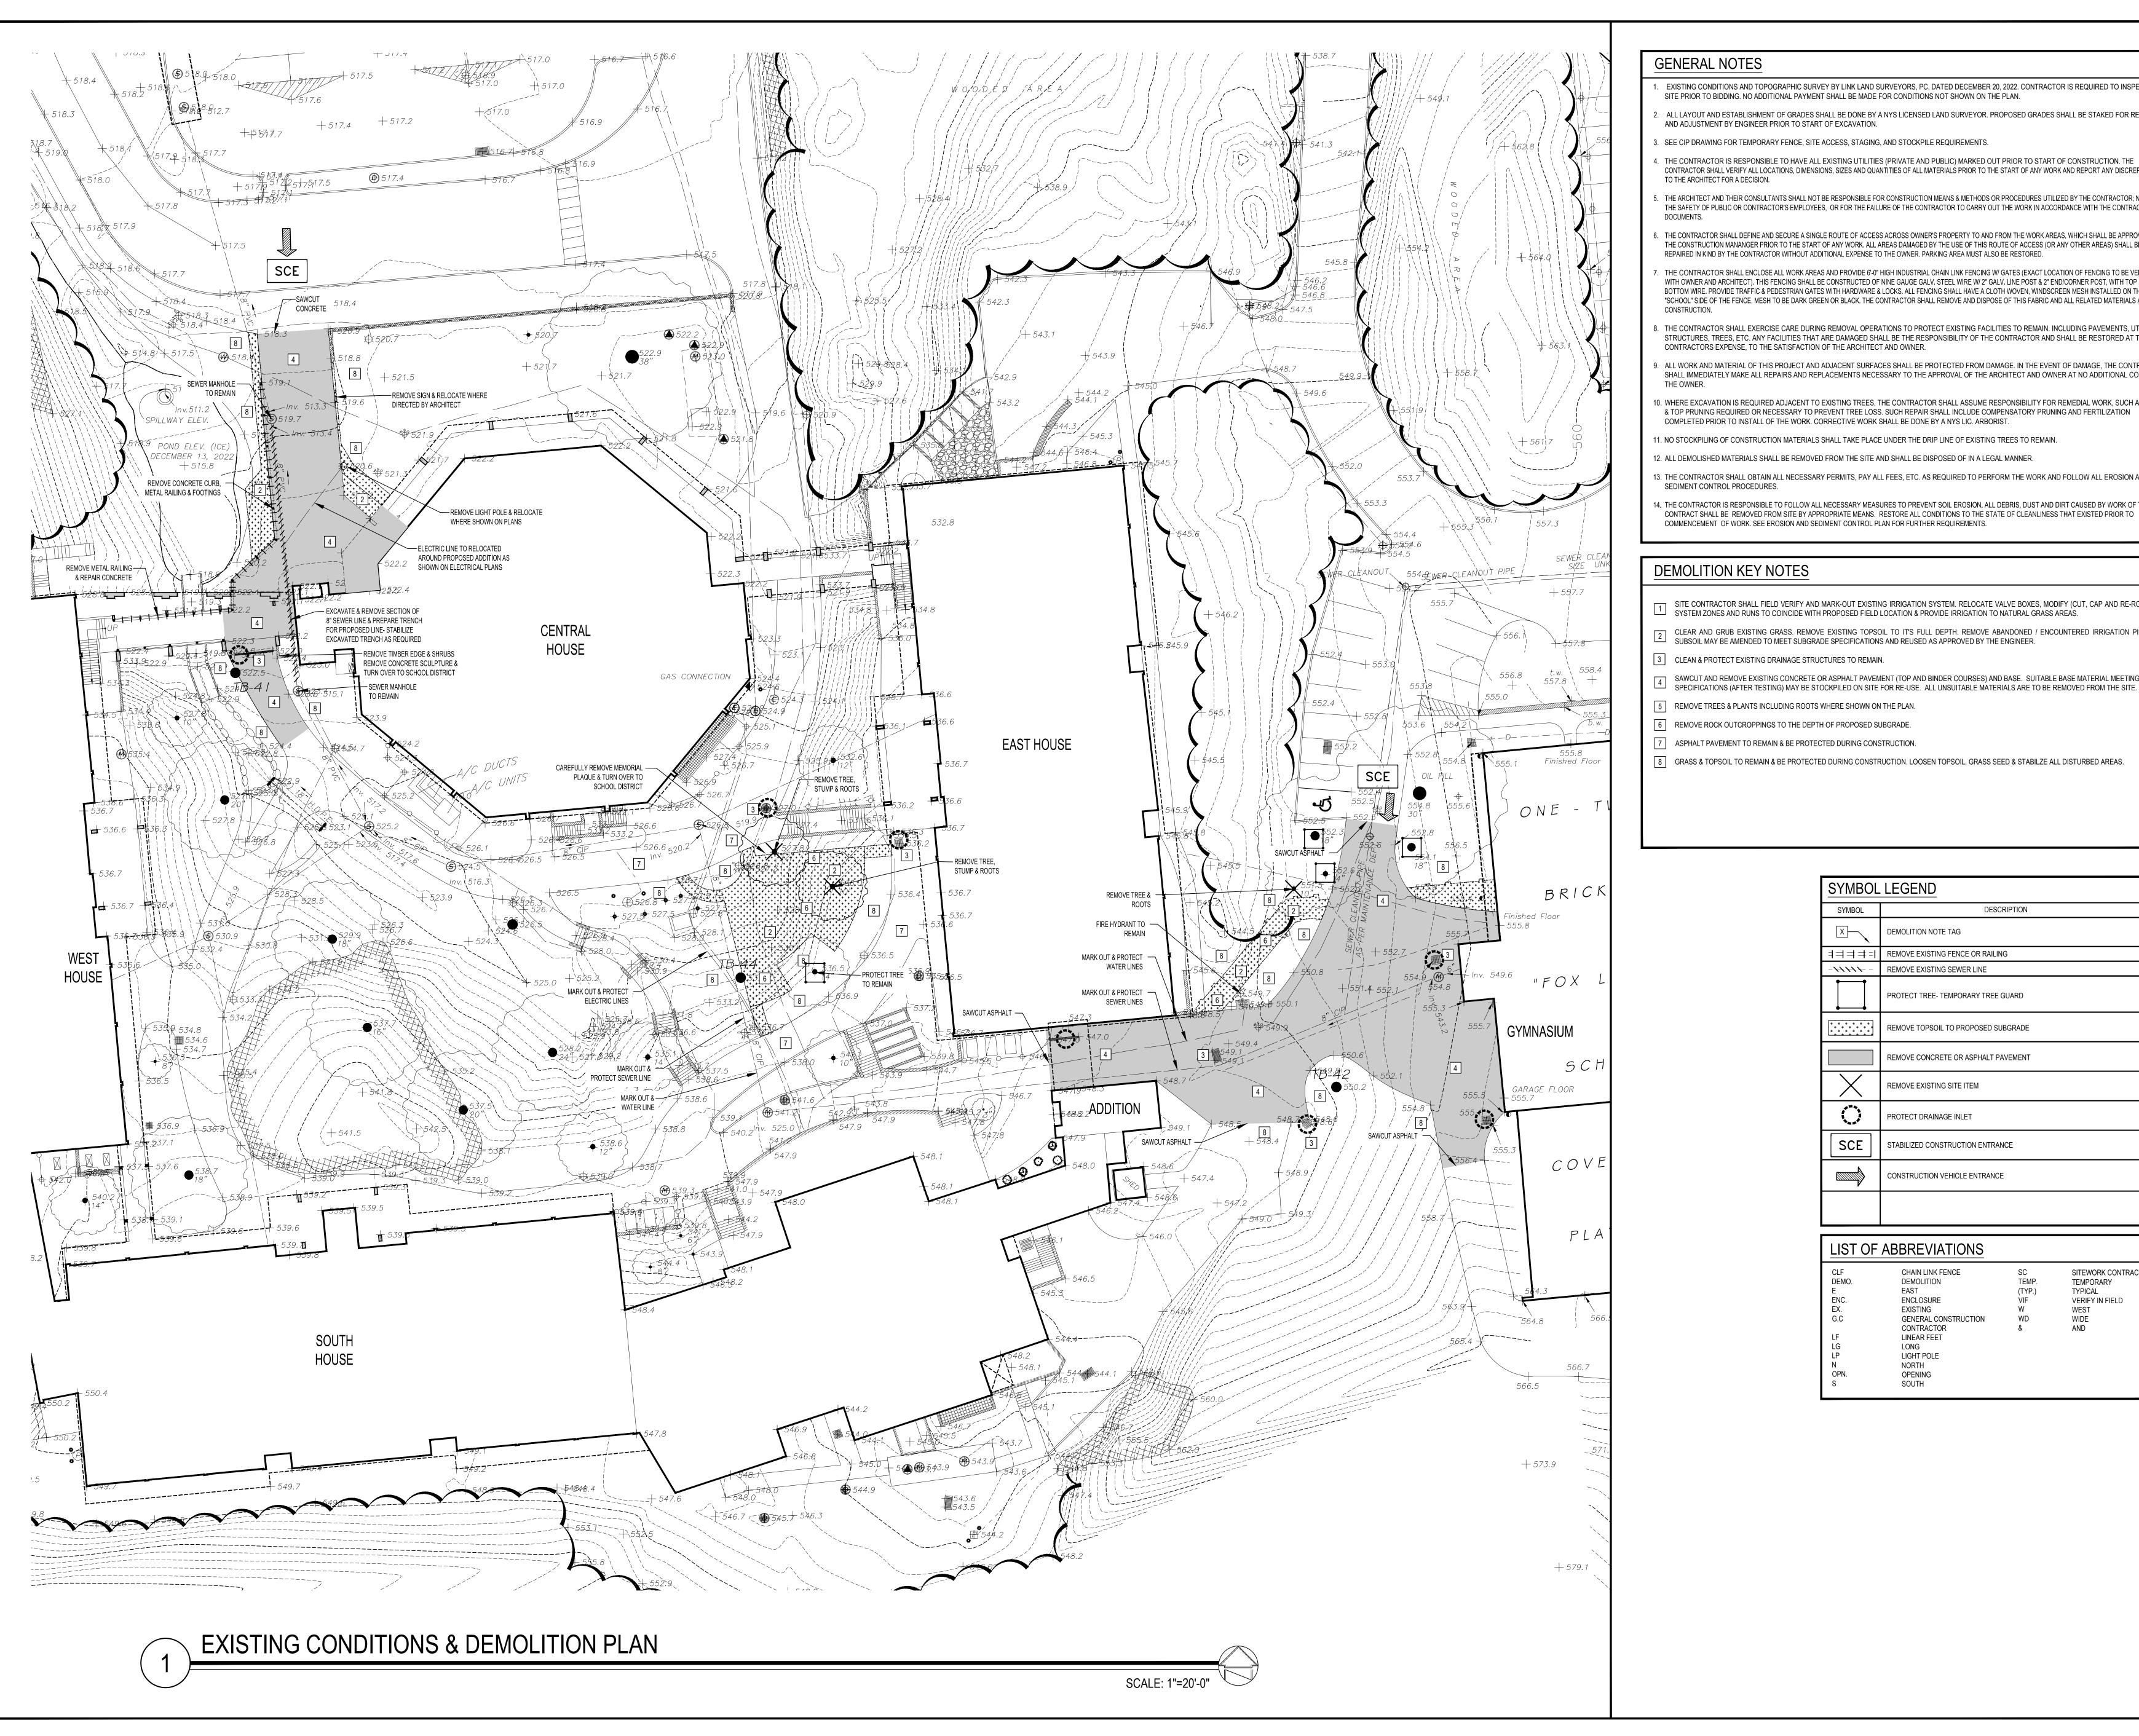

GENERAL NOTES

- EXISTING CONDITIONS AND TOPOGRAPHIC SURVEY BY LINK LAND SURVEYORS, PC, DATED DECEMBER 20, 2022. CONTRACTOR IS REQUIRED TO INSPECT THE SITE PRIOR TO BIDDING. NO ADDITIONAL PAYMENT SHALL BE MADE FOR CONDITIONS NOT SHOWN ON THE PLAN.
- ALL LAYOUT AND ESTABLISHMENT OF GRADES SHALL BE DONE BY A NYS LICENSED LAND SURVEYOR. PROPOSED GRADES SHALL BE STAKED FOR REVIEW
- 3. SEE CIP DRAWING FOR TEMPORARY FENCE, SITE ACCESS, STAGING, AND STOCKPILE REQUIREMENTS.
- CONTRACTOR SHALL VERIFY ALL LOCATIONS, DIMENSIONS, SIZES AND QUANTITIES OF ALL MATERIALS PRIOR TO THE START OF ANY WORK AND REPORT ANY DISCREPANCIES
- 5. THE ARCHITECT AND THEIR CONSULTANTS SHALL NOT BE RESPONSIBLE FOR CONSTRUCTION MEANS & METHODS OR PROCEDURES UTILIZED BY THE CONTRACTOR; NOR FOR THE SAFETY OF PUBLIC OR CONTRACTOR'S EMPLOYEES, OR FOR THE FAILURE OF THE CONTRACTOR TO CARRY OUT THE WORK IN ACCORDANCE WITH THE CONTRACT
- THE CONTRACTOR SHALL DEFINE AND SECURE A SINGLE ROUTE OF ACCESS ACROSS OWNER'S PROPERTY TO AND FROM THE WORK AREAS, WHICH SHALL BE APPROVED BY THE CONSTRUCTION MANANGER PRIOR TO THE START OF ANY WORK. ALL AREAS DAMAGED BY THE USE OF THIS ROUTE OF ACCESS (OR ANY OTHER AREAS) SHALL BE REPAIRED IN KIND BY THE CONTRACTOR WITHOUT ADDITIONAL EXPENSE TO THE OWNER. PARKING AREA MUST ALSO BE RESTORED.
- . THE CONTRACTOR SHALL ENCLOSE ALL WORK AREAS AND PROVIDE 6'-0" HIGH INDUSTRIAL CHAIN LINK FENCING W/ GATES (EXACT LOCATION OF FENCING TO BE VERIFIED WITH OWNER AND ARCHITECT). THIS FENCING SHALL BE CONSTRUCTED OF NINE GAUGE GALV. STEEL WIRE W/ 2" GALV. LINE POST & 2" END/CORNER POST, WITH TOP RAIL & BOTTOM WIRE. PROVIDE TRAFFIC & PEDESTRIAN GATES WITH HARDWARE & LOCKS. ALL FENCING SHALL HAVE A CLOTH WOVEN, WINDSCREEN MESH INSTALLED ON THE "SCHOOL" SIDE OF THE FENCE. MESH TO BE DARK GREEN OR BLACK. THE CONTRACTOR SHALL REMOVE AND DISPOSE OF THIS FABRIC AND ALL RELATED MATERIALS AFTER
- B. THE CONTRACTOR SHALL EXERCISE CARE DURING REMOVAL OPERATIONS TO PROTECT EXISTING FACILITIES TO REMAIN. INCLUDING PAVEMENTS, UTILITIES, STRUCTURES, TREES, ETC. ANY FACILITIES THAT ARE DAMAGED SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR AND SHALL BE RESTORED AT THE CONTRACTORS EXPENSE. TO THE SATISFACTION OF THE ARCHITECT AND OWNER.
-). ALL WORK AND MATERIAL OF THIS PROJECT AND ADJACENT SURFACES SHALL BE PROTECTED FROM DAMAGE. IN THE EVENT OF DAMAGE, THE CONTRACTOR SHALL IMMEDIATELY MAKE ALL REPAIRS AND REPLACEMENTS NECESSARY TO THE APPROVAL OF THE ARCHITECT AND OWNER AT NO ADDITIONAL COST TO
- 10. WHERE EXCAVATION IS REQUIRED ADJACENT TO EXISTING TREES, THE CONTRACTOR SHALL ASSUME RESPONSIBILITY FOR REMEDIAL WORK, SUCH AS ROOT & TOP PRUNING REQUIRED OR NECESSARY TO PREVENT TREE LOSS. SUCH REPAIR SHALL INCLUDE COMPENSATORY PRUNING AND FERTILIZATION
- COMPLETED PRIOR TO INSTALL OF THE WORK. CORRECTIVE WORK SHALL BE DONE BY A NYS LIC. ARBORIST.
- 11. NO STOCKPILING OF CONSTRUCTION MATERIALS SHALL TAKE PLACE UNDER THE DRIP LINE OF EXISTING TREES TO REMAIN.
- 13. THE CONTRACTOR SHALL OBTAIN ALL NECESSARY PERMITS, PAY ALL FEES, ETC. AS REQUIRED TO PERFORM THE WORK AND FOLLOW ALL EROSION AND
- 14. THE CONTRACTOR IS RESPONSIBLE TO FOLLOW ALL NECESSARY MEASURES TO PREVENT SOIL EROSION. ALL DEBRIS, DUST AND DIRT CAUSED BY WORK OF THIS CONTRACT SHALL BE REMOVED FROM SITE BY APPROPRIATE MEANS. RESTORE ALL CONDITIONS TO THE STATE OF CLEANLINESS THAT EXISTED PRIOR TO COMMENCEMENT OF WORK. SEE EROSION AND SEDIMENT CONTROL PLAN FOR FURTHER REQUIREMENTS.

DEMOLITION KEY NOTES


- SITE CONTRACTOR SHALL FIELD VERIFY AND MARK-OUT EXISTING IRRIGATION SYSTEM. RELOCATE VALVE BOXES, MODIFY (CUT, CAP AND RE-ROUTE) SYSTEM ZONES AND RUNS TO COINCIDE WITH PROPOSED FIELD LOCATION & PROVIDE IRRIGATION TO NATURAL GRASS AREAS.
- CLEAR AND GRUB EXISTING GRASS. REMOVE EXISTING TOPSOIL TO IT'S FULL DEPTH. REMOVE ABANDONED / ENCOUNTERED IRRIGATION PIPING. SUBSOIL MAY BE AMENDED TO MEET SUBGRADE SPECIFICATIONS AND REUSED AS APPROVED BY THE ENGINEER.
- 3 CLEAN & PROTECT EXISTING DRAINAGE STRUCTURES TO REMAIN.
- SAWCUT AND REMOVE EXISTING CONCRETE OR ASPHALT PAVEMENT (TOP AND BINDER COURSES) AND BASE. SUITABLE BASE MATERIAL MEETING THE SPECIFICATIONS (AFTER TESTING) MAY BE STOCKPILED ON SITE FOR RE-USE. ALL UNSUITABLE MATERIALS ARE TO BE REMOVED FROM THE SITE.
- 5 REMOVE TREES & PLANTS INCLUDING ROOTS WHERE SHOWN ON THE PLAN.
- REMOVE ROCK OUTCROPPINGS TO THE DEPTH OF PROPOSED SUBGRADE.
- 7 ASPHALT PAVEMENT TO REMAIN & BE PROTECTED DURING CONSTRUCTION.
- 8 GRASS & TOPSOIL TO REMAIN & BE PROTECTED DURING CONSTRUCTION. LOOSEN TOPSOIL, GRASS SEED & STABILZE ALL DISTURBED AREAS

SYMBOL	DESCRIPTION				
X	DEMOLITION NOTE TAG				
	REMOVE EXISTING FENCE OR RAILING				
-444-	REMOVE EXISTING SEWER LINE				
	PROTECT TREE- TEMPORARY TREE GUARD				
+ + + + + + + + + + + + + + + + + + + +	REMOVE TOPSOIL TO PROPOSED SUBGRADE				
	REMOVE CONCRETE OR ASPHALT PAVEMENT				
X	REMOVE EXISTING SITE ITEM				
	PROTECT DRAINAGE INLET				
SCE	STABILIZED CONSTRUCTION ENTRANCE				
	CONSTRUCTION VEHICLE ENTRANCE				

LIST OF ABBREVIATIONS

CHAIN LINK FENCE DEMOLITION FAST	SC TEMP. (TYP.)	SITEWORK CONTRACTOR TEMPORARY TYPICAL
ENCLOSURE	` ,	VERIFY IN FIELD
EXISTING	W	WEST
GENERAL CONSTRUCTION	WD	WIDE
CONTRACTOR	&	AND
LINEAR FEET		
LONG		
LIGHT POLE		
NORTH		
OPENING		
SOUTH		
	DEMOLITION EAST ENCLOSURE EXISTING GENERAL CONSTRUCTION CONTRACTOR LINEAR FEET LONG LIGHT POLE NORTH OPENING	DEMOLITION TEMP. EAST (TYP.) ENCLOSURE VIF EXISTING W GENERAL CONSTRUCTION WD CONTRACTOR & LINEAR FEET LONG LIGHT POLE NORTH OPENING

HESE DRAWINGS ARE BASED ON CONSTRUCTION DRAWINGS NO REPARED BY BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND NGINEERS, PC. AND, THEREFORE, MAY NOT REPRESENT THE CONDITIONS AS CONSTRUCTED AT THE TIME. ALL EXISTING ONDITIONS SHOWN ARE REPRESENTED AS SUGGESTIVE SFORMATION AS THEY MAY NOT HAVE BEEN BUILT AND DETAILED ER THE ORIGINAL DOCUMENTS OR PER THE OWNER'S INFORMATION

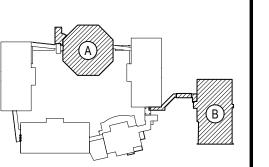

KEY PLAN NOT TO SCALE


DRAWING BY: CTC CHECK BY: JP

PROJECT IS PROHIBITED. ANY ALTERATION OR REPRODUCTION OF THIS DOCUMENT IS ALSO PROHIBITED WITHOUT THE WRITTEN CONSENT OF THE ARCHITECT OR ENGINEER.

ARCHITECTS

LANDSCAPE ARCHITECTS ENGINEERS


PATCHOGUE SUITE 115, ALBANY NEW YORK 11772 NEW YORK 12203 T. 631.475.0349 T. 518.621.7650 F. 518.621.7655 F. 631.475.0361 www.BBSARCHITECTURE.com

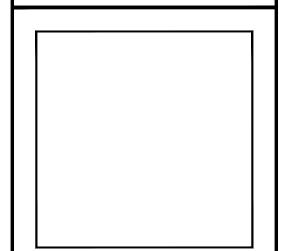

66-01-02-06-0-007-013 DISTRICT BEDFORD CENTRAL SCHOOL DISTRICT **PROJECT** PHASE 2 -BOND IMPROVEMENTS

<u>DWG TITLE</u> EXISTING CONDITIONS and DEMOLITION PLANS SCALE: AS NOTED


BID PICK-UP: FEBRUARY 24, 2025

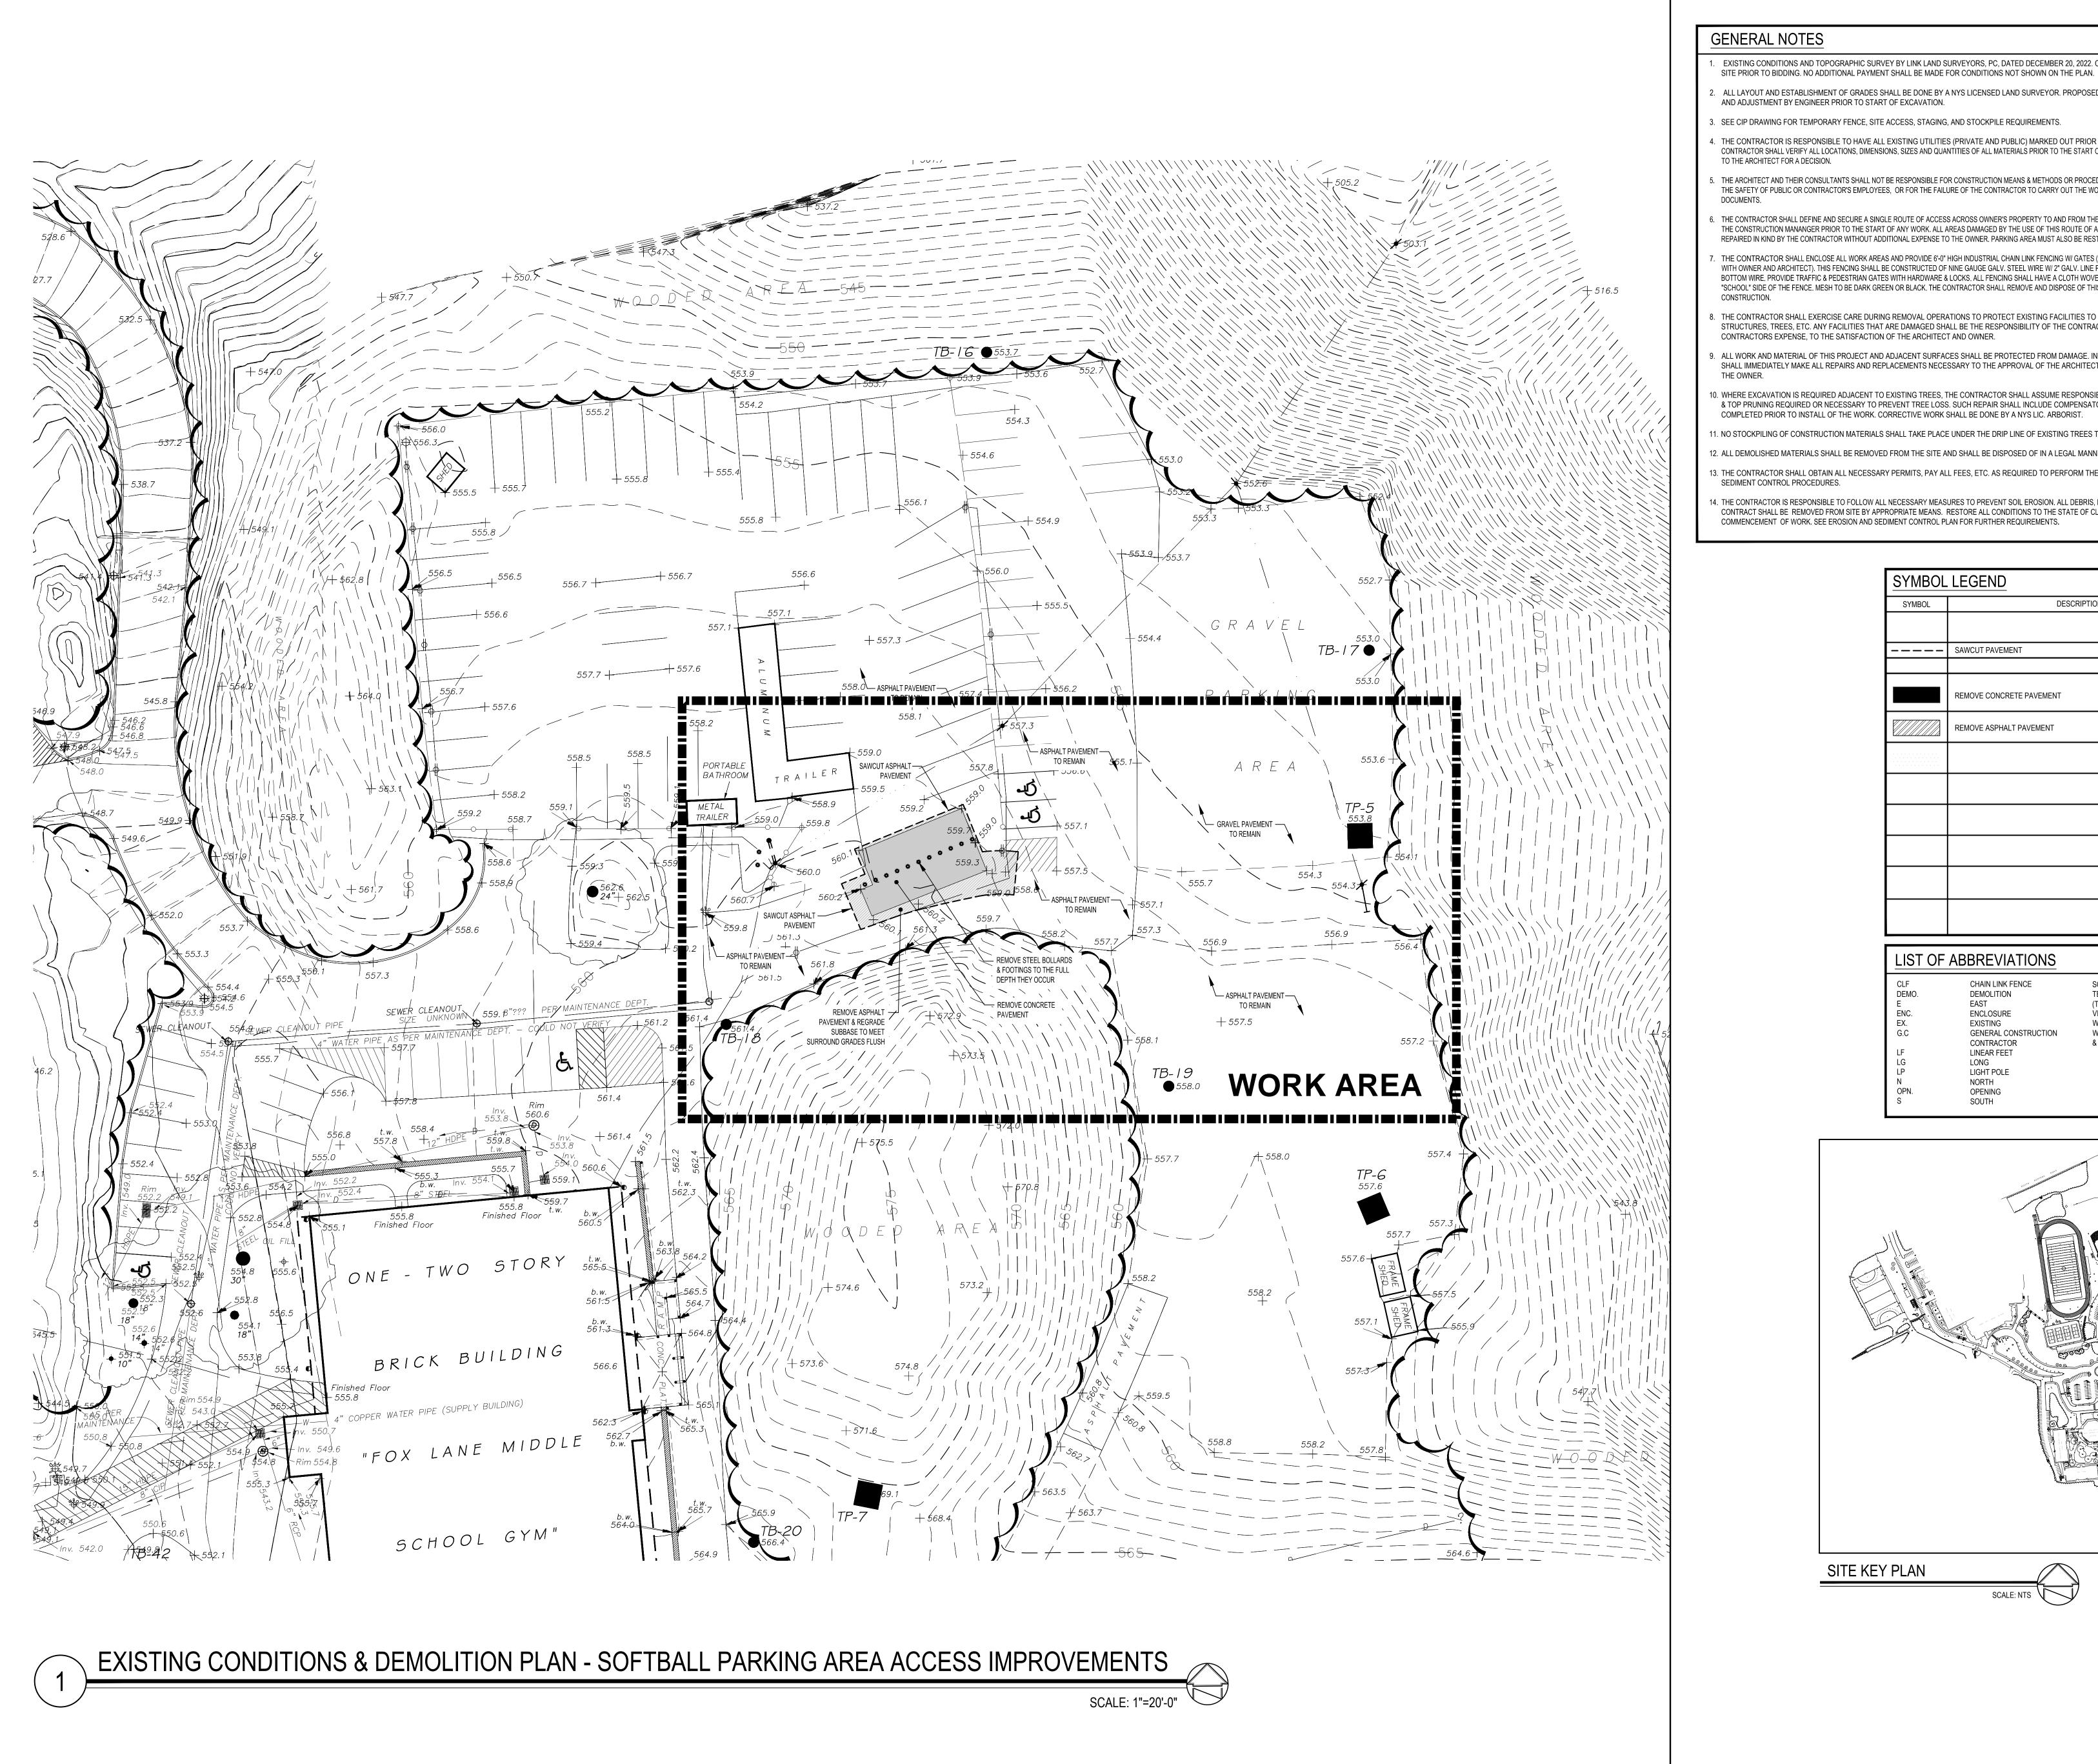

- EXISTING CONDITIONS AND TOPOGRAPHIC SURVEY BY LINK LAND SURVEYORS, PC. DATED DECEMBER 20, 2022. CONTRACTOR IS REQUIRED TO INSPECT THE
- ALL LAYOUT AND ESTABLISHMENT OF GRADES SHALL BE DONE BY A NYS LICENSED LAND SURVEYOR. PROPOSED GRADES SHALL BE STAKED FOR REVIEW
- 3. SEE CIP DRAWING FOR TEMPORARY FENCE, SITE ACCESS, STAGING, AND STOCKPILE REQUIREMENTS.
- 4. THE CONTRACTOR IS RESPONSIBLE TO HAVE ALL EXISTING UTILITIES (PRIVATE AND PUBLIC) MARKED OUT PRIOR TO START OF CONSTRUCTION. THE CONTRACTOR SHALL VERIFY ALL LOCATIONS, DIMENSIONS, SIZES AND QUANTITIES OF ALL MATERIALS PRIOR TO THE START OF ANY WORK AND REPORT ANY DISCREPANCIES TO THE ARCHITECT FOR A DECISION.
- 5. THE ARCHITECT AND THEIR CONSULTANTS SHALL NOT BE RESPONSIBLE FOR CONSTRUCTION MEANS & METHODS OR PROCEDURES UTILIZED BY THE CONTRACTOR: NOR FOR
- : THE CONTRACTOR SHALL DEFINE AND SECURE A SINGLE ROUTE OF ACCESS ACROSS OWNER'S PROPERTY TO AND FROM THE WORK AREAS, WHICH SHALL BE APPROVED BY THE CONSTRUCTION MANANGER PRIOR TO THE START OF ANY WORK. ALL AREAS DAMAGED BY THE USE OF THIS ROUTE OF ACCESS (OR ANY OTHER AREAS) SHALL BE REPAIRED IN KIND BY THE CONTRACTOR WITHOUT ADDITIONAL EXPENSE TO THE OWNER. PARKING AREA MUST ALSO BE RESTORED.
- . THE CONTRACTOR SHALL ENCLOSE ALL WORK AREAS AND PROVIDE 6'-0" HIGH INDUSTRIAL CHAIN LINK FENCING W/ GATES (EXACT LOCATION OF FENCING TO BE VERIFIED WITH OWNER AND ARCHITECT). THIS FENCING SHALL BE CONSTRUCTED OF NINE GAUGE GALV. STEEL WIRE W/ 2" GALV. LINE POST & 2" END/CORNER POST, WITH TOP RAIL & BOTTOM WIRE. PROVIDE TRAFFIC & PEDESTRIAN GATES WITH HARDWARE & LOCKS. ALL FENCING SHALL HAVE A CLOTH WOVEN, WINDSCREEN MESH INSTALLED ON THE "SCHOOL" SIDE OF THE FENCE. MESH TO BE DARK GREEN OR BLACK. THE CONTRACTOR SHALL REMOVE AND DISPOSE OF THIS FABRIC AND ALL RELATED MATERIALS AFTER
- . THE CONTRACTOR SHALL EXERCISE CARE DURING REMOVAL OPERATIONS TO PROTECT EXISTING FACILITIES TO REMAIN. INCLUDING PAVEMENTS, UTILITIES, STRUCTURES, TREES, ETC. ANY FACILITIES THAT ARE DAMAGED SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR AND SHALL BE RESTORED AT THE
- . ALL WORK AND MATERIAL OF THIS PROJECT AND ADJACENT SURFACES SHALL BE PROTECTED FROM DAMAGE. IN THE EVENT OF DAMAGE, THE CONTRACTOR
- 0. WHERE EXCAVATION IS REQUIRED ADJACENT TO EXISTING TREES. THE CONTRACTOR SHALL ASSUME RESPONSIBILITY FOR REMEDIAL WORK, SUCH AS ROOT & TOP PRUNING REQUIRED OR NECESSARY TO PREVENT TREE LOSS. SUCH REPAIR SHALL INCLUDE COMPENSATORY PRUNING AND FERTILIZATION COMPLETED PRIOR TO INSTALL OF THE WORK. CORRECTIVE WORK SHALL BE DONE BY A NYS LIC. ARBORIST.
- 11. NO STOCKPILING OF CONSTRUCTION MATERIALS SHALL TAKE PLACE UNDER THE DRIP LINE OF EXISTING TREES TO REMAIN.
- 12. ALL DEMOLISHED MATERIALS SHALL BE REMOVED FROM THE SITE AND SHALL BE DISPOSED OF IN A LEGAL MANNER.
- 13. THE CONTRACTOR SHALL OBTAIN ALL NECESSARY PERMITS, PAY ALL FEES, ETC. AS REQUIRED TO PERFORM THE WORK AND FOLLOW ALL EROSION AND
- 14. THE CONTRACTOR IS RESPONSIBLE TO FOLLOW ALL NECESSARY MEASURES TO PREVENT SOIL EROSION. ALL DEBRIS, DUST AND DIRT CAUSED BY WORK OF THIS CONTRACT SHALL BE REMOVED FROM SITE BY APPROPRIATE MEANS. RESTORE ALL CONDITIONS TO THE STATE OF CLEANLINESS THAT EXISTED PRIOR TO COMMENCEMENT OF WORK. SEE EROSION AND SEDIMENT CONTROL PLAN FOR FURTHER REQUIREMENTS.

SYMBOL	DESCRIPTION
	- SAWCUT PAVEMENT
	REMOVE CONCRETE PAVEMENT
	REMOVE ASPHALT PAVEMENT
	REMOVE ASPRALI PAVEMENT


LIST OF	ABBREVIATIONS		
CLF DEMO. E ENC. EX. G.C	CHAIN LINK FENCE DEMOLITION EAST ENCLOSURE EXISTING GENERAL CONSTRUCTION CONTRACTOR	SC TEMP. (TYP.) VIF W WD	SITEWORK CONTRACTOR TEMPORARY TYPICAL VERIFY IN FIELD WEST WIDE AND
LF LG LP N OPN. S	LINEAR FEET LONG LIGHT POLE NORTH OPENING SOUTH	ŭ	, 110

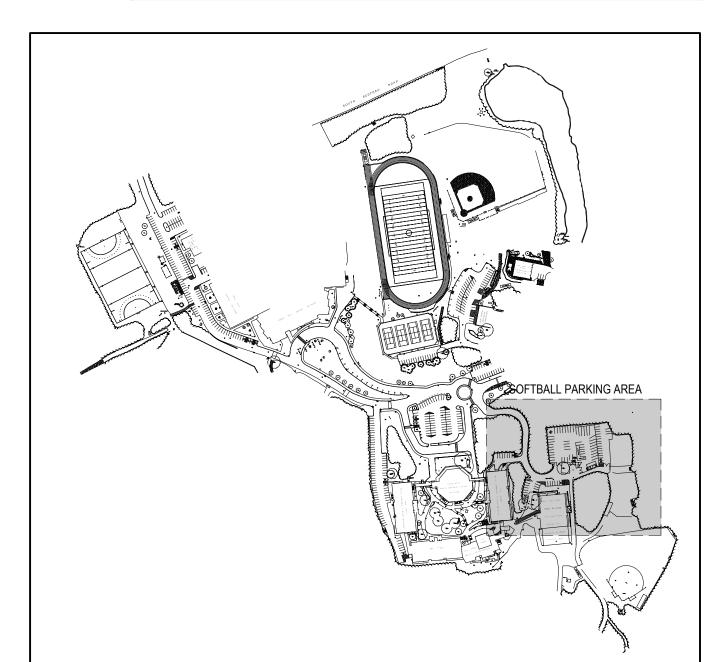

SITE KEY PLAN



HESE DRAWINGS ARE BASED ON CONSTRUCTION DRAWINGS NO REPARED BY BBS ARCHITECTS, LANDSCAPE ARCHITECTS AN ONDITIONS AS CONSTRUCTED AT THE TIME. ALL EXISTIN CONDITIONS SHOWN ARE REPRESENTED AS SUGGESTIVI INFORMATION AS THEY MAY NOT HAVE BEEN BUILT AND DETAILED

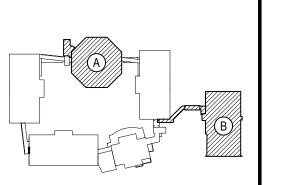

NOT TO SCALE

CHECK BY: J.P.

LANDSCAPE ARCHITECTS ENGINEERS

www.BBSARCHITECTURE.com


66-01-02-06-0-007-013

BEDFORD CENTRAL SCHOOL DISTRICT <u>PROJECT</u> PHASE 2 -BOND IMPROVEMENTS

DWG TITLE EXISTING CONDITIONS & DEMOLITION PLAN

SCALE: AS NOTED BID PICK-UP: FEBRUARY 24, 2025

CS1.02

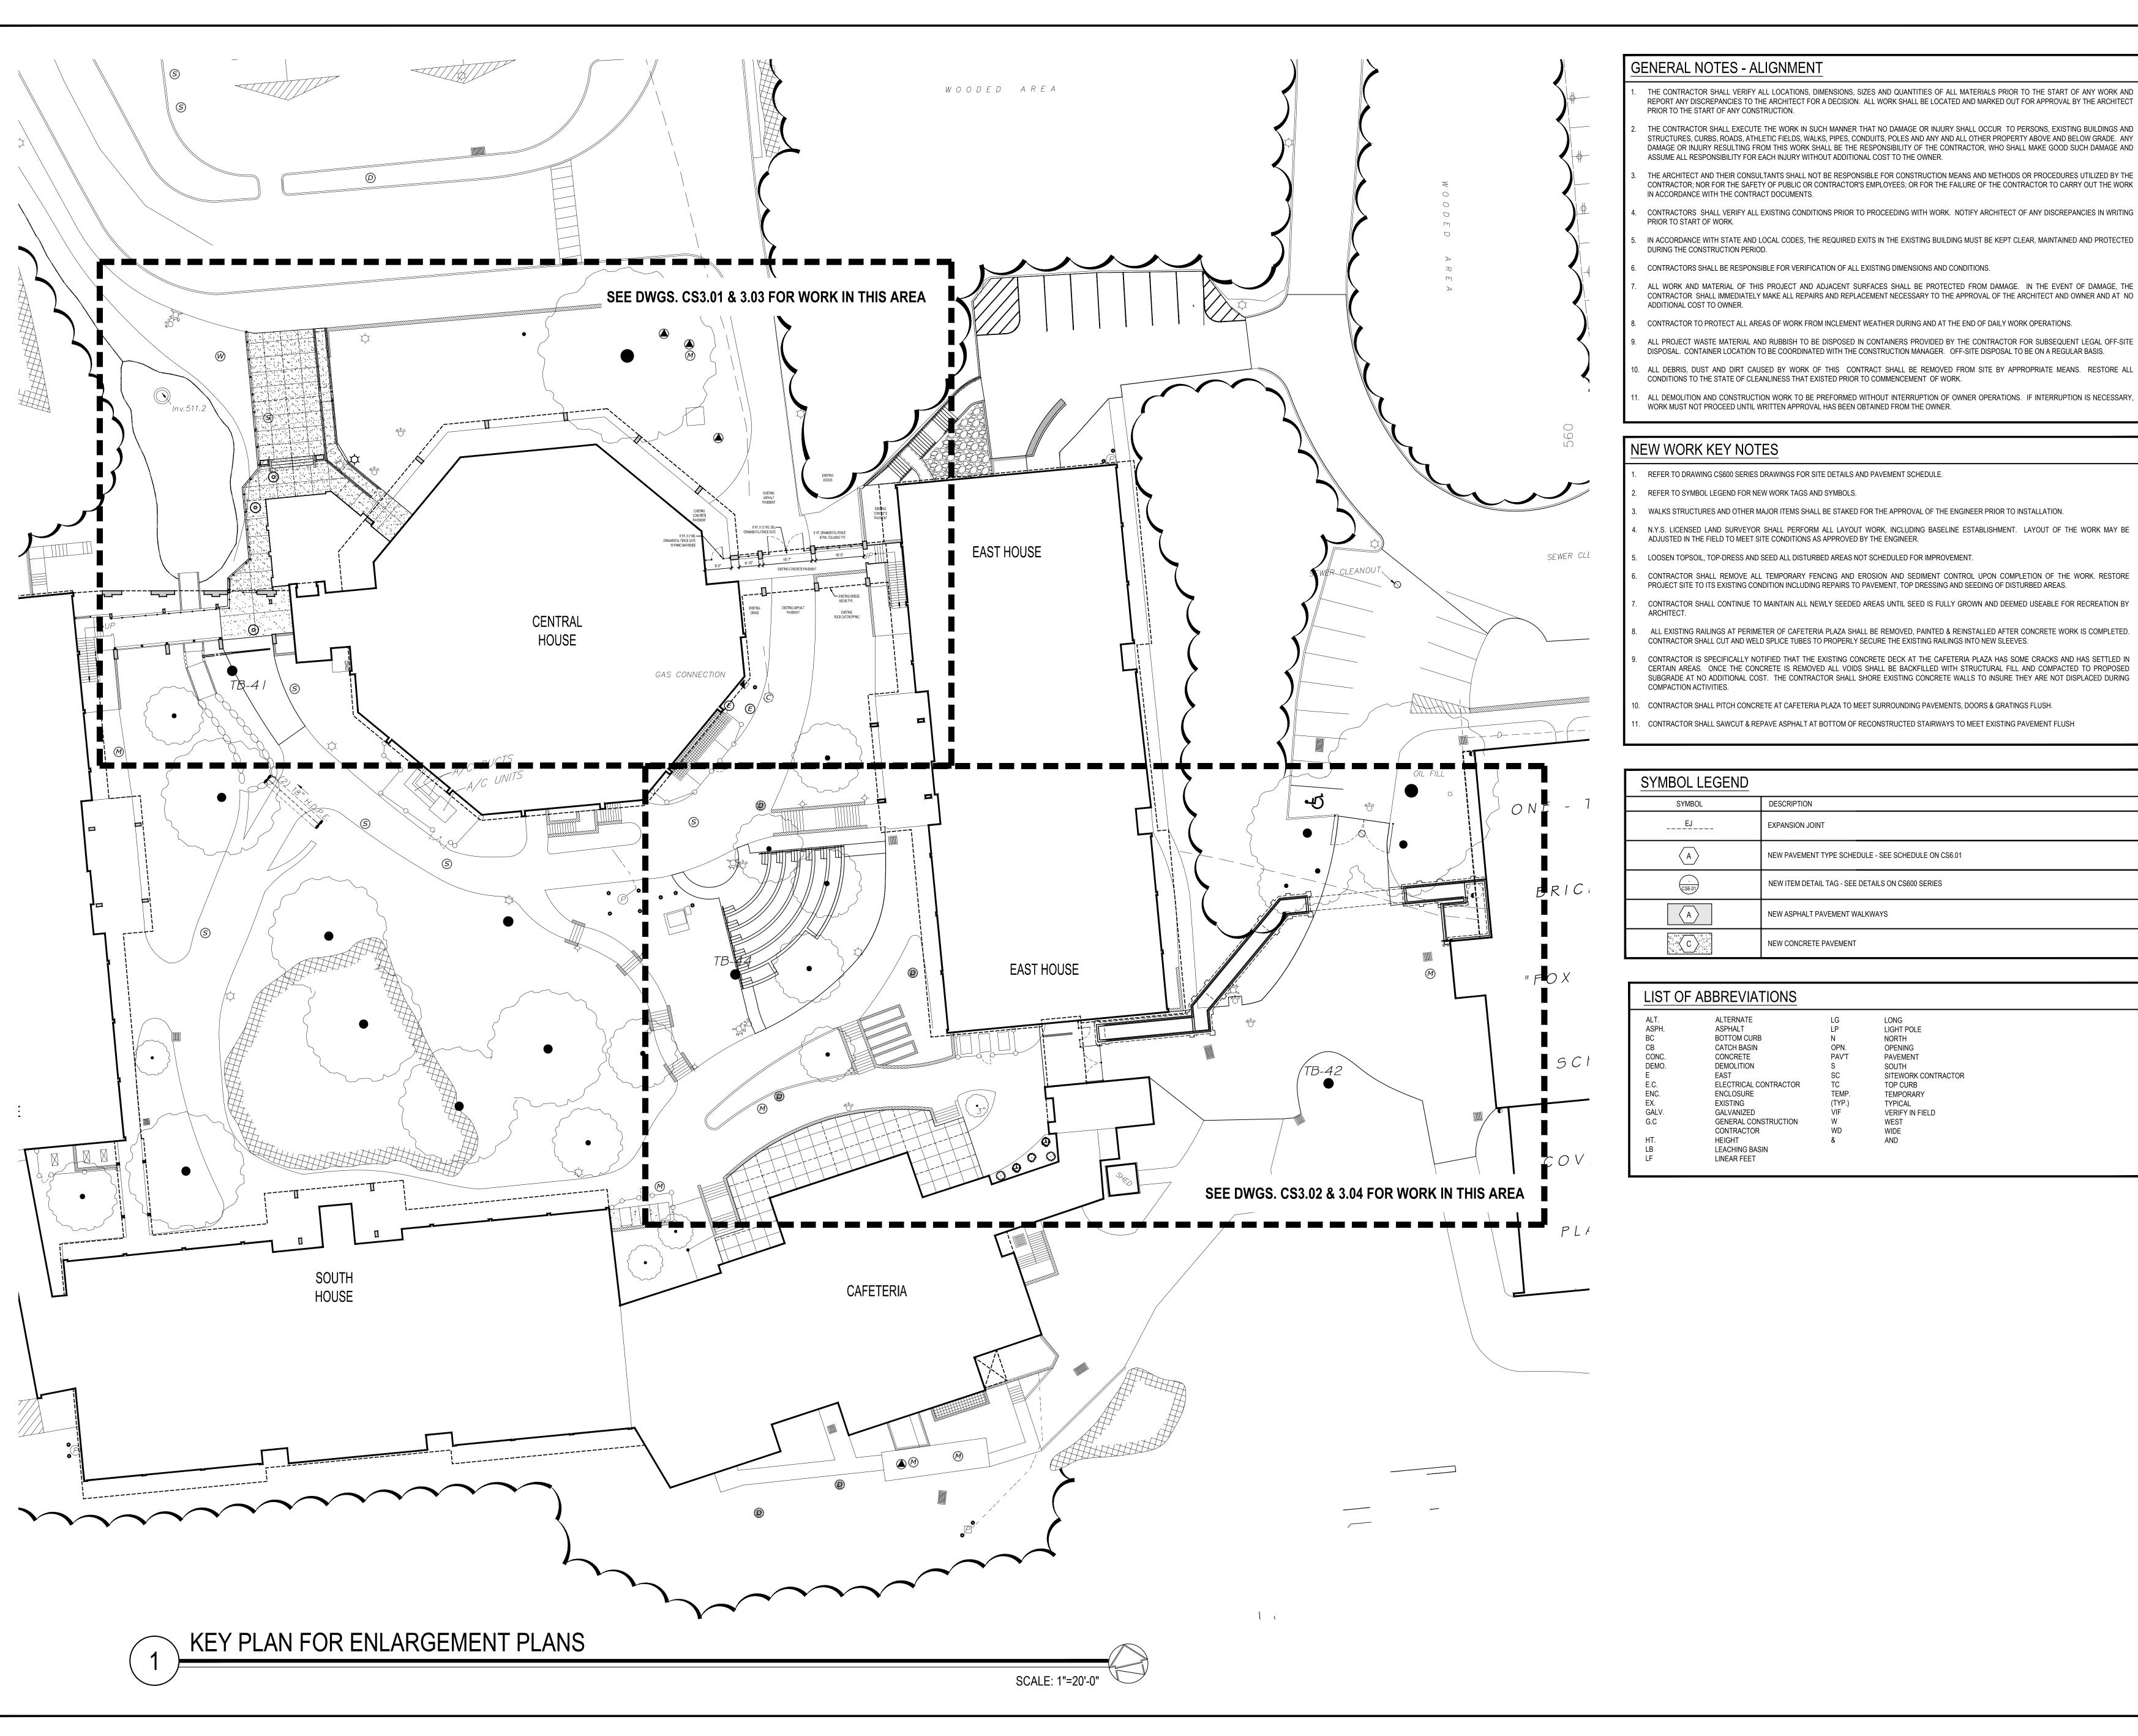

THE CONTRACTOR SHALL VERIFY ALL LOCATIONS, DIMENSIONS, SIZES AND QUANTITIES OF ALL MATERIALS PRIOR TO THE START OF ANY WORK AND REPORT ANY DISCREPANCIES TO THE ARCHITECT FOR A DECISION. ALL WORK SHALL BE LOCATED AND MARKED OUT FOR APPROVAL BY THE ARCHITECT

THE CONTRACTOR SHALL EXECUTE THE WORK IN SUCH MANNER THAT NO DAMAGE OR INJURY SHALL OCCUR TO PERSONS, EXISTING BUILDINGS AND STRUCTURES, CURBS, ROADS, ATHLETIC FIELDS, WALKS, PIPES, CONDUITS, POLES AND ANY AND ALL OTHER PROPERTY ABOVE AND BELOW GRADE. ANY DAMAGE OR INJURY RESULTING FROM THIS WORK SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR, WHO SHALL MAKE GOOD SUCH DAMAGE AND

- THE ARCHITECT AND THEIR CONSULTANTS SHALL NOT BE RESPONSIBLE FOR CONSTRUCTION MEANS AND METHODS OR PROCEDURES UTILIZED BY THE CONTRACTOR; NOR FOR THE SAFETY OF PUBLIC OR CONTRACTOR'S EMPLOYEES; OR FOR THE FAILURE OF THE CONTRACTOR TO CARRY OUT THE WORK
- CONTRACTORS SHALL VERIFY ALL EXISTING CONDITIONS PRIOR TO PROCEEDING WITH WORK. NOTIFY ARCHITECT OF ANY DISCREPANCIES IN WRITING
- IN ACCORDANCE WITH STATE AND LOCAL CODES, THE REQUIRED EXITS IN THE EXISTING BUILDING MUST BE KEPT CLEAR, MAINTAINED AND PROTECTED

- CONTRACTOR SHALL IMMEDIATELY MAKE ALL REPAIRS AND REPLACEMENT NECESSARY TO THE APPROVAL OF THE ARCHITECT AND OWNER AND AT NO
- ALL PROJECT WASTE MATERIAL AND RUBBISH TO BE DISPOSED IN CONTAINERS PROVIDED BY THE CONTRACTOR FOR SUBSEQUENT LEGAL OFF-SITE
- CONDITIONS TO THE STATE OF CLEANLINESS THAT EXISTED PRIOR TO COMMENCEMENT OF WORK.
- ALL DEMOLITION AND CONSTRUCTION WORK TO BE PREFORMED WITHOUT INTERRUPTION OF OWNER OPERATIONS. IF INTERRUPTION IS NECESSARY, WORK MUST NOT PROCEED UNTIL WRITTEN APPROVAL HAS BEEN OBTAINED FROM THE OWNER.
- REFER TO DRAWING CS600 SERIES DRAWINGS FOR SITE DETAILS AND PAVEMENT SCHEDULE.
- WALKS STRUCTURES AND OTHER MAJOR ITEMS SHALL BE STAKED FOR THE APPROVAL OF THE ENGINEER PRIOR TO INSTALLATION.
- N.Y.S. LICENSED LAND SURVEYOR SHALL PERFORM ALL LAYOUT WORK, INCLUDING BASELINE ESTABLISHMENT. LAYOUT OF THE WORK MAY BE


- PROJECT SITE TO ITS EXISTING CONDITION INCLUDING REPAIRS TO PAVEMENT, TOP DRESSING AND SEEDING OF DISTURBED AREAS.
- CONTRACTOR SHALL CONTINUE TO MAINTAIN ALL NEWLY SEEDED AREAS UNTIL SEED IS FULLY GROWN AND DEEMED USEABLE FOR RECREATION BY
- ALL EXISTING RAILINGS AT PERIMETER OF CAFETERIA PLAZA SHALL BE REMOVED, PAINTED & REINSTALLED AFTER CONCRETE WORK IS COMPLETED. CONTRACTOR SHALL CUT AND WELD SPLICE TUBES TO PROPERLY SECURE THE EXISTING RAILINGS INTO NEW SLEEVES.
- CERTAIN AREAS. ONCE THE CONCRETE IS REMOVED ALL VOIDS SHALL BE BACKFILLED WITH STRUCTURAL FILL AND COMPACTED TO PROPOSED SUBGRADE AT NO ADDITIONAL COST. THE CONTRACTOR SHALL SHORE EXISTING CONCRETE WALLS TO INSURE THEY ARE NOT DISPLACED DURING
- 10. CONTRACTOR SHALL PITCH CONCRETE AT CAFETERIA PLAZA TO MEET SURROUNDING PAVEMENTS, DOORS & GRATINGS FLUSH.

SYMBOL	DESCRIPTION	
EJ	EXPANSION JOINT	
NEW PAVEMENT TYPE SCHEDULE - SEE SCHEDULE ON CS6.01		
	NEW ITEM DETAIL TAG - SEE DETAILS ON CS600 SERIES	
A	NEW ASPHALT PAVEMENT WALKWAYS	
(C)	NEW CONCRETE PAVEMENT	

ALT.	ALTERNATE	LG	LONG	
ASPH.	ASPHALT	LP	LIGHT POLE	
BC	BOTTOM CURB	N	NORTH	
СВ	CATCH BASIN	OPN.	OPENING	
CONC.	CONCRETE	PAV'T	PAVEMENT	
DEMO.	DEMOLITION	S	SOUTH	
E	EAST	SC	SITEWORK CONTRACTOR	
E.C.	ELECTRICAL CONTRACTOR	TC	TOP CURB	
ENC.	ENCLOSURE	TEMP.	TEMPORARY	
EX.	EXISTING	(TYP.)	TYPICAL	
GALV.	GALVANIZED	VIF	VERIFY IN FIELD	
G.C	GENERAL CONSTRUCTION	W	WEST	
	CONTRACTOR	WD	WIDE	
HT.	HEIGHT	&	AND	
LB	LEACHING BASIN			

REV. DATE

THESE DRAWINGS ARE BASED ON CONSTRUCTION DRAWINGS NOT PREPARED BY BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PC. AND, THEREFORE, MAY NOT REPRESENT THE CONDITIONS AS CONSTRUCTED AT THE TIME. ALL EXISTING CONDITIONS SHOWN ARE REPRESENTED AS SUGGESTIVE INFORMATION AS THEY MAY NOT HAVE BEEN BUILT AND DETAILED PER THE OWNER'S INFORMATION.

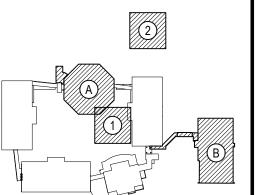

KEY PLAN

NOT TO SCALE

CHECK BY:


THIS DRAWING, PREPARED FOR THE SPECIFIC PROJECT INDICATED IS AN INSTRUMENT OF SERVICE AND THE PROPERTY OF BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PC. INFRINGEMENT OR ANY USE OF THIS DRAWING FOR ANY OTHER PROJECT IS PROHIBITED. ANY ALTERATION OR REPRODUCTION OF THIS DOCUMENT IS ALSO PROHIBITED WITHOUT THE WRITTEN CONSENT OF THE ARCHITECT OR ENGINEER.

ARCHITECTS

LANDSCAPE ARCHITECTS ENGINEERS .44 EAST MAIN STREET | 100 GREAT OAKS BLVD

PATCHOGUE SUITE 115, ALBANY NEW YORK 11772 NEW YORK 12203 T. 631.475.0349 T. 518.621.7650 F. 631.475.0361

F. 518.621.7655 www.BBSARCHITECTURE.com

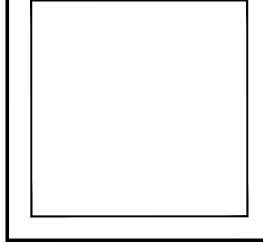

66-01-02-06-0-007-013


DISTRICT BEDFORD CENTRAL SCHOOL DISTRICT

PROJECT PHASE 2 -

BOND IMPROVEMENTS DWG TITLE ALIGNMENT AND SCHEDULE PLAN

BID PICK-UP: FEBRUARY 24, 2025

CS2.01

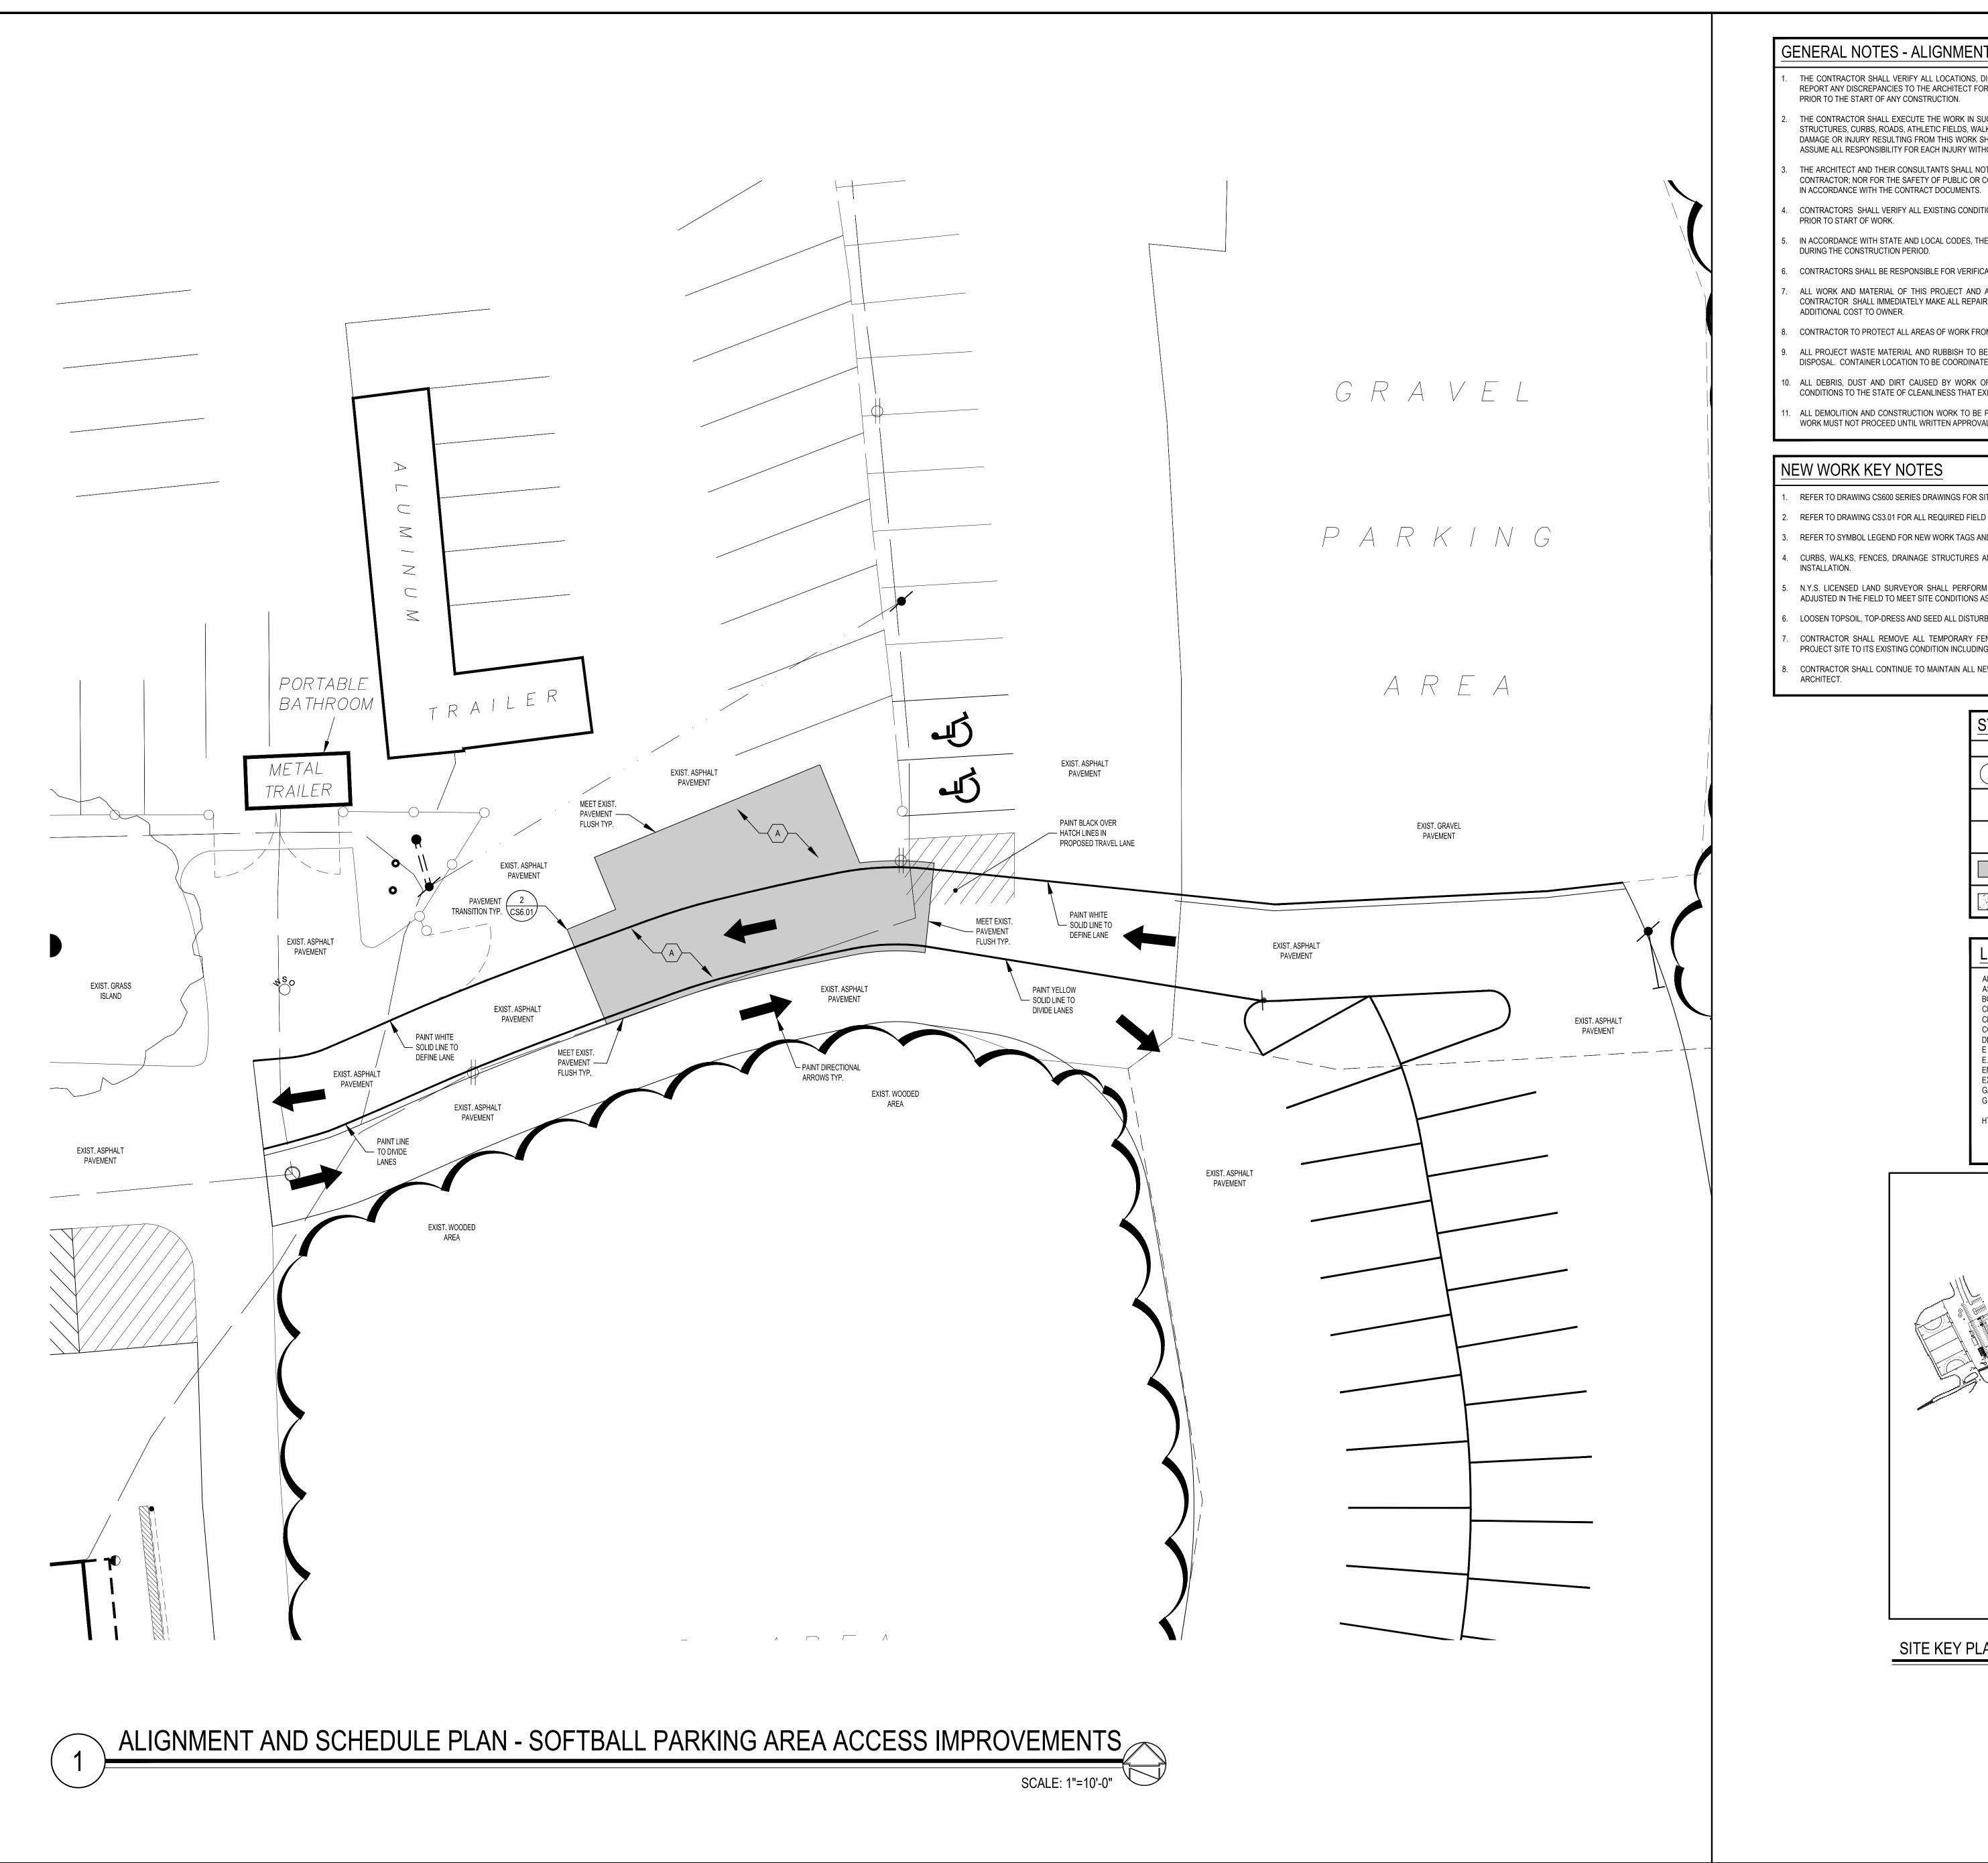

GENERAL NOTES - ALIGNMENT


- THE CONTRACTOR SHALL VERIFY ALL LOCATIONS, DIMENSIONS, SIZES AND QUANTITIES OF ALL MATERIALS PRIOR TO THE START OF ANY WORK AND REPORT ANY DISCREPANCIES TO THE ARCHITECT FOR A DECISION. ALL WORK SHALL BE LOCATED AND MARKED OUT FOR APPROVAL BY THE ARCHITECT PRIOR TO THE START OF ANY CONSTRUCTION.
- THE CONTRACTOR SHALL EXECUTE THE WORK IN SUCH MANNER THAT NO DAMAGE OR INJURY SHALL OCCUR TO PERSONS, EXISTING BUILDINGS AND STRUCTURES, CURBS, ROADS, ATHLETIC FIELDS, WALKS, PIPES, CONDUITS, POLES AND ANY AND ALL OTHER PROPERTY ABOVE AND BELOW GRADE. ANY DAMAGE OR INJURY RESULTING FROM THIS WORK SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR, WHO SHALL MAKE GOOD SUCH DAMAGE AND
 - ASSUME ALL RESPONSIBILITY FOR EACH INJURY WITHOUT ADDITIONAL COST TO THE OWNER. THE ARCHITECT AND THEIR CONSULTANTS SHALL NOT BE RESPONSIBLE FOR CONSTRUCTION MEANS AND METHODS OR PROCEDURES UTILIZED BY THE CONTRACTOR; NOR FOR THE SAFETY OF PUBLIC OR CONTRACTOR'S EMPLOYEES; OR FOR THE FAILURE OF THE CONTRACTOR TO CARRY OUT THE WORK
 - CONTRACTORS SHALL VERIFY ALL EXISTING CONDITIONS PRIOR TO PROCEEDING WITH WORK. NOTIFY ARCHITECT OF ANY DISCREPANCIES IN WRITING
 - IN ACCORDANCE WITH STATE AND LOCAL CODES, THE REQUIRED EXITS IN THE EXISTING BUILDING MUST BE KEPT CLEAR, MAINTAINED AND PROTECTED
 - CONTRACTORS SHALL BE RESPONSIBLE FOR VERIFICATION OF ALL EXISTING DIMENSIONS AND CONDITIONS.
- ALL WORK AND MATERIAL OF THIS PROJECT AND ADJACENT SURFACES SHALL BE PROTECTED FROM DAMAGE. IN THE EVENT OF DAMAGE, THE CONTRACTOR SHALL IMMEDIATELY MAKE ALL REPAIRS AND REPLACEMENT NECESSARY TO THE APPROVAL OF THE ARCHITECT AND OWNER AND AT NO ADDITIONAL COST TO OWNER.
- CONTRACTOR TO PROTECT ALL AREAS OF WORK FROM INCLEMENT WEATHER DURING AND AT THE END OF DAILY WORK OPERATIONS.
- ALL PROJECT WASTE MATERIAL AND RUBBISH TO BE DISPOSED IN CONTAINERS PROVIDED BY THE CONTRACTOR FOR SUBSEQUENT LEGAL OFF-SITE DISPOSAL. CONTAINER LOCATION TO BE COORDINATED WITH THE CONSTRUCTION MANAGER. OFF-SITE DISPOSAL TO BE ON A REGULAR BASIS.
- ALL DEBRIS, DUST AND DIRT CAUSED BY WORK OF THIS CONTRACT SHALL BE REMOVED FROM SITE BY APPROPRIATE MEANS. RESTORE ALL CONDITIONS TO THE STATE OF CLEANLINESS THAT EXISTED PRIOR TO COMMENCEMENT OF WORK.
- ALL DEMOLITION AND CONSTRUCTION WORK TO BE PREFORMED WITHOUT INTERRUPTION OF OWNER OPERATIONS. IF INTERRUPTION IS NECESSARY, WORK MUST NOT PROCEED UNTIL WRITTEN APPROVAL HAS BEEN OBTAINED FROM THE OWNER.

NEW WORK KEY NOTES

- REFER TO DRAWING CS600 SERIES DRAWINGS FOR SITE DETAILS AND PAVEMENT SCHEDULE.
- REFER TO DRAWING CS3.01 FOR ALL REQUIRED FIELD MARKINGS.
- REFER TO SYMBOL LEGEND FOR NEW WORK TAGS AND SYMBOLS.
- CURBS, WALKS, FENCES, DRAINAGE STRUCTURES AND OTHER MAJOR ITEMS SHALL BE STAKED FOR THE APPROVAL OF THE ENGINEER PRIOR TO
- N.Y.S. LICENSED LAND SURVEYOR SHALL PERFORM ALL LAYOUT WORK, INCLUDING BASELINE ESTABLISHMENT. LAYOUT OF THE WORK MAY BE ADJUSTED IN THE FIELD TO MEET SITE CONDITIONS AS APPROVED BY THE ENGINEER.
- LOOSEN TOPSOIL, TOP-DRESS AND SEED ALL DISTURBED AREAS NOT SCHEDULED FOR IMPROVEMENT.
- CONTRACTOR SHALL REMOVE ALL TEMPORARY FENCING AND EROSION AND SEDIMENT CONTROL UPON COMPLETION OF THE WORK. RESTORE PROJECT SITE TO ITS EXISTING CONDITION INCLUDING REPAIRS TO PAVEMENT, TOP DRESSING AND SEEDING OF DISTURBED AREAS.
- CONTRACTOR SHALL CONTINUE TO MAINTAIN ALL NEWLY SEEDED AREAS UNTIL SEED IS FULLY GROWN AND DEEMED USEABLE FOR RECREATION BY

SYMBOL	SYMBOL LEGEND					
SYMBOL	DESCRIPTION					
NEW CURB TYPE - SEE DETAILS ON CS6.01						
NEW PAVEMENT TYPE SCHEDULE - SEE SCHEDULE ON CS6.01						
NEW ITEM DETAIL TAG - SEE DETAILS ON CS600 SERIES						
	NEW ASPHALT PAVEMENT					
	NEW CONCRETE PAVEMENT					

ALT.	ALTERNATE	LB	LEACHING BASIN
ASPH.	ASPHALT	LF	LINEAR FEET
BC	BOTTOM CURB	LG	LONG
CB	CATCH BASIN	LP	LIGHT POLE
CLF	CHAIN LINK FENCE	N	NORTH
CONC.	CONCRETE	OPN.	OPENING
DEMO.	DEMOLITION	PAV'T	PAVEMENT
E	EAST	S	SOUTH
E.C.	ELECTRICAL CONTRACTOR	SC	SITEWORK CONTRACTO
ENC.	ENCLOSURE	TC	TOP CURB
EX.	EXISTING	TEMP.	TEMPORARY
GALV.	GALVANIZED	(TYP.)	TYPICAL
G.C	GENERAL CONSTRUCTION	VIF	VERIFY IN FIELD
	CONTRACTOR	VCCLF	VINLY CLAD CHAIN LINE
HT.	HEIGHT		FENCE
		W	WEST
		WD	WIDE
		&	AND

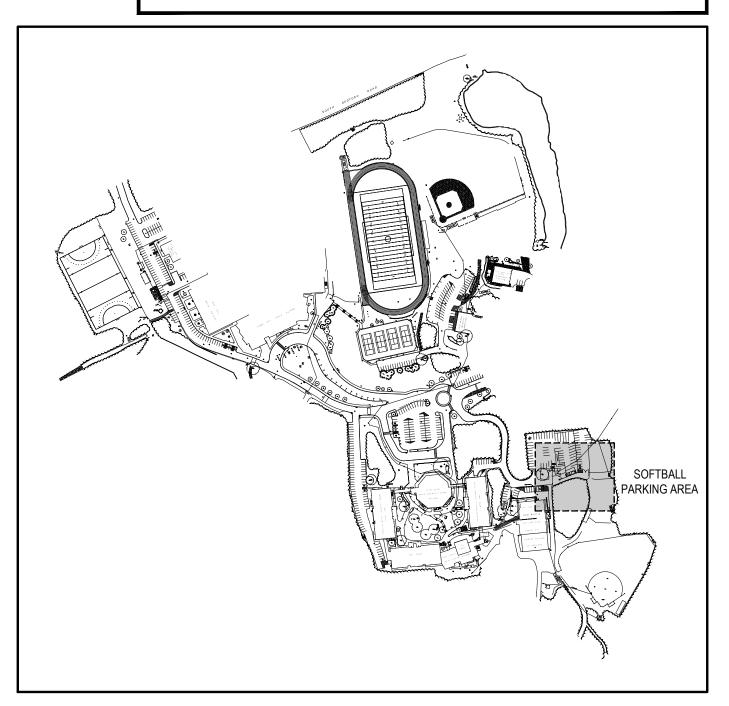

SITE KEY PLAN

REV. DATE

THESE DRAWINGS ARE BASED ON CONSTRUCTION DRAWINGS NOT PREPARED BY BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PC. AND, THEREFORE, MAY NOT REPRESENT THE ENGINEERS, P.C. AND, THEREFORE, MAY NOT REPRESENT THE CONDITIONS AS CONSTRUCTED AT THE TIME. ALL EXISTING CONDITIONS SHOWN ARE REPRESENTED AS SUGGESTIVE INFORMATION AS THEY MAY NOT HAVE BEEN BUILT AND DETAILED PER THE ORIGINAL DOCUMENTS OR PER THE OWNER'S INFORMATION.

NOT TO SCALE

CHECK BY: THIS DRAWING, PREPARED FOR THE SPECIFIC PROJECT INDICATED IS AN INSTRUMENT OF SERVICE AND THE PROPERTY OF BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PC. INFRINGEMENT OR ANY USE OF THIS DRAWING FOR ANY OTHER PROJECT IS PROHIBITED. ANY ALTERATION OR REPRODUCTION OF THIS DOCUMENT IS ALSO PROHIBITED WITHOUT THE WRITTEI CONSENT OF THE ARCHITECT OR ENGINEER.

LANDSCAPE ARCHITECTS ENGINEERS

244 EAST MAIN STREET 100 GREAT OAKS BLVD.
PATCHOGUE SUITE 115, ALBANY
NEW YORK 11772 NEW YORK 12203 T. 631.475.0349 T. 518.621.7650 F. 631.475.0361 F. 518.621.7655


66-01-02-06-0-007-013 BEDFORD CENTRAL SCHOOL DISTRICT

PROJECT PHASE 2 -BOND IMPROVEMENTS


DWG TITLE SITE PLAN

BID PICK-UP: FEBRUARY 24, 2025

CS2.02

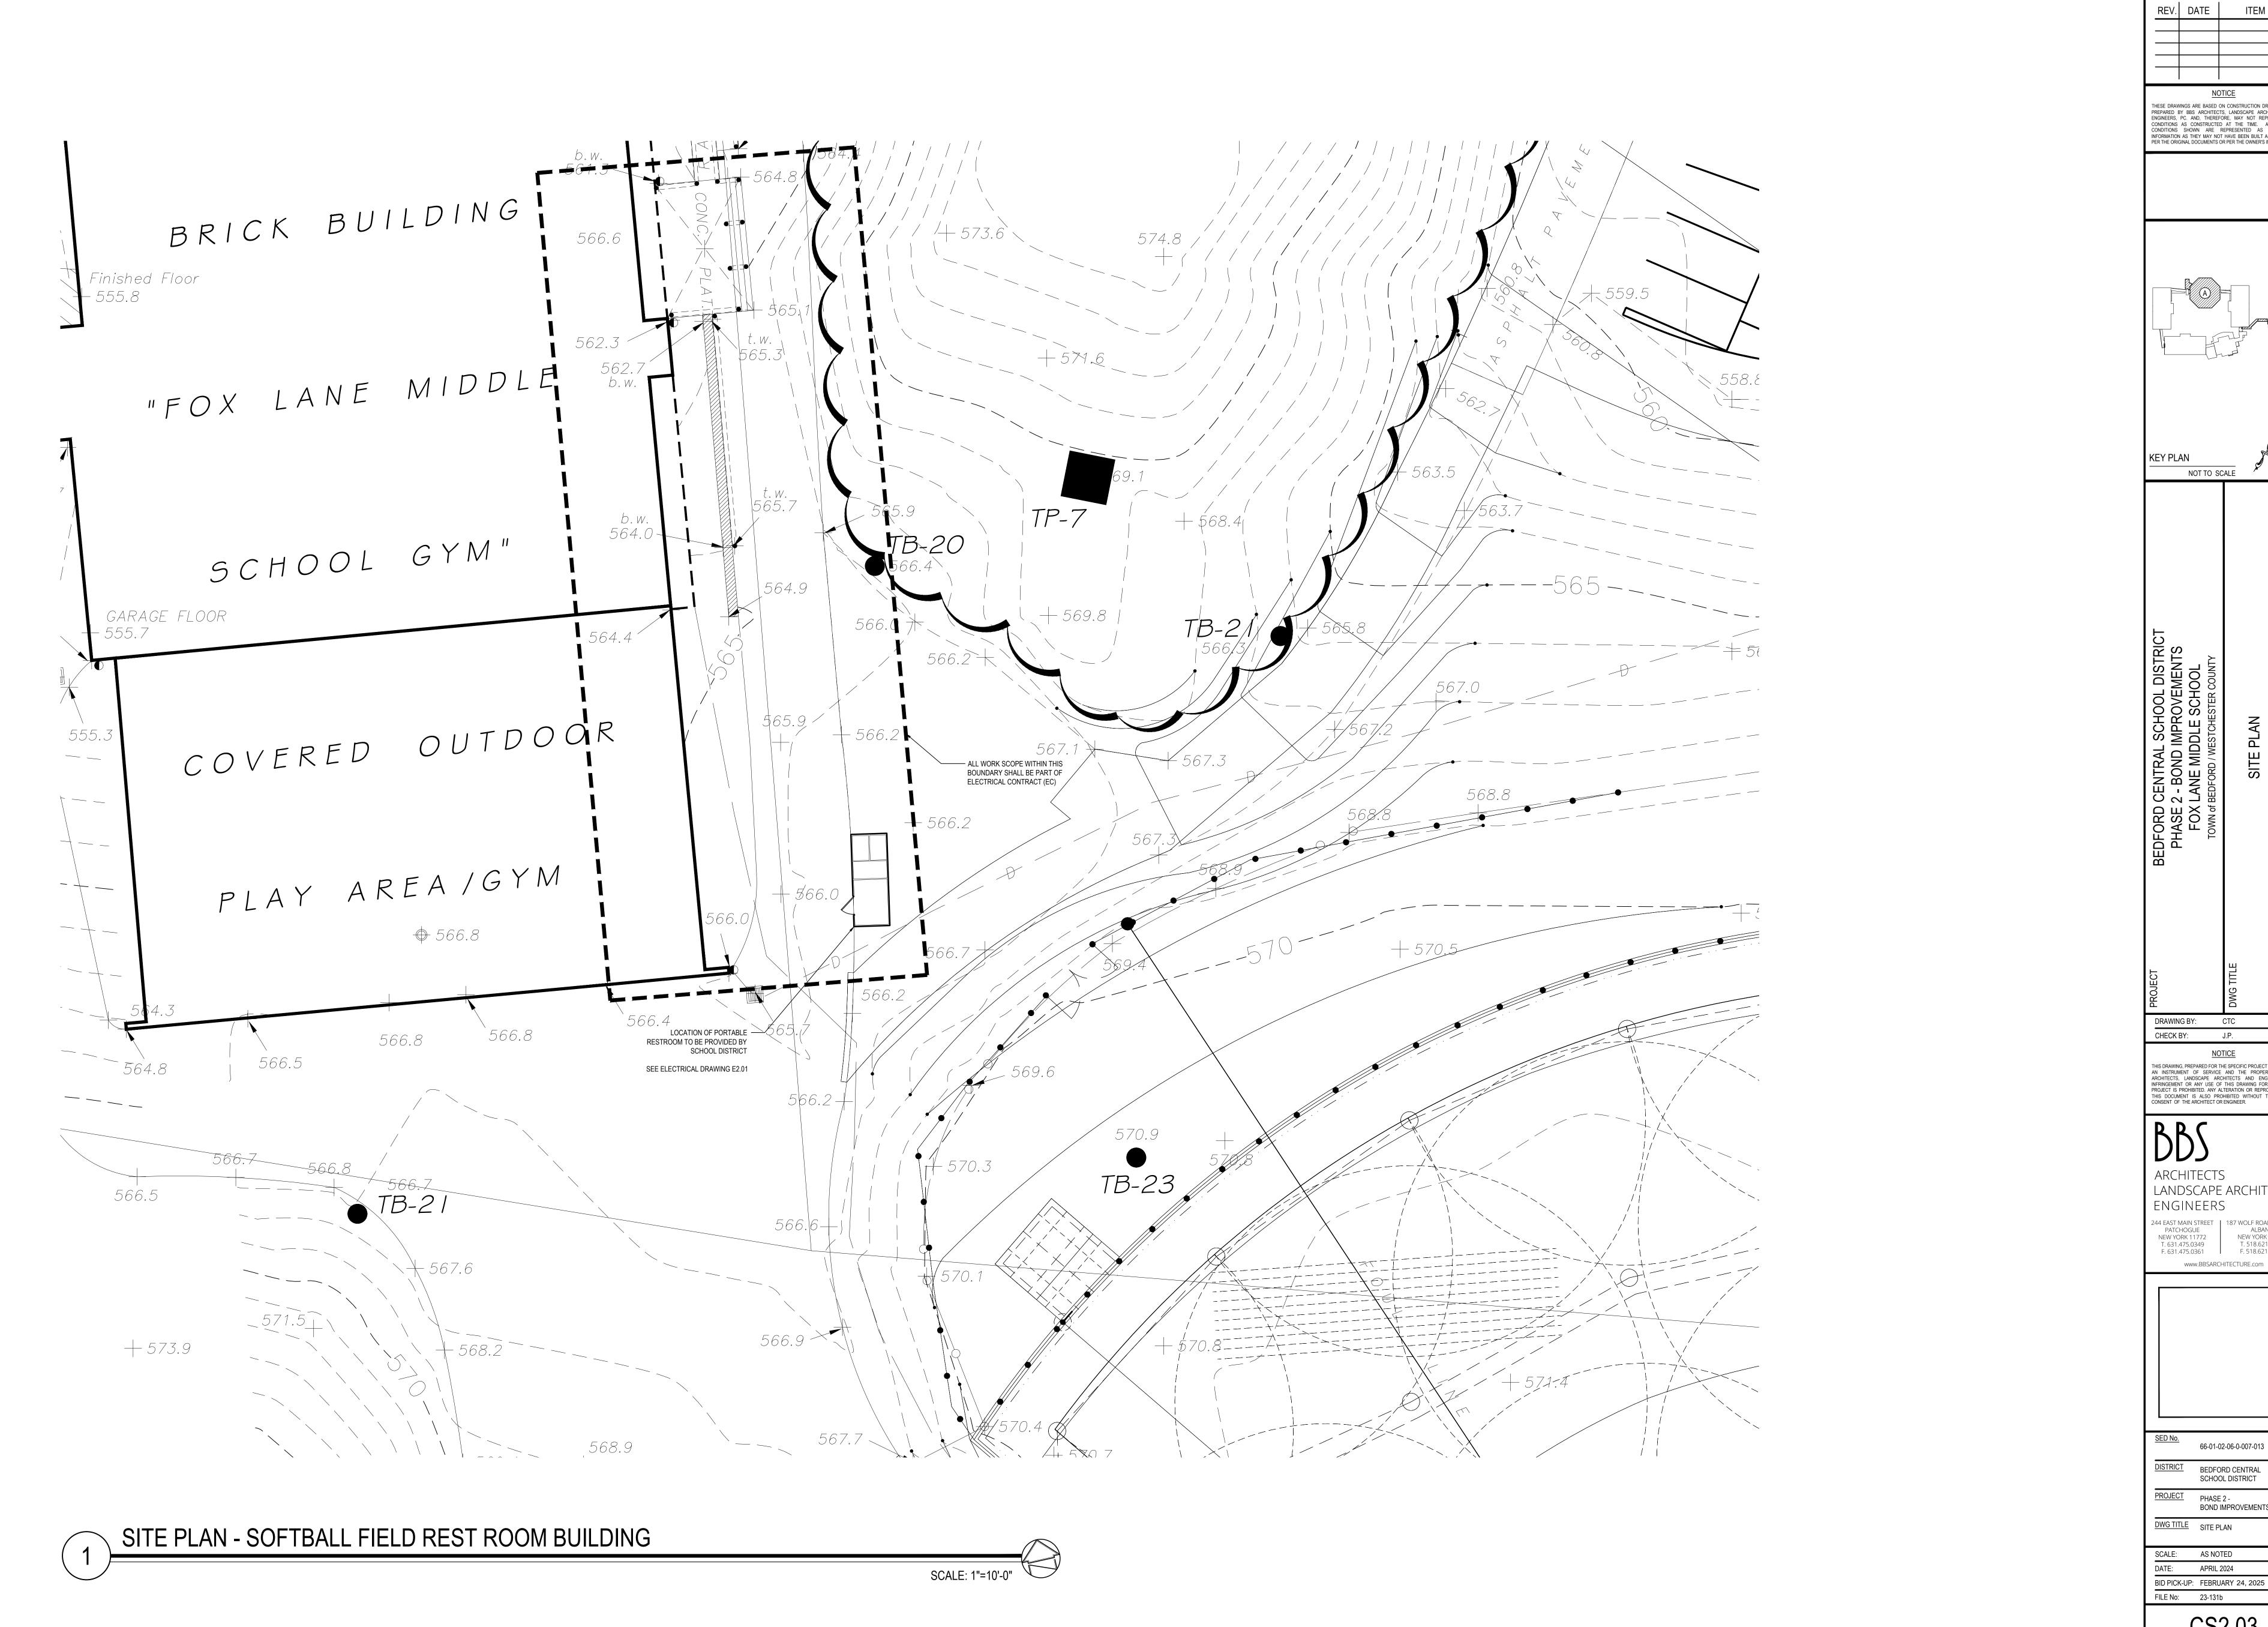

THESE DRAWINGS ARE BASED ON CONSTRUCTION DRAWINGS N

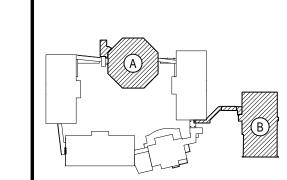


NOT TO SCALE

ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PUNFRINGEMENT OR ANY USE OF THIS DRAWING FOR ANY OTHER PROJECT IS PROHIBITED. ANY ALTERATION OR REPRODUCTION OF THIS DOCUMENT IS ALSO PROHIBITED WITHOUT THE WRITTEN CONSENT OF THE ARCHITECT OR ENGINEER.

LANDSCAPE ARCHITECTS ENGINEERS

244 EAST MAIN STREET PATCHOGUE ALBANY NEW YORK 11772 T. 631.475.0349 F. 631.475.0361 P. 518.621.7655

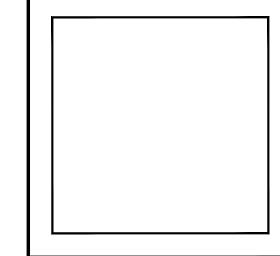

66-01-02-06-0-007-013 DISTRICT BEDFORD CENTRAL

PROJECT PHASE 2 -BOND IMPROVEMENTS

DWG TITLE SITE PLAN SCALE: AS NOTED

BID PICK-UP: FEBRUARY 24, 2025


CS2.03

SYMBOL LEGE	<u>ND</u>	NEW WORK KEY NOTES
SYMBOL	DESCRIPTION	REFER TO DRAWING CS600 SERIES DRAWINGS FOR SITE DETAILS AND PAVEMENT SCHEDULE.
EJ	EXPANSION JOINT	2. REFER TO SYMBOL LEGEND FOR NEW WORK TAGS AND SYMBOLS.
A	NEW PAVEMENT TYPE SCHEDULE - SEE SCHEDULE ON CS6.01	3. WALKS STRUCTURES AND OTHER MAJOR ITEMS SHALL BE STAKED FOR THE APPROVAL OF THE ENGINEER PRIOR TO INSTAL 4. N.Y.S. LICENSED LAND SURVEYOR SHALL PERFORM ALL LAYOUT WORK, INCLUDING BASELINE ESTABLISHMENT. LAYOUT WORK, INCLUDING BASELINE ESTABLISHMENT.
CS6.01	NEW ITEM DETAIL TAG - SEE DETAILS ON CS600 SERIES	ADJUSTED IN THE FIELD TO MEET SITE CONDITIONS AS APPROVED BY THE ENGINEER. 5. LOOSEN TOPSOIL, TOP-DRESS AND SEED ALL DISTURBED AREAS NOT SCHEDULED FOR IMPROVEMENT.
A	NEW ASPHALT PAVEMENT WALKWAYS	6. CONTRACTOR SHALL REMOVE ALL TEMPORARY FENCING AND EROSION AND SEDIMENT CONTROL UPON COMPLETION PROJECT SITE TO ITS EXISTING CONDITION INCLUDING REPAIRS TO PAVEMENT, TOP DRESSING AND SEEDING OF DISTURBE
C	NEW CONCRETE PAVEMENT	7. CONTRACTOR SHALL CONTINUE TO MAINTAIN ALL NEWLY SEEDED AREAS UNTIL SEED IS FULLY GROWN AND DEEMED US ARCHITECT.
	'	8. ALL EXISTING RAILINGS AT PERIMETER OF CAFETERIA PLAZA SHALL BE REMOVED, PAINTED & REINSTALLED AFTER CONC CONTRACTOR SHALL CUT AND WELD SPLICE TUBES TO PROPERLY SECURE THE EXISTING RAILINGS INTO NEW SLEEVES.
		9. CONTRACTOR IS SPECIFICALLY NOTIFIED THAT THE EXISTING CONCRETE DECK AT THE CAFETERIA PLAZA HAS SOME CF CERTAIN AREAS. ONCE THE CONCRETE IS REMOVED ALL VOIDS SHALL BE BACKFILLED WITH STRUCTURAL FILL AND SUBGRADE AT NO ADDITIONAL COST. THE CONTRACTOR SHALL SHORE EXISTING CONCRETE WALLS TO INSURE THEY A COMPACTION ACTIVITIES.
		10. CONTRACTOR SHALL PITCH CONCRETE AT CAFETERIA PLAZA TO MEET SURROUNDING PAVEMENTS, DOORS & GRATINGS FL
		11. CONTRACTOR SHALL SAWCUT & REPAVE ASPHALT AT BOTTOM OF RECONSTRUCTED STAIRWAYS TO MEET EXISTING PAVEN

- S600 SERIES DRAWINGS FOR SITE DETAILS AND PAVEMENT SCHEDULE.
- GEND FOR NEW WORK TAGS AND SYMBOLS.
- AND OTHER MAJOR ITEMS SHALL BE STAKED FOR THE APPROVAL OF THE ENGINEER PRIOR TO INSTALLATION.
- SURVEYOR SHALL PERFORM ALL LAYOUT WORK, INCLUDING BASELINE ESTABLISHMENT. LAYOUT OF THE WORK MAY BE D TO MEET SITE CONDITIONS AS APPROVED BY THE ENGINEER.
- -DRESS AND SEED ALL DISTURBED AREAS NOT SCHEDULED FOR IMPROVEMENT.
 - REMOVE ALL TEMPORARY FENCING AND EROSION AND SEDIMENT CONTROL UPON COMPLETION OF THE WORK. RESTORE EXISTING CONDITION INCLUDING REPAIRS TO PAVEMENT, TOP DRESSING AND SEEDING OF DISTURBED AREAS. CONTINUE TO MAINTAIN ALL NEWLY SEEDED AREAS UNTIL SEED IS FULLY GROWN AND DEEMED USEABLE FOR RECREATION BY
- S AT PERIMETER OF CAFETERIA PLAZA SHALL BE REMOVED, PAINTED & REINSTALLED AFTER CONCRETE WORK IS COMPLETED.
- CIFICALLY NOTIFIED THAT THE EXISTING CONCRETE DECK AT THE CAFETERIA PLAZA HAS SOME CRACKS AND HAS SETTLED IN E THE CONCRETE IS REMOVED ALL VOIDS SHALL BE BACKFILLED WITH STRUCTURAL FILL AND COMPACTED TO PROPOSED DITIONAL COST. THE CONTRACTOR SHALL SHORE EXISTING CONCRETE WALLS TO INSURE THEY ARE NOT DISPLACED DURING
- ITCH CONCRETE AT CAFETERIA PLAZA TO MEET SURROUNDING PAVEMENTS, DOORS & GRATINGS FLUSH.
- AWCUT & REPAVE ASPHALT AT BOTTOM OF RECONSTRUCTED STAIRWAYS TO MEET EXISTING PAVEMENT FLUSH

GENERAL NOTES - ALIGNMENT


- THE CONTRACTOR SHALL VERIFY ALL LOCATIONS, DIMENSIONS, SIZES AND QUANTITIES OF ALL MATERIALS PRIOR TO THE START OF ANY WORK AND REPORT ANY DISCREPANCIES TO THE ARCHITECT FOR A DECISION. ALL WORK SHALL BE LOCATED AND MARKED OUT FOR APPROVAL BY THE ARCHITECT PRIOR TO THE START OF ANY CONSTRUCTION.
- THE CONTRACTOR SHALL EXECUTE THE WORK IN SUCH MANNER THAT NO DAMAGE OR INJURY SHALL OCCUR TO PERSONS, EXISTING BUILDINGS AND STRUCTURES, CURBS, ROADS, ATHLETIC FIELDS, WALKS, PIPES, CONDUITS, POLES AND ANY AND ALL OTHER PROPERTY ABOVE AND BELOW GRADE. ANY DAMAGE OR INJURY RESULTING FROM THIS WORK SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR, WHO SHALL MAKE GOOD SUCH DAMAGE AND ASSUME ALL RESPONSIBILITY FOR EACH INJURY WITHOUT ADDITIONAL COST TO THE OWNER.
- THE ARCHITECT AND THEIR CONSULTANTS SHALL NOT BE RESPONSIBLE FOR CONSTRUCTION MEANS AND METHODS OR PROCEDURES UTILIZED BY THE CONTRACTOR; NOR FOR THE SAFETY OF PUBLIC OR CONTRACTOR'S EMPLOYEES; OR FOR THE FAILURE OF THE CONTRACTOR TO CARRY OUT THE WORK IN ACCORDANCE WITH THE CONTRACT DOCUMENTS.
- CONTRACTORS SHALL VERIFY ALL EXISTING CONDITIONS PRIOR TO PROCEEDING WITH WORK. NOTIFY ARCHITECT OF ANY DISCREPANCIES IN WRITING PRIOR TO START OF WORK.
- IN ACCORDANCE WITH STATE AND LOCAL CODES, THE REQUIRED EXITS IN THE EXISTING BUILDING MUST BE KEPT CLEAR, MAINTAINED AND PROTECTED DURING THE CONSTRUCTION PERIOD.
- CONTRACTORS SHALL BE RESPONSIBLE FOR VERIFICATION OF ALL EXISTING DIMENSIONS AND CONDITIONS.
- ALL WORK AND MATERIAL OF THIS PROJECT AND ADJACENT SURFACES SHALL BE PROTECTED FROM DAMAGE. IN THE EVENT OF DAMAGE, THE CONTRACTOR SHALL IMMEDIATELY MAKE ALL REPAIRS AND REPLACEMENT NECESSARY TO THE APPROVAL OF THE ARCHITECT AND OWNER AND AT NO ADDITIONAL COST TO OWNER.
- CONTRACTOR TO PROTECT ALL AREAS OF WORK FROM INCLEMENT WEATHER DURING AND AT THE END OF DAILY WORK OPERATIONS.
- ALL PROJECT WASTE MATERIAL AND RUBBISH TO BE DISPOSED IN CONTAINERS PROVIDED BY THE CONTRACTOR FOR SUBSEQUENT LEGAL OFF-SITE DISPOSAL. CONTAINER LOCATION TO BE COORDINATED WITH THE CONSTRUCTION MANAGER. OFF-SITE DISPOSAL TO BE ON A REGULAR BASIS.
- ALL DEBRIS, DUST AND DIRT CAUSED BY WORK OF THIS CONTRACT SHALL BE REMOVED FROM SITE BY APPROPRIATE MEANS. RESTORE ALL CONDITIONS TO THE STATE OF CLEANLINESS THAT EXISTED PRIOR TO COMMENCEMENT OF WORK.
- ALL DEMOLITION AND CONSTRUCTION WORK TO BE PREFORMED WITHOUT INTERRUPTION OF OWNER OPERATIONS. IF INTERRUPTION IS NECESSARY, WORK MUST NOT PROCEED UNTIL WRITTEN APPROVAL HAS BEEN OBTAINED FROM THE OWNER.

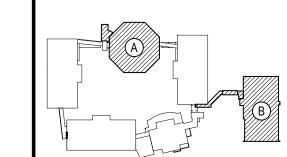

THESE DRAWINGS ARE BASED ON CONSTRUCTION DRAWINGS NOT PREPARED BY BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PC. AND, THEREFORE, MAY NOT REPRESENT THE CONDITIONS AS CONSTRUCTED AT THE TIME. ALL EXISTING

CONDITIONS SHOWN ARE REPRESENTED AS SUGGESTIVE INFORMATION AS THEY MAY NOT HAVE BEEN BUILT AND DETAILED PER THE ORIGINAL DOCUMENTS OR PER THE OWNER'S INFORMATION.



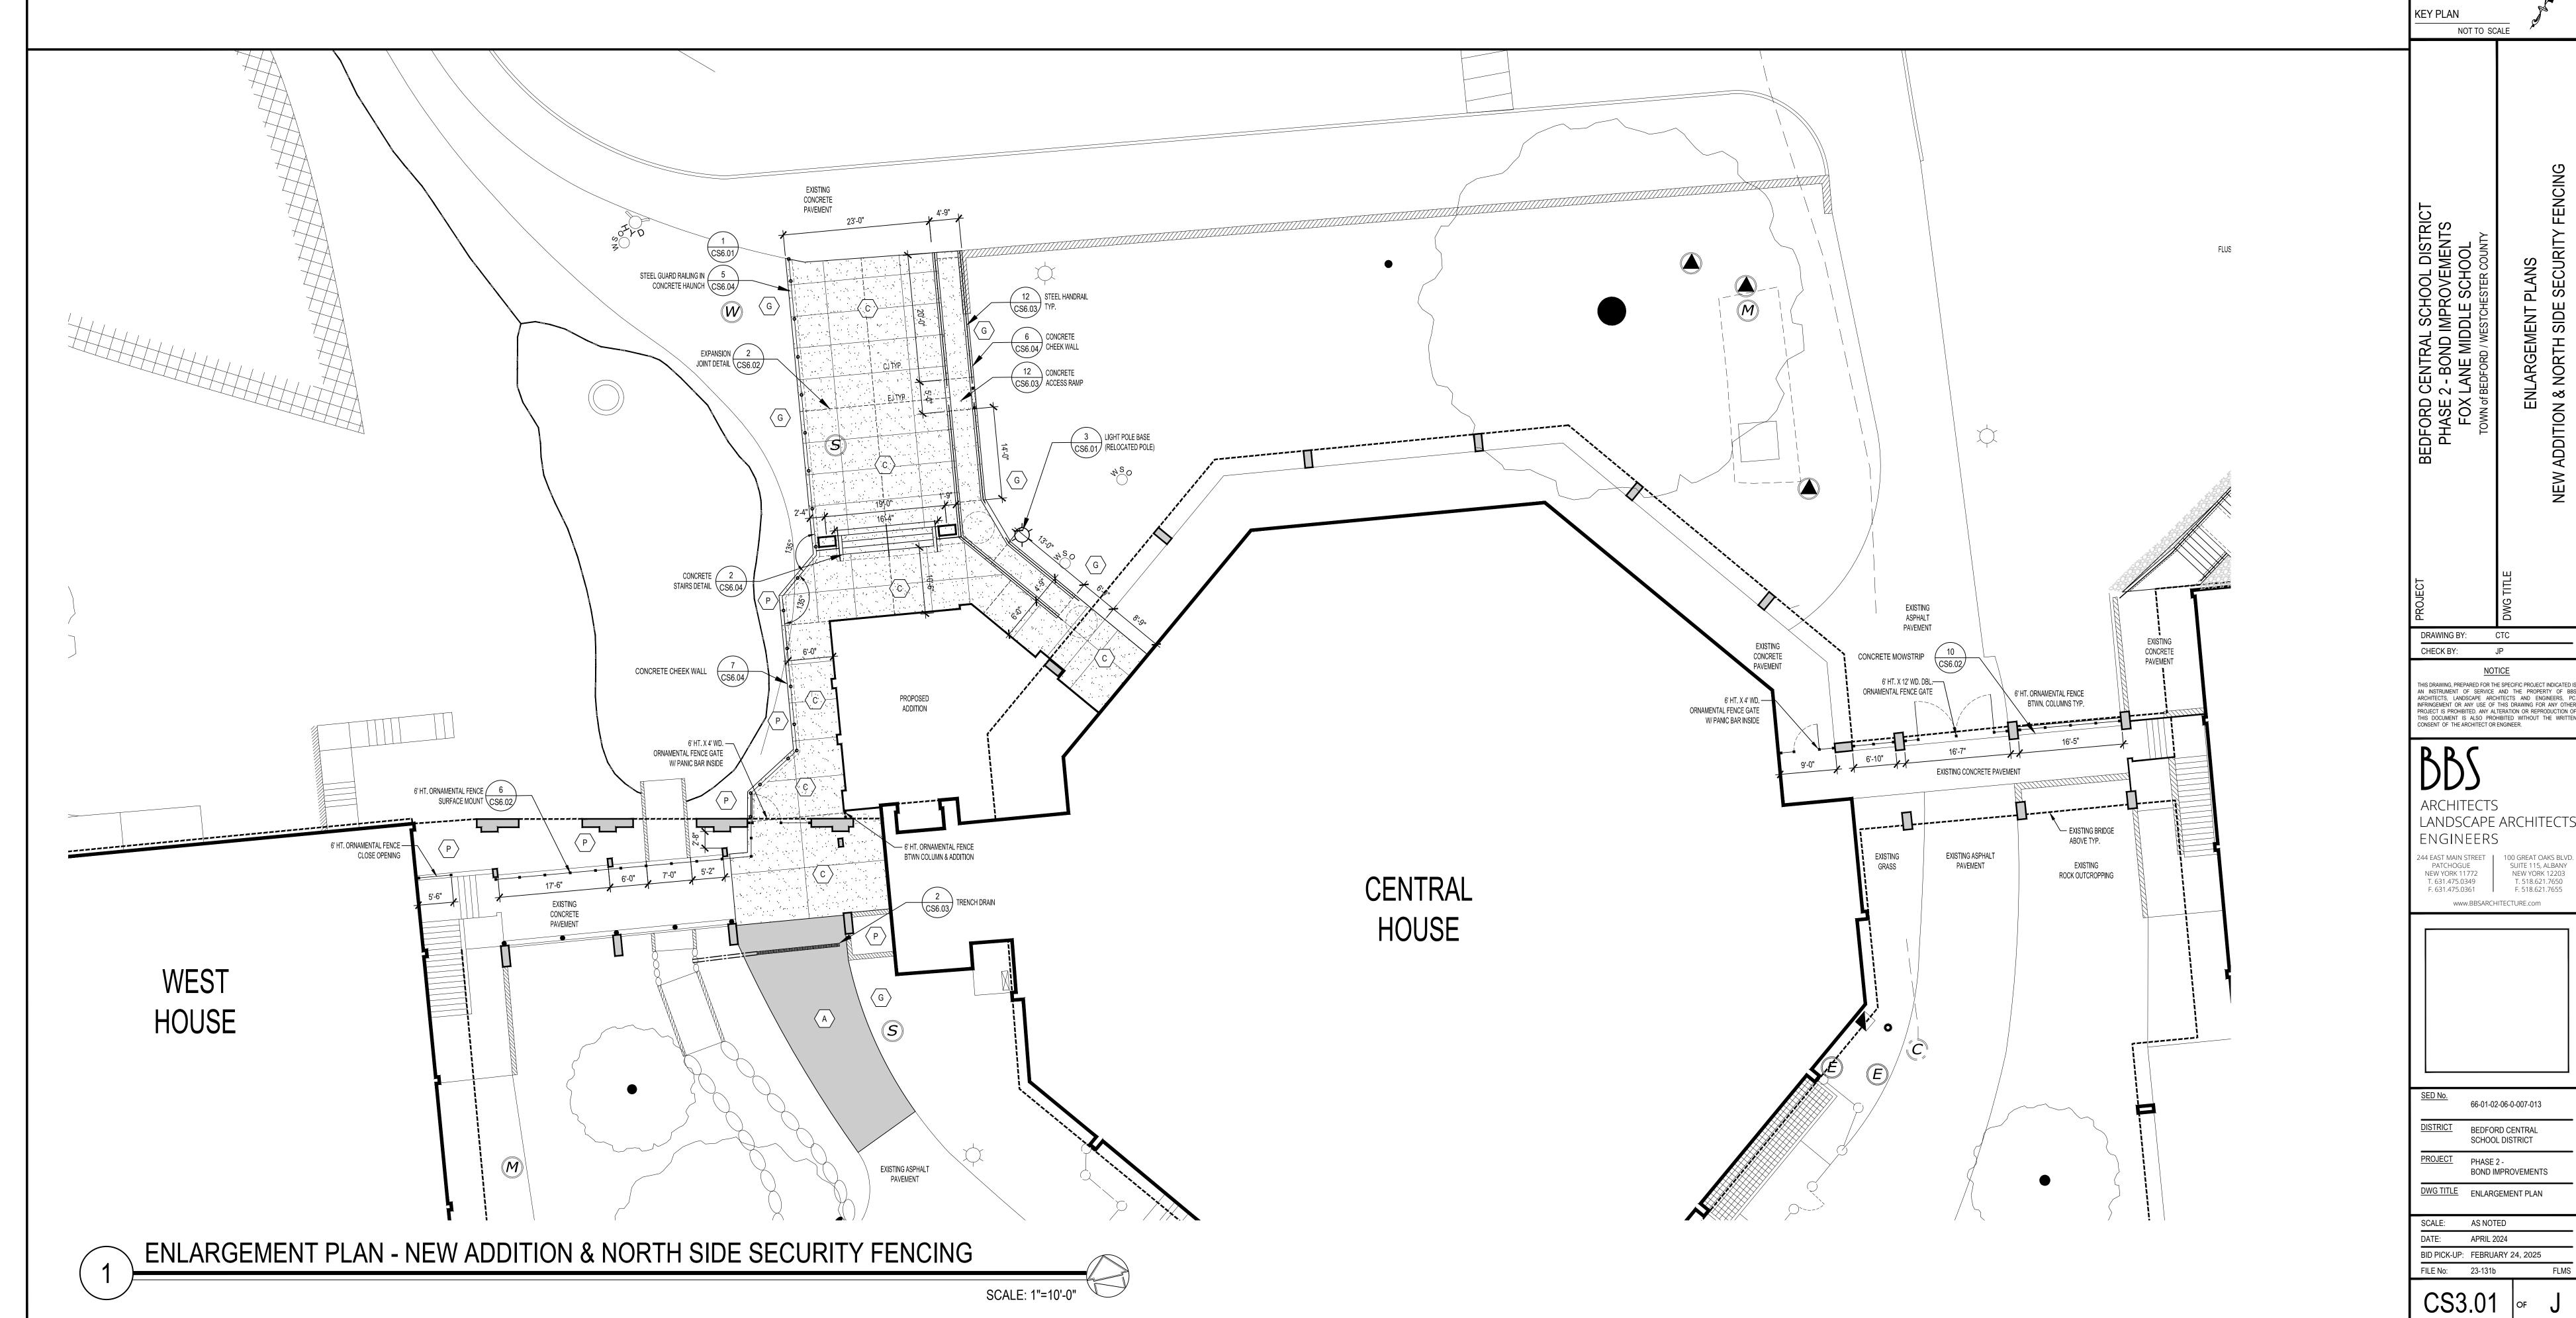

SIGN SCHEDULE							
SIGN PANEL	TYPE	N.Y.S. D.O.T. SIGN No.	SIZE	BACKGROUND COLOR	LEGEND COLOR	BORDER	LEGEND SIZES
STOP	S3	R3-1B	24" x 24"	RED	WHITE	5/8"	8-C"
DO NOT ENTER	S4	R3-15C	30" x 30"	RED / WHITE	WHITE	VAR.	4" - D 5" BAR 4" - D

1. SIGNS S3, AND S4 SHALL CONFORM TO THE N.Y.S. MANUAL OF UNIFORM TRAFFIC CONTROL DEVICES (MUTCD), SECTION 221,

INCLUSIVE, AS APPLICABLE.

2. SEE PLANS FOR SIGN LOCATIONS TO DETERMINE ARROW DIRECTIONS ON SIGNS.

SYMBOL LEGEND	
SYMBOL	DESCRIPTION
EJ	EXPANSION JOINT
A	NEW PAVEMENT TYPE SCHEDULE - SEE SCHEDULE ON CS6.01
CS6.01)	NEW ITEM DETAIL TAG - SEE DETAILS ON CS600 SERIES
A	NEW ASPHALT PAVEMENT WALKWAYS
C	NEW CONCRETE PAVEMENT

NEW WORK KEY NOTES


- REFER TO DRAWING CS600 SERIES DRAWINGS FOR SITE DETAILS AND PAVEMENT SCHEDULE.
- REFER TO SYMBOL LEGEND FOR NEW WORK TAGS AND SYMBOLS.
- WALKS STRUCTURES AND OTHER MAJOR ITEMS SHALL BE STAKED FOR THE APPROVAL OF THE ENGINEER PRIOR TO INSTALLATION.
- 4. N.Y.S. LICENSED LAND SURVEYOR SHALL PERFORM ALL LAYOUT WORK, INCLUDING BASELINE ESTABLISHMENT. LAYOUT OF THE WORK MAY BE ADJUSTED IN THE FIELD TO MEET SITE CONDITIONS AS APPROVED BY THE ENGINEER.
- LOOSEN TOPSOIL, TOP-DRESS AND SEED ALL DISTURBED AREAS NOT SCHEDULED FOR IMPROVEMENT.
- CONTRACTOR SHALL REMOVE ALL TEMPORARY FENCING AND EROSION AND SEDIMENT CONTROL UPON COMPLETION OF THE WORK. RESTORE PROJECT SITE TO ITS EXISTING CONDITION INCLUDING REPAIRS TO PAVEMENT, TOP DRESSING AND SEEDING OF DISTURBED AREAS.
- CONTRACTOR SHALL CONTINUE TO MAINTAIN ALL NEWLY SEEDED AREAS UNTIL SEED IS FULLY GROWN AND DEEMED USEABLE FOR RECREATION BY
- ALL EXISTING RAILINGS AT PERIMETER OF CAFETERIA PLAZA SHALL BE REMOVED, PAINTED & REINSTALLED AFTER CONCRETE WORK IS COMPLETED.
- CONTRACTOR IS SPECIFICALLY NOTIFIED THAT THE EXISTING CONCRETE DECK AT THE CAFETERIA PLAZA HAS SOME CRACKS AND HAS SETTLED IN CERTAIN AREAS. ONCE THE CONCRETE IS REMOVED ALL VOIDS SHALL BE BACKFILLED WITH STRUCTURAL FILL AND COMPACTED TO PROPOSED SUBGRADE AT NO ADDITIONAL COST. THE CONTRACTOR SHALL SHORE EXISTING CONCRETE WALLS TO INSURE THEY ARE NOT DISPLACED DURING COMPACTION ACTIVITIES.
- 0. CONTRACTOR SHALL PITCH CONCRETE AT CAFETERIA PLAZA TO MEET SURROUNDING PAVEMENTS, DOORS & GRATINGS FLUSH.

CONTRACTOR SHALL CUT AND WELD SPLICE TUBES TO PROPERLY SECURE THE EXISTING RAILINGS INTO NEW SLEEVES.

. CONTRACTOR SHALL SAWCUT & REPAVE ASPHALT AT BOTTOM OF RECONSTRUCTED STAIRWAYS TO MEET EXISTING PAVEMENT FLUSH

GENERAL NOTES - ALIGNMENT

- THE CONTRACTOR SHALL VERIFY ALL LOCATIONS, DIMENSIONS, SIZES AND QUANTITIES OF ALL MATERIALS PRIOR TO THE START OF ANY WORK AND REPORT ANY DISCREPANCIES TO THE ARCHITECT FOR A DECISION. ALL WORK SHALL BE LOCATED AND MARKED OUT FOR APPROVAL BY THE ARCHITECT PRIOR TO THE START OF ANY CONSTRUCTION.
- THE CONTRACTOR SHALL EXECUTE THE WORK IN SUCH MANNER THAT NO DAMAGE OR INJURY SHALL OCCUR TO PERSONS, EXISTING BUILDINGS AND STRUCTURES, CURBS, ROADS, ATHLETIC FIELDS, WALKS, PIPES, CONDUITS, POLES AND ANY AND ALL OTHER PROPERTY ABOVE AND BELOW GRADE. ANY DAMAGE OR INJURY RESULTING FROM THIS WORK SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR, WHO SHALL MAKE GOOD SUCH DAMAGE AND ASSUME ALL RESPONSIBILITY FOR EACH INJURY WITHOUT ADDITIONAL COST TO THE OWNER.
- THE ARCHITECT AND THEIR CONSULTANTS SHALL NOT BE RESPONSIBLE FOR CONSTRUCTION MEANS AND METHODS OR PROCEDURES UTILIZED BY THE CONTRACTOR; NOR FOR THE SAFETY OF PUBLIC OR CONTRACTOR'S EMPLOYEES; OR FOR THE FAILURE OF THE CONTRACTOR TO CARRY OUT THE WORK IN ACCORDANCE WITH THE CONTRACT DOCUMENTS.
- CONTRACTORS SHALL VERIFY ALL EXISTING CONDITIONS PRIOR TO PROCEEDING WITH WORK. NOTIFY ARCHITECT OF ANY DISCREPANCIES IN WRITING PRIOR TO START OF WORK.
- IN ACCORDANCE WITH STATE AND LOCAL CODES, THE REQUIRED EXITS IN THE EXISTING BUILDING MUST BE KEPT CLEAR, MAINTAINED AND PROTECTED DURING THE CONSTRUCTION PERIOD.
- CONTRACTORS SHALL BE RESPONSIBLE FOR VERIFICATION OF ALL EXISTING DIMENSIONS AND CONDITIONS.
- ALL WORK AND MATERIAL OF THIS PROJECT AND ADJACENT SURFACES SHALL BE PROTECTED FROM DAMAGE. IN THE EVENT OF DAMAGE, THE CONTRACTOR SHALL IMMEDIATELY MAKE ALL REPAIRS AND REPLACEMENT NECESSARY TO THE APPROVAL OF THE ARCHITECT AND OWNER AND AT NO ADDITIONAL COST TO OWNER.
- CONTRACTOR TO PROTECT ALL AREAS OF WORK FROM INCLEMENT WEATHER DURING AND AT THE END OF DAILY WORK OPERATIONS.
- ALL PROJECT WASTE MATERIAL AND RUBBISH TO BE DISPOSED IN CONTAINERS PROVIDED BY THE CONTRACTOR FOR SUBSEQUENT LEGAL OFF-SITE DISPOSAL. CONTAINER LOCATION TO BE COORDINATED WITH THE CONSTRUCTION MANAGER. OFF-SITE DISPOSAL TO BE ON A REGULAR BASIS.
- ALL DEBRIS, DUST AND DIRT CAUSED BY WORK OF THIS CONTRACT SHALL BE REMOVED FROM SITE BY APPROPRIATE MEANS. RESTORE ALL CONDITIONS TO THE STATE OF CLEANLINESS THAT EXISTED PRIOR TO COMMENCEMENT OF WORK.
- ALL DEMOLITION AND CONSTRUCTION WORK TO BE PREFORMED WITHOUT INTERRUPTION OF OWNER OPERATIONS. IF INTERRUPTION IS NECESSARY, WORK MUST NOT PROCEED UNTIL WRITTEN APPROVAL HAS BEEN OBTAINED FROM THE OWNER.

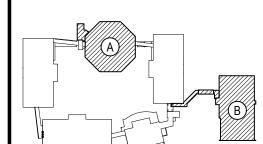

NOT TO SCALE


KEY PLAN


THESE DRAWINGS ARE BASED ON CONSTRUCTION DRAWINGS NOT PREPARED BY BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND

ENGINEERS, PC. AND, THEREFORE, MAY NOT REPRESENT TH CONDITIONS AS CONSTRUCTED AT THE TIME. ALL EXISTIN

CONDITIONS SHOWN ARE REPRESENTED AS SUGGESTIVINFORMATION AS THEY MAY NOT HAVE BEEN BUILT AND DETAILE

PER THE ORIGINAL DOCUMENTS OR PER THE OWNER'S INFORMATIO

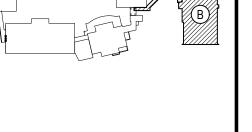

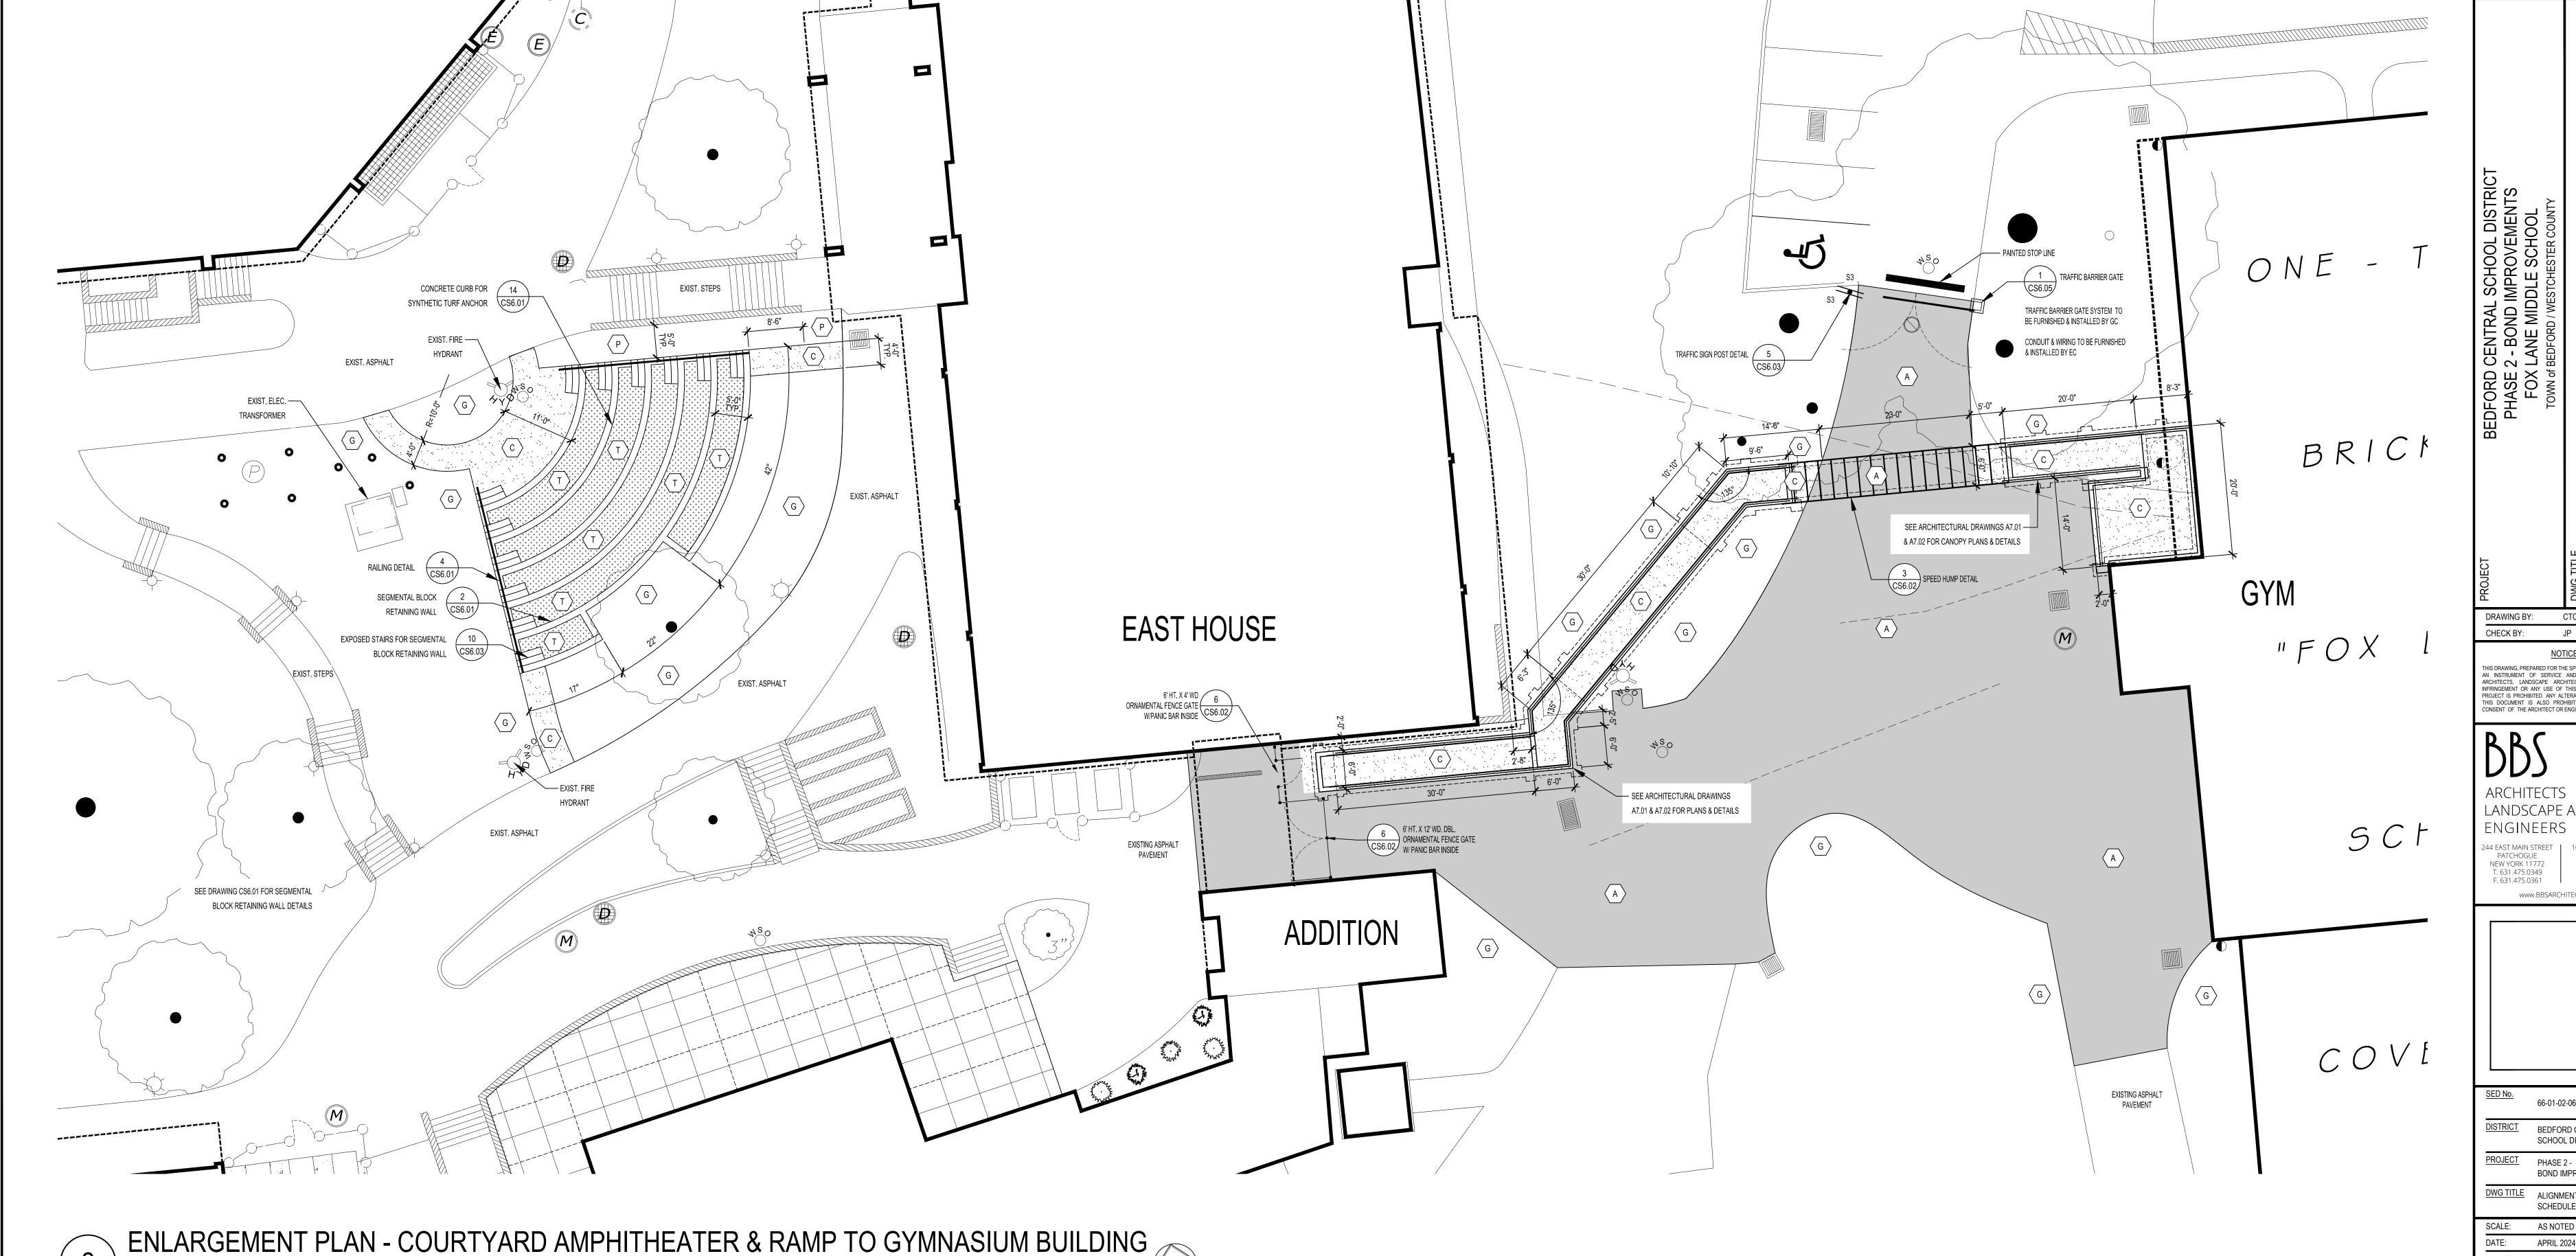

DRAWING BY: CTC CHECK BY: JP

THIS DRAWING, PREPARED FOR THE SPECIFIC PROJECT INDICATED IS AN INSTRUMENT OF SERVICE AND THE PROPERTY OF BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PC. INFRINGEMENT OR ANY USE OF THIS DRAWING FOR ANY OTHER PROJECT IS PROHIBITED. ANY ALTERATION OR REPRODUCTION OF THIS DOCUMENT IS ALSO PROHIBITED WITHOUT THE WRITTEN CONSENT OF THE ARCHITECT OR ENGINEER.

ARCHITECTS LANDSCAPE ARCHITECTS

> SUITE 115, ALBANY NEW YORK 12203 F. 518.621.7655

www.BBSARCHITECTURE.com

66-01-02-06-0-007-013


DISTRICT BEDFORD CENTRAL SCHOOL DISTRICT


BOND IMPROVEMENTS DWG TITLE ALIGNMENT AND SCHEDULE PLAN


SCALE: AS NOTED BID PICK-UP: FEBRUARY 24, 2025


CS3.02


	SYMBOL LEGEND SYMBOL	NOTICE THESE DRAWINGS ARE BASED ON CONSTRUCTION DRAWINGS NOT PREPARED BY BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PC. AND, THEREFORE, MAY NOT REPRESENT THE CONDITIONS AS CONSTRUCTED AT THE TIME. ALL EXISTING CONDITION AS THEY MAY NOT HAVE BEEN BULL TAND DETAILED PER THE ORIGINAL DOCUMENTS OR PER THE OWNER'S INFORMATION.
518.4 517.9 518.4 518.6 517.7 518.4 518.6 517.7 518.4 518.6 517.7 MEET EXIST, SIDENULK PLUSHTYP. BR 518.10 BR 518.10 BR 518.10 BR 518.10	517.8 + 527.2 + 517.8 + 528.5 Fig. 1.5 F	KEY PLAN NOT TO SCALE SNA
# 544 517.5 10.00	527.6 → 527.6 → 521.8 → 521.8 → 521.8 → 521.8 → 521.8 → 521.8 → 521.8 → 521.8 → 521.8	BEDFORD CENTRAL SCHOOL DISTRICT PHASE 2 - BOND IMPROVEMENTS FOX LANE MIDDLE SCHOOL TOWN of BEDFORD / WESTCHESTER COUNTY GRADING, DRAINAGE & SEWER ENLARGEMENT PL/ NEW ADDITION
WEST HOUSE	CONCRETE PAVEMENT 5222 5221 5221 5221 5221 5221 5221 5221 5221 5221 5221 5221 5221 5221 5221 5221 5221 5221	DRAWING BY: CTC CHECK BY: JP NOTICE THIS DRAWING, PREPARED FOR THE SPECIFIC PROJECT INDICATED IS AN INSTRUMENT OF SERVICE AND THE PROPERTY OF BE ARCHITECTS. LANDSCAPE ARCHITECTS AND ENGINEERS, POINFRINGEMENT OR ANY USE OF THIS DRAWING FOR ANY OTHER PROJECT IS PROHIBITED. ANY ALTERATION OR REPRODUCTION OF THIS DOCUMENT IS ALSO PROHIBITED WITHOUT THE WRITTER CONSENT OF THE ARCHITECT OR ENGINEER. BBS ARCHITECTS LANDSCAPE ARCHITECTS LANDSCAPE ARCHITECTS ENGINEERS 244 EAST MAIN STREET PATCHOGUE NEW YORK 11772 T. 631.475.0349 F. 631.475.0349 F. 631.475.0361 F. 518.621.7655 WWW.BBSARCHITECTURE.com
GRADING, DRAINAGE & SEWER ENLARGEMENT PLAN - NEW ADDITION SCALE: 1"=10"-0"	# 527/ # 526.7 533.9 533.6 12" 12	SED No. 66-01-02-06-0-007-013 DISTRICT BEDFORD CENTRAL SCHOOL DISTRICT PROJECT PHASE 2 - BOND IMPROVEMENTS DWG TITLE GRADING, DRAINAGE & SEWER ENLARGEMENT PLAN SCALE: AS NOTED DATE: APRIL 2024 BID PICK-UP: FEBRUARY 24, 2025 FILE No: 23-131b FLMS CS3.03 OF J

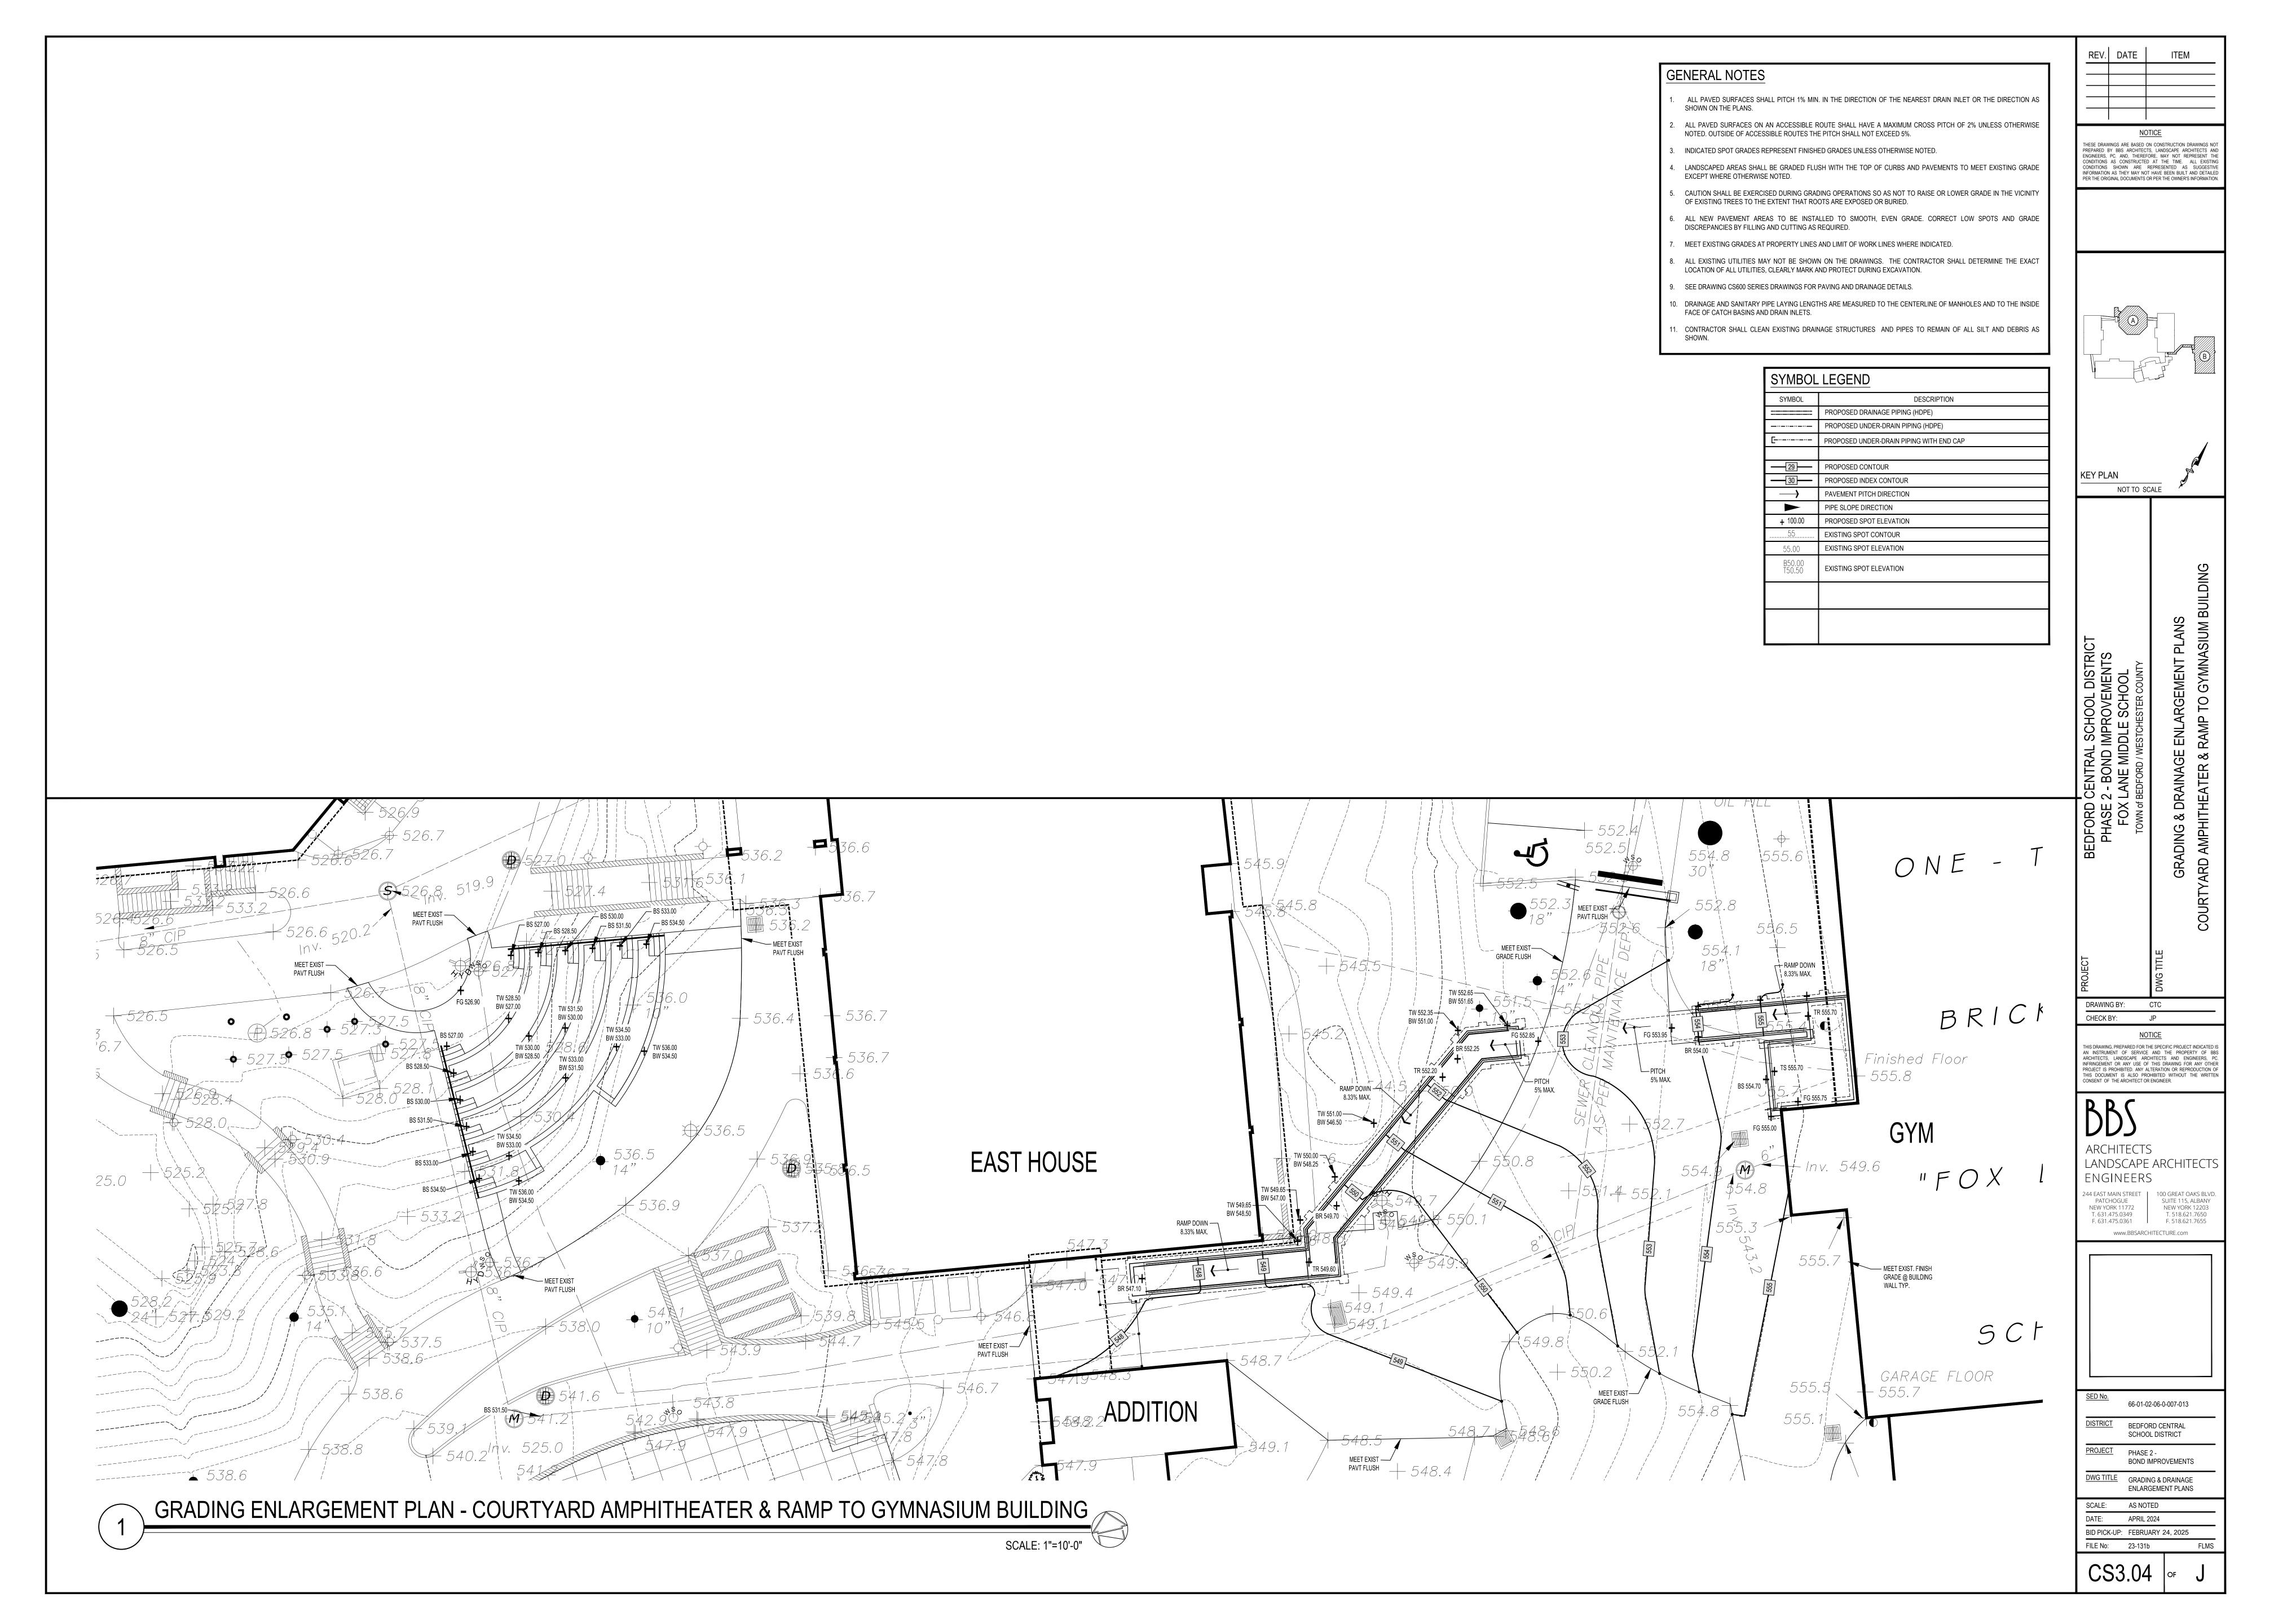


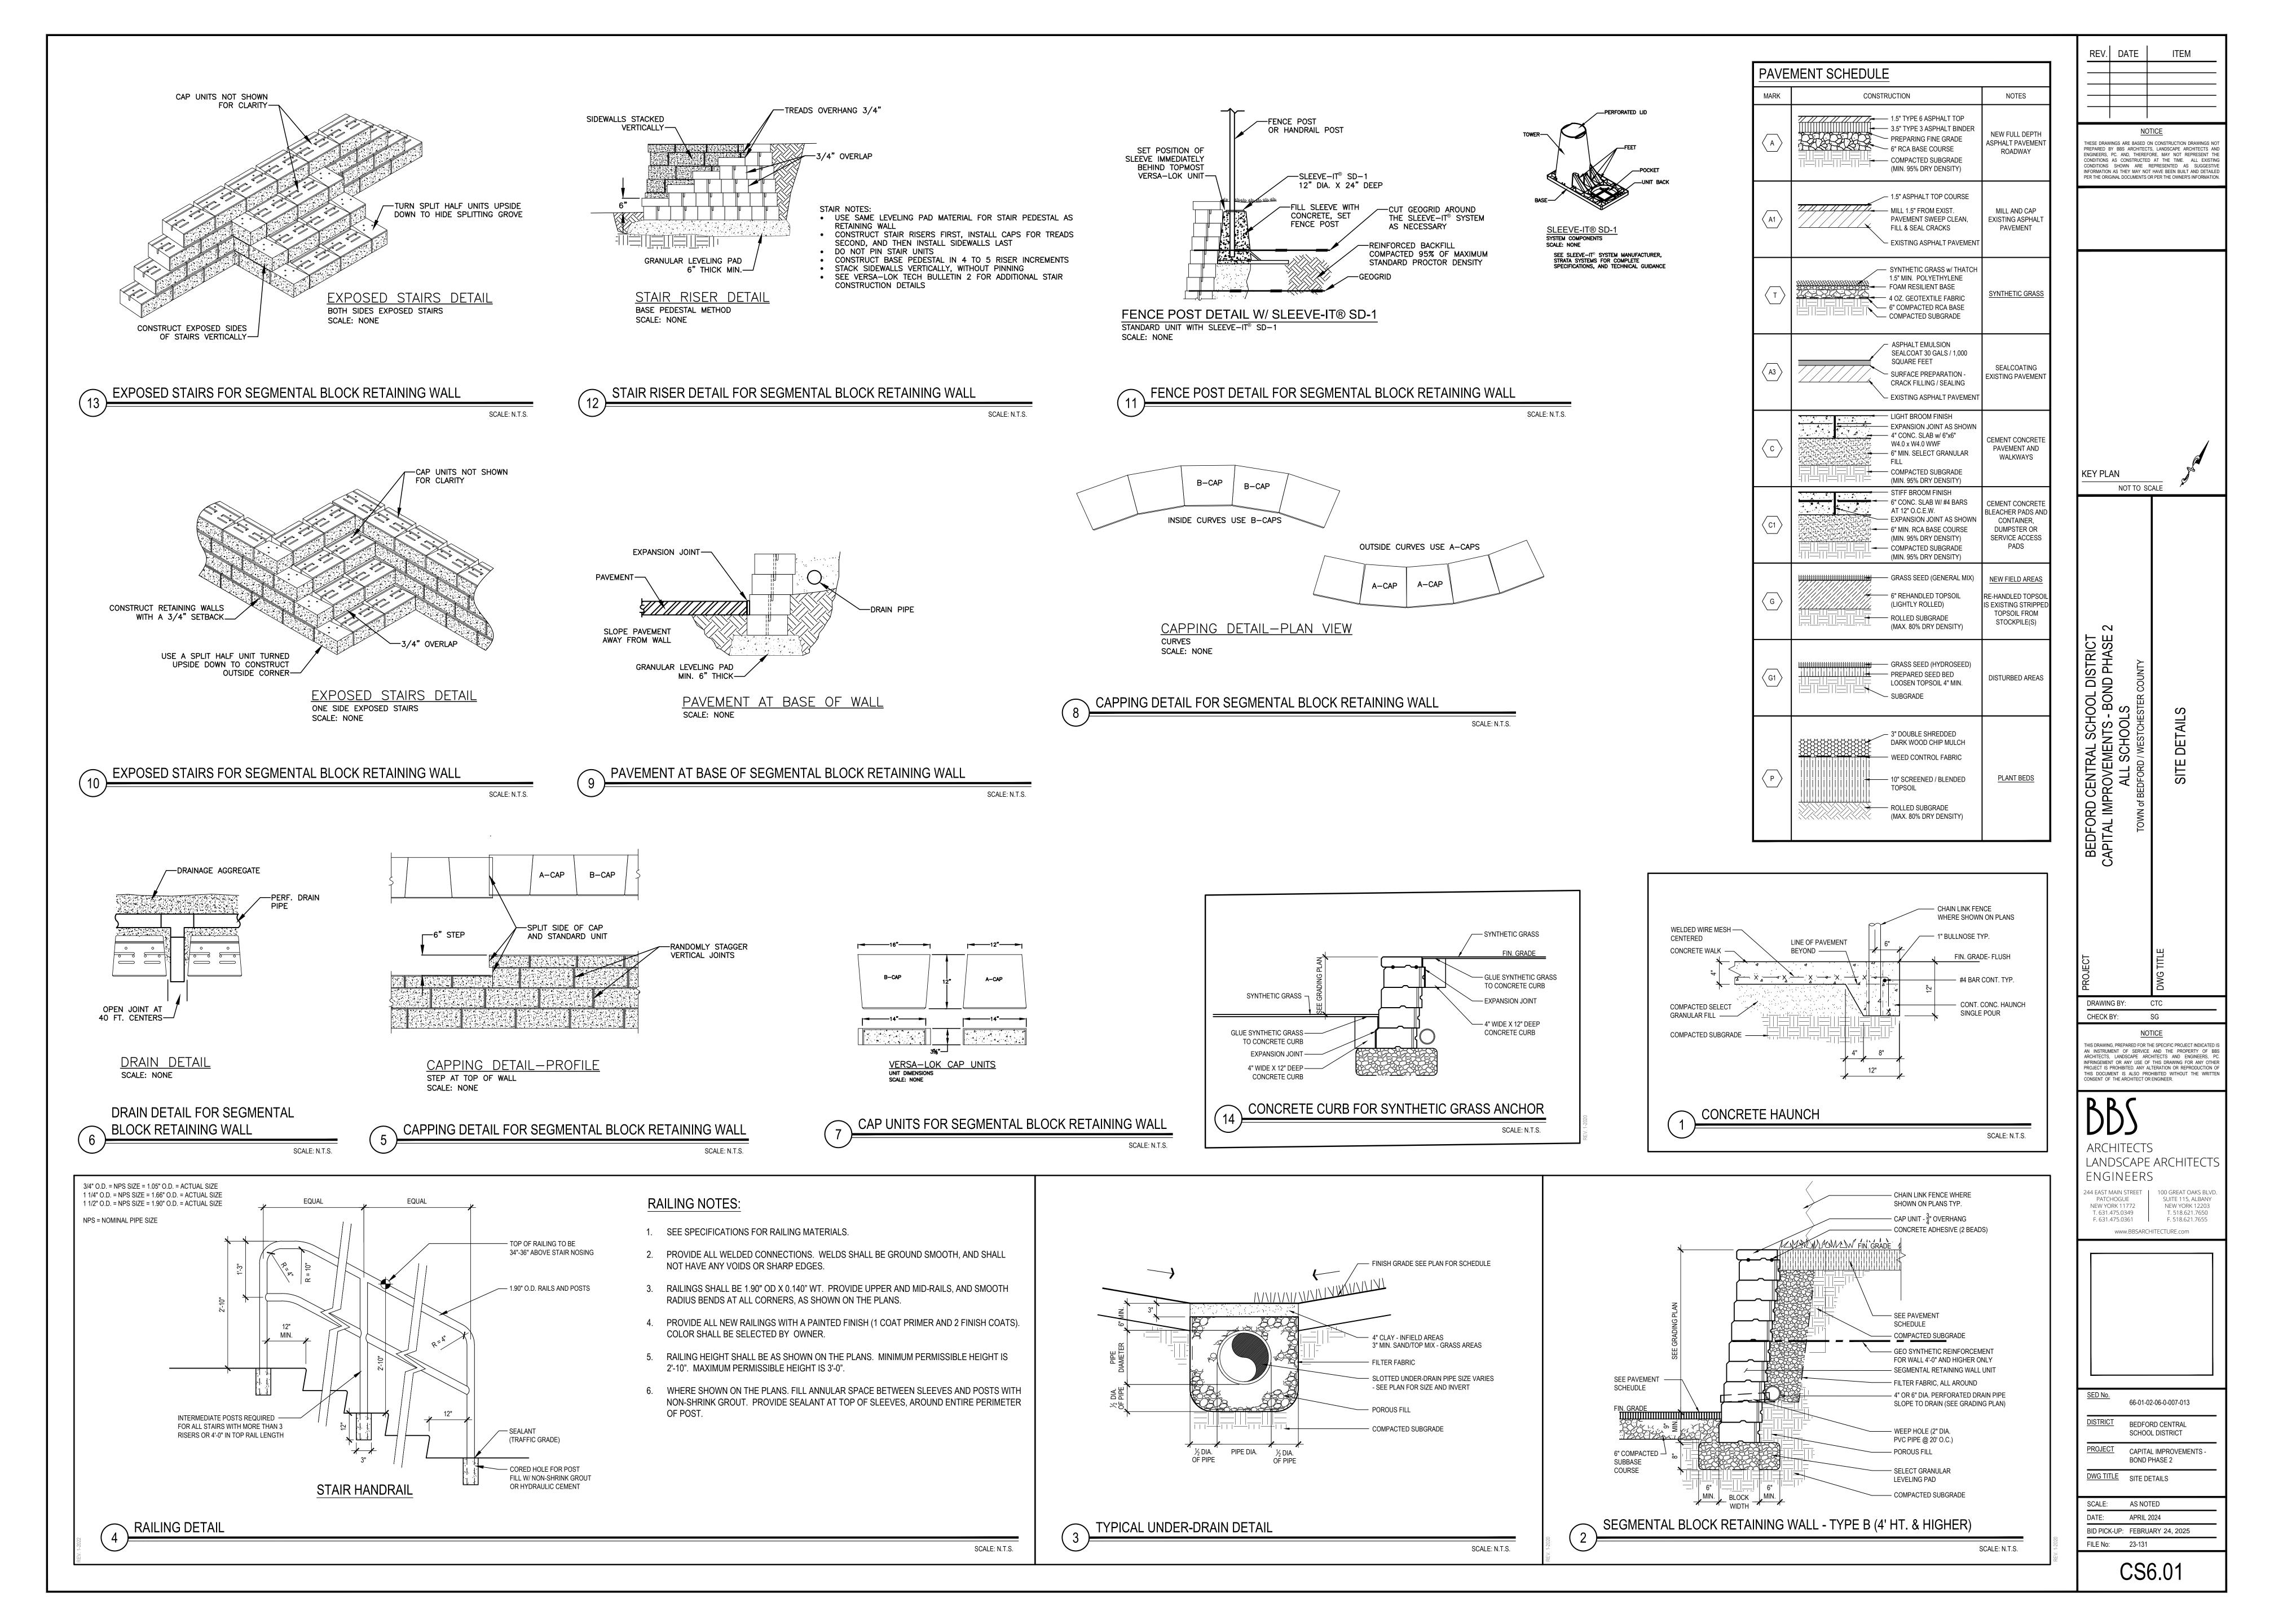


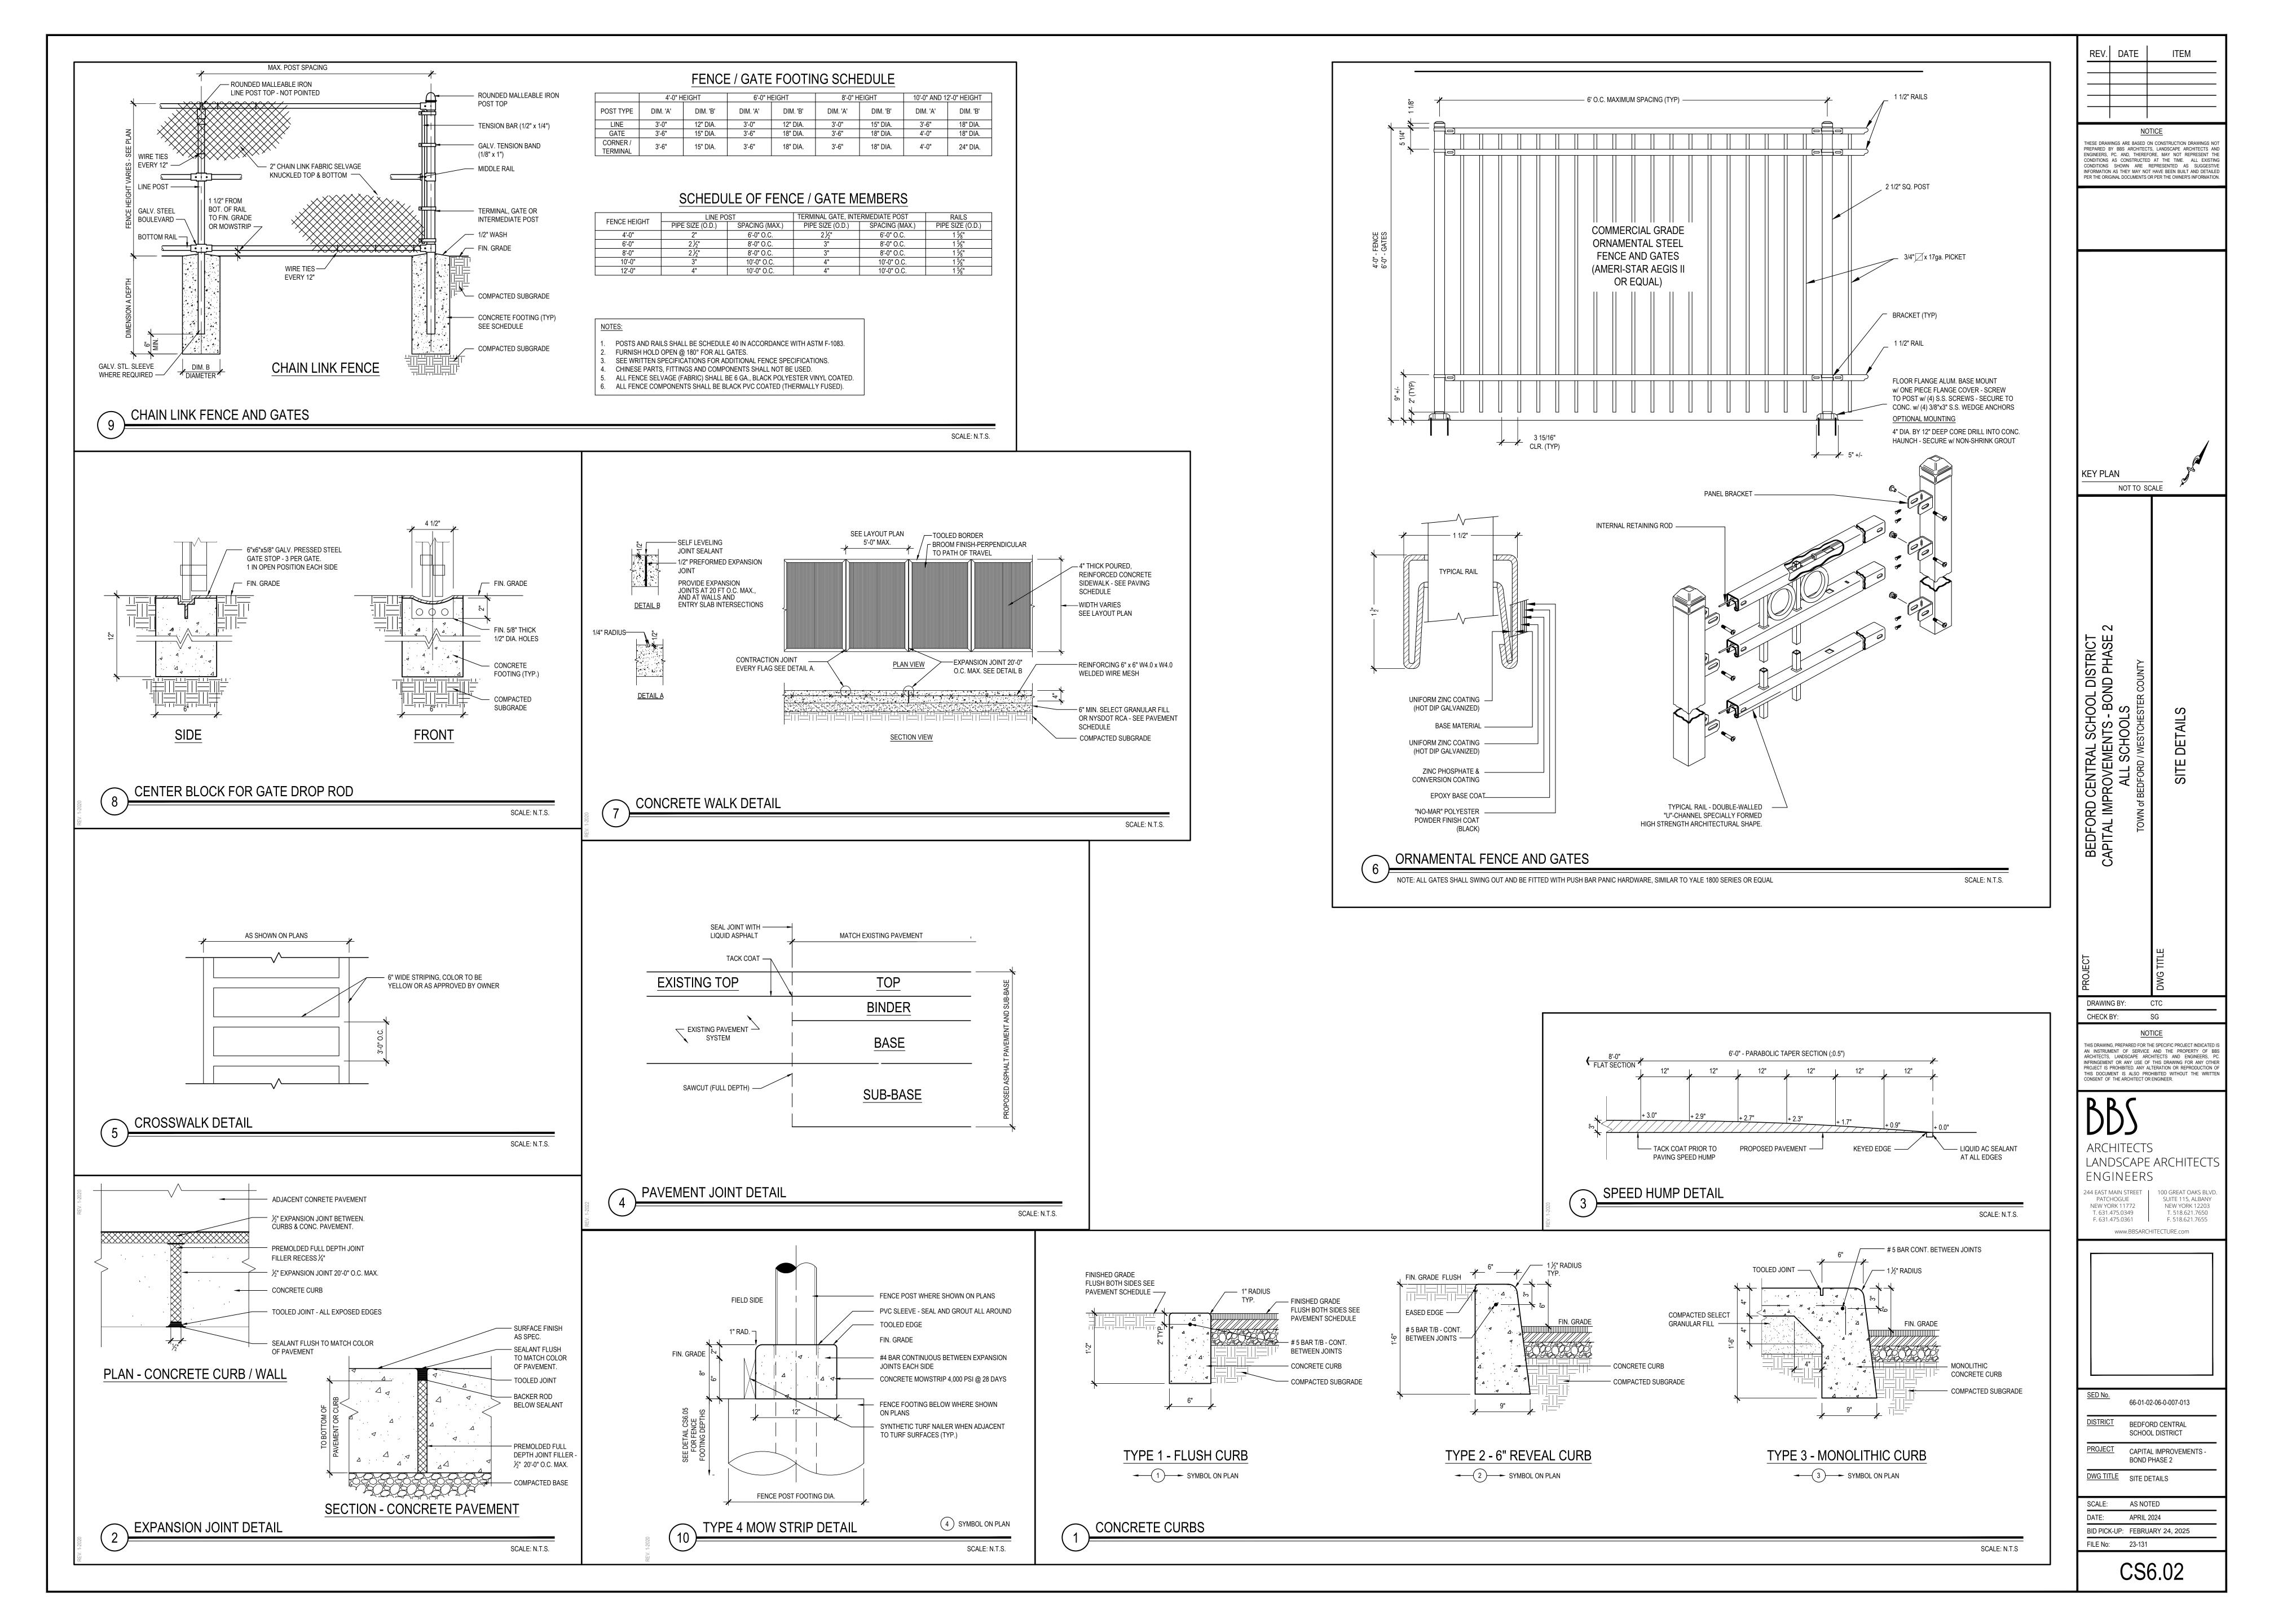

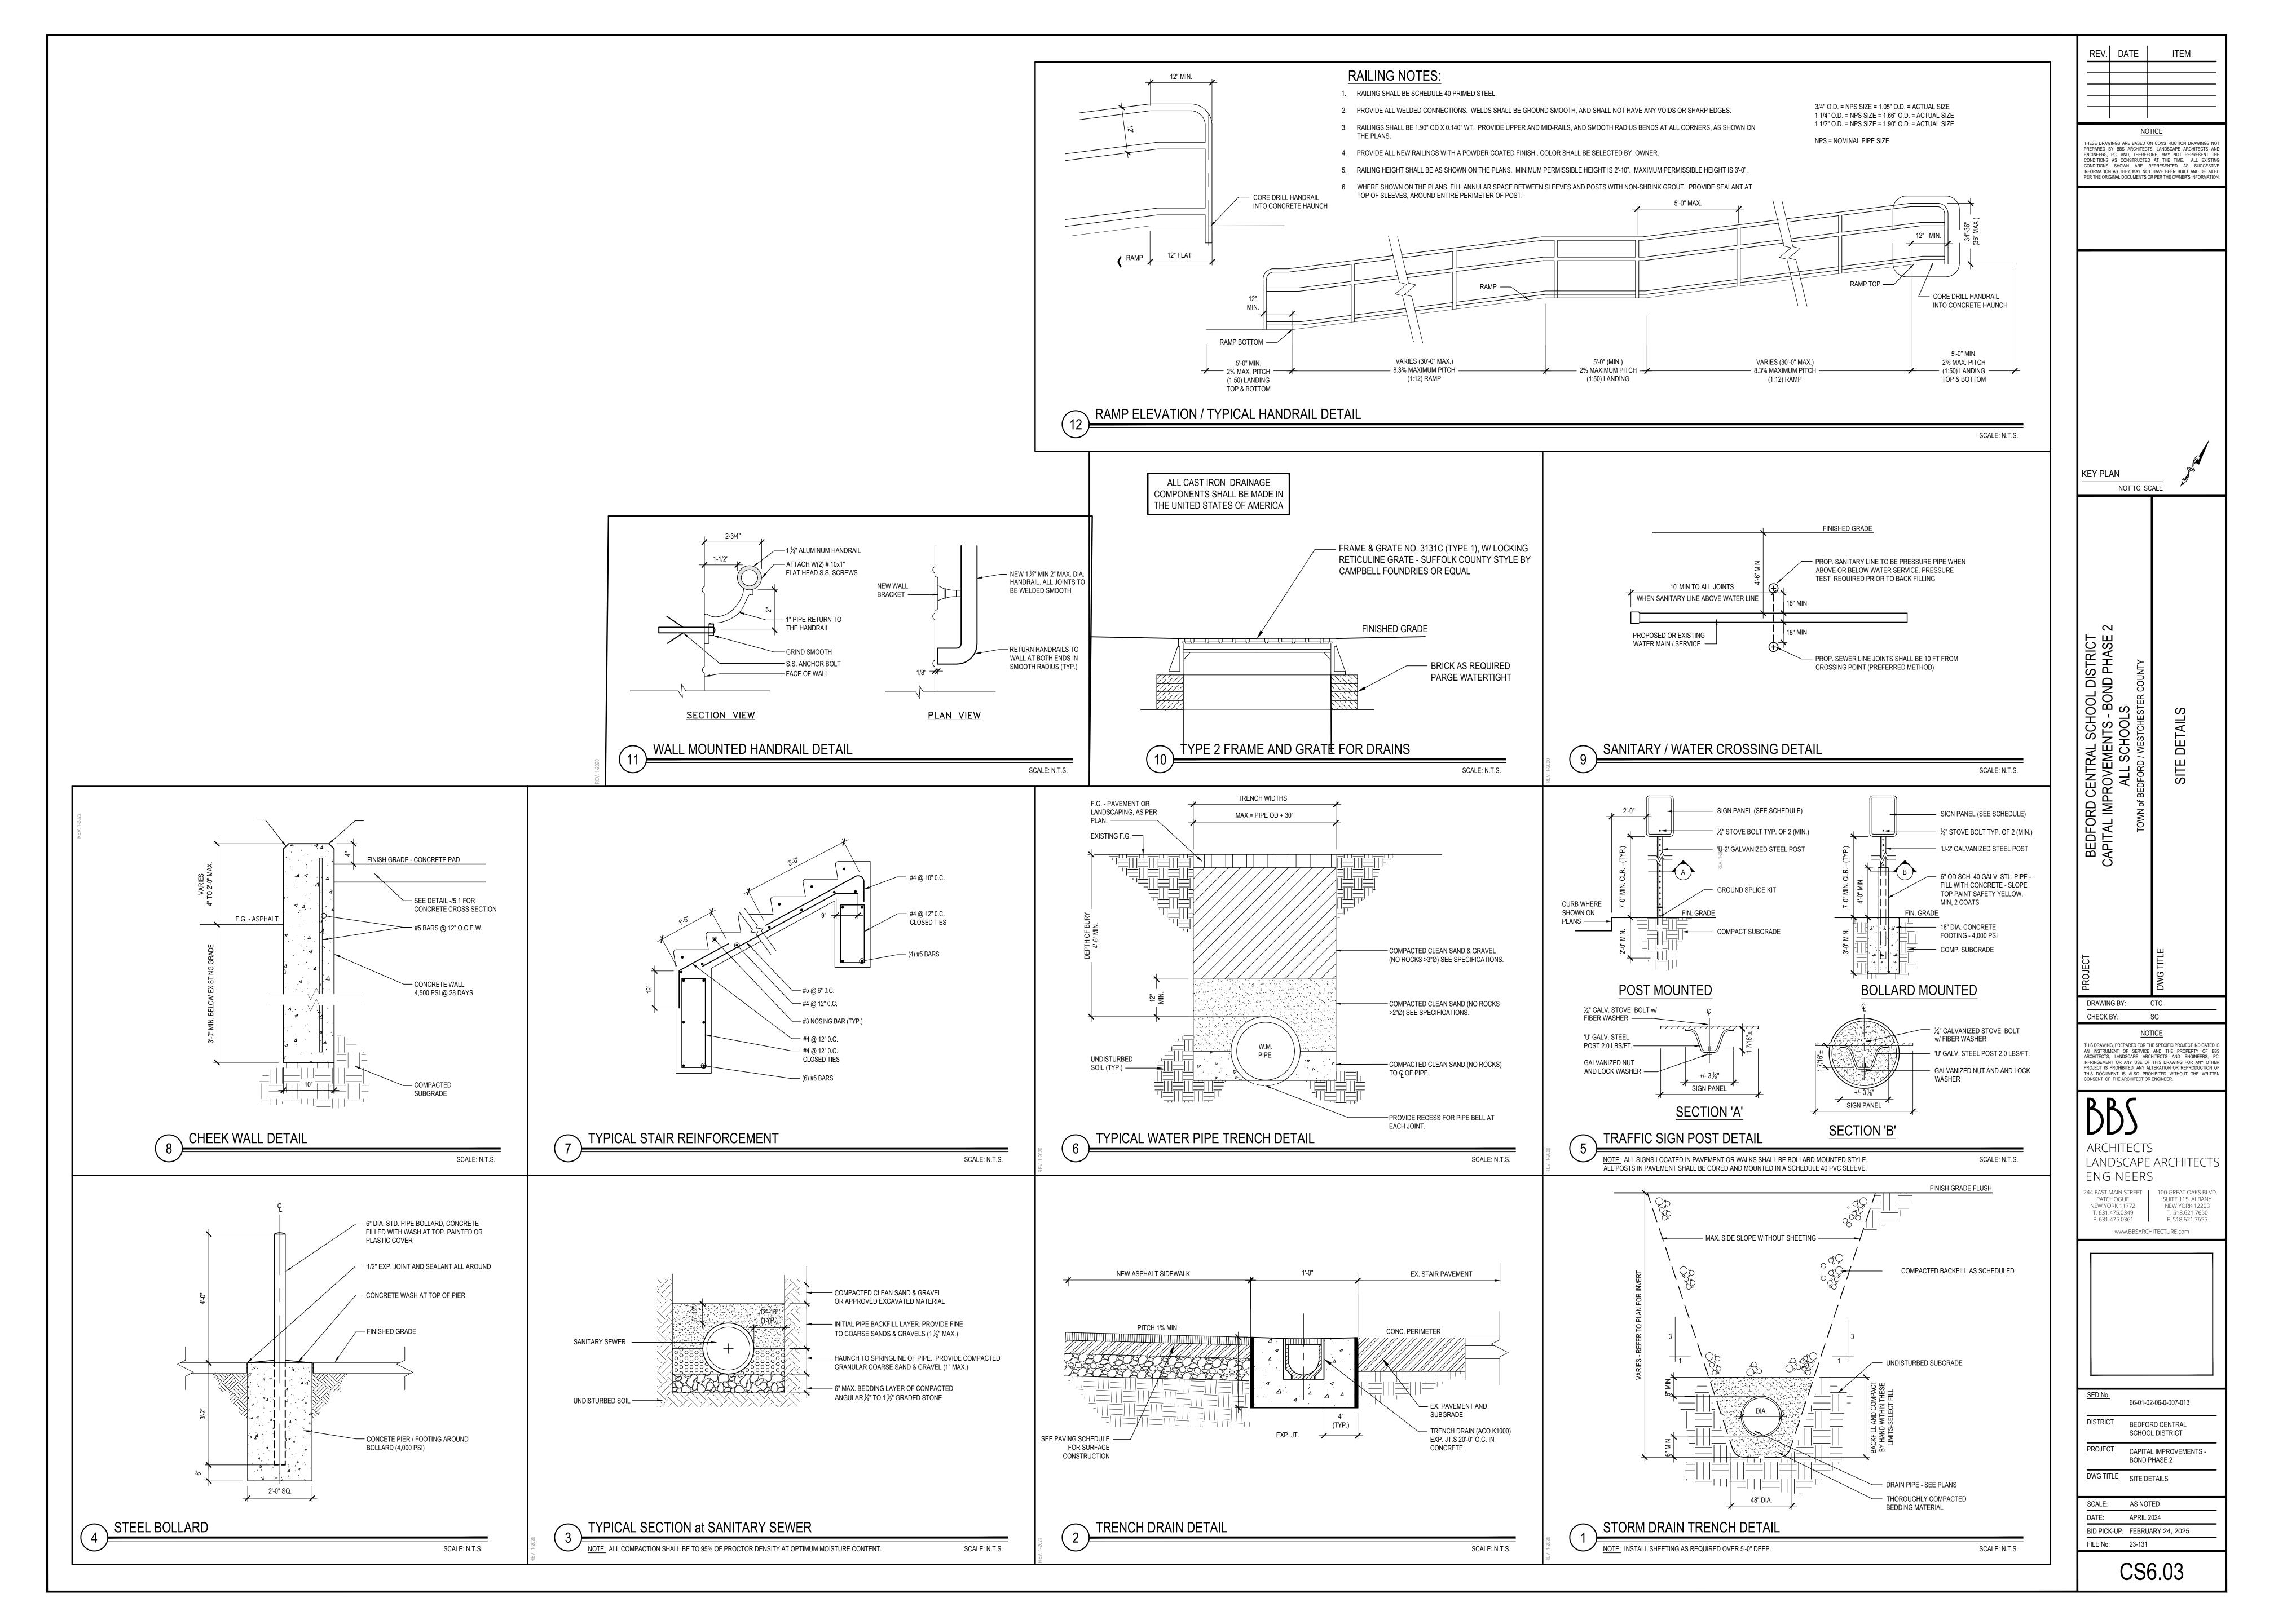

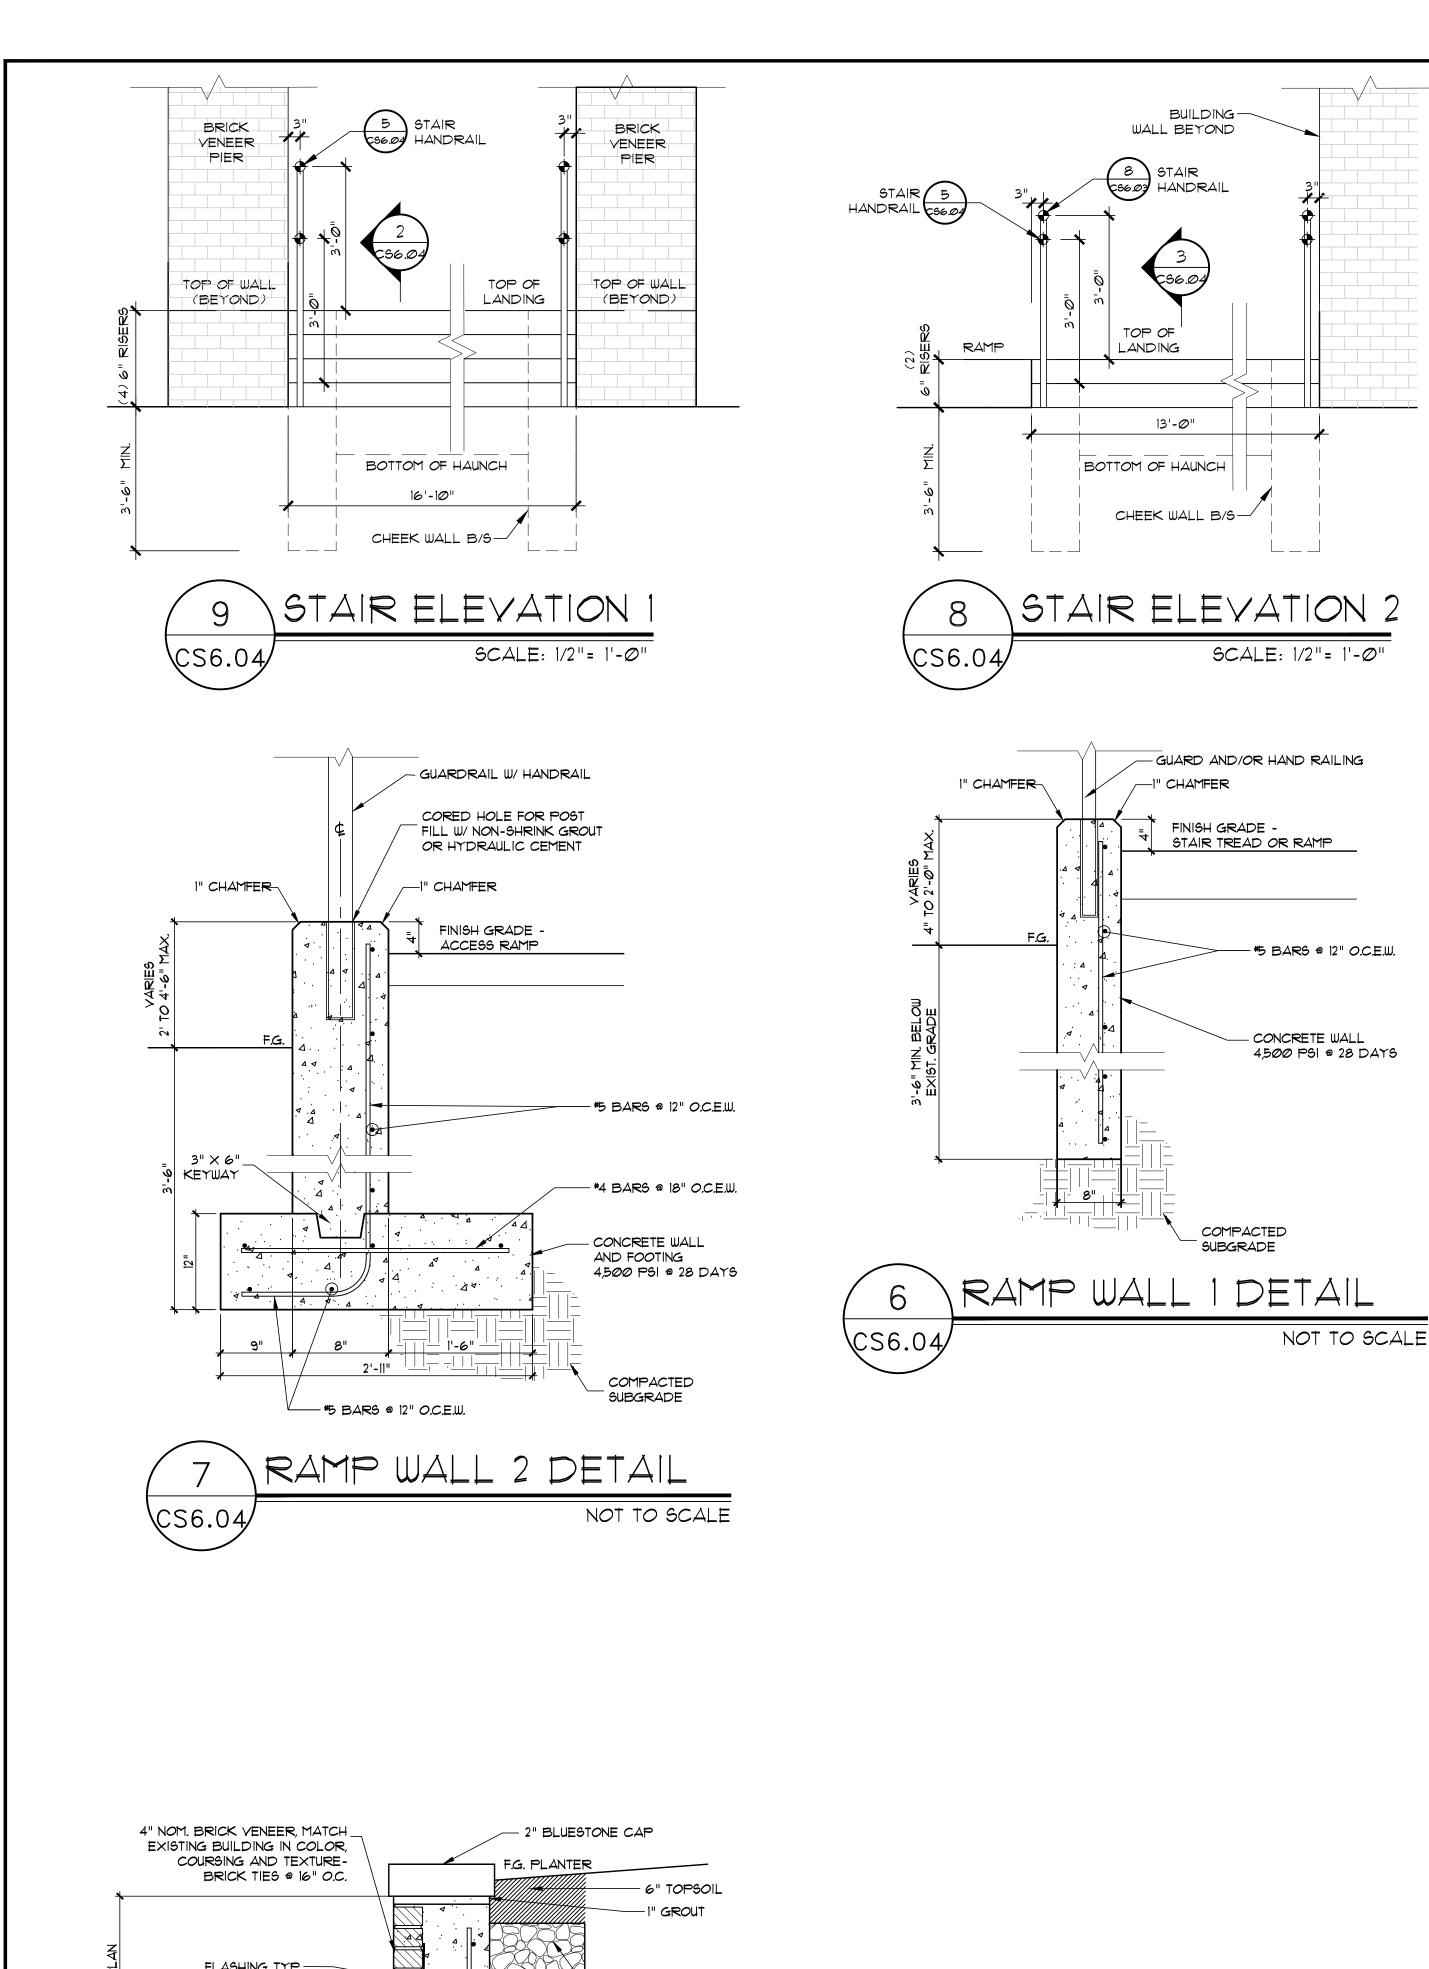


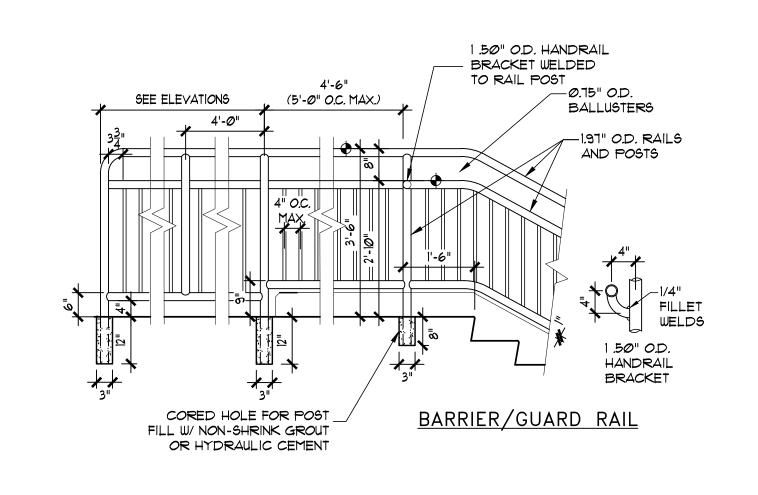


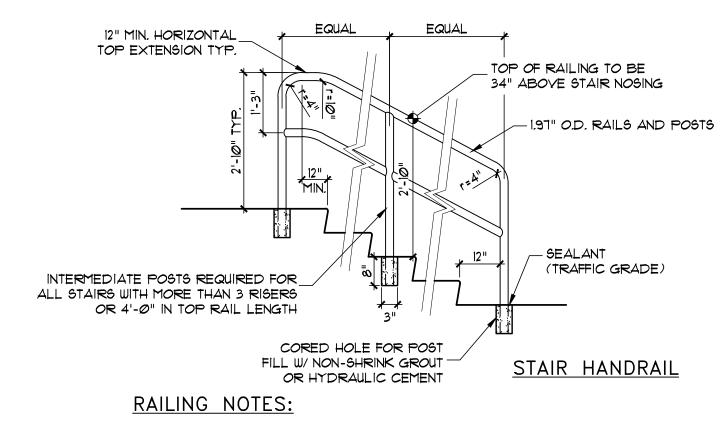



- 1. SEE SPECIFICATIONS FOR RAILING MATERIALS.
- 2. PROVIDE ALL WELDED CONNECTIONS, WELDS SHALL BE GROUND SMOOTH, AND SHALL NOT HAVE ANY VOIDS OR SHARP EDGES.
- 3. RAILINGS SHALL BE 1.97" OD imes 0.140" WT. PROVIDE UPPER AND MID-RAILS, AND SMOOTH RADIUS BENDS AT ALL CORNERS, AS SHOWN ON THE PLANS.
- 4. PROVIDE ALL NEW RAILINGS WITH A FACTORY APPLIED POLYESTER POWDER COAT FINISH.
- 5. RAILING HEIGHT SHALL BE AS SHOWN ON THE PLANS. MINIMUM PERMISSIBLE HEIGHT IS 2'-10". MAXIMUM PERMISSIBLE HEIGHT IS 3'-0".
- 6. WHERE SHOWN ON THE PLANS, FILL ANNULAR SPACE BETWEEN SLEEVES AND POSTS WITH NON-SHRINK GROUT PROVIDE SEALANT AT TOP OF SLEEVES, AROUND ENTIRE PERIMETER OF POST.



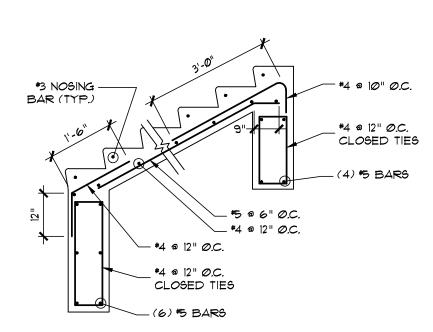


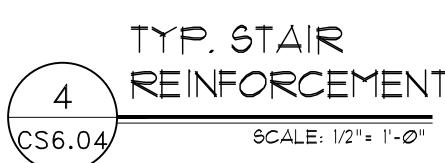

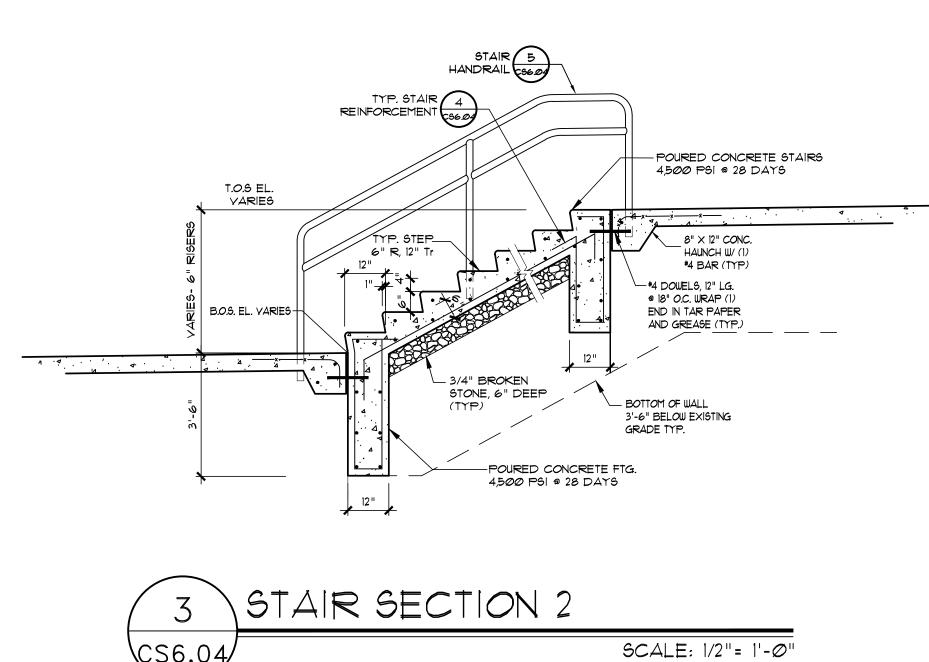

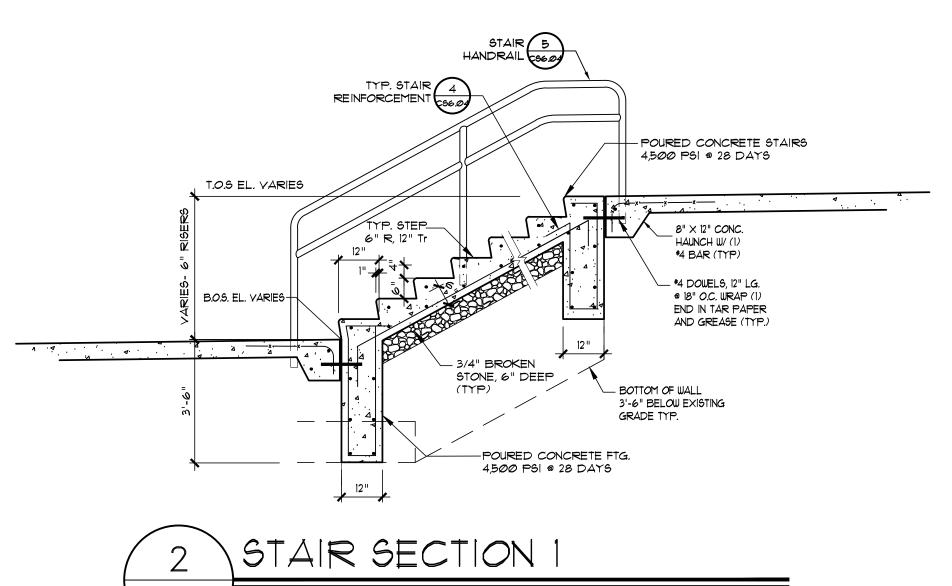

SCALE: 1/2"= 1'-0"

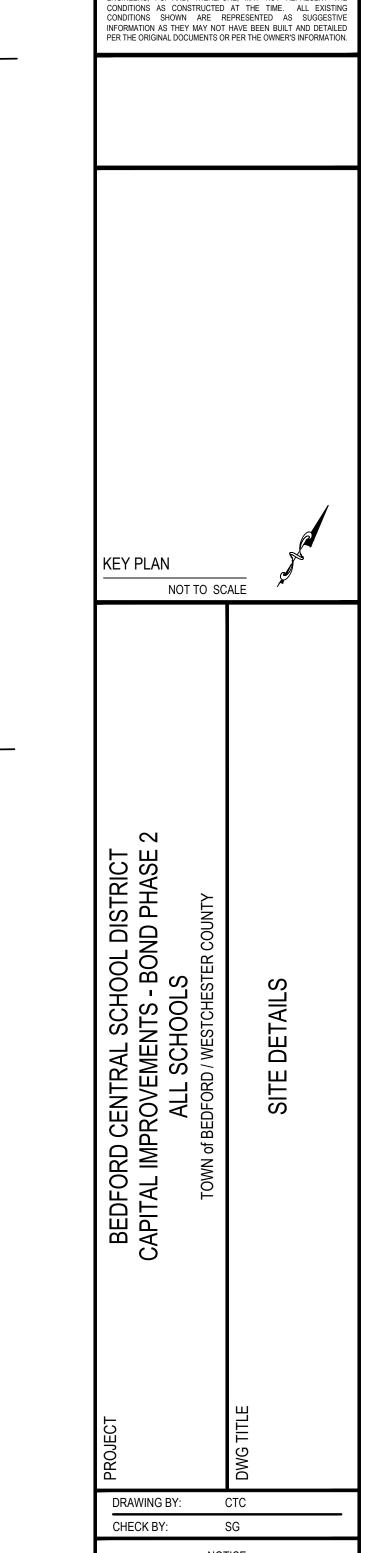

REV. DATE

HESE DRAWINGS ARE BASED ON CONSTRUCTION DRAWINGS N REPARED BY BBS ARCHITECTS, LANDSCAPE ARCHITECTS A RIGINEERS, PC. AND, THEREFORE, MAY NOT REPRESENT T

THIS DRAWING, PREPARED FOR THE SPECIFIC PROJECT INDICATED IS AN INSTRUMENT OF SERVICE AND THE PROPERTY OF BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PC INFRINGEMENT OR ANY USE OF THIS DRAWING FOR ANY OTH THIS DOCUMENT IS ALSO PROHIBITED WITHOUT THE WRITTE CONSENT OF THE ARCHITECT OR ENGINEER.

LANDSCAPE ARCHITECT: ENGINEERS

44 EAST MAIN STREET | 100 GREAT OAKS BLVE PATCHOGUE SUITE 115, ALBANY NEW YORK 11772 NEW YORK 12203 T. 631.475.0349 T. 518.621.7650 F. 518.621.7655 F. 631.475.0361


www.BBSARCHITECTURE.com

66-01-02-06-0-007-013 DISTRICT BEDFORD CENTRAL PROJECT CAPITAL IMPROVEMENTS -

BOND PHASE 2 <u>DWG TITLE</u> SITE DETAILS


SCALE: AS NOTED APRIL 2024 BID PICK-UP: FEBRUARY 24, 2025 FILE No: 23-131


CS6.04

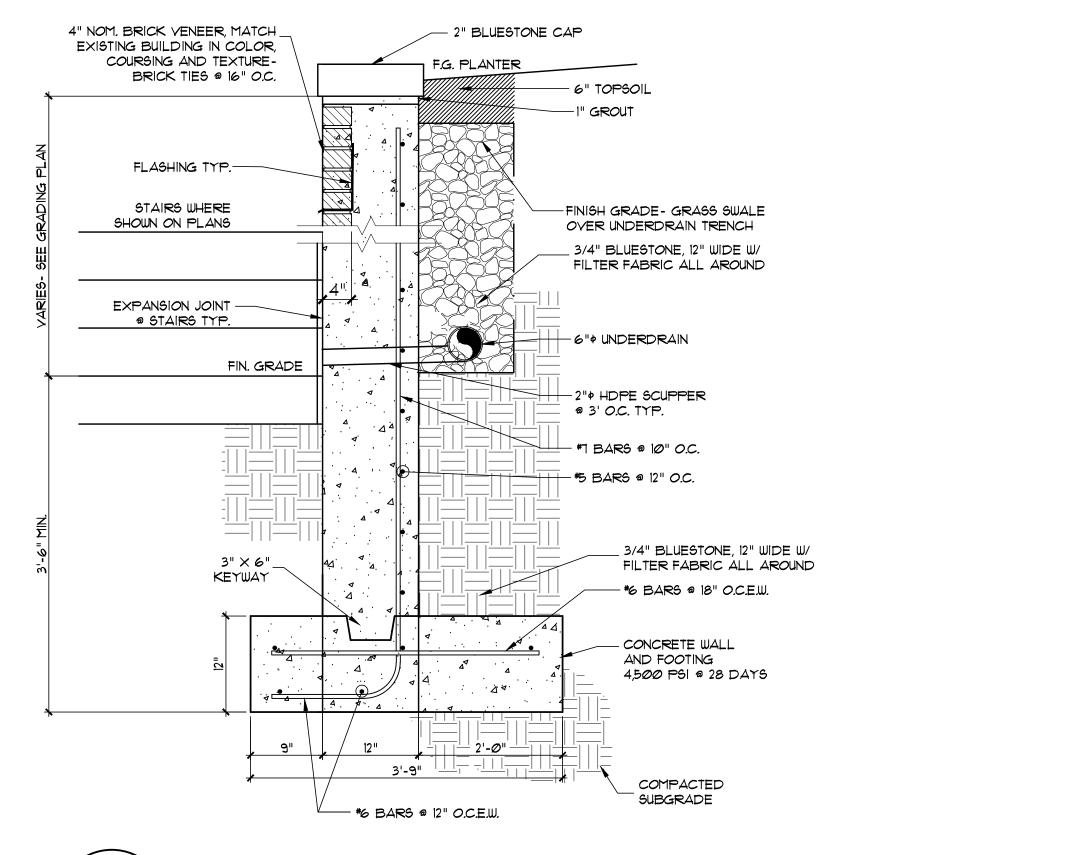

SCALE: 1/2"= 1'-0"

RETAINING WALL

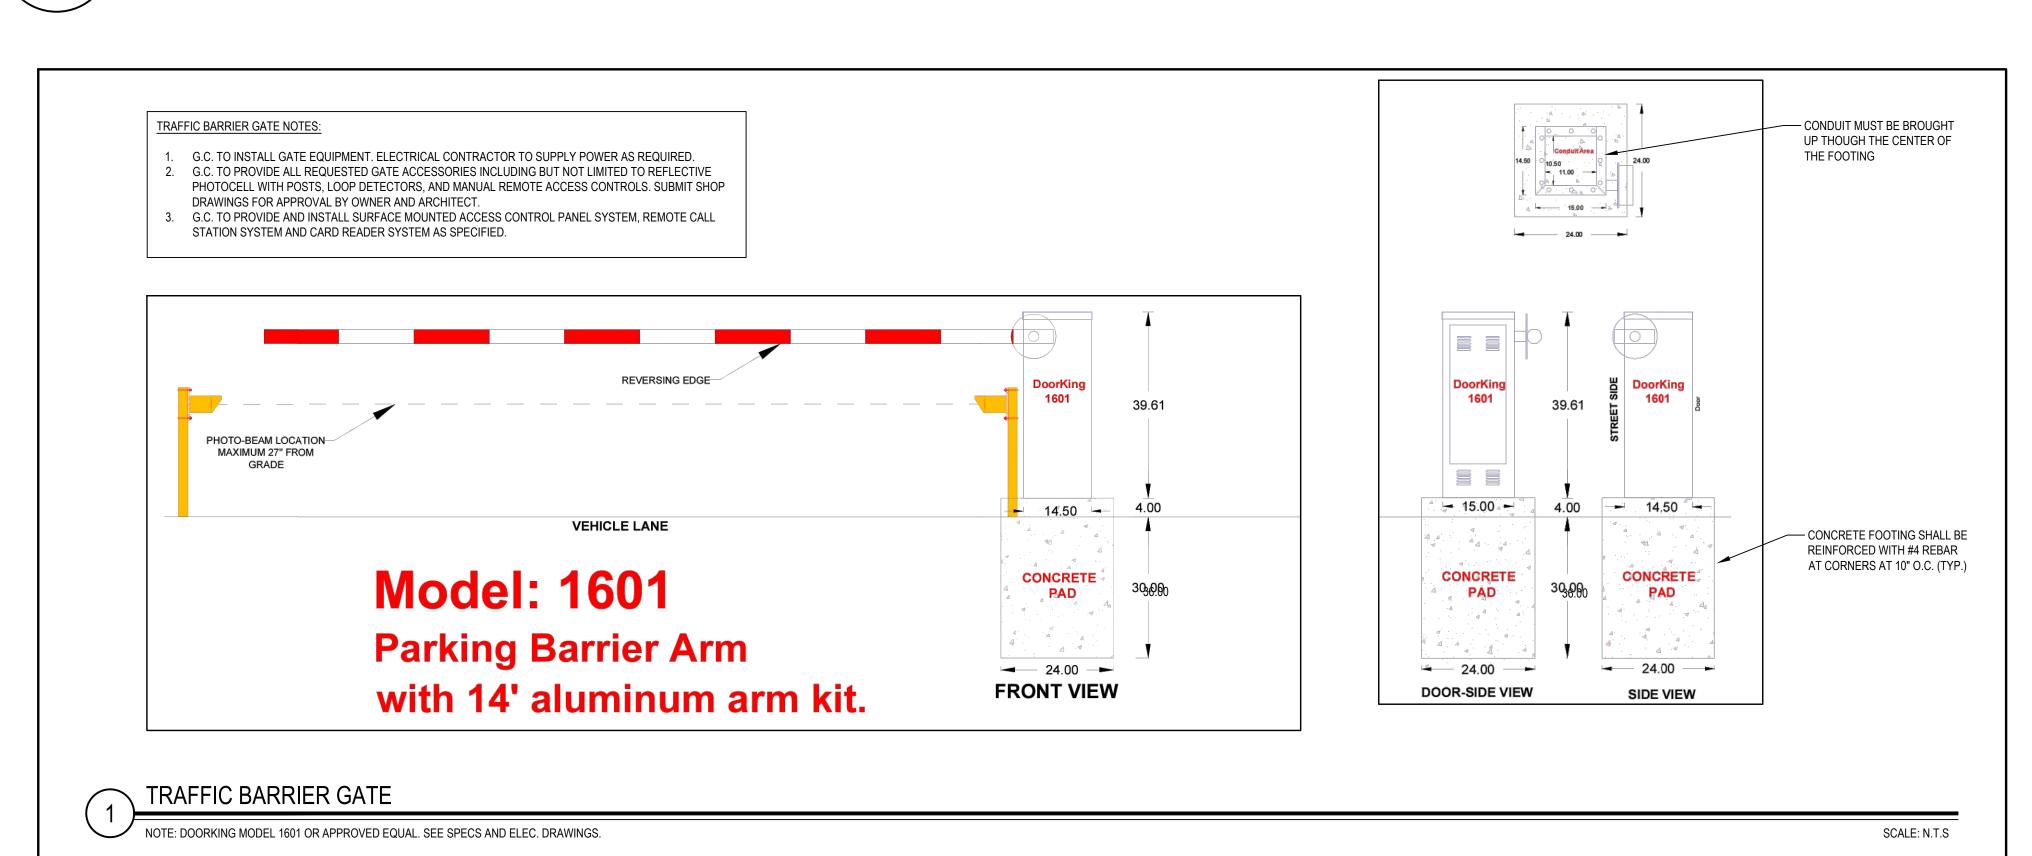


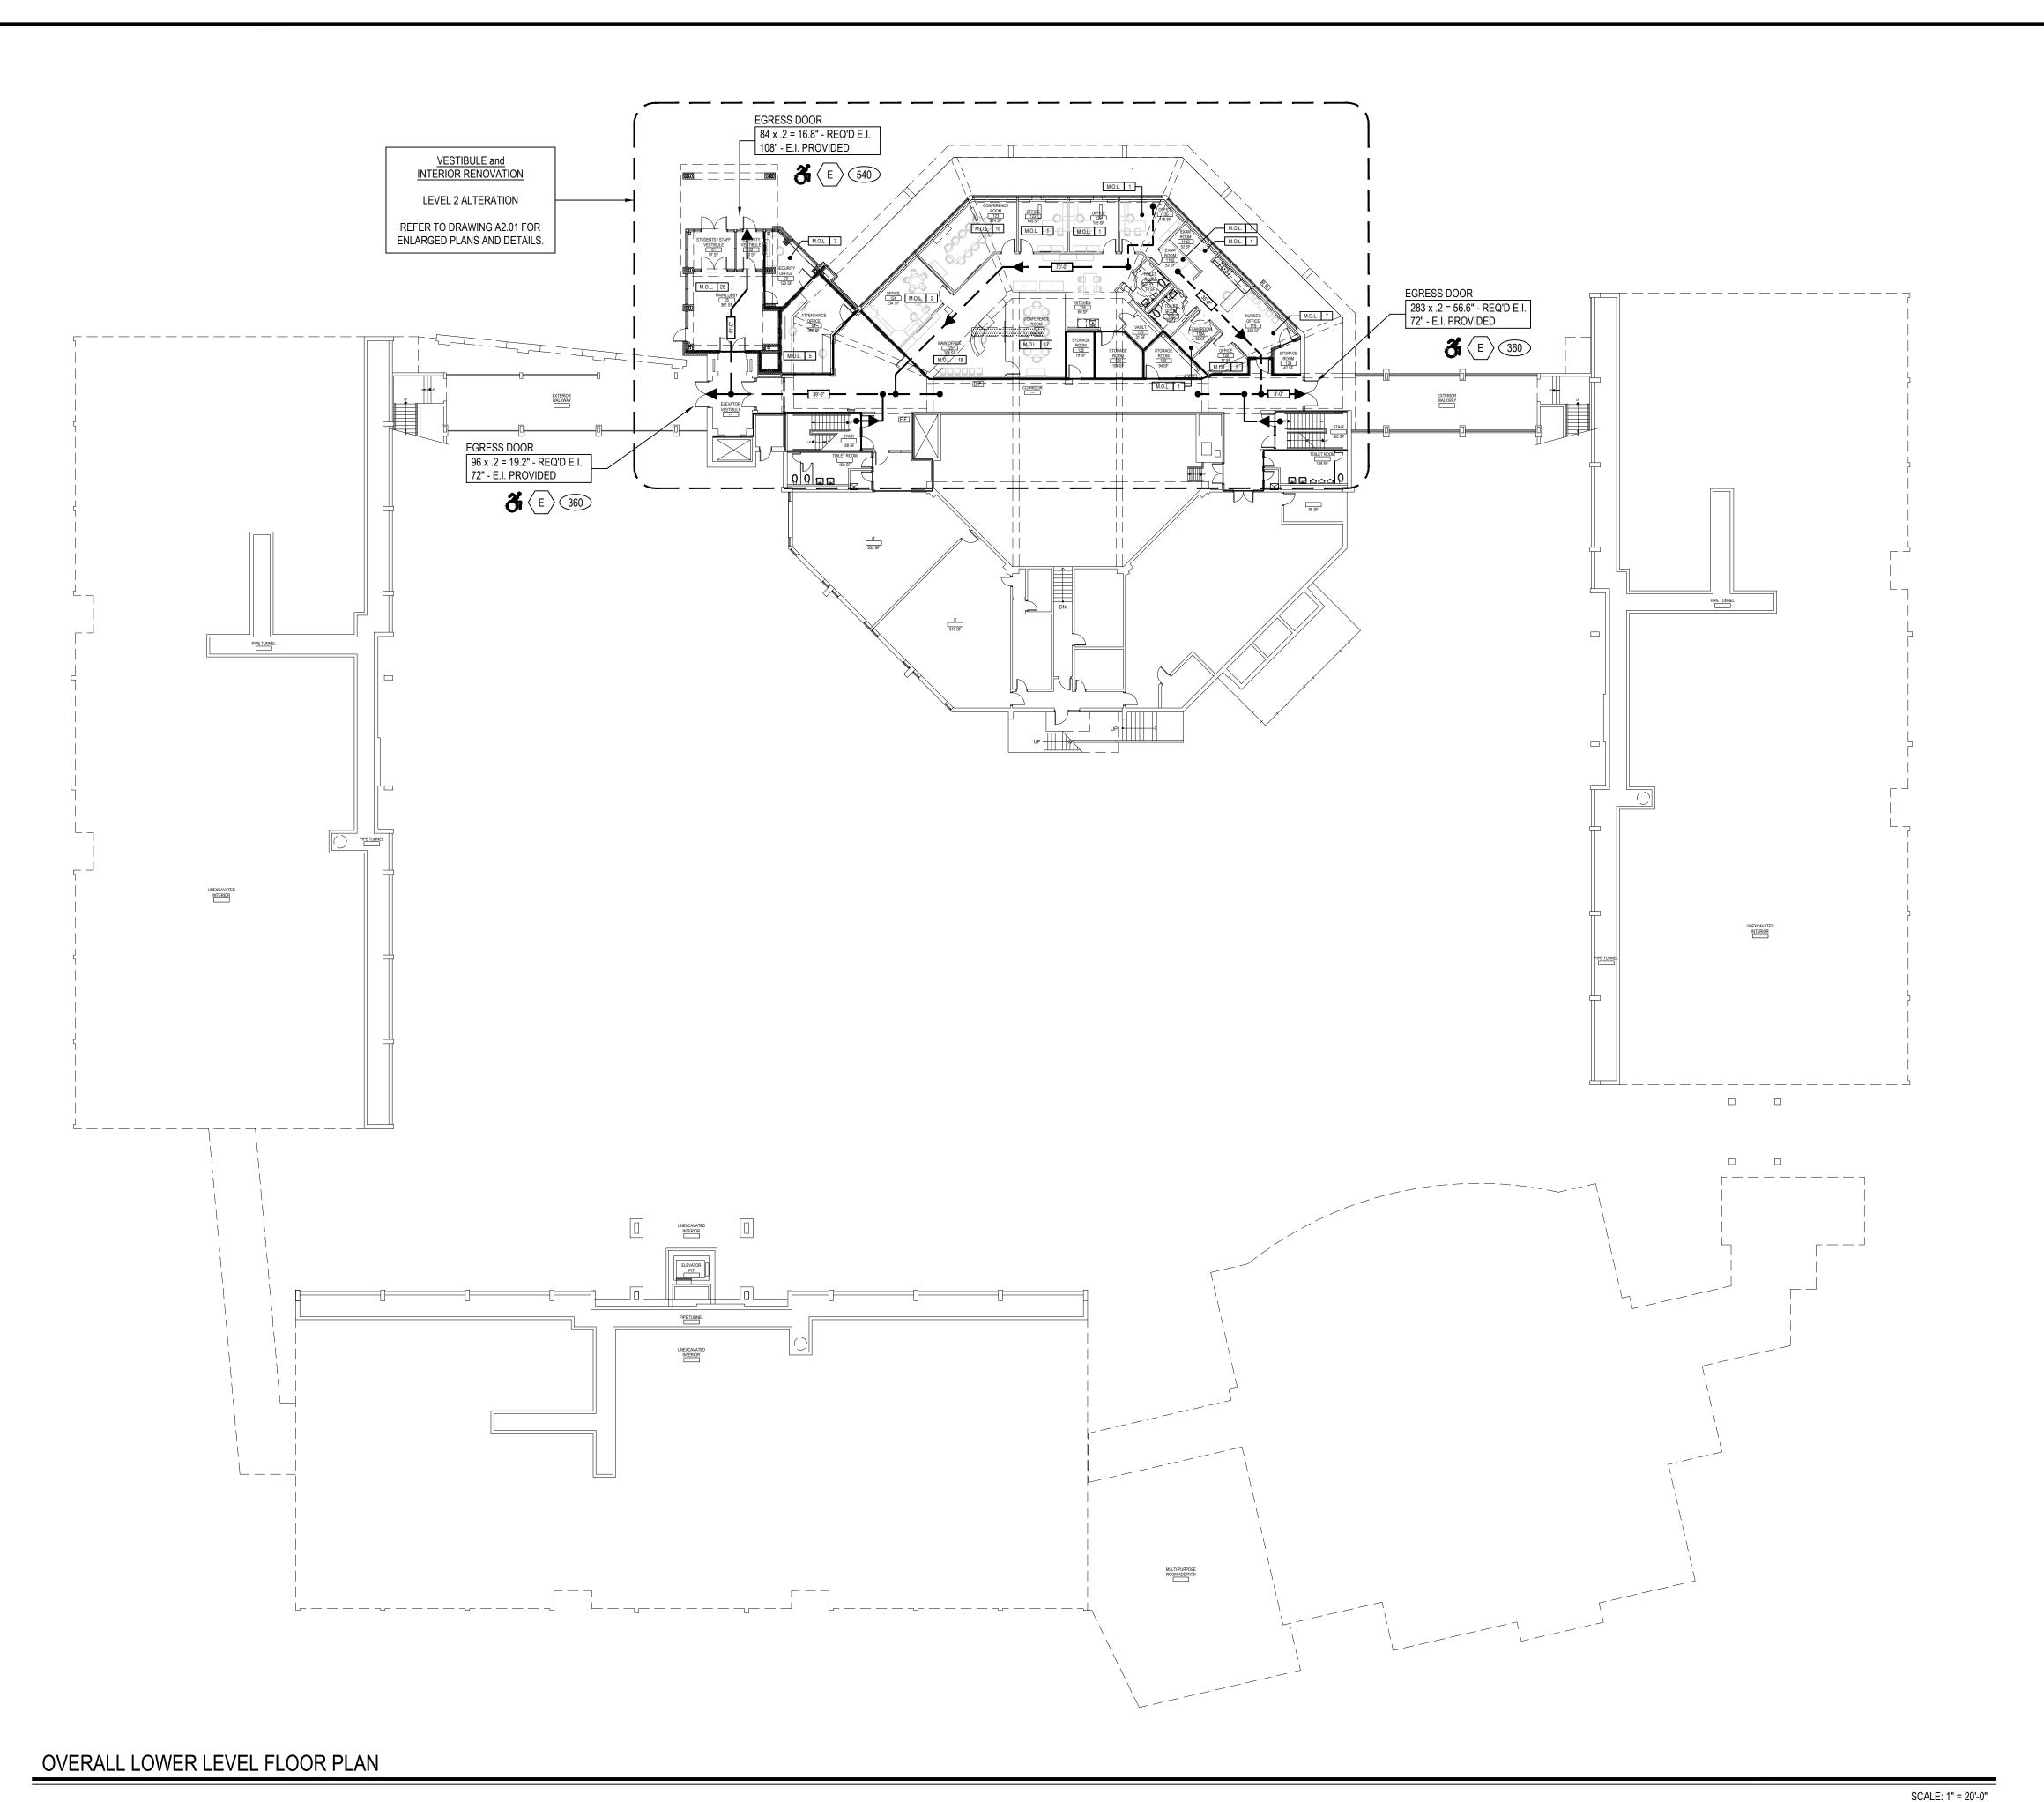


FIRE RESISTANCE RATING DESCRIPTIONS REFER TO U.L. RATED ASSEMBLY DESCRIPTIONS AND DOCUMENTATION FOR COMPLETE RATED CONSTRUCTION AND FIRE RESISTANCE REQUIREMENTS. SMOKE PARTITION - (0) HR RATED CONSTRUCTION -CONSTRUCT PARTITION IN ACCORDANCE WITH IBC 2015 SECTION SMOKE PARTITIONS. EXTEND FROM FINISHED FLOOR TO BOTTOM FLOOR/ROOF STRUCTURE ABOVE AND SEAL AT TOP, BOTTOM, AND PENETRATIONS TO PROHIBIT THE PASSAGE OF SMOKE THROUGH E SMOKE COMPARTMENT. FIRE BARRIER - (1) HR RATED CONSTRUCTION U.L. RATED U905/U906 OR U419 FIRE BARRIER - (2) HR RATED CONSTRUCTION ____ U.L. RATED U905/U906 OR U419 FIRE WALL - (2) HR RATED CONSTRUCTION _____ U.L. RATED U905/U906 STRUCTURAL FIRE PROTECTION REQUIREMENTS (NON-SPRINKLERED) PER SECTION 903.2.3, THE FOLLOWING SHALL BE PROVIDED: 2 HR. HORIZONTAL FIRE BARRIER (UL D925) 2 HR. FIRE RESISTANCE RATING (UL X632) AT ALL COLUMNS SUPPORTING THE SECOND FLOOR ONLY (COLUMN FIRE PROTECTION SHALL EXTEND FROM FINISH FIRST FLOOR TO TOP OF SECOND FLOO

TYPICAL 8" CMU WALL ASSEMBLY SHALL CONFORM TO <u>U.L. DESIGN U905.</u> PROVIDES A MAXIMUM 2 HR. RATING. (REFER TO PLAN FOR ALL 1 HR. AND 2 HR. WALL ASSEMBLY LOCATIONS) TO INCLUDE: AI CONCRETE BLOCK SHALL BE CLASSIFIED D-2 (2HR). CONTRACTOR TO PROVIDE ARCHITECT WITH WRITTEN CERTIFICATION FROM SUPPLIER. ALL MORTAR FOR BLOCK WORK SHALL BE LAID IN FULL BED, NORMAL 3/8" THICK. VERTICAL JOINTS TO BE

- SHALL CONFORM TO <u>U.L.</u> <u>DESIGN</u> <u>U419.</u> PROVIDES A MAXIMUM 1 HR. RATING. COMPOSITION TO BE 35/8" METAL STUDS WITH (1) LAYER 5/8" FIRECODE GYP. BD, EACH SIDE. CONTRACTOR TO PROVIDE ARCHITECT WITH WRITTEN CERTIFICATION FROM
- D925/ P819 2 HR. RATED FLOOR AND ROOF CONSTRUCTION SPRAY APPLIE FIREPROOFING SHALL BE "ISOLOTEK" BLAZE SHIELD II LOW DENSITY SPRAY APPLIED FIREPROOFING OR ARCHITECT APPROVED EQUAL. REFER TO SPECIFICATION SECTION 078100 FOR ADDITIONAL INFORMATION.

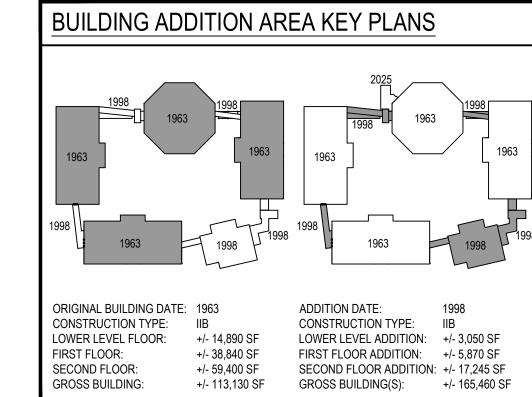

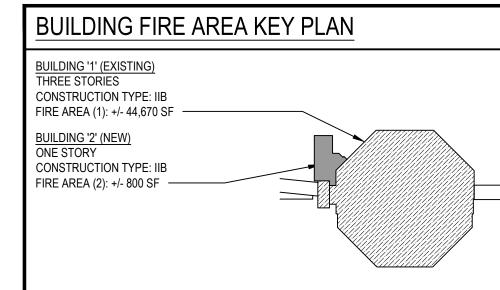

APPLICABLE CODE

THE PROPOSED WORK IS TO BE CONSTRUCTED IN ACCORDANCE WITH THE CURRENT VERSION OF THE SED MANUAL OF PLANNING STANDARDS, THE 2020 COMPILATION OF THE INTERNATIONAL BUILDING CODE, NEW YORK STATE VERSION, IN CONJUNCTION WITH NEW YORK STATE 2016 AND 2017 CODE SUPPLEMENTS.

		CODE C	OMPLIANCE SYMBOL LEGEND				
E	SYMBOL		DESCRIPTION				
		F.E.	NEW OR EXISTING FIRE EXTINGUISHER				
710		D.F.	NEW OR EXISTING DRINKING FOUNTAIN				
/ 10 // OF		S.D.	NEW OR EXISTING SMOKE DOOR				
ALL EACH		R.W.	RESCUE WINDOW LOCATION				
		360	DOOR / STAIR EXITING CAPACITY				
		E	INDICATES BUILDING ENTRANCE / EXIT				
		ð	INDICATES ACCESSIBLE ENTRANCE / EXIT				
		M	DOORS ON MAGNETIC AUTOMATIC HOLD OPEN DEVICE CONNECTED FIRE ALARM SYSTEM				
		4.7	REQUIRED EXIT UNITS FOR PLACES OF ASSEMBLY.				
ON OOR		M.O.L. 45 P.S. 27	MAXIMUM OCCUPANCY LOAD AND PUPIL STATION COUNT —— (PER N.Y.S. BUILDING CODE) —— PUPIL STATION COUNT				

REV. DATE

KEY PLAN

NOT TO SCALE

REPARED BY BBS ARCHITECTS, LANDSCAPE ARCHITECTS AN

ONDITIONS AS CONSTRUCTED AT THE TIME. ALL EXISTI


INFORMATION AS THEY MAY NOT HAVE BEEN BUILT AND DETAILED

ER THE ORIGINAL DOCUMENTS OR PER THE OWNER'S INFORMATION

GENERAL CODE COMPLIANCE NOTES


- REFER TO E-SERIES DRAWINGS FOR ALL NEW / EXISTING LIFE SAFETY INFORMATION INCLUDING BUT NOT LIMITED TO PULL STATIONS, EMERGENCY EXIT LIGHTS, EMERGENCY EXIT SIGNS, ETC.
- 2. ALL NEW CORRIDOR WALLS SHALL BE CONSTRICTED TO ACHIEVE ONE (1) HOUR FIRE SEPARATION FROM ADJACENT SPACES. HOLD CMU 1" FROM DECK, PACK ALL VOIDS WITH SAFING INSULATION AND SEAL EACH SIDE WITH SPEED SPRAY CP 672 (TO A THICKNESS APPLICABLE TO THE WALL RATING) AS MANUFACTURED BY 'HILTI' TO PROVIDE AN UNDERWRITERS LABORATORY APPROVED FIRE RATED JOINT SYSTEM.
- 3. NEW CORRIDOR FINISHES SHALL BE CLASS 'A'.
- 4. NEW ROOF SYSTEM SHALL BE CLASS 'A'.

TRAVEL DISTANCE LEGEND




EXIT ACCESS TRAVEL DISTANCE - [XXX'-XX"] → XXX'-XX" → DENOTES TRAVEL DISTANCE FOR THE

FIRE RATED WALL IDENTIFICATION DETAIL

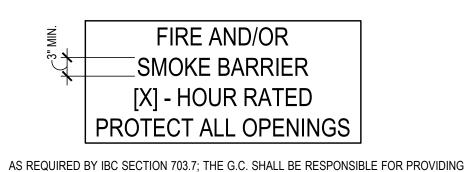

- AND INSTALLING ALL MARKING AND IDENTIFICATION SIGNS INDICATING, FIRE WALLS, FIRE BARRIERS, FIRE PARTITIONS, SMOKE BARRIERS AND OR SMOKE PARTITIONS AT ALL CONCEALED SPACES ABOVE ACCESSIBLE CEILINGS.
- G.C. SHALL PROVIDE SIGNS WITHIN 15 FEET OF EACH END OF WALL AND AT INTERVALS OF 30 FEET MAX. HORIZONTALLY ALONG WALL.
- PROVIDE SIGNS AS MANUFACTURED BY 'FIRE WALL SIGNS, INC.' OR ARCHITECT APPROVED EQUAL.
- REFER TO CODE COMPLIANCE FLOOR PLANS FOR LOCATIONS AND APPLICABLE HOURLY DESIGNATIONS OF RATED WALL CONSTRUCTION.

RESCUE WINDOW LABEL DETAIL

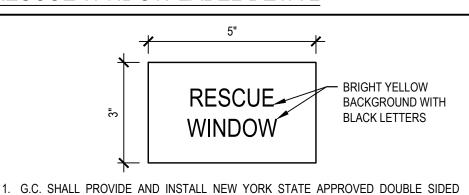

- 'RESCUE WINDOW' DESIGNATION STICKER AT ALL PROPOSED RESCUE WINDOW LOCATIONS DESIGNATED AS "RW" ON THE DRAWINGS.
- 2. REFER TO CODE COMPLIANCE PLANS FOR ADDITIONAL INFORMATION/LOCATIONS. FINAL LOCATIONS TO BE COORDINATED IN THE FIELD WITH OWNER/ARCHITECT.
- 3. ANY NEW OR EXISTING WINDOW COVERINGS SHALL HAVE LABELS CLEARLY VISIBLE IN ADDITION TO IDENTIFICATION ON THE WINDOW SASH. IF STICKER CAN NOT BE AFFIXED TO WINDOW COVERINGS, THE IDENTIFICATION STICKER SHALL BE PERMITTED TO BE AFFIXED TO THE WALL IMMEDIATELY ADJACENT TO THE RESCUE
- 4. TEXT SHALL READ "RESCUE WINDOW" AND BE READABLE FROM INTERIOR AND EXTERIOR. ALL DOUBLE SIDED STICKERS SHALL BE INSTALLED ON INTERIOR SIDE OF WINDOW SASH. WHERE REFLECTIVE GLAZING IS PROVIDED, A STICKER SHALL BE PROVIDED ON EACH SIDE OF THE SASH.
- 5. STICKER SHALL BE BRIGHT YELLOW BACKGROUND WITH BLACK LETTERING.
- 6. PROVIDE WINDOW OPERATING INSTRUCTIONS ON HOW TO OPERATE RESCUE WINDOW IF NOT READILY APPARENT.
- 7. MINIMUM CLEAR OPENING FOR RESCUE WINDOWS IS 6 SF, WITH A 24" MINIMUM DIMENSION IN ANY DIRECTION. THE WINDOWS DESIGNATED AS RESCUE WINDOWS ON THESE DRAWINGS EXCEED SAID MINIMUM DIMENSIONS.

PLUMBING FIXTURE COUNT

MINIMUM REQUIRED (NYSBC SECTION 2902.1, NYSPC SECTION 403.1) CLASSIFICATION: EDUCATIONAL, OCCUPANCY: E

WATER CLOSETS: 1 PER 50 LAVATORIES: 1 PER 50 DRINKING FOUNTAIN: 1 PER 100 SERVICE SINK: 1

TOTAL OCCUPANTS: 962 STUDENT ENROLLMENT. 100 PROPOSED STAFF.

2020 NYS BUILDING CODE REFERENCES

SECTION 1109.2.2 WATER CLOSET COMPARTMENT - 5% OF THE TOTAL NUMBER SHALL BE WHEELCHAIR ACCESSIBLE.

SECTION 1109.2.3 LAVATORIES - 5% OF THE TOTAL NUMBER SHALL BE WHEELCHAIR ACCESSIBLE.

SECTION 1109.5.2 DRINKING FOUNTAINS - 50% OF THE TOTAL NUMBER PROVIDED SHALL COMPLY WITH ICC A117.1.

	TOTAL REQUIRED								MINIMUM 5% REQUIRED	PROVIDED ACCESSIBLE				
	FIXTURES	FIXTURES	BOYS	BOYS ADA	GIRLS	GIRLS ADA	UNISEX	UNISEX ADA	MEN	MEN ADA	WOMEN	WOMEN ADA	ACCESSIBLE FIXTURES	FIXTURES
WATER CLOSETS	22	41	5	5	12	5		3	1	4	2	4	4	21
URINALS		10	4	3					2	1				4
LAVATORIES	22	36	3	3	7	5	4	2	2	4	2	4	4	18
DRINKING FOUNTAINS	10	10												
SERVICE SINKS	1	10					1	0						

66-01-02-06-0-007-013 DISTRICT BEDFORD CENTRAL SCHOOL DISTRICT PROJECT PHASE 2 -

DRAWING BY:

CHECK BY: P.J.H.

ONSENT OF THE ARCHITECT OR ENGINEER.

A.A.

THIS DRAWING, PREPARED FOR THE SPECIFIC PROJECT INDICATED IS AN INSTRUMENT OF SERVICE AND THE PROPERTY OF BBS

ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PINFRINGEMENT OR ANY USE OF THIS DRAWING FOR ANY OTHE

PROJECT IS PROHIBITED. ANY ALTERATION OR REPRODUCTION OF THIS DOCUMENT IS ALSO PROHIBITED WITHOUT THE WRITTEN

LANDSCAPE ARCHITECTS

44 EAST MAIN STREET | 100 GREAT OAKS BLVD

www.BBSARCHITECTURE.com

SUITE 115, ALBANY

NEW YORK 12203

T. 518.621.7650

F. 518.621.7655

ENGINEERS

PATCHOGUE

NEW YORK 11772

T. 631.475.0349

F. 631.475.0361


SCALE: AS NOTED DATE: APRIL 2024 BID PICK-UP: FEBRUARY 24, 2025 FILE No: 23-131b


DWG TITLE LOWER LEVEL

A0.01

BOND IMPROVEMENTS

COMPLIANCE KEY PLAN

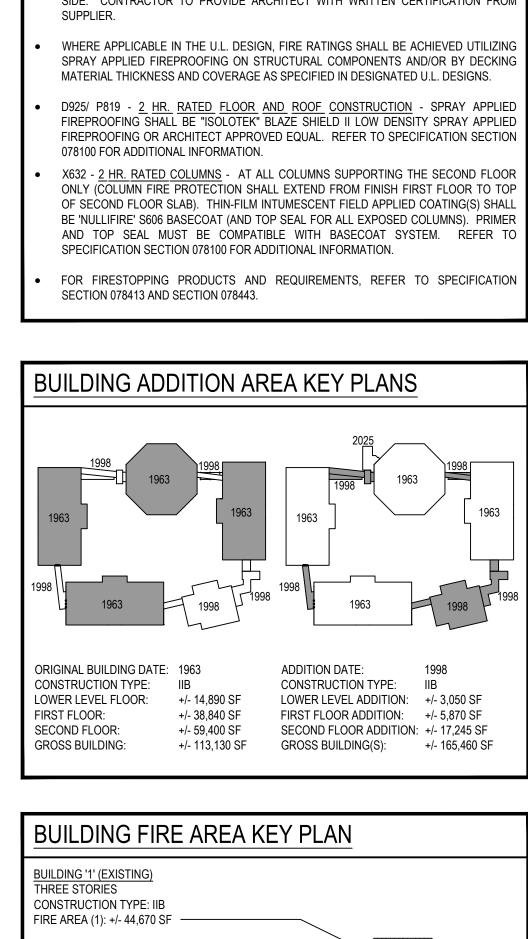

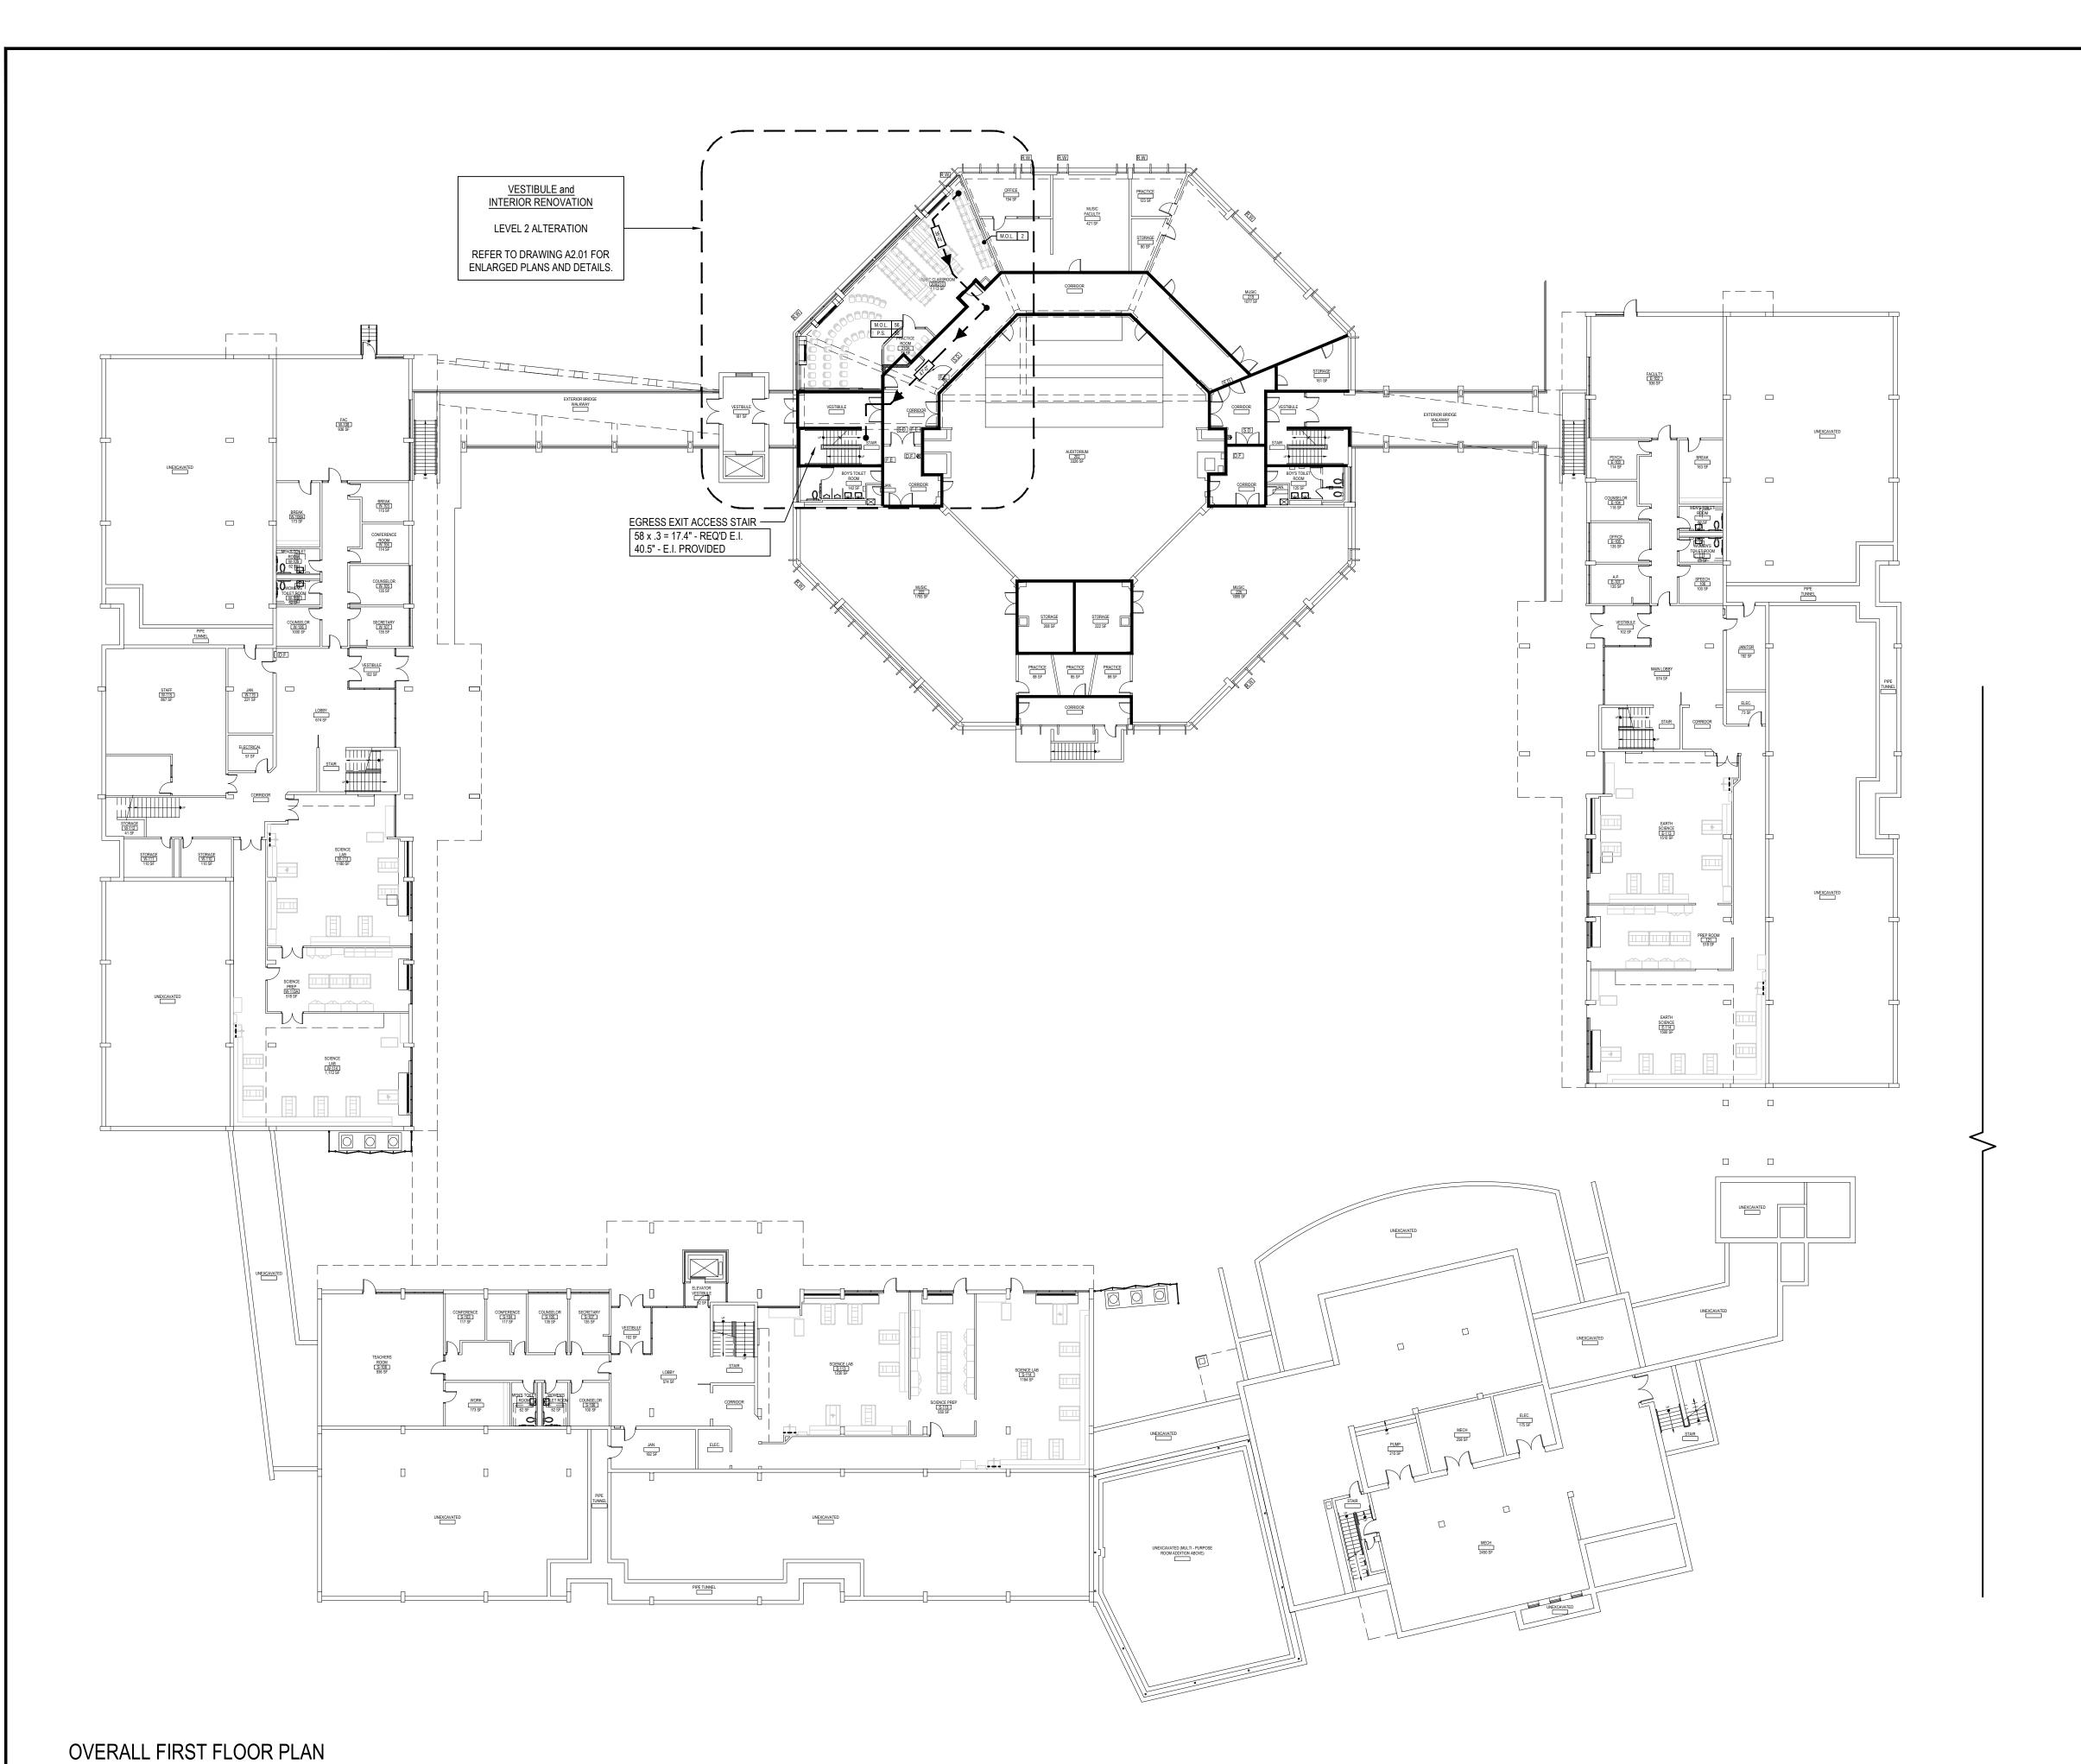

SCALE: 1" = 20'-0"

FIRE RESISTANCE RATING DESCRIPTIONS

REFER TO U.L. RATED ASSEMBLY DESCRIPTIONS AND DOCUMENTATION FOR COMPLETE RATED CONSTRUCTION AND FIRE RESISTANCE REQUIREMENTS.

SMOKE PARTITION - (0) HR RATED CONSTRUCTION CONSTRUCT PARTITION IN ACCORDANCE WITH IBC 2015 SECTION 710
SMOKE PARTITIONS. EXTEND FROM FINISHED FLOOR TO BOTTOM OF
FLOOR/ROOF STRUCTURE ABOVE AND SEAL AT TOP, BOTTOM, AND ALL
PENETRATIONS TO PROHIBIT THE PASSAGE OF SMOKE THROUGH EACH
SMOKE COMPARTMENT.

FIRE BARRIER - (1) HR RATED CONSTRUCTION
U.L. RATED U905/U906 OR U419

FIRE BARRIER - (2) HR RATED CONSTRUCTION
U.L. RATED U905/U906 OR U419

FIRE WALL - (2) HR RATED CONSTRUCTION
U.L. RATED U905/U906

STRUCTURAL FIRE PROTECTION REQUIREMENTS (NON-SPRINKLERED)

PER SECTION 903.2.3, THE FOLLOWING SHALL BE PROVIDED:

• 2 HR. HORIZONTAL FIRE BARRIER (UL D925)

• 2 HR. FIRE RESISTANCE RATING (UL X632) AT ALL COLUMNS SUPPORTING THE SECOND FLOOR ONLY (COLUMN FIRE PROTECTION SHALL EXTEND FROM FINISH FIRST FLOOR TO TOP OF SECOND FLOOR

TYPICAL 8" CMU WALL ASSEMBLY
SHALL CONFORM TO U.L. DESIGN U905. PROVIDES A MAXIMUM 2 HR. RATING. (REFER TO PLAN FOR ALL 1 HR. AND 2 HR. WALL ASSEMBLY LOCATIONS) TO INCLUDE: ALL CONCRETE BLOCK SHALL BE CLASSIFIED D-2 (2HR). CONTRACTOR TO PROVIDE ARCHITECT WITH WRITTEN CERTIFICATION FROM SUPPLIER. ALL MORTAR FOR BLOCK

TYPICAL 5" GYP. BD. WALL ASSEMBLY
SHALL CONFORM TO <u>U.L.</u> <u>DESIGN</u> <u>U419.</u> PROVIDES A MAXIMUM 1 HR. RATING.
COMPOSITION TO BE 3%" METAL STUDS WITH (1) LAYER %" FIRECODE GYP. BD, EACH SIDE. CONTRACTOR TO PROVIDE ARCHITECT WITH WRITTEN CERTIFICATION FROM SUPPLIER

WORK SHALL BE LAID IN FULL BED, NORMAL 3/8" THICK. VERTICAL JOINTS TO BE

 WHERE APPLICABLE IN THE U.L. DESIGN, FIRE RATINGS SHALL BE ACHIEVED UTILIZING SPRAY APPLIED FIREPROOFING ON STRUCTURAL COMPONENTS AND/OR BY DECKING MATERIAL THICKNESS AND COVERAGE AS SPECIFIED IN DESIGNATED U.L. DESIGNS.


 D925/ P819 - 2 HR. RATED FLOOR AND ROOF CONSTRUCTION - SPRAY APPLIED FIREPROOFING SHALL BE "ISOLOTEK" BLAZE SHIELD II LOW DENSITY SPRAY APPLIED FIREPROOFING OR ARCHITECT APPROVED EQUAL. REFER TO SPECIFICATION SECTION 078100 FOR ADDITIONAL INFORMATION.

• X632 - 2 HR. RATED COLUMNS - AT ALL COLUMNS SUPPORTING THE SECOND FLOOR ONLY (COLUMN FIRE PROTECTION SHALL EXTEND FROM FINISH FIRST FLOOR TO TOP OF SECOND FLOOR SLAB). THIN-FILM INTUMESCENT FIELD APPLIED COATING(S) SHALL BE 'NULLIFIRE' S606 BASECOAT (AND TOP SEAL FOR ALL EXPOSED COLUMNS). PRIMER AND TOP SEAL MUST BE COMPATIBLE WITH BASECOAT SYSTEM. REFER TO SPECIFICATION SECTION 078100 FOR ADDITIONAL INFORMATION.

 FOR FIRESTOPPING PRODUCTS AND REQUIREMENTS, REFER TO SPECIFICATION SECTION 078413 AND SECTION 078443. REV. DATE ITEM

NOTICE

THESE DRAWINGS ARE BASED ON CONSTRUCTION DRAWINGS NOT PREPARED BY BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PC. AND, THEREFORE, MAY NOT REPRESENT THE CONDITIONS AS CONSTRUCTED AT THE TIME. ALL EXISTING CONDITIONS SHOWN ARE REPRESENTED AS SUGGESTIVE INFORMATION AS THEY MAY NOT HAVE BEEN BUILT AND DETAILED PER THE ORIGINAL DOCUMENTS OR PER THE OWNER'S INFORMATION.

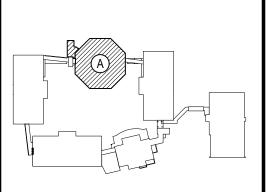

KEY PLAN

NOT TO SCALE

PHASE 2 - BOND IMPROVEMENTS
FOX LANE MIDDLE SCHOOL
TOWN of BEDFORD / WESTCHESTER COUNTY
FIRST FLOOR CODE COMPLIANCE KEY PLAN

DRAWING BY: A.A.

CHECK BY: P.J.H.

NOTICE


THIS DRAWING, PREPARED FOR THE SPECIFIC PROJECT INDICATED IS AN INSTRUMENT OF SERVICE AND THE PROPERTY OF BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PC. INFRINGEMENT OR ANY USE OF THIS DRAWING FOR ANY OTHER PROJECT IS PROHIBITED. ANY ALTERATION OR REPRODUCTION OF THIS DOCUMENT IS ALSO PROHIBITED WITHOUT THE WRITTEN CONSENT OF THE ARCHITECT OR ENGINEER.

ARCHITECTS
LANDSCAPE ARCHITECTS

ENGINEERS

244 EAST MAIN STREET
PATCHOGUE
NEW YORK 11772
T. 631.475.0349
T. 518.621.7650

F. 631.475.0361 F. 518.621.7655 www.BBSARCHITECTURE.com

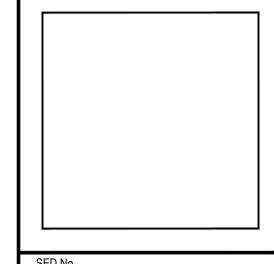

DISTRICT

BEDFORD CENTRAL
SCHOOL DISTRICT

PROJECT

PHASE 2 BOND IMPROVEMENTS

DWG TITLE

FIRST FLOOR CODE
COMPLIANCE KEY PLAN


SCALE: AS NOTED


DATE: APRIL 2024


BID PICK-UP: FEBRUARY 24, 2025

FILE No: 23-131b FLMS

10 02

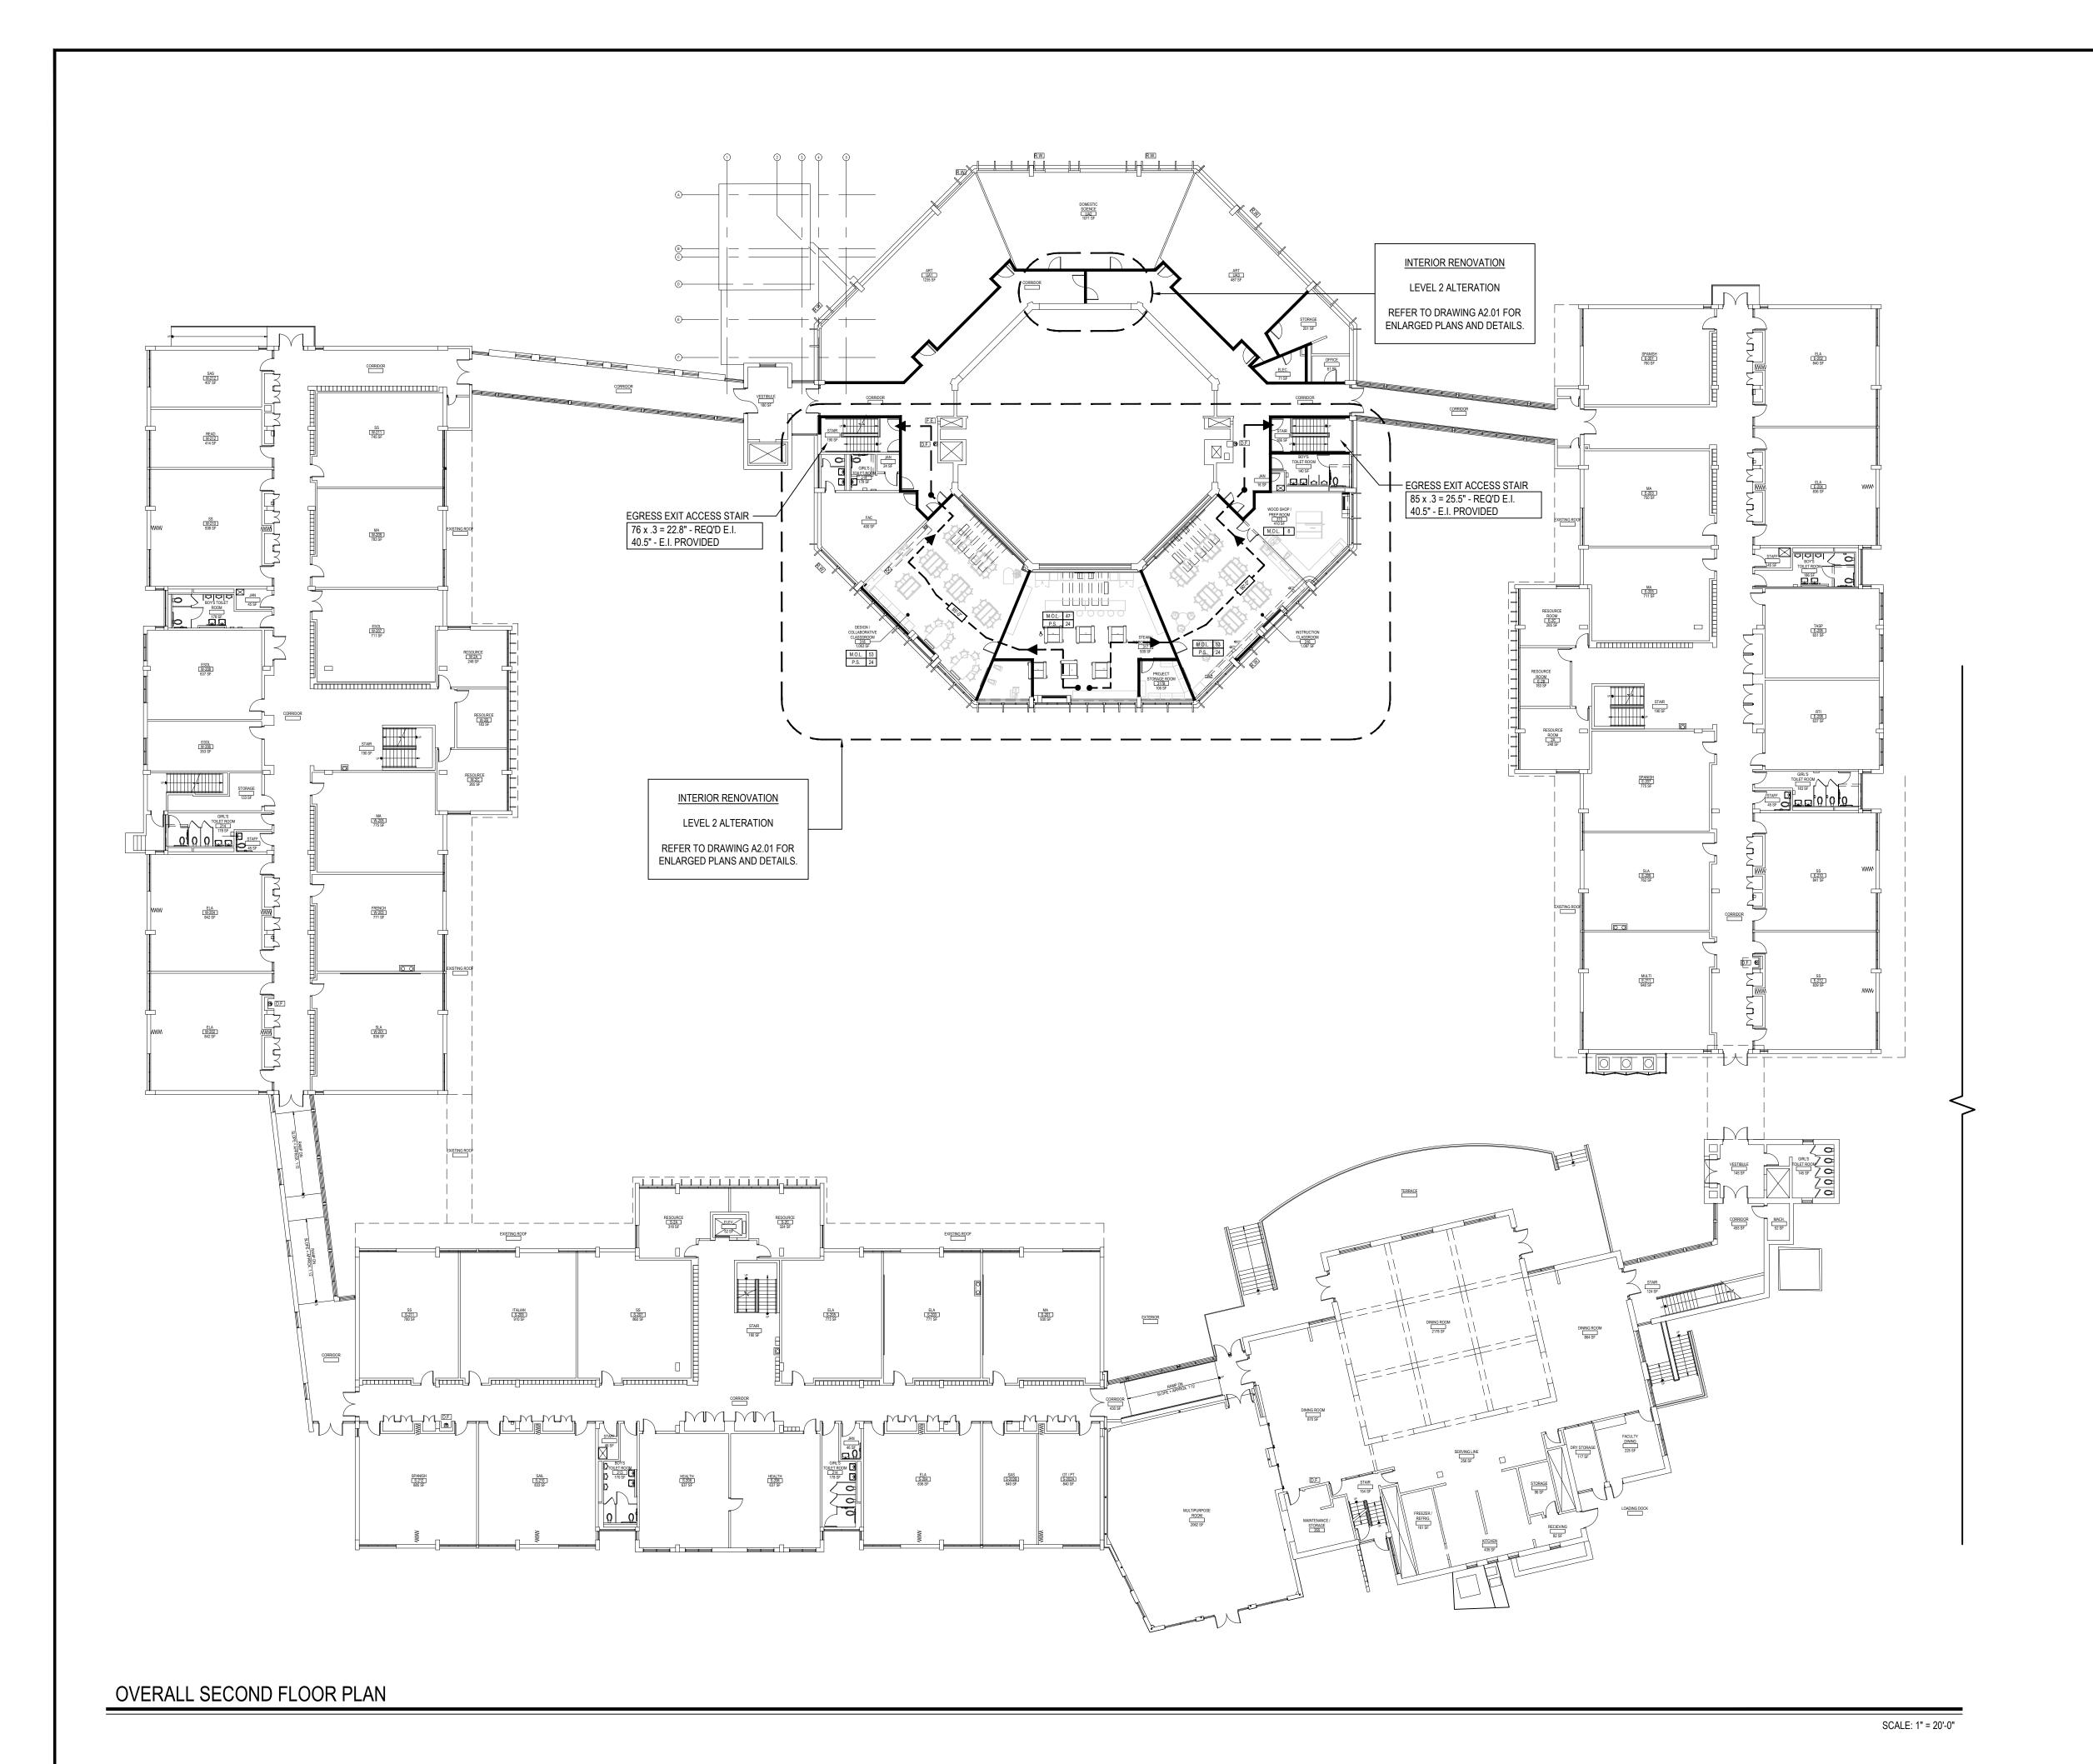


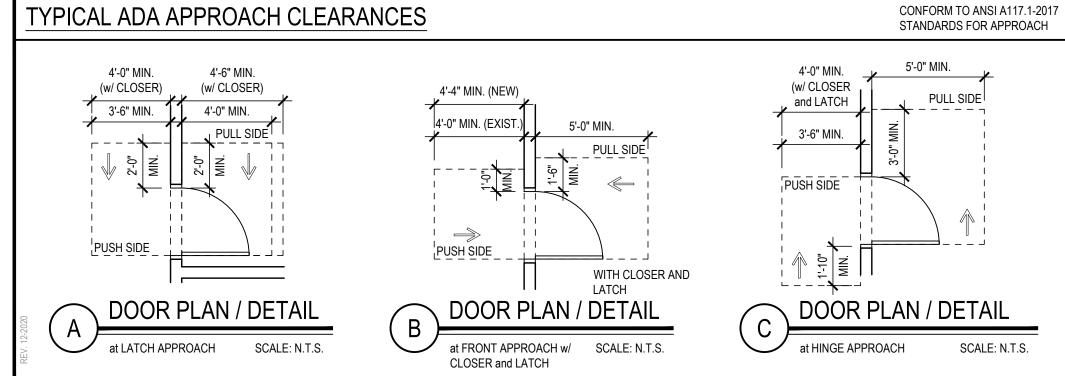

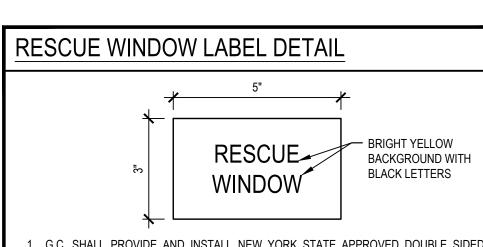

- G.C. SHALL PROVIDE AND INSTALL NEW YORK STATE APPROVED DOUBLE SIDED 'RESCUE WINDOW' DESIGNATION STICKER AT ALL PROPOSED RESCUE WINDOW LOCATIONS DESIGNATED AS "RW" ON THE DRAWINGS.
- 2. REFER TO CODE COMPLIANCE PLANS FOR ADDITIONAL INFORMATION/LOCATIONS. FINAL LOCATIONS TO BE COORDINATED IN THE FIELD WITH OWNER/ARCHITECT.
- 3. ANY NEW OR EXISTING WINDOW COVERINGS SHALL HAVE LABELS CLEARLY VISIBLE IN ADDITION TO IDENTIFICATION ON THE WINDOW SASH. IF STICKER CAN NOT BE AFFIXED TO WINDOW COVERINGS, THE IDENTIFICATION STICKER SHALL BE PERMITTED TO BE AFFIXED TO THE WALL IMMEDIATELY ADJACENT TO THE RESCUE WINDOW.
- 4. TEXT SHALL READ "RESCUE WINDOW" AND BE READABLE FROM INTERIOR AND EXTERIOR. ALL DOUBLE SIDED STICKERS SHALL BE INSTALLED ON INTERIOR SIDE OF WINDOW SASH. WHERE REFLECTIVE GLAZING IS PROVIDED, A STICKER SHALL BE PROVIDED ON EACH SIDE OF THE SASH.
- 5. STICKER SHALL BE BRIGHT YELLOW BACKGROUND WITH BLACK LETTERING.
- 6. PROVIDE WINDOW OPERATING INSTRUCTIONS ON HOW TO OPERATE RESCUE WINDOW IF NOT READILY APPARENT.
- 7. MINIMUM CLEAR OPENING FOR RESCUE WINDOWS IS 6 SF, WITH A 24" MINIMUM DIMENSION IN ANY DIRECTION. THE WINDOWS DESIGNATED AS RESCUE WINDOWS ON THESE DRAWINGS EXCEED SAID MINIMUM DIMENSIONS.

STANDARDS FOR APPROACH	l I -
5'-0" MIN. PULL SIDE	
3.0" MIN.	NOTICE THESE DRAWINGS ARE BASED ON CONSTRUCTION DRAWINGS NOT PREPARED BY BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PC. AND, THEREFORE, MAY NOT REPRESENT THE CONDITIONS AS CONSTRUCTED AT THE TIME. ALL EXISTING CONDITIONS SHOWN ARE REPRESENTED AS SUGGESTIVE INFORMATION AS THEY MAY NOT HAVE BEEN BUILT AND DETAILED PER THE ORIGINAL DOCUMENTS OR PER THE OWNER'S INFORMATION.
R PLAN / DETAIL	

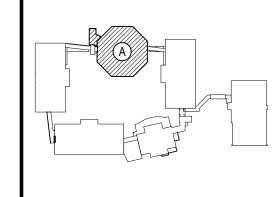

REV. DATE

EY PLAN

KEY PLAN

NOT TO SCALE

BEDFORD CENTRAL SCHOOL DISTRICT
PHASE 2 - BOND IMPROVEMENTS
FOX LANE MIDDLE SCHOOL
TOWN of BEDFORD / WESTCHESTER COUNTY

SECOND FLOOR CODE COMPLIANCE KEY PLAN

CHECK BY: P.J.H.

NOTICE

THIS DRAWING, PREPARED FOR THE SPECIFIC PROJECT INDICATED IS AN INSTRUMENT OF SERVICE AND THE PROPERTY OF BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PC. INFRINGEMENT OR ANY USE OF THIS DRAWING FOR ANY OTHER PROJECT IS PROHIBITED. ANY ALTERATION OR REPRODUCTION OF THIS DOCUMENT IS ALSO PROHIBITED WITHOUT THE WRITTEN CONSENT OF THE ARCHITECT OR ENGINEER.

BBS ARCHITECTS


LANDSCAPE ARCHITECTS
ENGINEERS

244 EAST MAIN STREET | 100 GREAT OAKS BLVD.
PATCHOGUE | SUITE 115, ALBANY

NEW YORK 11772

T. 631.475.0349 T. 518.621.7650 F. 631.475.0361 F. 518.621.7655 www.BBSARCHITECTURE.com

NEW YORK 12203

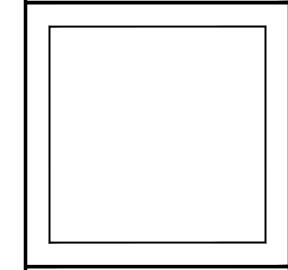

SED No.	66-01-02-06-0-007-013
DISTRICT	BEDFORD CENTRAL SCHOOL DISTRICT
PROJECT	PHASE 2 - BOND IMPROVEMENTS
DWG TITLE	SECOND FLOOR CODE COMPLIANCE KEY PLAN


SCALE: AS NOTED

DATE: APRIL 2024

BID PICK-UP: FEBRUARY 24, 2025

FILE No: 23-131b FLMS

A0.03

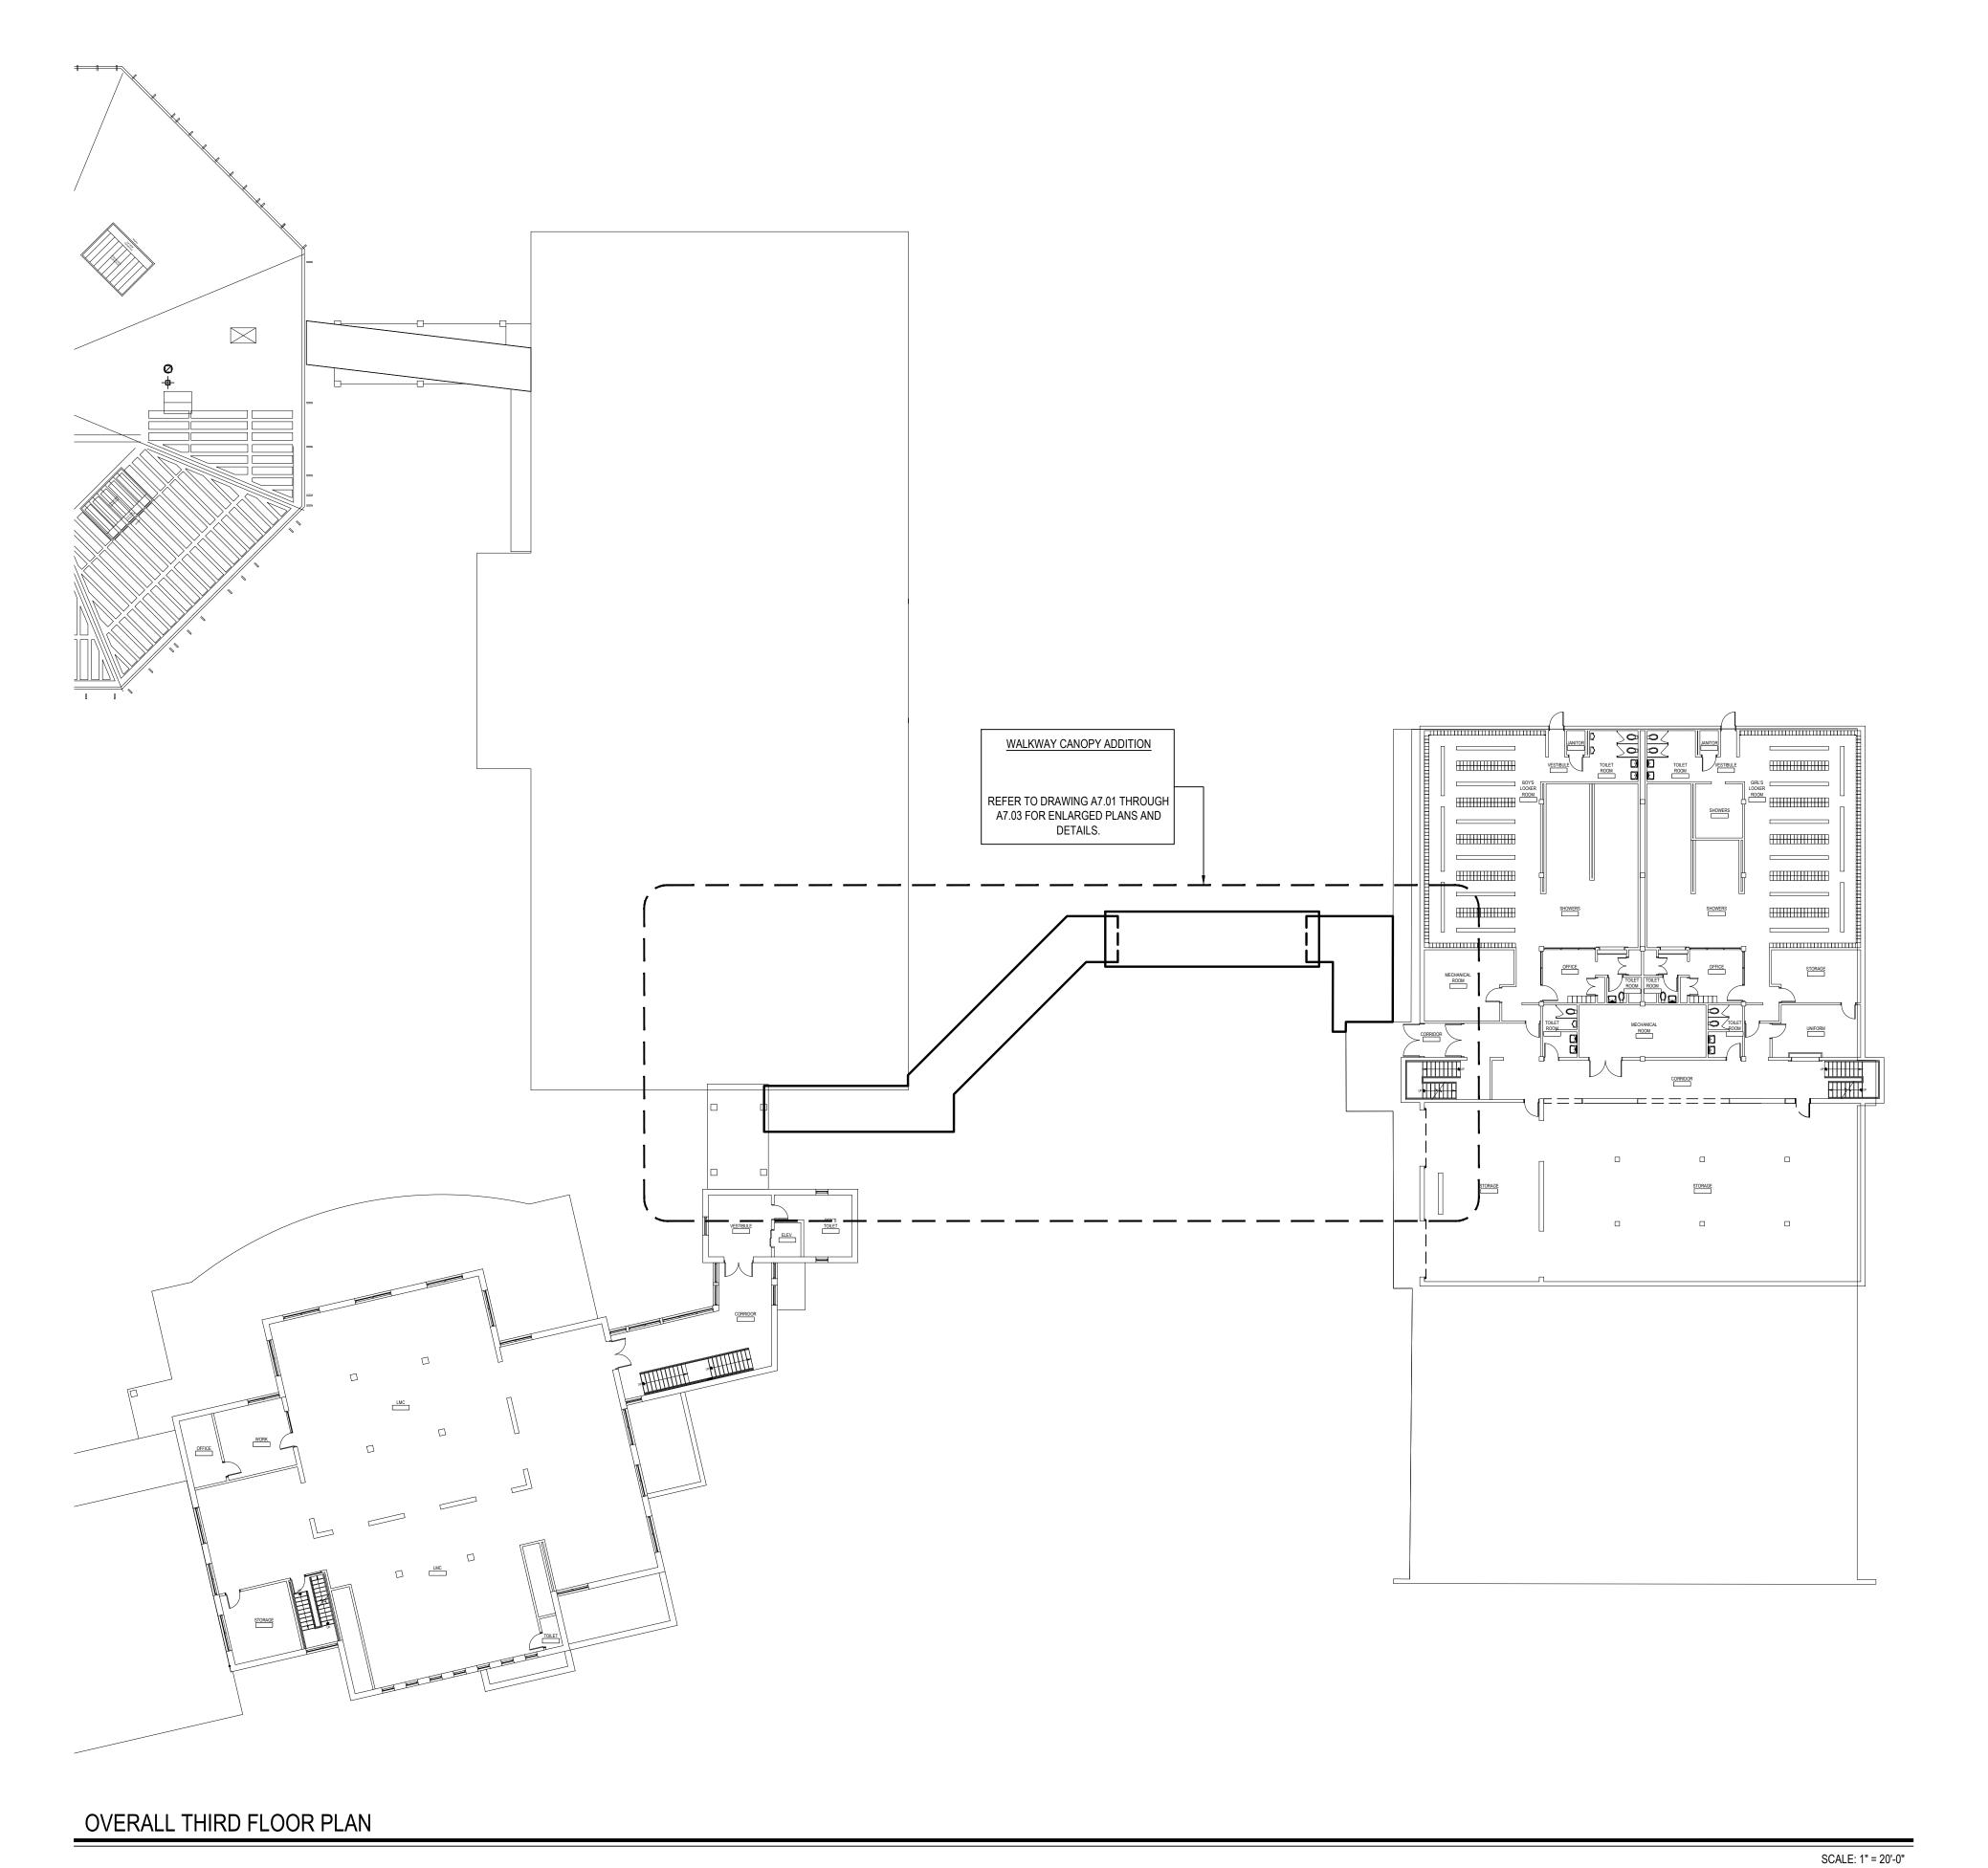

ENLARGED PLANS AND DETAILS.

BID ALTERNATE No. GC-2

REFER TO DRAWING A9.01 FOR

OVERALL FOURTH FLOOR PLAN

SCALE: 1" = 20'-0"

REV. DATE

<u>NOTICE</u> THESE DRAWINGS ARE BASED ON CONSTRUCTION DRAWINGS NOT PREPARED BY BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PC. AND, THEREFORE, MAY NOT REPRESENT THE CONDITIONS AS CONSTRUCTED AT THE TIME. ALL EXISTING CONDITIONS SHOWN ARE REPRESENTED AS SUGGESTIVE INFORMATION AS THEY MAY NOT HAVE BEEN BUILT AND DETAILED PER THE ORIGINAL DOCUMENTS OR PER THE OWNER'S INFORMATION.

KEY PLAN NOT TO SCALE

DRAWING BY: P.J.H.


CHECK BY: P.J.H.

ARCHITECTS LANDSCAPE ARCHITECTS ENGINEERS

THIS DRAWING, PREPARED FOR THE SPECIFIC PROJECT INDICATED IS AN INSTRUMENT OF SERVICE AND THE PROPERTY OF BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PC. INFRINGEMENT OR ANY USE OF THIS DRAWING FOR ANY OTHER PROJECT IS PROHIBITED. ANY ALTERATION OR REPRODUCTION OF THIS DOCUMENT IS ALSO PROHIBITED WITHOUT THE WRITTEN CONSENT OF THE ARCHITECT OR ENGINEER.

244 EAST MAIN STREET PATCHOGUE SUITE 115, ALBANY
NEW YORK 11772 NEW YORK 12203
T. 631.475.0349 T. 518.621.7650
F. 631.475.0361 F. 518.621.7655

www.BBSARCHITECTURE.com

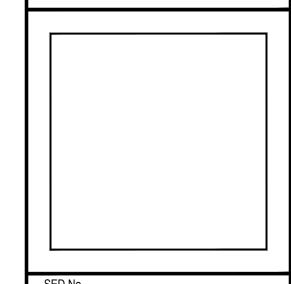


66-01-02-06-0-007-013 DISTRICT BEDFORD CENTRAL SCHOOL DISTRICT PROJECT PHASE 2 - BOND IMPROVEMENTS DWG TITLE THIRD AND FOURTH FLOOR CODE COMPLIANCE KEY PLANS

SCALE: AS NOTED

DATE: APRIL 2024 BID PICK-UP: FEBRUARY 24, 2025

FILE No: 23-131b

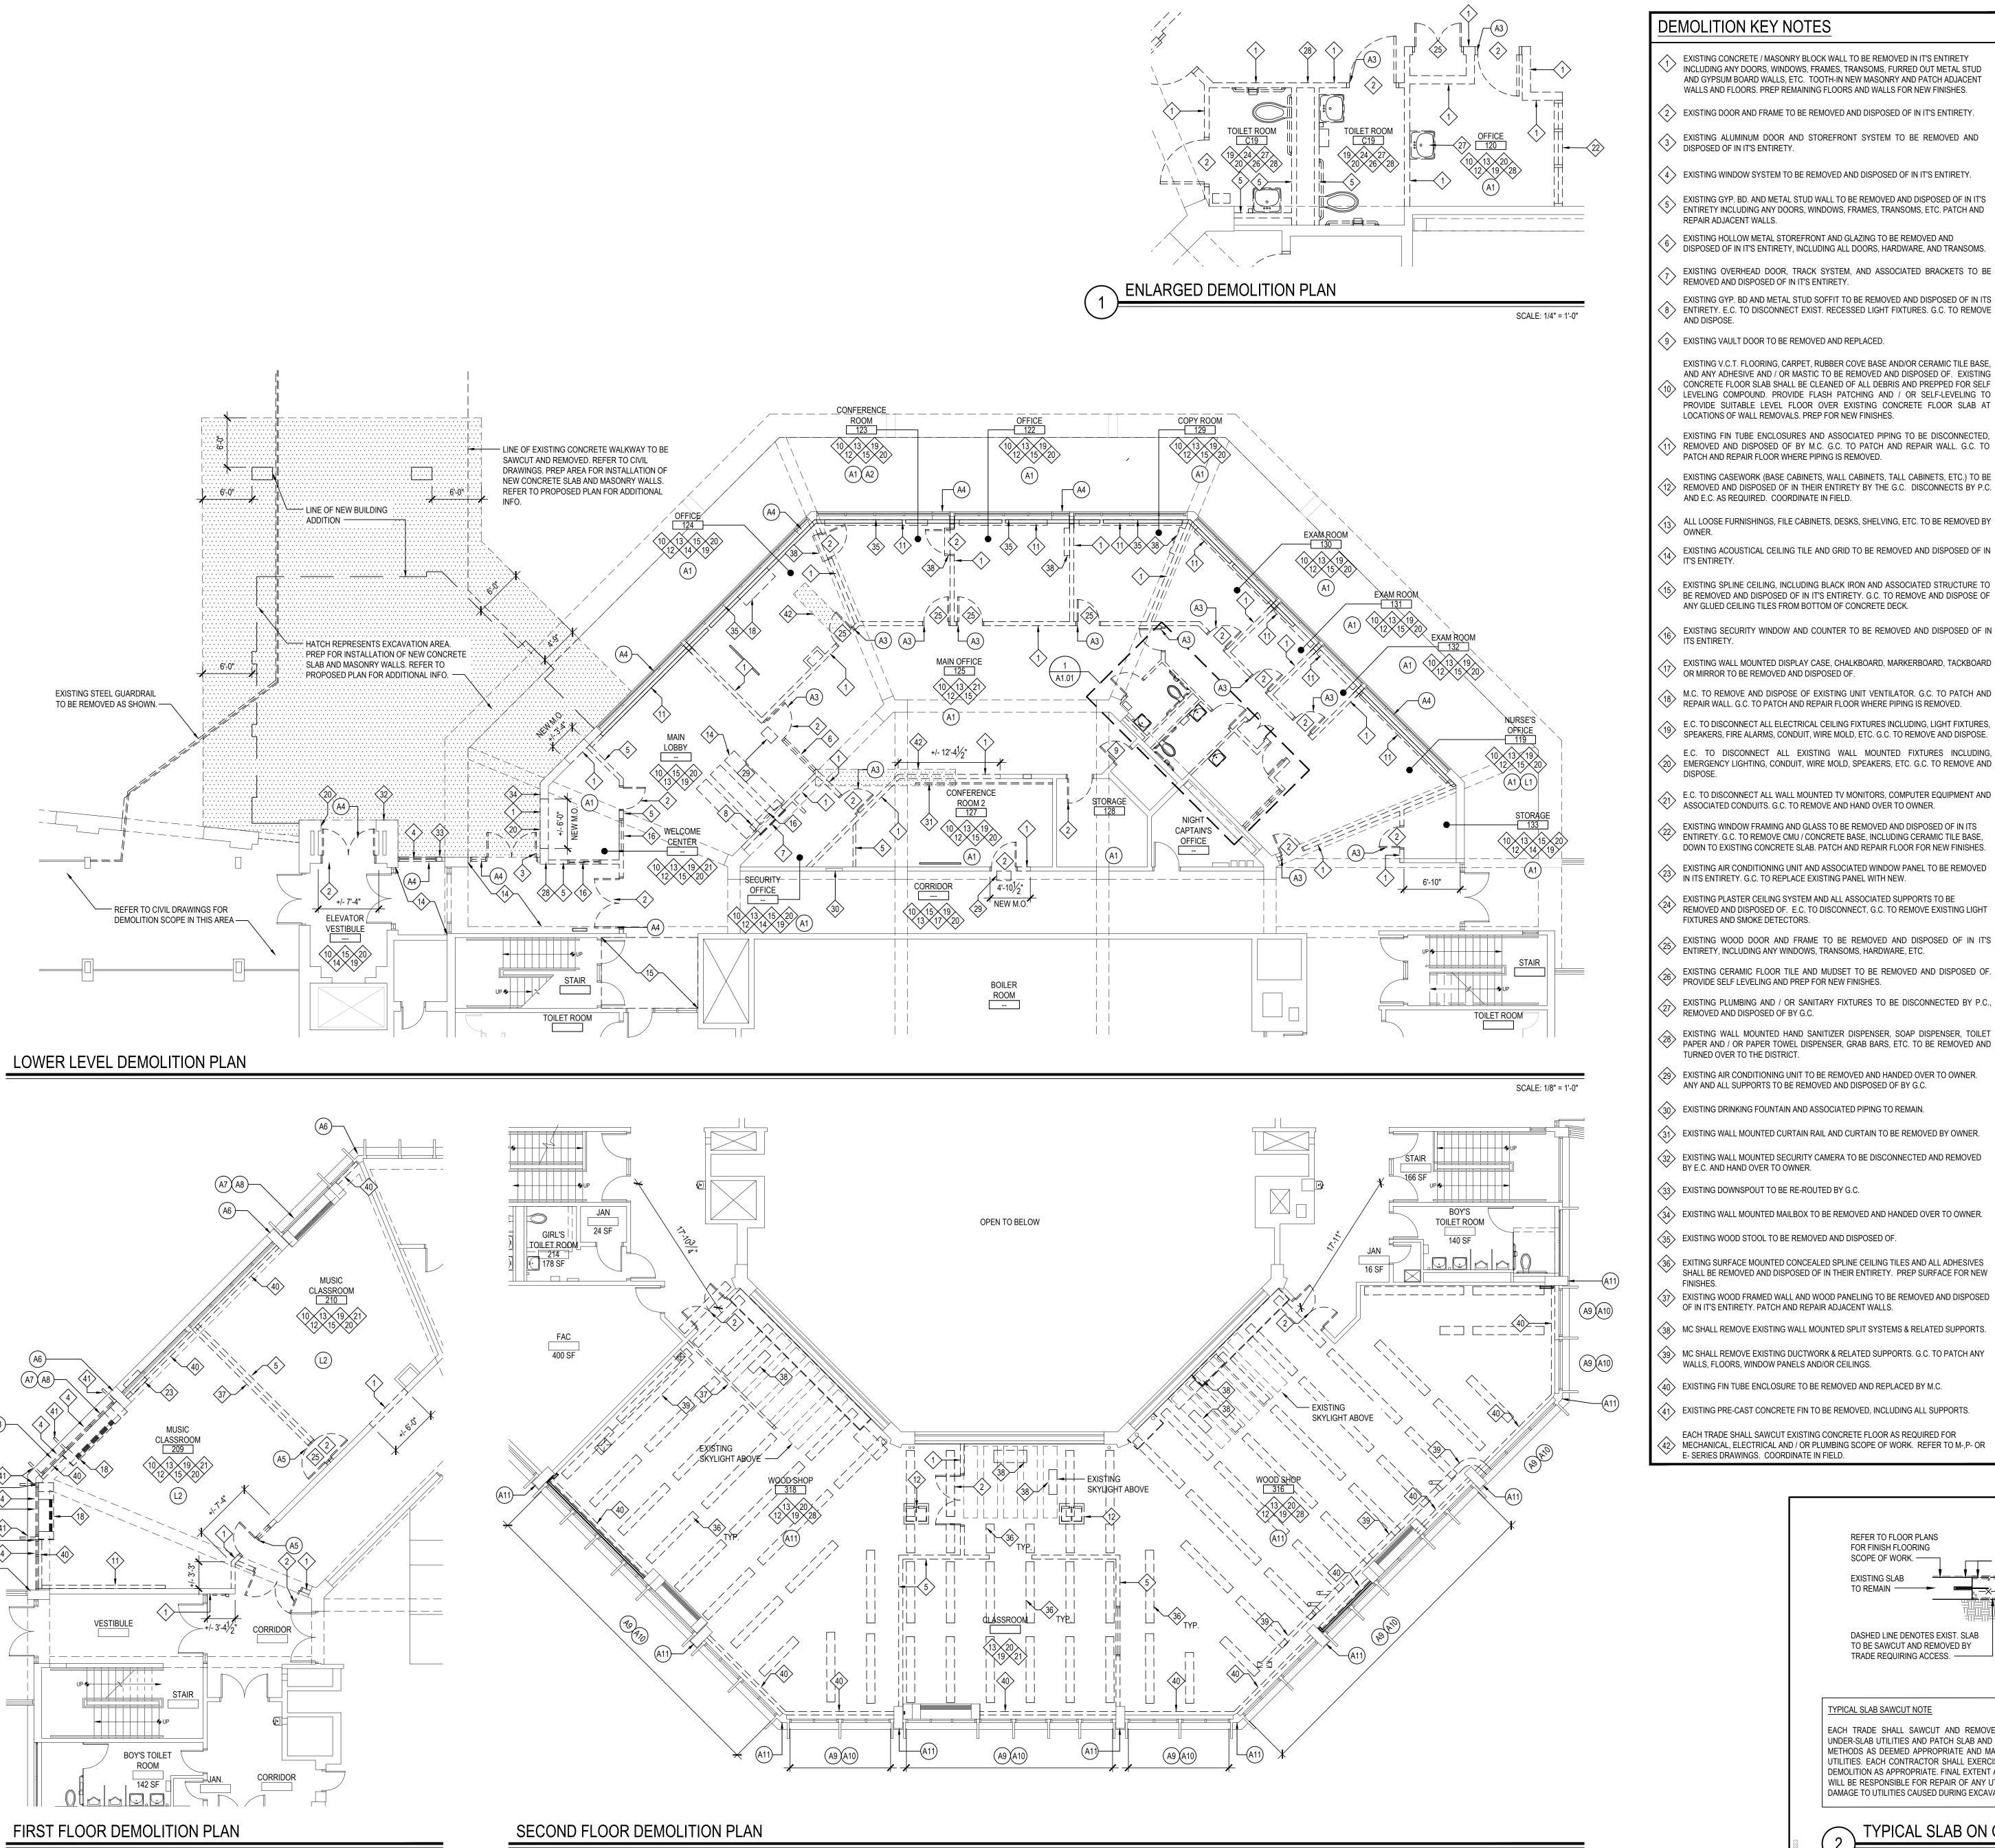

SCALE: 1/8" = 1'-0"

DEMOLITION KEY NOTES

- EXISTING CONCRETE / MASONRY BLOCK WALL TO BE REMOVED IN IT'S ENTIRETY INCLUDING ANY DOORS, WINDOWS, FRAMES, TRANSOMS, FURRED OUT METAL STUD AND GYPSUM BOARD WALLS, ETC. TOOTH-IN NEW MASONRY AND PATCH ADJACENT WALLS AND FLOORS. PREP REMAINING FLOORS AND WALLS FOR NEW FINISHES.
- 2 EXISTING DOOR AND FRAME TO BE REMOVED AND DISPOSED OF IN IT'S ENTIRETY.
- EXISTING ALUMINUM DOOR AND STOREFRONT SYSTEM TO BE REMOVED AND
- (4) EXISTING WINDOW SYSTEM TO BE REMOVED AND DISPOSED OF IN IT'S ENTIRETY.
- EXISTING GYP. BD. AND METAL STUD WALL TO BE REMOVED AND DISPOSED OF IN IT'S ENTIRETY INCLUDING ANY DOORS, WINDOWS, FRAMES, TRANSOMS, ETC. PATCH AND
- EXISTING HOLLOW METAL STOREFRONT AND GLAZING TO BE REMOVED AND
- EXISTING OVERHEAD DOOR, TRACK SYSTEM, AND ASSOCIATED BRACKETS TO BE
- EXISTING GYP. BD AND METAL STUD SOFFIT TO BE REMOVED AND DISPOSED OF IN ITS $\langle 8
 angle$ entirety. E.C. to disconnect exist. Recessed light fixtures. G.C. to remove
- (9) EXISTING VAULT DOOR TO BE REMOVED AND REPLACED.
- EXISTING V.C.T. FLOORING, CARPET, RUBBER COVE BASE AND/OR CERAMIC TILE BASE, AND ANY ADHESIVE AND / OR MASTIC TO BE REMOVED AND DISPOSED OF. EXISTING CONCRETE FLOOR SLAB SHALL BE CLEANED OF ALL DEBRIS AND PREPPED FOR SELF LEVELING COMPOUND. PROVIDE FLASH PATCHING AND / OR SELF-LEVELING T PROVIDE SUITABLE LEVEL FLOOR OVER EXISTING CONCRETE FLOOR SLAB A
- EXISTING FIN TUBE ENCLOSURES AND ASSOCIATED PIPING TO BE DISCONNECTED. REMOVED AND DISPOSED OF BY M.C. G.C. TO PATCH AND REPAIR WALL. G.C. TO PATCH AND REPAIR FLOOR WHERE PIPING IS REMOVED.
- EXISTING CASEWORK (BASE CABINETS, WALL CABINETS, TALL CABINETS, ETC.) TO BE > REMOVED AND DISPOSED OF IN THEIR ENTIRETY BY THE G.C. DISCONNECTS BY P.C
- 🔍 ALL LOOSE FURNISHINGS, FILE CABINETS, DESKS, SHELVING, ETC. TO BE REMOVED BY
- EXISTING ACOUSTICAL CEILING TILE AND GRID TO BE REMOVED AND DISPOSED OF IN
- EXISTING SPLINE CEILING, INCLUDING BLACK IRON AND ASSOCIATED STRUCTURE TO BE REMOVED AND DISPOSED OF IN IT'S ENTIRETY. G.C. TO REMOVE AND DISPOSE OF
- EXISTING SECURITY WINDOW AND COUNTER TO BE REMOVED AND DISPOSED OF IN
- EXISTING WALL MOUNTED DISPLAY CASE, CHALKBOARD, MARKERBOARD, TACKBOARD OR MIRROR TO BE REMOVED AND DISPOSED OF.
- M.C. TO REMOVE AND DISPOSE OF EXISTING UNIT VENTILATOR. G.C. TO PATCH AND
- REPAIR WALL. G.C. TO PATCH AND REPAIR FLOOR WHERE PIPING IS REMOVED.
- E.C. TO DISCONNECT ALL EXISTING WALL MOUNTED FIXTURES INCLUDING
- EXISTING WINDOW FRAMING AND GLASS TO BE REMOVED AND DISPOSED OF IN ITS
- EXISTING AIR CONDITIONING UNIT AND ASSOCIATED WINDOW PANEL TO BE REMOVED
- IN ITS ENTIRETY. G.C. TO REPLACE EXISTING PANEL WITH NEW.
- EXISTING WOOD DOOR AND FRAME TO BE REMOVED AND DISPOSED OF IN IT'S
- EXISTING PLUMBING AND / OR SANITARY FIXTURES TO BE DISCONNECTED BY P.C
- EXISTING WALL MOUNTED HAND SANITIZER DISPENSER, SOAP DISPENSER, TOILET
- TURNED OVER TO THE DISTRICT.
- 29 EXISTING AIR CONDITIONING UNIT TO BE REMOVED AND HANDED OVER TO OWNER. ANY AND ALL SUPPORTS TO BE REMOVED AND DISPOSED OF BY G.C.
- (30) EXISTING DRINKING FOUNTAIN AND ASSOCIATED PIPING TO REMAIN.
- (31) EXISTING WALL MOUNTED CURTAIN RAIL AND CURTAIN TO BE REMOVED BY OWNER.
- 22 EXISTING WALL MOUNTED SECURITY CAMERA TO BE DISCONNECTED AND REMOVED BY E.C. AND HAND OVER TO OWNER.
- (33) EXISTING DOWNSPOUT TO BE RE-ROUTED BY G.C.
- (34) EXISTING WALL MOUNTED MAILBOX TO BE REMOVED AND HANDED OVER TO OWNER.
- (35) EXISTING WOOD STOOL TO BE REMOVED AND DISPOSED OF
- SHALL BE REMOVED AND DISPOSED OF IN THEIR ENTIRETY. PREP SURFACE FOR NEW
- > EXISTING WOOD FRAMED WALL AND WOOD PANELING TO BE REMOVED AND DISPOSED OF IN IT'S ENTIRETY. PATCH AND REPAIR ADJACENT WALLS.
- (38) MC SHALL REMOVE EXISTING WALL MOUNTED SPLIT SYSTEMS & RELATED SUPPORTS.
- 39> MC SHALL REMOVE EXISTING DUCTWORK & RELATED SUPPORTS. G.C. TO PATCH ANY WALLS, FLOORS, WINDOW PANELS AND/OR CEILINGS.
- $\langle 40 \rangle$ EXISTING FIN TUBE ENCLOSURE TO BE REMOVED AND REPLACED BY M.C.

SCALE: 1/8" = 1'-0"

- EXISTING PRE-CAST CONCRETE FIN TO BE REMOVED, INCLUDING ALL SUPPORTS.
- EACH TRADE SHALL SAWCUT EXISTING CONCRETE FLOOR AS REQUIRED FOR

REFER TO FLOOR PLANS FOR FINISH FLOORING

SCOPE OF WORK. ——

DASHED LINE DENOTES EXIST. SLAB TO BE SAWCUT AND REMOVED BY

TRADE REQUIRING ACCESS. ———

EXISTING SLAB

TYPICAL SLAB SAWCUT NOTE

EXISTING CONSTRUCTION TO BE SURFACES) EXISTING FLOOR SLAB TO BE SAW SLAB UTILITIES. REFER TO INFORMATION. $\langle x \rangle$ KEYED NOTE # DETAIL NUMBER AX.XX/ DRAWING NUMBER ECTION / ELEVATION TAG XX DETAIL NUMBER XX.XX DRAWING NUMBER XXXX - ROOM NAME XXX ROOM NUMBER XXX SF ROOM AREA

DEMOLITION SYMBOL LEGEND

HAZARDOUS MATERIALS NOTES

- OWNER HAS EMPLOYED AN ENVIRONMENTAL CONSULTANT TO PERFORM DESIGN-PHASE INSPECTION AND TESTING FOR ASBESTOS, LEAD AND / OR PCBs. SUCH REPORTS ARE CONTAINED IN THE PROJECT MANUAL AND MAY CONTAIN ADDITIONAL REQUIREMENTS BEYOND THOSE SHOWN IN THE CONSTRUCTION DRAWINGS AND
- CONSTRUCTION DRAWINGS INDICATE EXTENT OF HAZARDOUS MATERIALS REMOVALS, WHICH MAY BE ASSUMED OR CONFIRMED POSITIVE. CONTRACTOR SHALL VERIFY
- CONTRACTOR SHALL EMPLOY A PROPERLY CREDENTIALED HAZARDOUS MATERIALS
- ASBESTOS ABATEMENT SHALL BE PERFORMED IN ACCORDANCE WITH NYS INDUSTRIAL CODE RULE 56.
- REMOVAL OF LEAD CONTAINING CONSTRUCTION MATERIALS SHALL BE PERFORMED IN ACCORDANCE WITH FEDERAL HUD REGULATIONS AND THE EPA'S RRP RULE. THE WORK OF THIS PROJECT IS NOT INTENDED TO BE A LEAD ABATEMENT.
- WHERE WORK INVOLVES LEAD CONTAINING CONSTRUCTION MATERIALS, WIPE TESTS WILL BE PERFORMED UPON FINAL CLEANING. FAILURE WILL REQUIRE RE-CLEANING BY THE CONTRACTOR.
- PCB REMOVALS SHALL BE PERFORMED IN ACCORDANCE WITH FEDERAL EPA REGULATIONS AS ENFORCED BY NYS DEC. IF SUCH MATERIALS ALSO CONTAIN ASBESTOS, THEN SUCH MATERIALS SHALL BE HANDLED AND DISPOSED OF PER BOTH
- CONTRACTOR SHALL COORDINATE HAZARDOUS MATERIALS REMOVAL ACTIVITIES WITH MONITORING.

NYS DEC AND NYS ICR 56.

- IF ANY SUSPECT MATERIALS ARE DISCOVERED DURING DEMOLITION THAT ARE
- ASBESTOS CONTAINING 9"X 9" FLOOR TILE (GRAY) AND ASSOCIATED MASTIC
- ASBESTOS CONTAINING CARPET MASTIC (YELLOW) AT MAIN OFFICE
- ASBESTOS CONTAINING WINDOW CAULKING (BLACK) AT LOWER LEVEL MAIN OFFICE.
- ASBESTOS CONTAINING CONCRETE EXPANSION JOINT CAULK (BEIGE) AT
- ASBESTOS CONTAINING CONONLIL.
 SECOND FLOOR MUSIC ROOM 210 ASBESTOS CONTAINING WINDOW CAULK (BLACK) AT SECOND FLOOR MUSIC
- ASBESTOS CO ROOM 210
- ASBESTOS CONTAINING WINDOW GLAZING (WHITE) AT SECOND FLOOR MUSIC ROOM 210
- (A9) ASBESTOS CONTAINING WINDOW CAULK (BLACK) AT THIRD FLOOR
- ASBESTOS CONTAINING CONCRETE EXPANSION JOINT CAULK (BEIGE) AT THIRD FLOOR WOODSHOP ROOM 318
- (L2) LEAD CONTAINING BLACK PAINT ON CERAMIC TILE WALL AT SECOND FLOOR
- LEAD CONTAINING BLUE CERAMIC TILE WALL AT SECOND FLOOR TOILET ROOMS
- P1 EXTERIOR WINDOW PANEL CAULK (BLACK) AT OLD WINDOWS EXTERIOR BUILDING THROUGHOUT

DESCRIPTION
EXISTING CONSTRUCTION TO BE REMOVED (PATCH ALL REMAINING SURFACES)
EXISTING FLOOR SLAB TO BE SAWCUT TO ACCOMMODATE NEW UNDER SLAB UTILITIES. REFER TO SAWCUT DETAIL FOR ADDITIONAL INFORMATION.
KEYED NOTE
DETAIL TAG — DETAIL NUMBER — DRAWING NUMBER
SECTION / ELEVATION TAG — DETAIL NUMBER — DRAWING NUMBER
ROOM TAG — ROOM NAME — ROOM NUMBER — ROOM AREA
REVISION CLOUD AND KEYED DESIGNATION. REFER TO DRAWING TITLEBLOCK FOR ADDITIONAL INFORMATION.

- DIVISION 1 RELATED SPECIFICATIONS.
- QUANTITIES OF SUCH MATERIALS AND ACCOUNT FOR THEM IN THE BID.
- SUBCONTRACTOR AS REQUIRED FOR THE SCOPE OF WORK AT HAND.

- THE OWNER'S ENVIRONMENTAL CONSULTANT FOR APPROPRIATE PROJECT
- OUTSIDE OF THE IDENTIFIED SCOPE OF WORK, THE CONTRACTOR SHALL CEASE REMOVAL AND NOTIFY THE ARCHITECT.
- THE FOLLOWING HAZARDOUS MATERIAL REMOVAL KEY NOTES CORRESPOND TO THE CONSTRUCTION DRAWINGS:
- (BLACK) AT LOWER LEVEL
- (A2) CONFERENCE ROOM
- ASBESTOS CONTAINING DOOR CAULKING (GRAY) AT LOWER LEVEL MAIN
- ASBESTOS CONTAINING DOOR CAULKING (BLACK) AT SECOND FLOOR MUSIC ROOM.
- (A10) ASBESTOS CONTAINING WINDOW GLAZING (WHITE) AT THIRD FLOOR
- (L1) LEAD CONTAINING BLUE PAINT ON CINDER BLOCK WALL AT ROOM 119

—— 4" MIN. POURED CONCRETE SLAB (MATCH EXISTING THICKNESS)

WITH 6x6 W4.0 x W4.0 W.W.M. OVER 15 MIL. VAPOR BARRIER.

- EXISTING SUB-GRADE TO BE EXCAVATED BY P.C. OR E.C. AS REQUIRED

FOR INSTALLATION OF NEW WORK. BACKFILL AND COMPACTION BY

PROVIDE 12" LONG #4 BARS WITH 6" EMBEDMENT AT 12" O.C.
STAGGERED EACH SIDE OF TRENCH AND EPOXY INTO EXIST.

TRADE REQUIRING ACCESS.

EACH TRADE SHALL SAWCUT AND REMOVE PORTIONS OF EXISTING CONCRETE SLAB-ON-GRADE TO ACCOMMODATE INSTALLATION OF NEW

UNDER-SLAB UTILITIES AND PATCH SLAB AND FINISH FLOORING. SLAB SHALL BE SCANNED VIA GROUND PENETRATING RADAR (GPR) AND/OR OTHER

METHODS AS DEEMED APPROPRIATE AND MARKED-OUT FOR BURIED AND/OR EMBEDDED PIPING, DUCT BANKS, ELECTRICAL CONDUIT, AND OTHER

UTILITIES. EACH CONTRACTOR SHALL EXERCISE CARE IN SLAB DEMOLITION IN THE VICINITY OF LOCATED UTILITIES AND ALTER METHODS OF SLAB

DEMOLITION AS APPROPRIATE. FINAL EXTENT AND LOCATIONS OF SLAB REMOVAL TO BE COORDINATED BETWEEN TRADES IN THE FIELD. EACH TRADE WILL BE RESPONSIBLE FOR REPAIR OF ANY UTILITIES CUT OR DAMAGED BY THEIR SLAB REMOVAL WHETHER REVEALED BY SCANNING OR NOT. ANY

DAMAGE TO UTILITIES CAUSED DURING EXCAVATION BY OTHER TRADES WILL BE THE RESPONSIBILITY OF THE TRADE WHICH CAUSED THE DAMAGE.

REV. DATE

<u>NOTICE</u>

HESE DRAWINGS ARE BASED ON CONSTRUCTION DRAWINGS NO

REPARED BY BBS ARCHITECTS, LANDSCAPE ARCHITECTS AN CONDITIONS AS CONSTRUCTED AT THE TIME ALL EXIST

INFORMATION AS THEY MAY NOT HAVE BEEN BUILT AND DETAILE

PER THE ORIGINAL DOCUMENTS OR PER THE OWNER'S INFORMATI

KEY PLAN

NOT TO SCALE

P.J.H. P.J.H.

THIS DRAWING, PREPARED FOR THE SPECIFIC PROJECT INDICATED AN INSTRUMENT OF SERVICE AND THE PROPERTY OF BE ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, INFRINGEMENT OR ANY USE OF THIS DRAWING FOR ANY OTH PROJECT IS PROHIBITED. ANY ALTERATION OR REPRODUCTION (THIS DOCUMENT IS ALSO PROHIBITED WITHOUT THE WRITTE ONSENT OF THE ARCHITECT OR ENGINEER.

ARCHITECTS

LANDSCAPE ARCHITECTS ENGINEERS PATCHOGUE SUITE 115, ALBANY NEW YORK 11772 NEW YORK 12203 T. 631.475.0349

F. 631.475.0361 F. 518.621.7655 www.BBSARCHITECTURE.com

66-01-02-06-0-007-013 DISTRICT BEDFORD CENTRAL SCHOOL DISTRICT <u>PROJECT</u> PHASE 2 -BOND IMPROVEMENTS DWG TITLE


DEMOLITION FLOOR PLANS SCALE: AS NOTED DATE: APRIL 2024 BID PICK-UP: FEBRUARY 24, 2025 FILE No: 23-131b


A1.01


TYPICAL SLAB ON GRADE SAWCUT INFILL DETAIL SCALE: 3/4" = 1'-0"


PROVIDE 12" LONG #4 BARS WITH 6" EMBEDMENT AT 12" O.C.

SLAB USING HILTI HY-200 OR EQUAL.

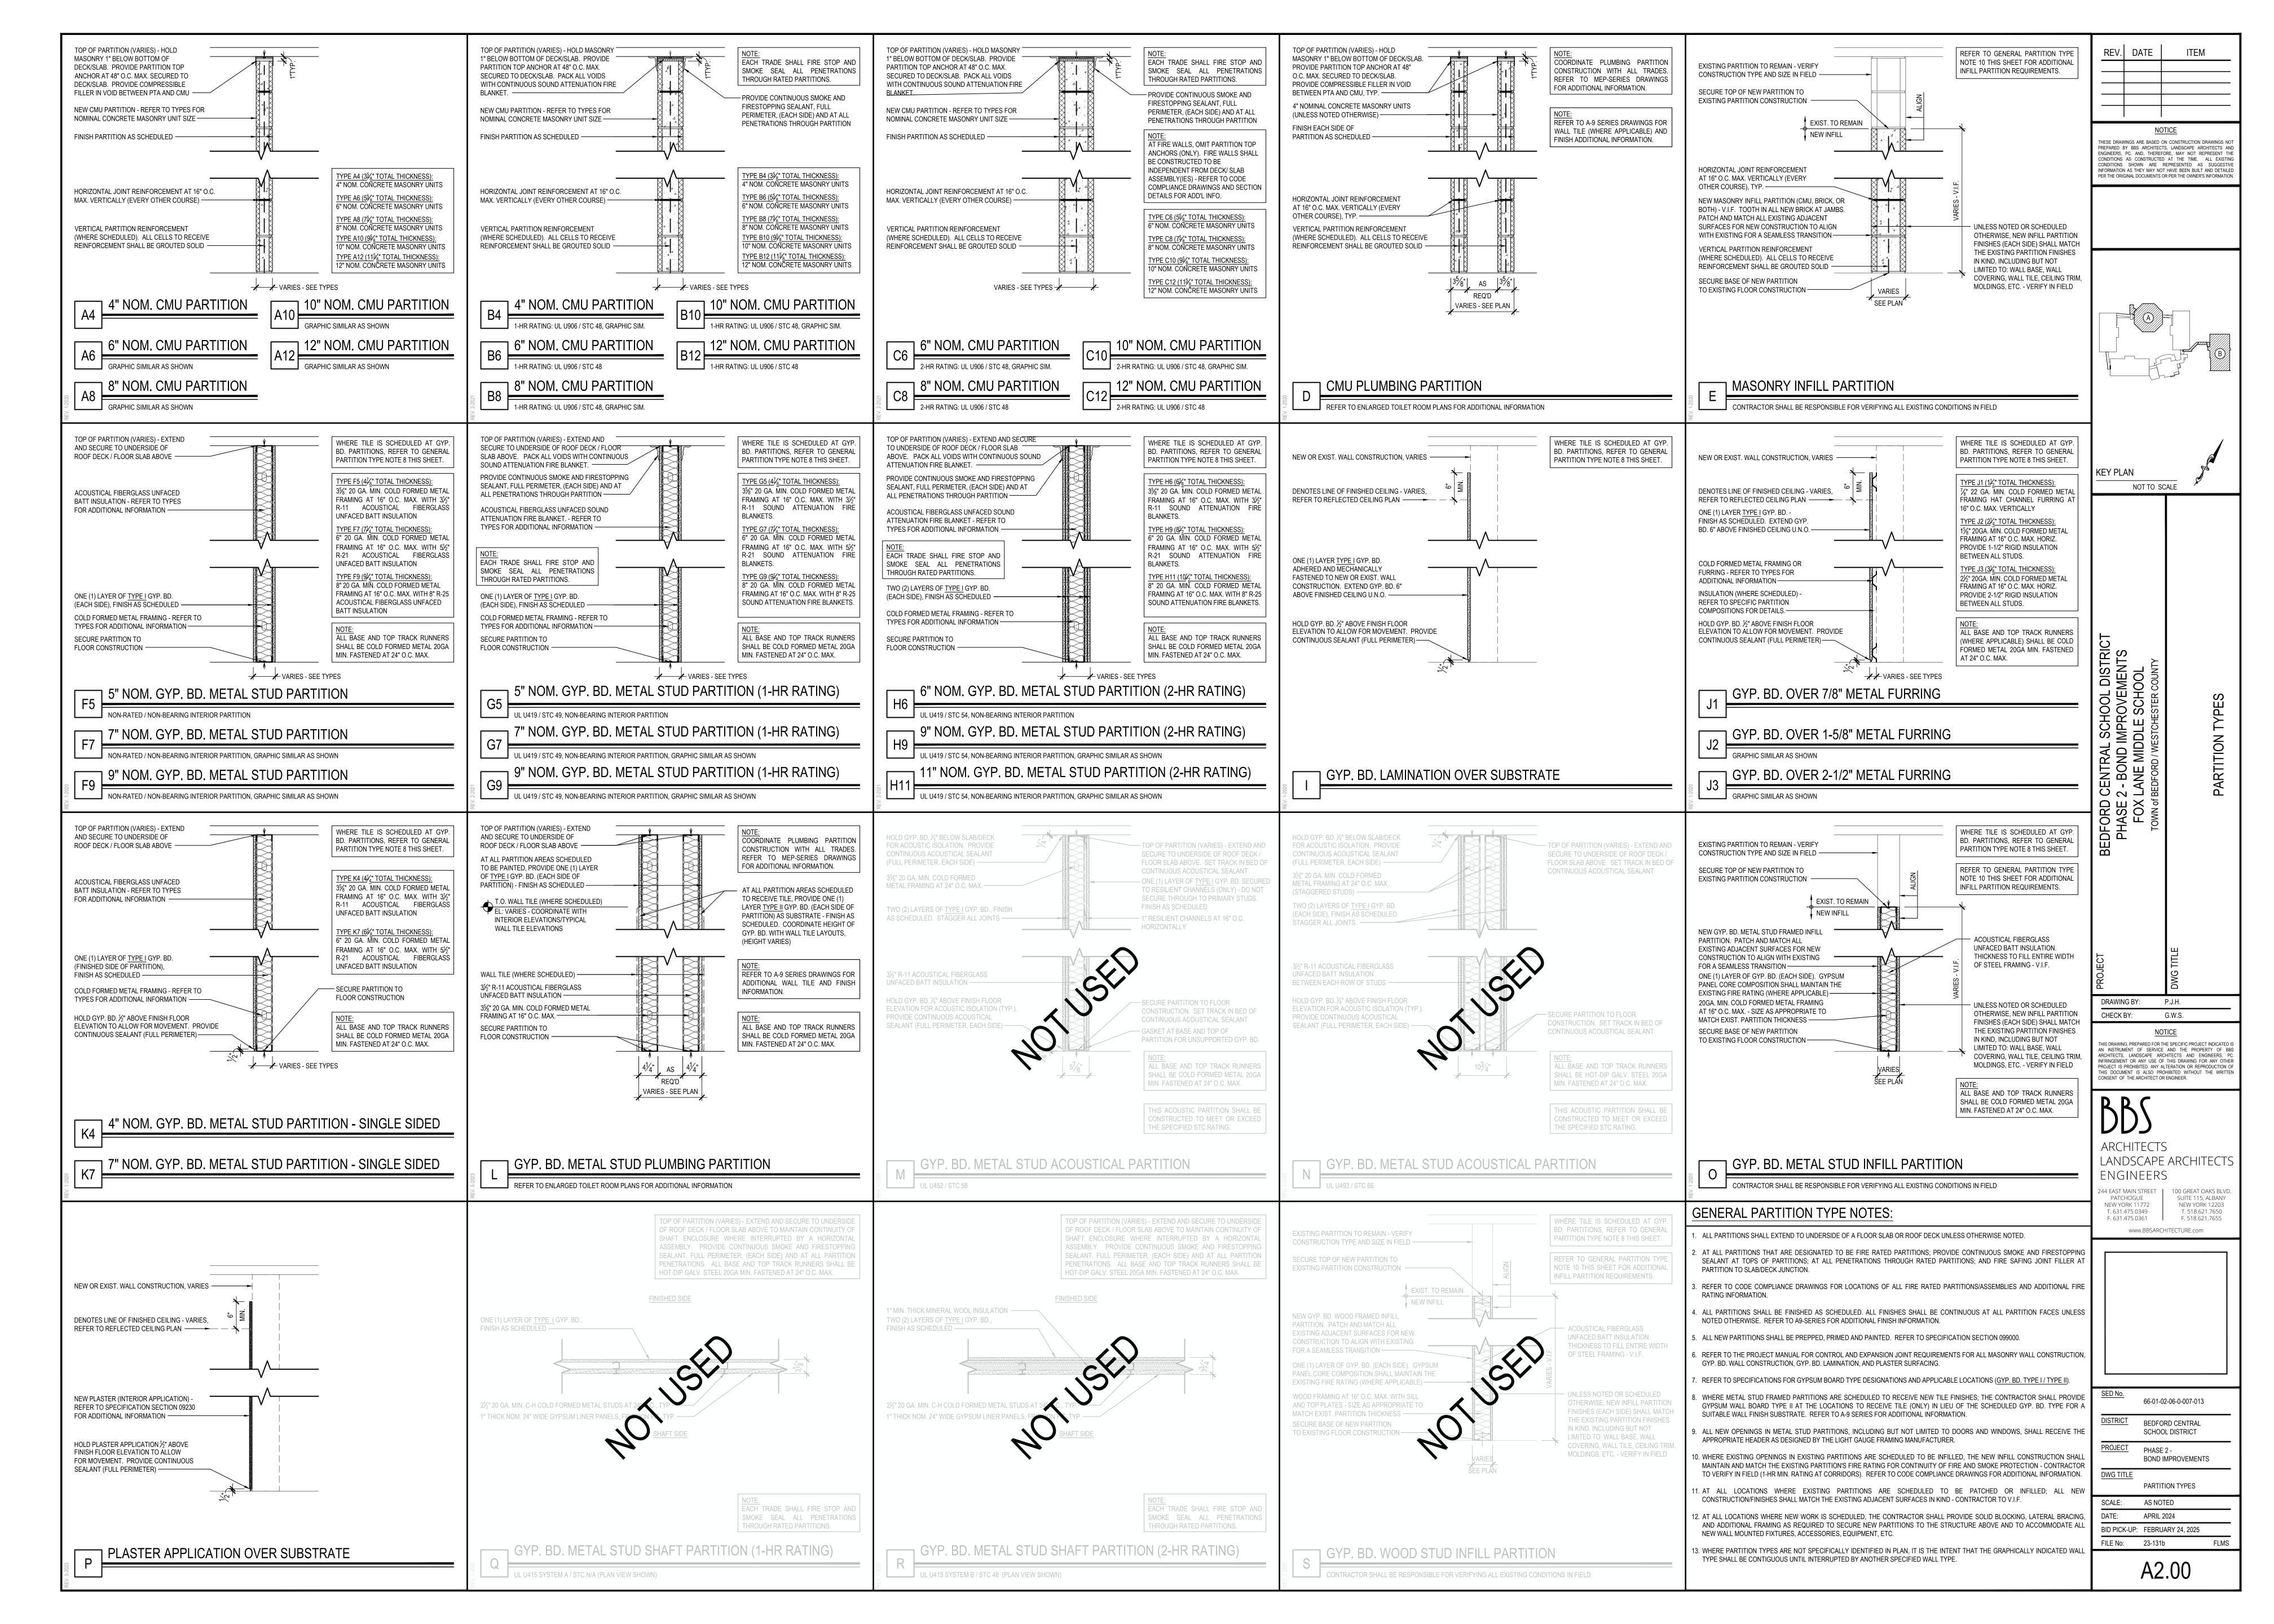

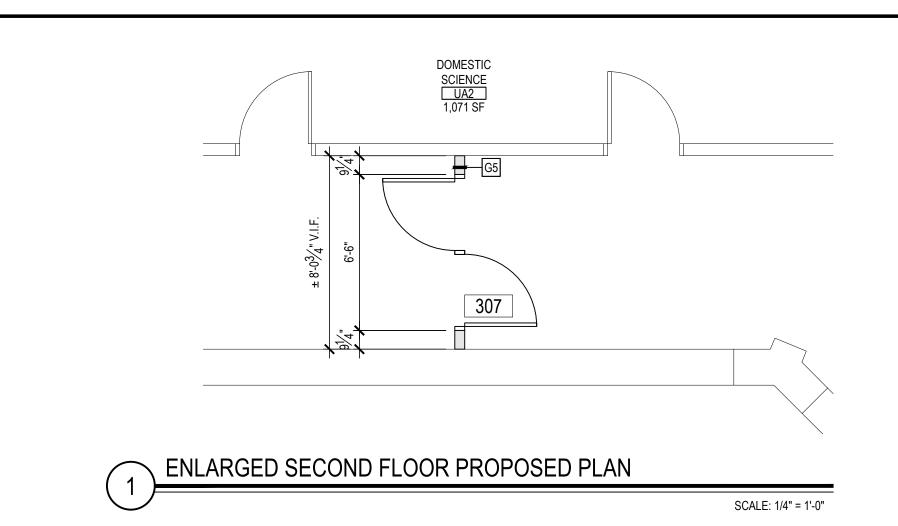

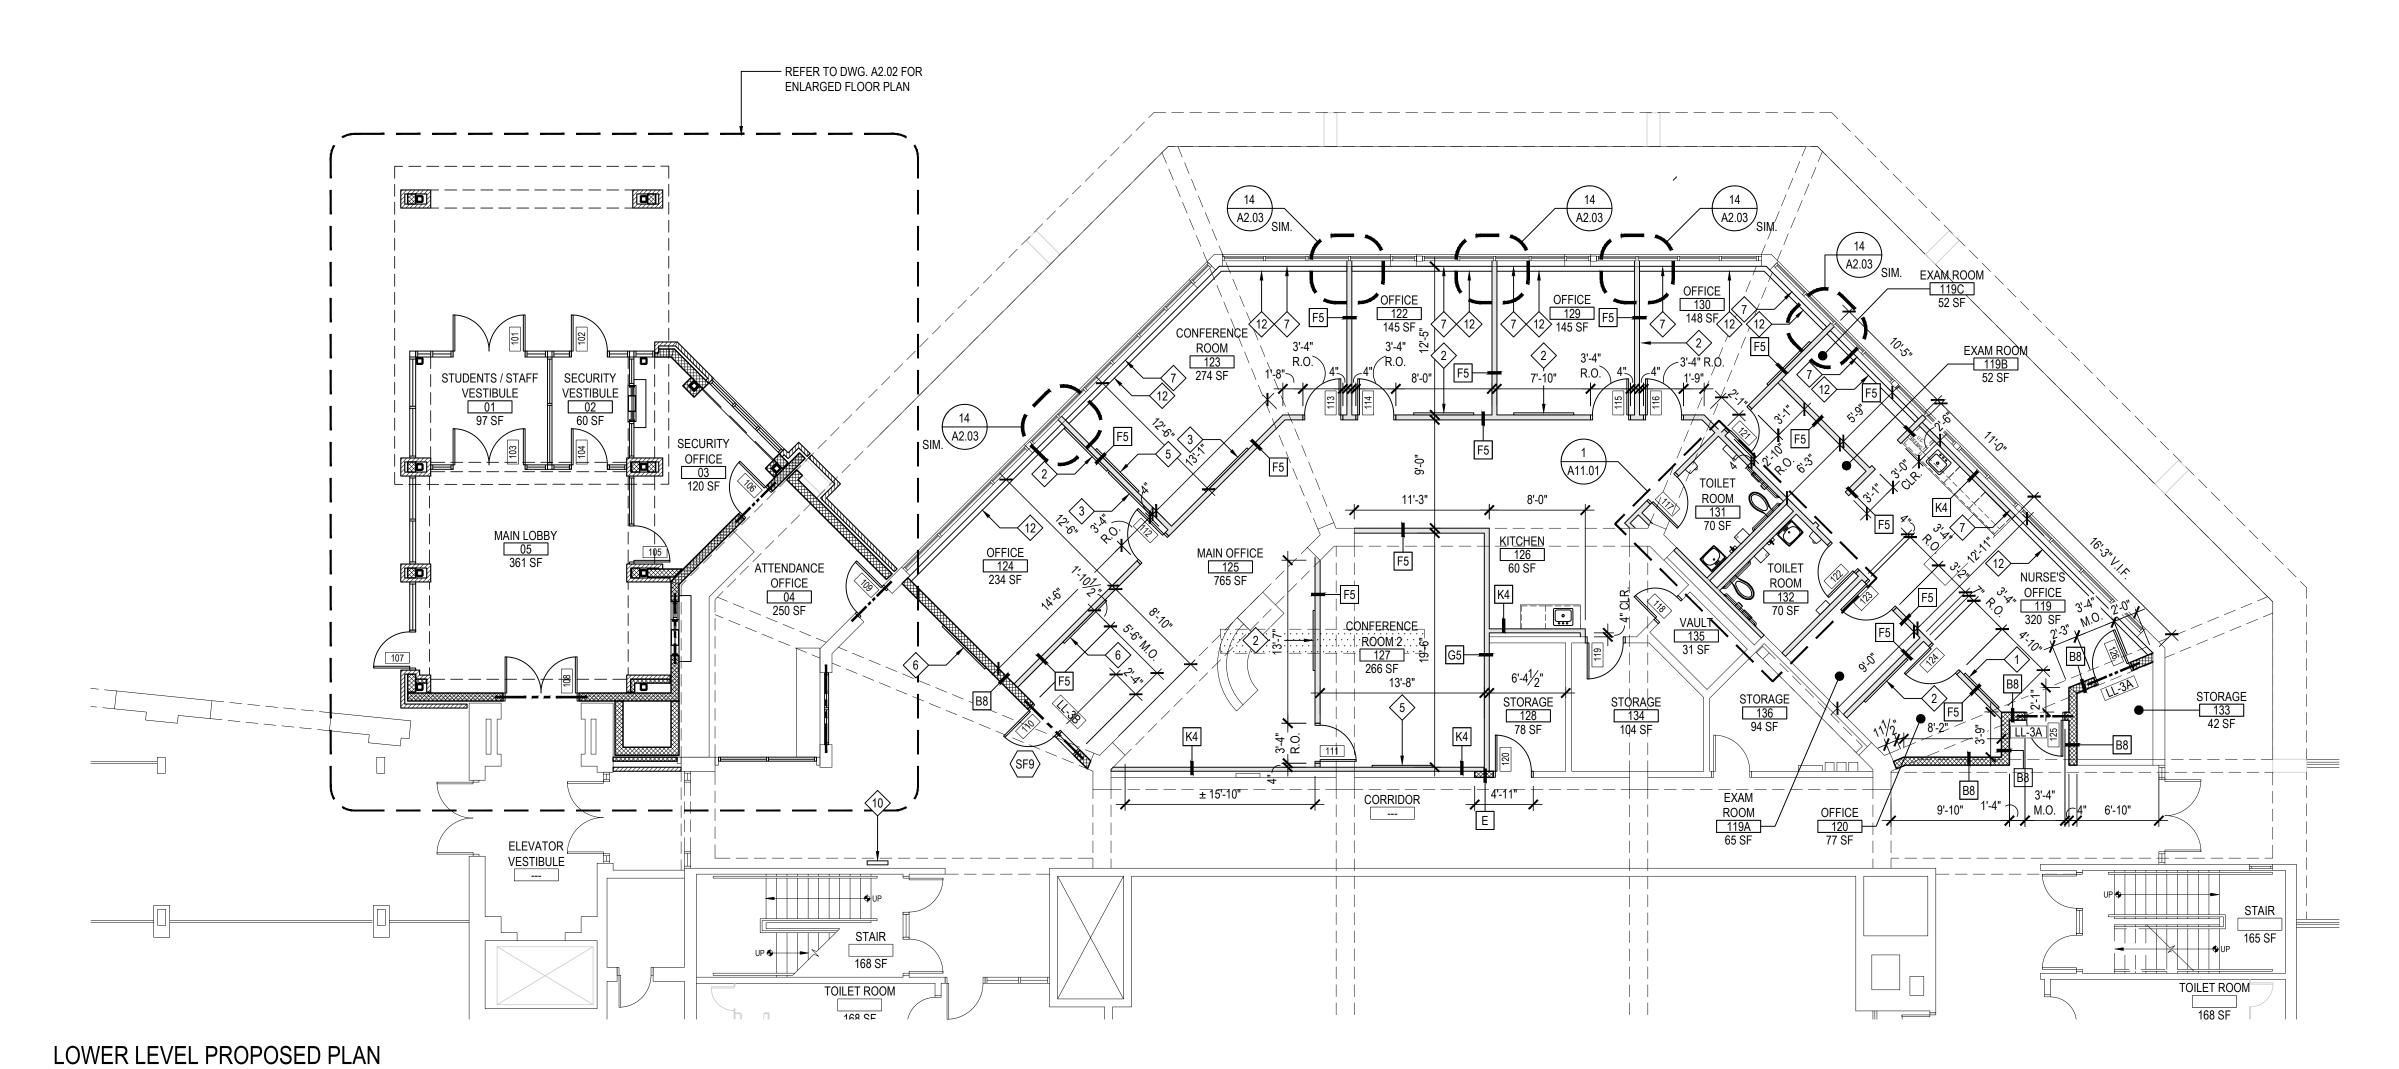

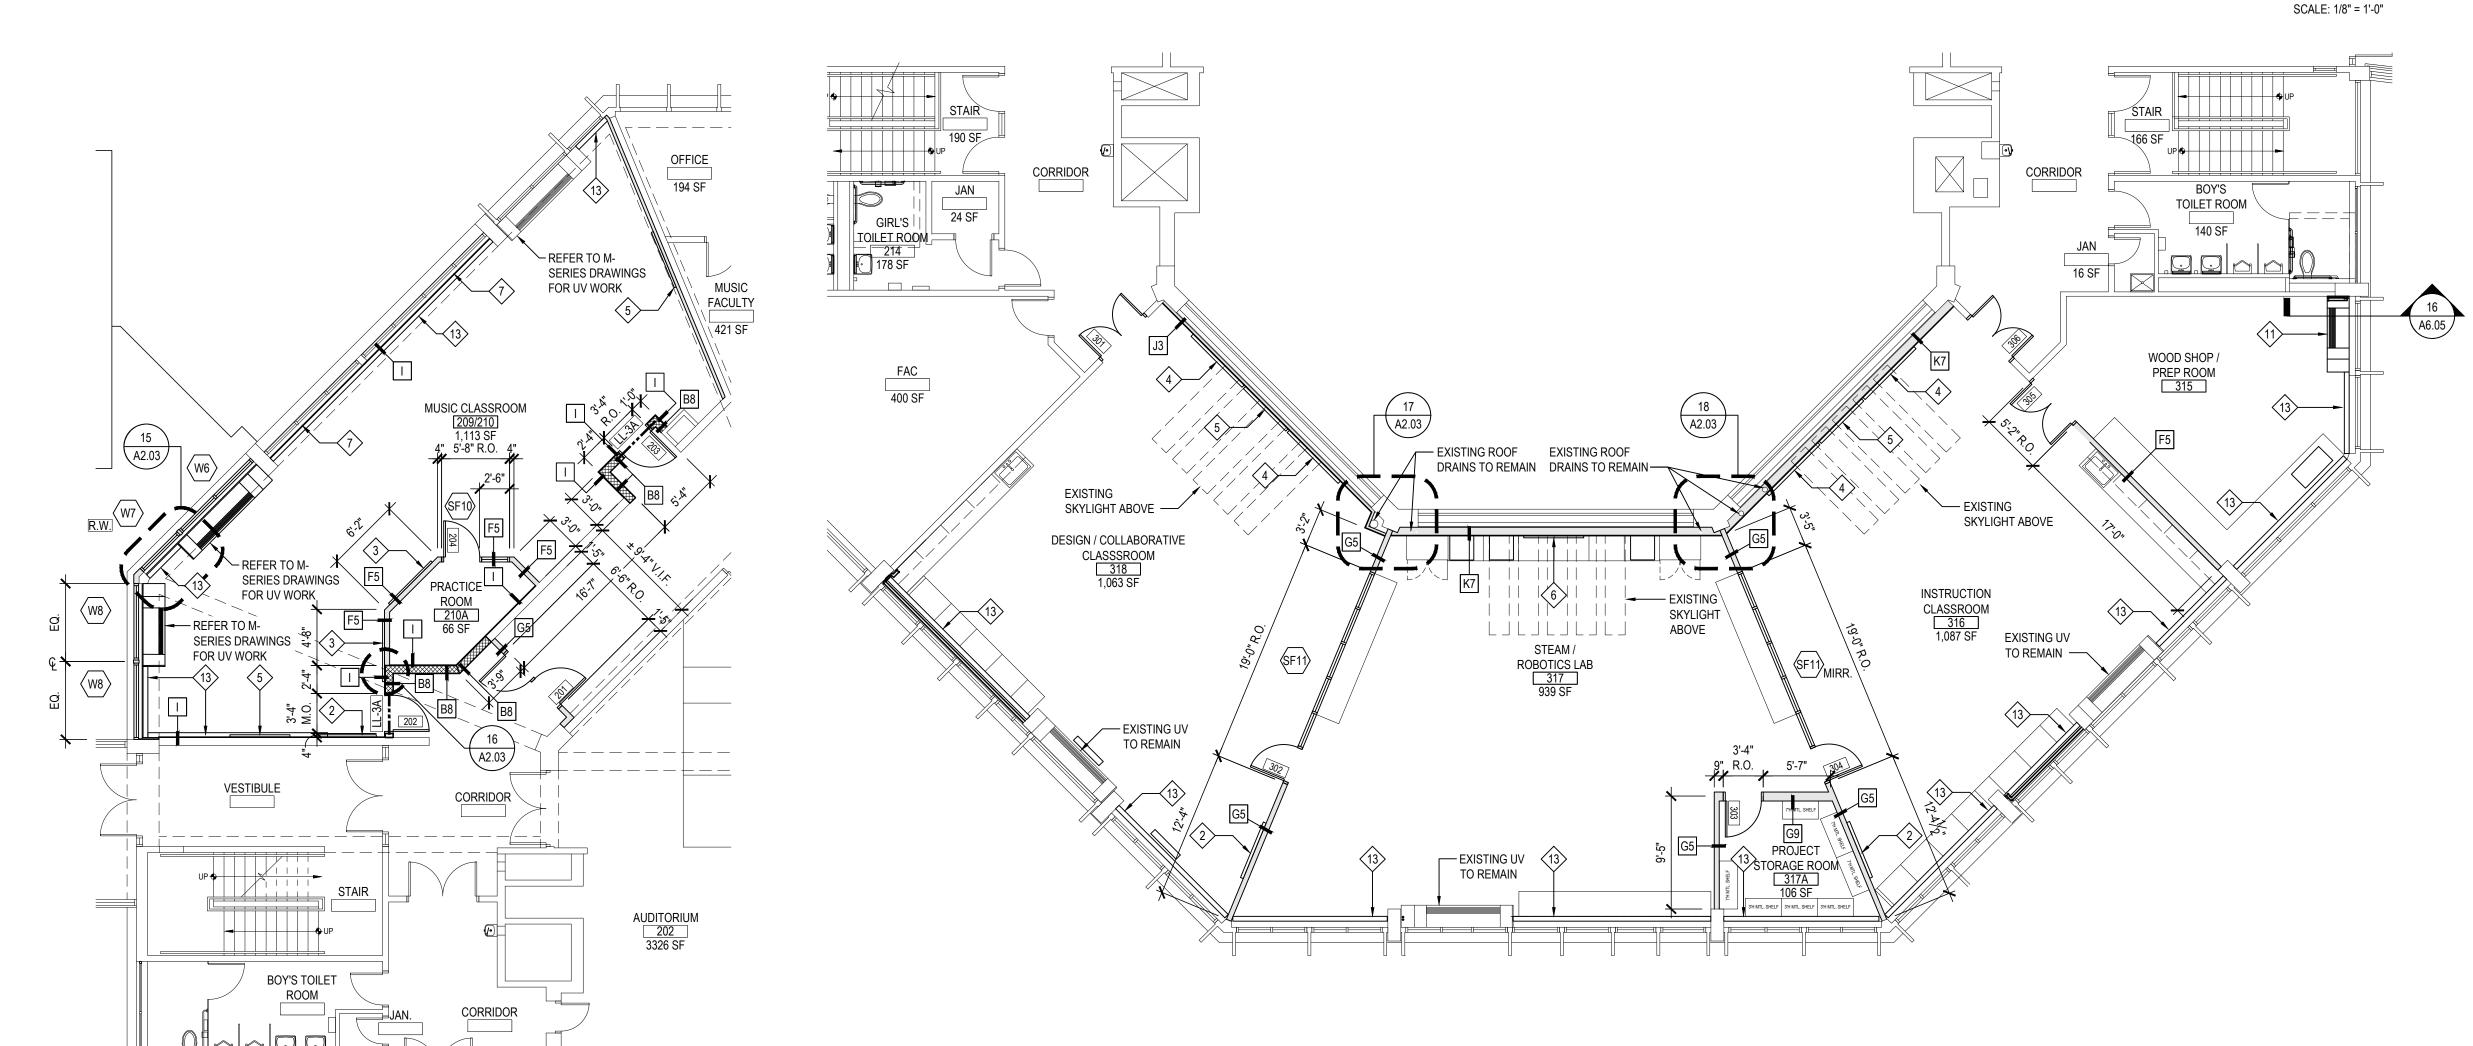

SECOND FLOOR PROPOSED PLAN

SCALE: 1/8" = 1'-0"

FIRST FLOOR PROPOSED PLAN

<u>G</u>	ENERAL CONSTRUCTION NOTES	<u>ARCHITE</u>	ECTURAL SYMBOL LEGENI
1.	GENERAL CONTRACTOR SHALL VERIFY ALL EXISTING CONDITIONS PRIOR TO BIDDING	SYMBOL	DESCRIPTION
	AND PROCEEDING WITH WORK. NOTIFY ARCHITECT OF ANY DISCREPANCIES IN WRITING PRIOR TO START OF WORK.	⋄	KEYED NOTE
2.	IN ACCORDANCE WITH STATE AND LOCAL CODES, THE REQUIRED EXITS IN THE EXISTING BUILDING MUST BE KEPT CLEAR, MAINTAINED AND PROTECTED DURING THE CONSTRUCTION PERIOD.	XXX	DOOR NUMBER
3.	CONTRACTOR SHALL BE RESPONSIBLE FOR VERIFICATION OF ALL DIMENSIONS REQUIRED FOR ESTIMATING.	⟨wx⟩	WINDOW DESIGNATION
١.	ALL WORK AND MATERIAL OF THIS PROJECT AND ADJACENT SURFACES SHALL BE PROTECTED FROM DAMAGE. IN THE EVENT OF DAMAGE, THE CONTRACTOR SHALL	XXXX -	ROOM TAG ROOM NAME
	IMMEDIATELY MAKE ALL REPAIRS AND REPLACEMENT NECESSARY TO THE APPROVAL OF THE ARCHITECT AND OWNER AND AT NO ADDITIONAL COST TO OWNER.	XXX SF -	- ROOM NUMBER - ROOM AREA
	CONTRACTOR SHALL PROTECT ALL AREAS OF WORK FROM INCLEMENT WEATHER DURING AND AT THE END OF DAILY WORK OPERATIONS.	#	DETAIL TAG DETAIL NUMBER
	ALL PROJECT WASTE MATERIAL AND RUBBISH SHALL BE DISPOSED IN CONTAINERS	AX.XX	- DRAWING NUMBER
	PROVIDED BY THE CONTRACTOR FOR SUBSEQUENT LEGAL OFF-SITE DISPOSAL. CONTAINER LOCATION TO BE COORDINATED WITH THE OWNER & CONSTRUCTION		SECTION / ELEVATION TAG
	MANAGER. OFF-SITE DISPOSAL TO BE ON A REGULAR BASIS.	XX XX.XX	— DETAIL NUMBER — DRAWING NUMBER
	ALL INTERIOR SURFACES DISTURBED DURING CONSTRUCTION SHALL BE REPAIRED AND/OR REPLACED TO MATCH EXISTING CONDITIONS TO THE APPROVAL OF THE		
	ARCHITECT AND OWNER.	-	DENOTES INTERIOR PARTITION TYPE - REFER TO ADDITIONAL INFORMATION.
	ALL DEBRIS, DUST AND DIRT CAUSED BY WORK OF THIS CONTRACT SHALL BE REMOVED FROM SITE BY APPROPRIATE MEANS. RESTORE ALL CONDITIONS TO THE STATE OF		DENOTES LOCATION OF FULL BUILDING EXPANSI APPROPRIATE INTERIOR FLOOR, WALL AND CEIL
	CLEANLINESS THAT EXISTED PRIOR TO COMMENCEMENT OF WORK.	E.J.	COVERS, WHERE APPLICABLE. PROVIDE VERTICATION OF THE PROVIDE VERTICATION OF
	ALL DEMOLITION AND CONSTRUCTION WORK TO BE PERFORMED WITHOUT INTERRUPTION OF OWNER OPERATIONS. IF INTERRUPTION IS NECESSARY, WORK		· · · · · · · · · · · · · · · · · · ·
	MUST NOT PROCEED UNTIL WRITTEN APPROVAL HAS BEEN OBTAINED FROM OWNER.	M.C.J.	DENOTES LOCATION OF $\frac{1}{2}$ " MASONRY CONTROL CONTINUOUS BACKER ROD AND SEALANT.

SYSTEM INTO EXISTING FIRE ALARM SYSTEM.

CLASSROOM / OFFICE EQUIPMENT AND FURNISHINGS.

NEW 1½ HOUR FIRE SHUTTER MODEL ERC-11-ALARMGUARD BY 'CORNELL IRONWORKS' OR ARCHITECT APPROVED EQUAL. E.C. TO CONNECT NEW SHUTTER

. G.C. SHALL COORDINATE TACK BOARD / MARKERBOARD LOCATIONS AND ELEVATIONS IN EACH CLASSROOM W/ PROPOSED INTERACTIVE BOARD OR PROJECTOR AND OTHER

2. G.C. SHALL REFER TO M.E.P. SERIES DRAWINGS FOR ADDITIONAL WORK SCOPES NOT


SCALE: 1/8" = 1'-0"

SHOWN ON THESE DRAWINGS AND COORDINATION OF WORK SCOPE BY OTHERS.

GENERAL NOTES:

	EXISTING BUILDING MUST BE KEPT CLEAR, MAINTAINED AND PROTECTED DURING THE CONSTRUCTION PERIOD.		XXX	DOOR NUMBER
3.	CONTRACTOR SHALL BE RESPONSIBLE FOR VERIFICATION OF ALL DIMENSIONS REQUIRED FOR ESTIMATING.		⟨wx⟩	WINDOW DESIGNATION
4.	ALL WORK AND MATERIAL OF THIS PROJECT AND ADJACENT SURFACES SHALL BE PROTECTED FROM DAMAGE. IN THE EVENT OF DAMAGE, THE CONTRACTOR SHALL IMMEDIATELY MAKE ALL REPAIRS AND REPLACEMENT NECESSARY TO THE APPROVAL OF THE ARCHITECT AND OWNER AND AT NO ADDITIONAL COST TO OWNER.			ROOM TAG — ROOM NAME — ROOM NUMBER — ROOM AREA
5.	CONTRACTOR SHALL PROTECT ALL AREAS OF WORK FROM INCLEMENT WEATHER DURING AND AT THE END OF DAILY WORK OPERATIONS.			DETAIL TAG — DETAIL NUMBER — DRAWING NUMBER
6.	ALL PROJECT WASTE MATERIAL AND RUBBISH SHALL BE DISPOSED IN CONTAINERS PROVIDED BY THE CONTRACTOR FOR SUBSEQUENT LEGAL OFF-SITE DISPOSAL. CONTAINER LOCATION TO BE COORDINATED WITH THE OWNER & CONSTRUCTION MANAGER. OFF-SITE DISPOSAL TO BE ON A REGULAR BASIS.			SECTION / ELEVATION TAG — DETAIL NUMBER — DRAWING NUMBER
7.	ALL INTERIOR SURFACES DISTURBED DURING CONSTRUCTION SHALL BE REPAIRED AND/OR REPLACED TO MATCH EXISTING CONDITIONS TO THE APPROVAL OF THE ARCHITECT AND OWNER.		XX	DENOTES INTERIOR PARTITION TYPE - REFER TO PARTITION TYPES FOR ADDITIONAL INFORMATION.
8.	ALL DEBRIS, DUST AND DIRT CAUSED BY WORK OF THIS CONTRACT SHALL BE REMOVED FROM SITE BY APPROPRIATE MEANS. RESTORE ALL CONDITIONS TO THE STATE OF CLEANLINESS THAT EXISTED PRIOR TO COMMENCEMENT OF WORK.		E.J.	DENOTES LOCATION OF FULL BUILDING EXPANSION JOINT. PROVIDE APPROPRIATE INTERIOR FLOOR, WALL AND CEILING EXPANSION JOINT COVERS, WHERE APPLICABLE. PROVIDE VERTICAL JOINT BY 'EMSEAL' OR EQUAL AT EXTERIOR, WHERE APPLICABLE.
9.	ALL DEMOLITION AND CONSTRUCTION WORK TO BE PERFORMED WITHOUT INTERRUPTION OF OWNER OPERATIONS. IF INTERRUPTION IS NECESSARY, WORK MUST NOT PROCEED UNTIL WRITTEN APPROVAL HAS BEEN OBTAINED FROM OWNER.		M.C.J.	DENOTES LOCATION OF ½" MASONRY CONTROL JOINT WITH CONTINUOUS BACKER ROD AND SEALANT.
10.	ALL CONTRACTORS ARE TO COORDINATE INSTALLATION OF THEIR WORK WITH EACH OTHER AND WITH THE WORK BEING PERFORMED UNDER SEPARATE CONTRACTS BY OTHERS AND WORK PERFORMED BY THE OWNER'S VENDOR(S).		D.S.	DENOTES LOCATION OF NEW CAST STONE DATE STONE.
	REFER TO CONSTRUCTION IMPLEMENTATION PLANS AND CONSTRUCTION SPECIAL		D.P.	DENOTES LOCATION OF NEW DEDICATION PLAQUE.
11.	PROVISIONS (PREPARED BY OTHERS, IF APPLICABLE) FOR ALL REQUIREMENTS FOR			
11.	PROVISIONS (PREPARED BY OTHERS, IF APPLICABLE) FOR ALL REQUIREMENTS FOR TEMPORARY CONSTRUCTION.		XX'-XX" XXX.XX'	DENOTES FINISH FLOOR ELEVATION REFERENCED FROM 0'-0". WHERE ENGINEERING ELEVATIONS ARE REFERENCED (000.00'), REFER TO CIVIL-SERIES DRAWINGS FOR ADDITIONAL DATUM INFORMATION.
	TEMPORARY CONSTRUCTION.]		ENGINEERING ELEVATIONS ARE REFERENCED (000.00'), REFER TO
	,]	XXX.XX'	ENGINEERING ELEVATIONS ARE REFERENCED (000.00'), REFER TO CIVIL-SERIES DRAWINGS FOR ADDITIONAL DATUM INFORMATION.
	TEMPORARY CONSTRUCTION.		I.D.	ENGINEERING ELEVATIONS ARE REFERENCED (000.00'), REFER TO CIVIL-SERIES DRAWINGS FOR ADDITIONAL DATUM INFORMATION. DENOTES LOCATION AND DESIGNATION OF NEW LINTEL. DENOTES LOCATION OF TRUSS / JOIST IDENTIFICATION SIGN.
	ROPOSED KEY NOTES		[LL-XX]	ENGINEERING ELEVATIONS ARE REFERENCED (000.00'), REFER TO CIVIL-SERIES DRAWINGS FOR ADDITIONAL DATUM INFORMATION. DENOTES LOCATION AND DESIGNATION OF NEW LINTEL.
	TEMPORARY CONSTRUCTION. ROPOSED KEY NOTES 4'-0"H x 4'-0"W TACKBOARD PROVIDED AND INSTALLED BY G.C. 4'-0"H x 5'-0"W TACKBOARD PROVIDED AND INSTALLED BY G.C. 4'-0"H x 5'-0"W MARKERBOARD PROVIDED AND INSTALLED BY G.C.		I.D.	ENGINEERING ELEVATIONS ARE REFERENCED (000.00'), REFER TO CIVIL-SERIES DRAWINGS FOR ADDITIONAL DATUM INFORMATION. DENOTES LOCATION AND DESIGNATION OF NEW LINTEL. DENOTES LOCATION OF TRUSS / JOIST IDENTIFICATION SIGN. DENOTES LOCATION OF TRUSS / JOIST IDENTIFICATION SIGN. DENOTES DOOR ON MAGNETIC AUTOMATIC HOLD OPEN DEVICE,
	TEMPORARY CONSTRUCTION. ROPOSED KEY NOTES 4'-0"H x 4'-0"W TACKBOARD PROVIDED AND INSTALLED BY G.C. 4'-0"H x 5'-0"W TACKBOARD PROVIDED AND INSTALLED BY G.C. 4'-0"H x 5'-0"W MARKERBOARD PROVIDED AND INSTALLED BY G.C. 4'-0"H x 6'-0"W MARKERBOARD PROVIDED AND INSTALLED BY G.C. NEW INTERACTIVE I CD SMARTBOARD PROVIDED BY OWNER INSTALLED BY E.C. G.C.		I.D. R.W.	ENGINEERING ELEVATIONS ARE REFERENCED (000.00'), REFER TO CIVIL-SERIES DRAWINGS FOR ADDITIONAL DATUM INFORMATION. DENOTES LOCATION AND DESIGNATION OF NEW LINTEL. DENOTES LOCATION OF TRUSS / JOIST IDENTIFICATION SIGN. DENOTES LOCATION OF TRUSS / JOIST IDENTIFICATION SIGN.
	A'-0"H x 4'-0"W TACKBOARD PROVIDED AND INSTALLED BY G.C. 4'-0"H x 5'-0"W TACKBOARD PROVIDED AND INSTALLED BY G.C. 4'-0"H x 5'-0"W MARKERBOARD PROVIDED AND INSTALLED BY G.C. 4'-0"H x 6'-0"W MARKERBOARD PROVIDED AND INSTALLED BY G.C. NEW INTERACTIVE LCD SMARTBOARD PROVIDED BY OWNER, INSTALLED BY E.C. G.C. TO INSTALL SOLID BLOCKING IN ALL EXISTING AND NEW METAL STUD WALLS. COORDINATE IN FIELD. REFER TO E-SERIES DRAWINGS.		I.D. R.W.	ENGINEERING ELEVATIONS ARE REFERENCED (000.00'), REFER TO CIVIL-SERIES DRAWINGS FOR ADDITIONAL DATUM INFORMATION. DENOTES LOCATION AND DESIGNATION OF NEW LINTEL. DENOTES LOCATION OF TRUSS / JOIST IDENTIFICATION SIGN. DENOTES LOCATION OF TRUSS / JOIST IDENTIFICATION SIGN. DENOTES DOOR ON MAGNETIC AUTOMATIC HOLD OPEN DEVICE, CONNECTED TO FIRE ALARM SYSTEM. DENOTES ACCESSIBLE ENTRANCE/EXIT, FIXTURE, ACCESSORY, DEVICE, OR
$\begin{array}{ c c }\hline \textbf{PI} \\ \hline & & \\ \hline & \\ \hline & \\ \hline & \\ \hline & & \\ \hline & \\ $	A'-0"H x 4'-0"W TACKBOARD PROVIDED AND INSTALLED BY G.C. 4'-0"H x 5'-0"W TACKBOARD PROVIDED AND INSTALLED BY G.C. 4'-0"H x 5'-0"W TACKBOARD PROVIDED AND INSTALLED BY G.C. 4'-0"H x 5'-0"W MARKERBOARD PROVIDED AND INSTALLED BY G.C. 4'-0"H x 6'-0"W MARKERBOARD PROVIDED AND INSTALLED BY G.C. NEW INTERACTIVE LCD SMARTBOARD PROVIDED BY OWNER, INSTALLED BY E.C. G.C. TO INSTALL SOLID BLOCKING IN ALL EXISTING AND NEW METAL STUD WALLS. COORDINATE IN FIELD. REFER TO E-SERIES DRAWINGS. NEW WALL MOUNTED MONITOR PROVIDED BY OWNER, INSTALLED BY E.C. REFER TO E-SERIES DRAWINGS.		I.D. R.W.	ENGINEERING ELEVATIONS ARE REFERENCED (000.00'), REFER TO CIVIL-SERIES DRAWINGS FOR ADDITIONAL DATUM INFORMATION. DENOTES LOCATION AND DESIGNATION OF NEW LINTEL. DENOTES LOCATION OF TRUSS / JOIST IDENTIFICATION SIGN. DENOTES LOCATION OF TRUSS / JOIST IDENTIFICATION SIGN. DENOTES DOOR ON MAGNETIC AUTOMATIC HOLD OPEN DEVICE, CONNECTED TO FIRE ALARM SYSTEM. DENOTES ACCESSIBLE ENTRANCE/EXIT, FIXTURE, ACCESSORY, DEVICE, OR PARTICIPATION AREA. REVISION CLOUD AND KEYED DESIGNATION. REFER TO DRAWING
$\begin{array}{ c c }\hline \textbf{PI} \\ \hline & & \\ \hline & \\ \hline & \\ \hline & \\ \hline & & \\ \hline & \\ $	A'-0"H x 4'-0"W TACKBOARD PROVIDED AND INSTALLED BY G.C. 4'-0"H x 5'-0"W TACKBOARD PROVIDED AND INSTALLED BY G.C. 4'-0"H x 5'-0"W MARKERBOARD PROVIDED AND INSTALLED BY G.C. 4'-0"H x 6'-0"W MARKERBOARD PROVIDED AND INSTALLED BY G.C. 4'-0"H x 6'-0"W MARKERBOARD PROVIDED AND INSTALLED BY G.C. NEW INTERACTIVE LCD SMARTBOARD PROVIDED BY OWNER, INSTALLED BY E.C. G.C. TO INSTALL SOLID BLOCKING IN ALL EXISTING AND NEW METAL STUD WALLS. COORDINATE IN FIELD. REFER TO E-SERIES DRAWINGS. NEW WALL MOUNTED MONITOR PROVIDED BY OWNER, INSTALLED BY E.C. REFER TO E-SERIES DRAWINGS. PROVIDE AND INSTALL NEW PHENOLIC RESIN WINDOW SILLS. MATCH WIDTH OF EXISTING MASONRY OPENING. REFER TO DETAIL ON SHEET A2.01.		I.D. R.W.	ENGINEERING ELEVATIONS ARE REFERENCED (000.00'), REFER TO CIVIL-SERIES DRAWINGS FOR ADDITIONAL DATUM INFORMATION. DENOTES LOCATION AND DESIGNATION OF NEW LINTEL. DENOTES LOCATION OF TRUSS / JOIST IDENTIFICATION SIGN. DENOTES LOCATION OF TRUSS / JOIST IDENTIFICATION SIGN. DENOTES DOOR ON MAGNETIC AUTOMATIC HOLD OPEN DEVICE, CONNECTED TO FIRE ALARM SYSTEM. DENOTES ACCESSIBLE ENTRANCE/EXIT, FIXTURE, ACCESSORY, DEVICE, OR PARTICIPATION AREA. REVISION CLOUD AND KEYED DESIGNATION. REFER TO DRAWING TITLEBLOCK FOR ADDITIONAL INFORMATION.
$\begin{array}{ c c }\hline \textbf{PI} \\ \hline & & \\ \hline \\ \hline$	A'-0"H x 4'-0"W TACKBOARD PROVIDED AND INSTALLED BY G.C. 4'-0"H x 5'-0"W TACKBOARD PROVIDED AND INSTALLED BY G.C. 4'-0"H x 5'-0"W TACKBOARD PROVIDED AND INSTALLED BY G.C. 4'-0"H x 5'-0"W MARKERBOARD PROVIDED AND INSTALLED BY G.C. 4'-0"H x 6'-0"W MARKERBOARD PROVIDED AND INSTALLED BY G.C. NEW INTERACTIVE LCD SMARTBOARD PROVIDED BY OWNER, INSTALLED BY E.C. G.C. TO INSTALL SOLID BLOCKING IN ALL EXISTING AND NEW METAL STUD WALLS. COORDINATE IN FIELD. REFER TO E-SERIES DRAWINGS. NEW WALL MOUNTED MONITOR PROVIDED BY OWNER, INSTALLED BY E.C. REFER TO E-SERIES DRAWINGS. PROVIDE AND INSTALL NEW PHENOLIC RESIN WINDOW SILLS. MATCH WIDTH OF EXISTING MASONRY OPENING. REFER TO DETAIL ON SHEET A2.01. PROVIDE AND INSTALL NEW FIRE EXTINGUISHER WITH RECESSED FIRE RATED CABINET. REFER TO DETAIL No. 5, DRAWING A11.06.		I.D. R.W.	ENGINEERING ELEVATIONS ARE REFERENCED (000.00'), REFER TO CIVIL-SERIES DRAWINGS FOR ADDITIONAL DATUM INFORMATION. DENOTES LOCATION AND DESIGNATION OF NEW LINTEL. DENOTES LOCATION OF TRUSS / JOIST IDENTIFICATION SIGN. DENOTES LOCATION OF TRUSS / JOIST IDENTIFICATION SIGN. DENOTES DOOR ON MAGNETIC AUTOMATIC HOLD OPEN DEVICE, CONNECTED TO FIRE ALARM SYSTEM. DENOTES ACCESSIBLE ENTRANCE/EXIT, FIXTURE, ACCESSORY, DEVICE, OR PARTICIPATION AREA. REVISION CLOUD AND KEYED DESIGNATION. REFER TO DRAWING TITLEBLOCK FOR ADDITIONAL INFORMATION. CMU WALL CONSTRUCTION
$\begin{array}{ c c }\hline \textbf{PI} \\ \hline & & \\ \hline $	A'-0"H x 4'-0"W TACKBOARD PROVIDED AND INSTALLED BY G.C. 4'-0"H x 5'-0"W TACKBOARD PROVIDED AND INSTALLED BY G.C. 4'-0"H x 5'-0"W MARKERBOARD PROVIDED AND INSTALLED BY G.C. 4'-0"H x 6'-0"W MARKERBOARD PROVIDED AND INSTALLED BY G.C. 4'-0"H x 6'-0"W MARKERBOARD PROVIDED AND INSTALLED BY G.C. NEW INTERACTIVE LCD SMARTBOARD PROVIDED BY OWNER, INSTALLED BY E.C. G.C. TO INSTALL SOLID BLOCKING IN ALL EXISTING AND NEW METAL STUD WALLS. COORDINATE IN FIELD. REFER TO E-SERIES DRAWINGS. NEW WALL MOUNTED MONITOR PROVIDED BY OWNER, INSTALLED BY E.C. REFER TO E-SERIES DRAWINGS. PROVIDE AND INSTALL NEW PHENOLIC RESIN WINDOW SILLS. MATCH WIDTH OF EXISTING MASONRY OPENING. REFER TO DETAIL ON SHEET A2.01. PROVIDE AND INSTALL NEW FIRE EXTINGUISHER WITH RECESSED FIRE RATED CABINET. REFER TO DETAIL No. 5, DRAWING A11.06. NEW ¾, HOUR FIRE SHUTTER MODEL ERC11-ALARMGUARD BY 'CORNELL IRONWORKS' OR ARCHITECT APPROVED EQUAL. E.C. TO CONNECT NEW SHUTTER SYSTEM INTO EXISTING FIRE ALARM SYSTEM.		I.D. R.W.	ENGINEERING ELEVATIONS ARE REFERENCED (000.00'), REFER TO CIVIL-SERIES DRAWINGS FOR ADDITIONAL DATUM INFORMATION. DENOTES LOCATION AND DESIGNATION OF NEW LINTEL. DENOTES LOCATION OF TRUSS / JOIST IDENTIFICATION SIGN. DENOTES LOCATION OF TRUSS / JOIST IDENTIFICATION SIGN. DENOTES DOOR ON MAGNETIC AUTOMATIC HOLD OPEN DEVICE, CONNECTED TO FIRE ALARM SYSTEM. DENOTES ACCESSIBLE ENTRANCE/EXIT, FIXTURE, ACCESSORY, DEVICE, OR PARTICIPATION AREA. REVISION CLOUD AND KEYED DESIGNATION. REFER TO DRAWING TITLEBLOCK FOR ADDITIONAL INFORMATION. CMU WALL CONSTRUCTION 2-HOUR FIREWALL CONSTRUCTION
$\begin{array}{ c c c }\hline \textbf{PI} & & & \\ \hline & & & \\ \hline & & & \\ \hline & & $	A'-0"H x 4'-0"W TACKBOARD PROVIDED AND INSTALLED BY G.C. 4'-0"H x 5'-0"W TACKBOARD PROVIDED AND INSTALLED BY G.C. 4'-0"H x 5'-0"W MARKERBOARD PROVIDED AND INSTALLED BY G.C. 4'-0"H x 5'-0"W MARKERBOARD PROVIDED AND INSTALLED BY G.C. 4'-0"H x 6'-0"W MARKERBOARD PROVIDED AND INSTALLED BY G.C. NEW INTERACTIVE LCD SMARTBOARD PROVIDED BY OWNER, INSTALLED BY E.C. G.C. TO INSTALL SOLID BLOCKING IN ALL EXISTING AND NEW METAL STUD WALLS. COORDINATE IN FIELD. REFER TO E-SERIES DRAWINGS. NEW WALL MOUNTED MONITOR PROVIDED BY OWNER, INSTALLED BY E.C. REFER TO E-SERIES DRAWINGS. PROVIDE AND INSTALL NEW PHENOLIC RESIN WINDOW SILLS. MATCH WIDTH OF EXISTING MASONRY OPENING. REFER TO DETAIL ON SHEET A2.01. PROVIDE AND INSTALL NEW FIRE EXTINGUISHER WITH RECESSED FIRE RATED CABINET. REFER TO DETAIL No. 5, DRAWING A11.06. NEW 3/4 HOUR FIRE SHUTTER MODEL ERC-11-ALARMGUARD BY 'CORNELL IRONWORKS' OR ARCHITECT APPROVED EQUAL. E.C. TO CONNECT NEW SHUTTER SYSTEM INTO EXISTING FIRE ALARM SYSTEM. NEW MECHANICAL FLOOR GRILLES PROVIDED BY M.C. COLOR AS SELECTED BY ARCHITECT.		I.D. R.W.	ENGINEERING ELEVATIONS ARE REFERENCED (000.00'), REFER TO CIVIL-SERIES DRAWINGS FOR ADDITIONAL DATUM INFORMATION. DENOTES LOCATION AND DESIGNATION OF NEW LINTEL. DENOTES LOCATION OF TRUSS / JOIST IDENTIFICATION SIGN. DENOTES LOCATION OF TRUSS / JOIST IDENTIFICATION SIGN. DENOTES DOOR ON MAGNETIC AUTOMATIC HOLD OPEN DEVICE, CONNECTED TO FIRE ALARM SYSTEM. DENOTES ACCESSIBLE ENTRANCE/EXIT, FIXTURE, ACCESSORY, DEVICE, OR PARTICIPATION AREA. REVISION CLOUD AND KEYED DESIGNATION. REFER TO DRAWING TITLEBLOCK FOR ADDITIONAL INFORMATION. CMU WALL CONSTRUCTION 2-HOUR FIREWALL CONSTRUCTION BRICK VENEER CONSTRUCTION GYPSUM AND METAL STUD WALL CONSTRUCTION
$\begin{array}{ c c c }\hline \textbf{PI} & & & \\\hline & & \\$	A'-0"H x 4'-0"W TACKBOARD PROVIDED AND INSTALLED BY G.C. 4'-0"H x 5'-0"W TACKBOARD PROVIDED AND INSTALLED BY G.C. 4'-0"H x 5'-0"W MARKERBOARD PROVIDED AND INSTALLED BY G.C. 4'-0"H x 5'-0"W MARKERBOARD PROVIDED AND INSTALLED BY G.C. 4'-0"H x 6'-0"W MARKERBOARD PROVIDED AND INSTALLED BY G.C. NEW INTERACTIVE LCD SMARTBOARD PROVIDED BY OWNER, INSTALLED BY E.C. G.C. TO INSTALL SOLID BLOCKING IN ALL EXISTING AND NEW METAL STUD WALLS. COORDINATE IN FIELD. REFER TO E-SERIES DRAWINGS. NEW WALL MOUNTED MONITOR PROVIDED BY OWNER, INSTALLED BY E.C. REFER TO E-SERIES DRAWINGS. PROVIDE AND INSTALL NEW PHENOLIC RESIN WINDOW SILLS. MATCH WIDTH OF EXISTING MASONRY OPENING. REFER TO DETAIL ON SHEET A2.01. PROVIDE AND INSTALL NEW FIRE EXTINGUISHER WITH RECESSED FIRE RATED CABINET. REFER TO DETAIL No. 5, DRAWING A11.06. NEW 3/2 HOUR FIRE SHUTTER MODEL ERC-11-ALARMGUARD BY CORNELL IRONWORKS' OR ARCHITECT APPROVED EQUAL. E.C. TO CONNECT NEW SHUTTER SYSTEM INTO EXISTING FIRE ALARM SYSTEM. NEW MECHANICAL FLOOR GRILLES PROVIDED BY M.C. COLOR AS SELECTED BY ARCHITECT. NEW UNIT VENTILATOR BY M.C. REFER TO M- SERIES DRAWINGS.		I.D. R.W.	ENGINEERING ELEVATIONS ARE REFERENCED (000.00*), REFER TO CIVIL-SERIES DRAWINGS FOR ADDITIONAL DATUM INFORMATION. DENOTES LOCATION AND DESIGNATION OF NEW LINTEL. DENOTES LOCATION OF TRUSS / JOIST IDENTIFICATION SIGN. DENOTES LOCATION OF TRUSS / JOIST IDENTIFICATION SIGN. DENOTES DOOR ON MAGNETIC AUTOMATIC HOLD OPEN DEVICE, CONNECTED TO FIRE ALARM SYSTEM. DENOTES ACCESSIBLE ENTRANCE/EXIT, FIXTURE, ACCESSORY, DEVICE, OR PARTICIPATION AREA. REVISION CLOUD AND KEYED DESIGNATION. REFER TO DRAWING TITLEBLOCK FOR ADDITIONAL INFORMATION. CMU WALL CONSTRUCTION 2-HOUR FIREWALL CONSTRUCTION BRICK VENEER CONSTRUCTION

WALL THICKNESS	MARK	OPENINGS UP TO 4'-0"			OPENINGS 4'-0" TO	7'-0"
4" CMU	LL-1A	MT6 x 5.9		LL-1B	MT6 x 5.9	
6" CMU	LL-2A	WT4 x 9		LL-2B	WT4 x 10.5	
8" CMU	LL-3A	(2) 3½" x 3½" x 5√6" STL. ANGLES		LL-3B	(2) 5" x 3½" x 5√6" (LLV)	
12" CMU	LL-4A	(1) 6" x 3½" x ⁵ ⁄ ₁₆ " (LLH) + (1) 5" x 3½" x ⁵ ⁄ ₁₆ " (LLH)		LL-4B	(1) 6" x 6" x ½6" + (1) 5" x 5" x ½6"	
12" COMPOSITE	LL-5A	(3) 3½" x 3½" x ½" x ½"		LL-5B	(3) 5" x 3½" x 5⁄₁6" (LLV)	
14" CAVITY	LL-6A	(2) 3½" x 3½" x ½" x ½" + (1) 6" x 3½" x ½" (LLH)		LL-6B	(2) 5" x 3½" x 5½" (LLV) + (1) 6" x 6" x 5½"	
15" CAVITY	LL-7A	(2) 3½" x 3½" x 5½" + (1) 7" x 4" x ¾" (LLH)		LL-7B	(2) 5" x 3½" x 5½" (LLV) + (1) 7" x 4" x 3½" (LLH)	
19" CAVITY	LL-8A	(1) 6" x 3½" x ⁵ ⁄ ₁₆ " (LLH) + (1) 7" x 4" x ³ ⁄ ₆ " (LLH)		LL-8B	(1) 6" x 6" x ⁵ ⁄ ₁₆ " + (1) 7" x 4" x ¾" (LLH)	

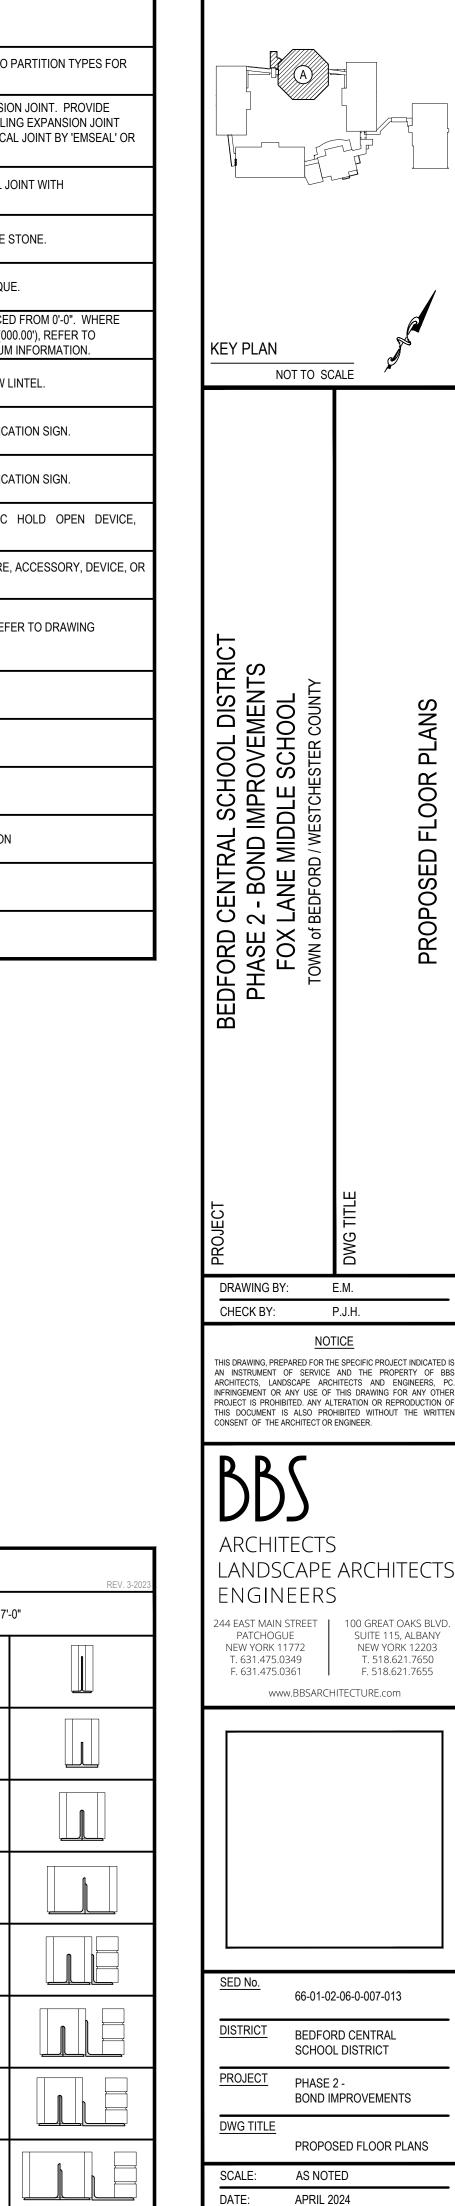

REV. DATE


THESE DRAWINGS ARE BASED ON CONSTRUCTION DRAWINGS NOT PREPARED BY BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PC. AND, THEREFORE, MAY NOT REPRESENT THE


CONDITIONS AS CONSTRUCTED AT THE TIME. ALL EXISTING CONDITIONS SHOWN ARE REPRESENTED AS SUGGESTIVE INFORMATION AS THEY MAY NOT HAVE BEEN BUILT AND DETAILED PER THE ORIGINAL DOCUMENTS OR PER THE OWNER'S INFORMATION.


FILE No: 23-131b

A2.01

BID PICK-UP: FEBRUARY 24, 2025

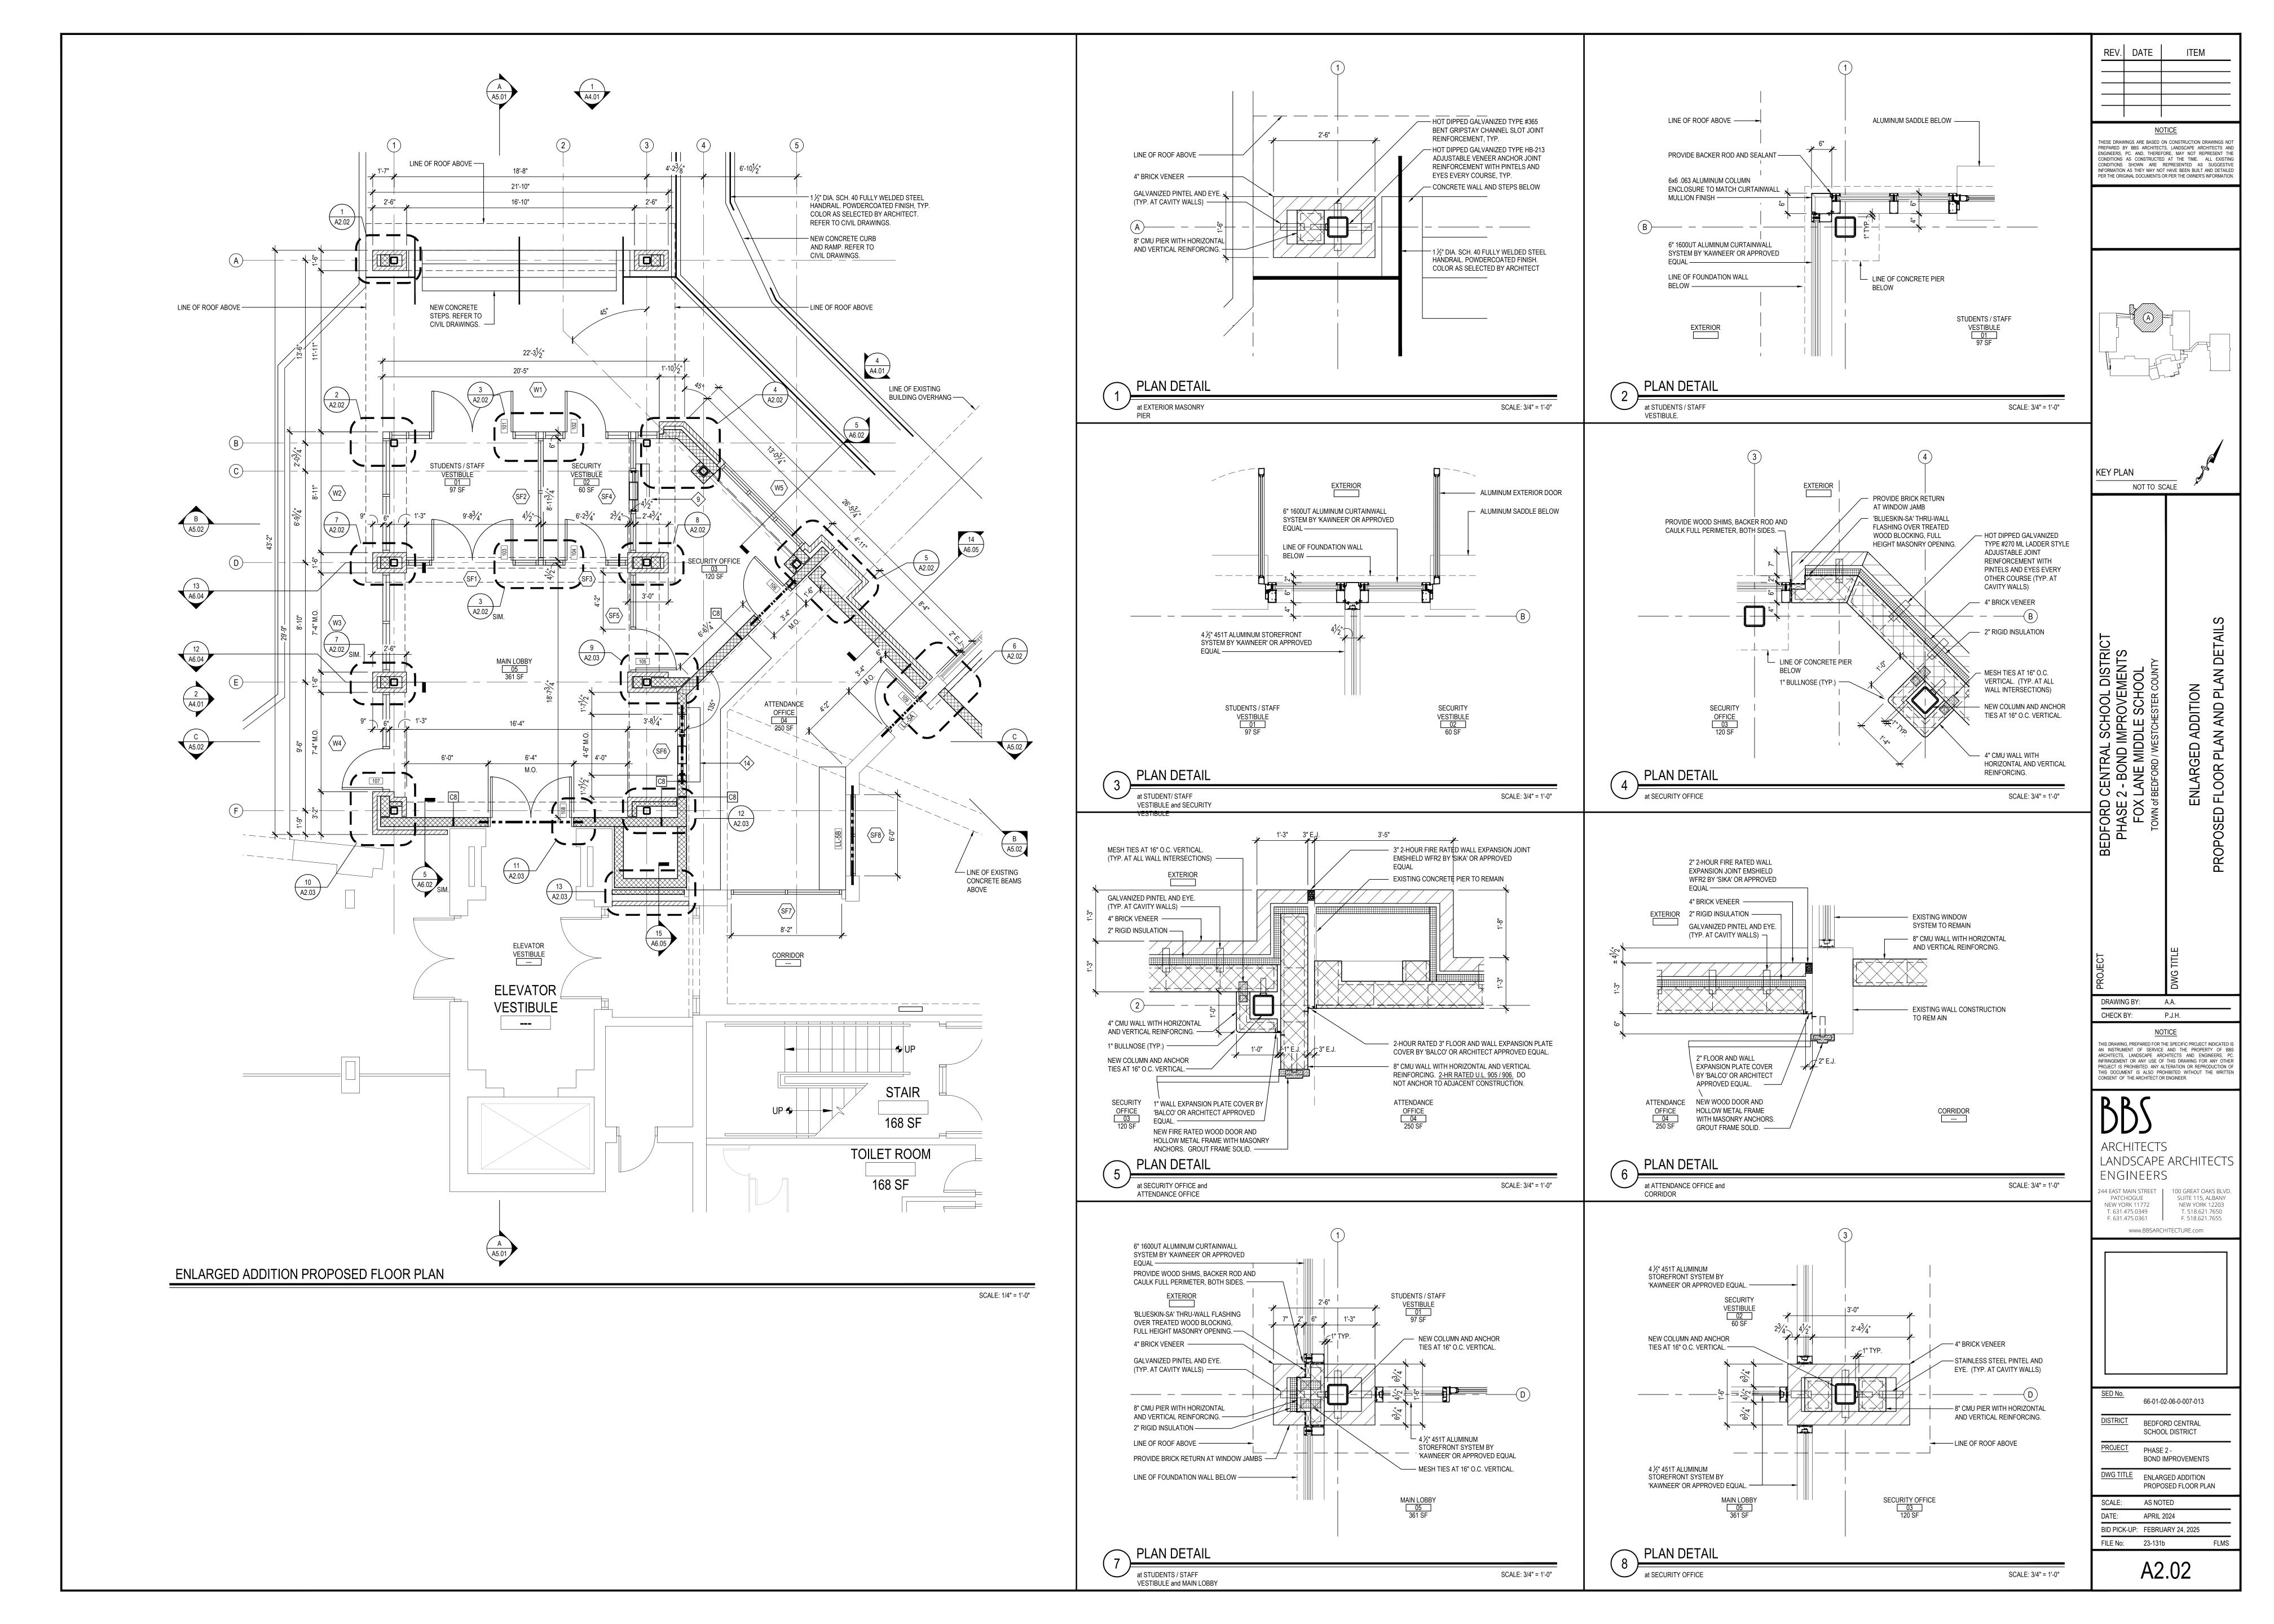

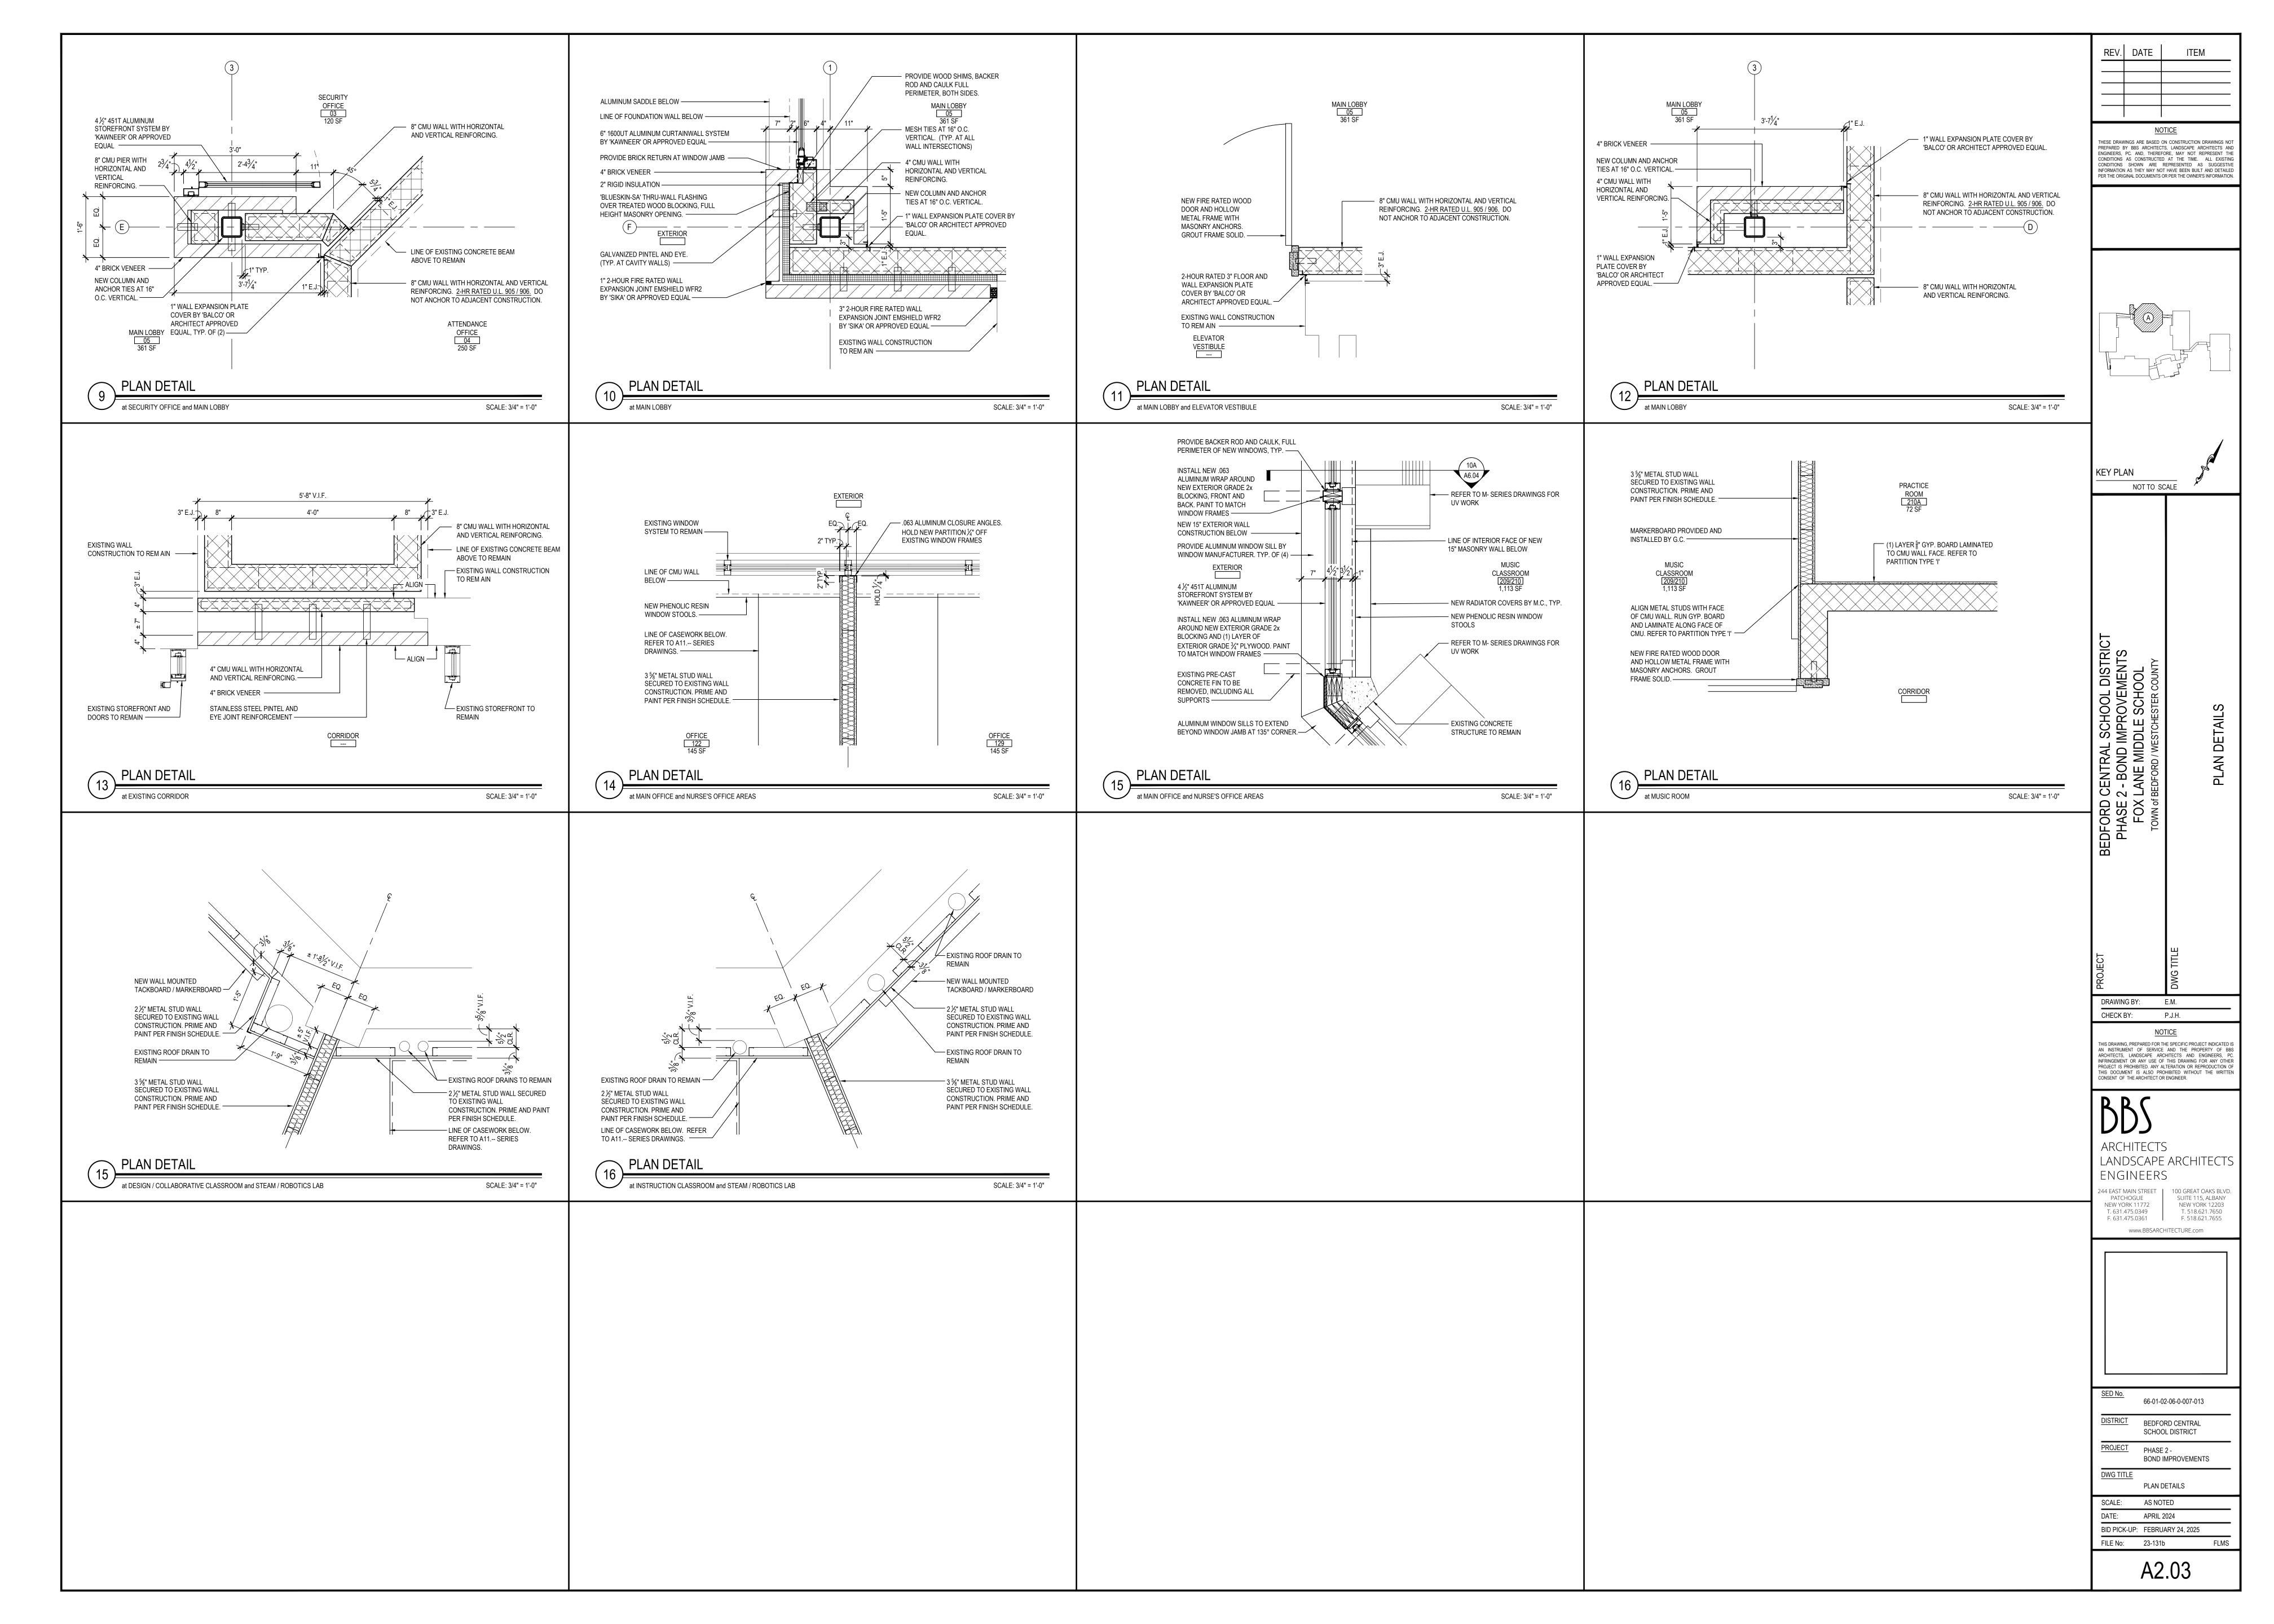

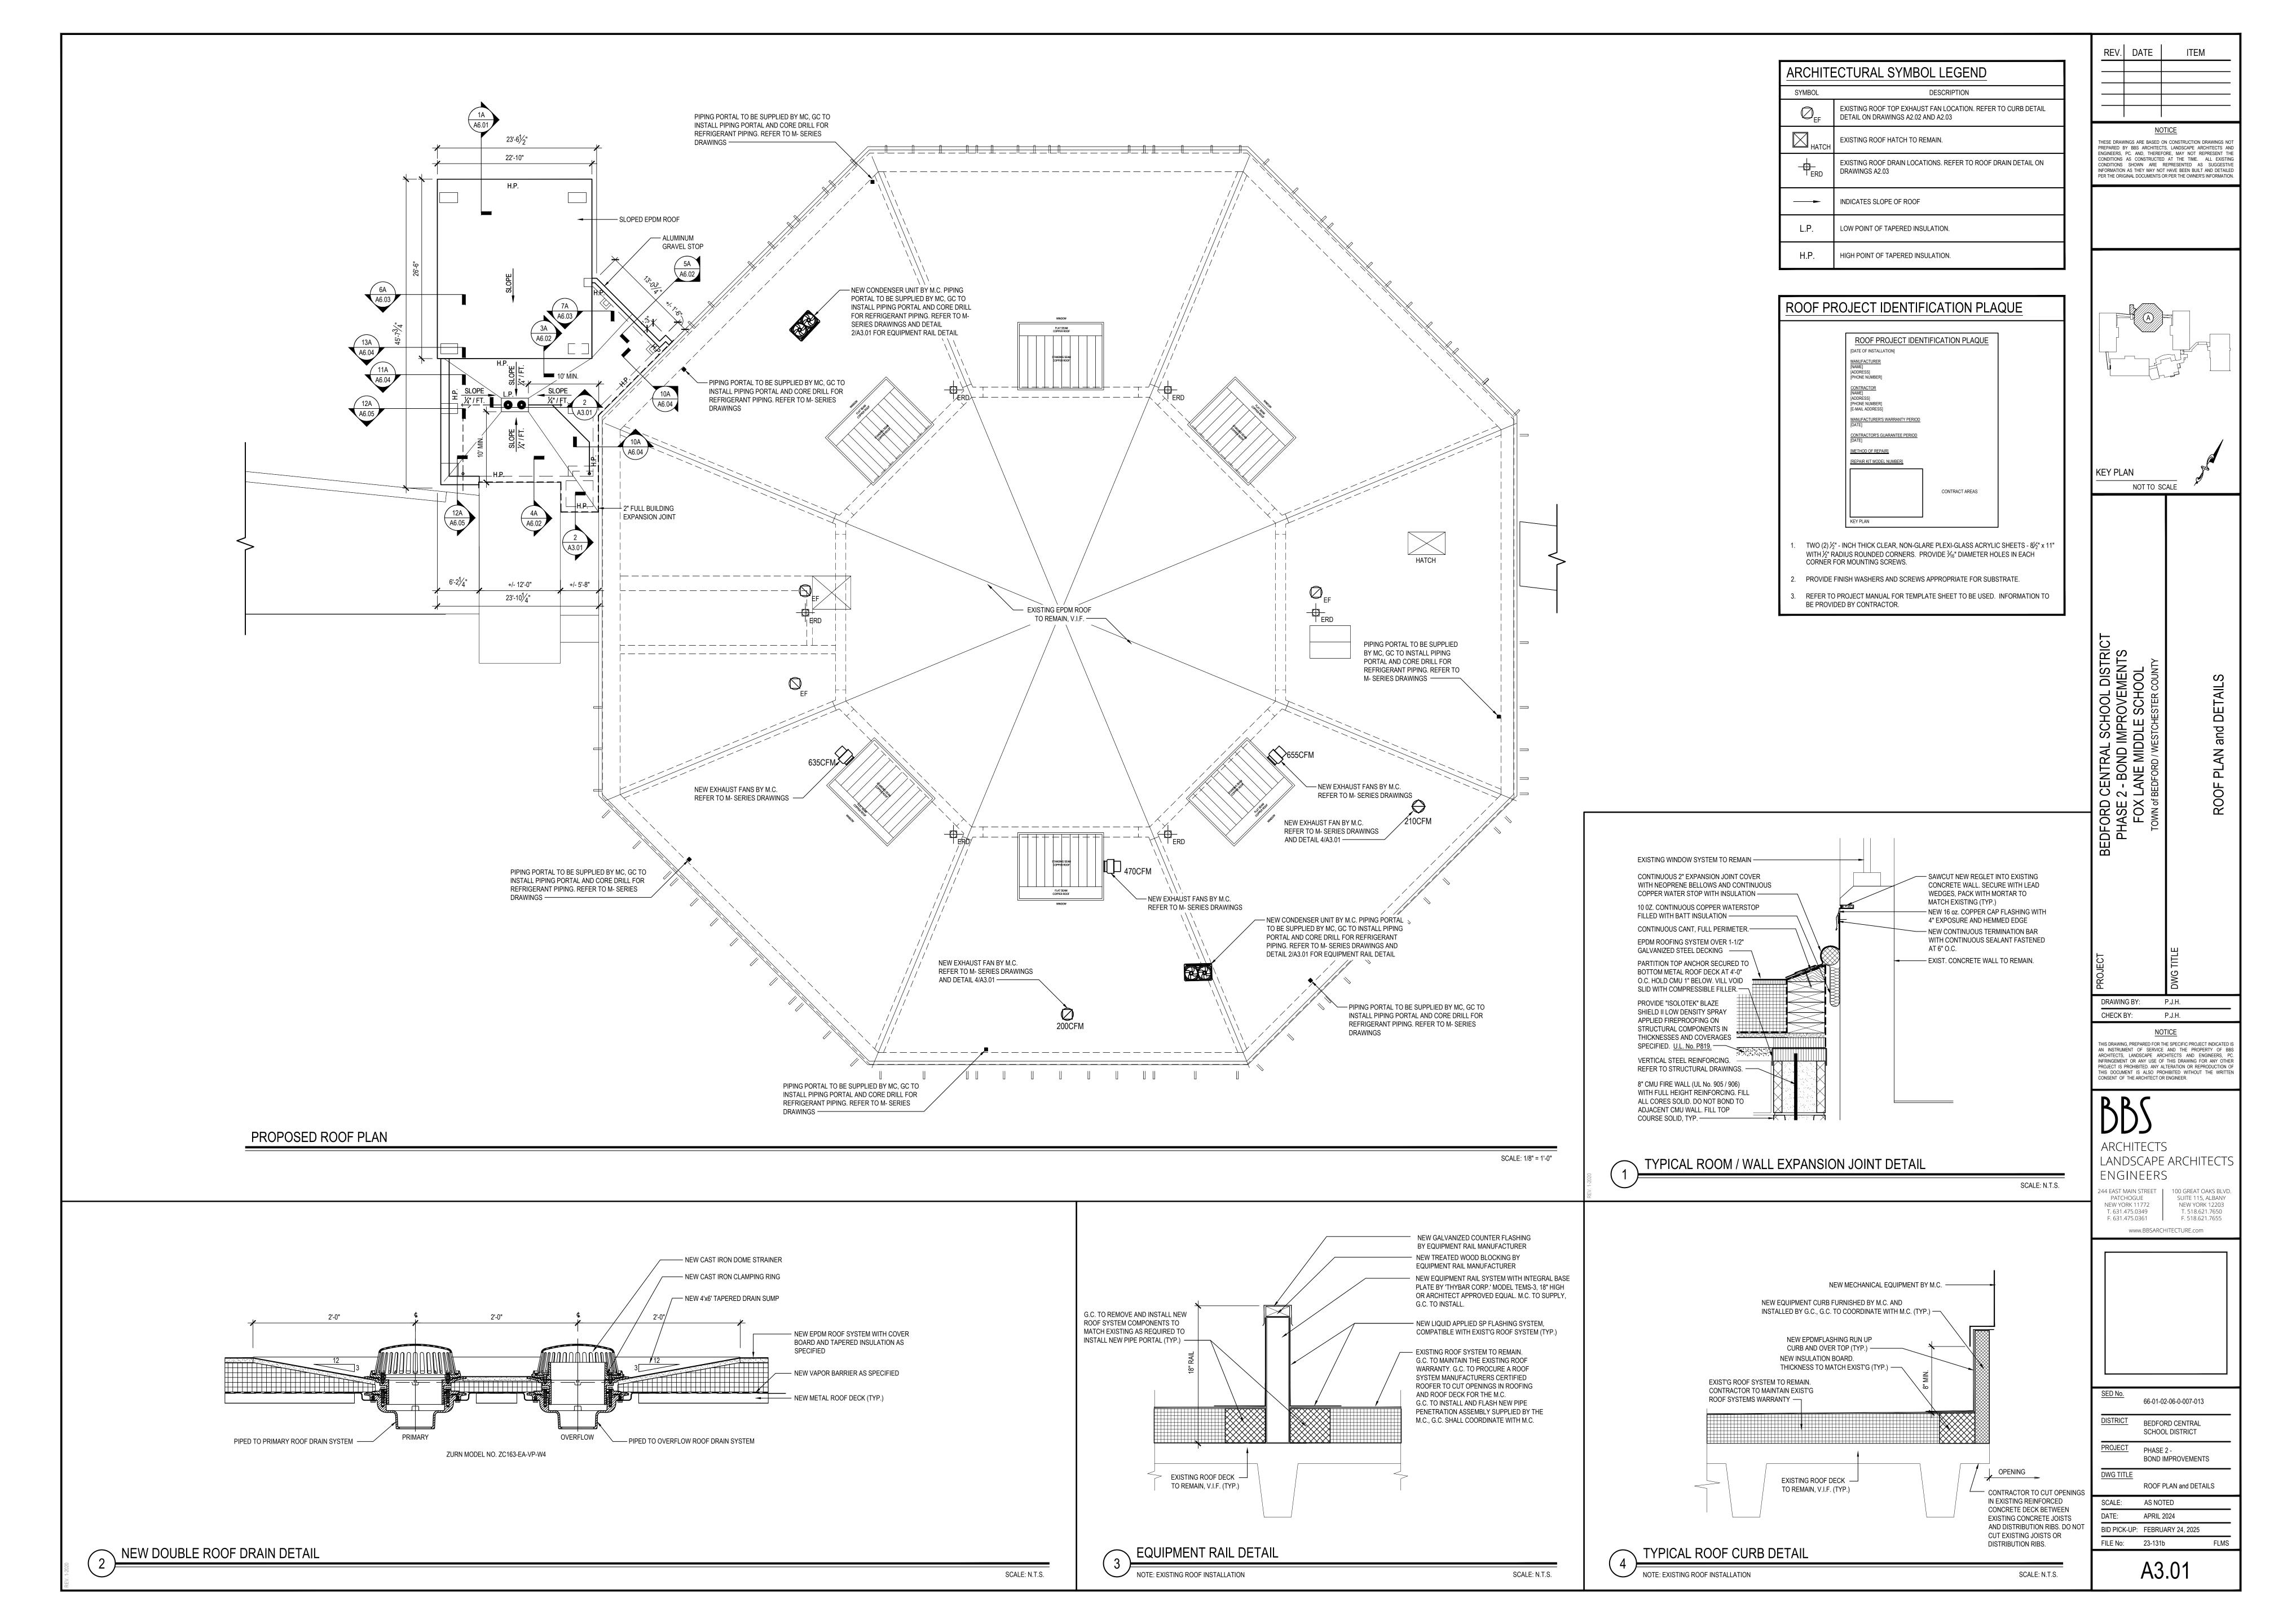

**** This Drawing is for Conceptual Purposes ONLY. ****

**** Not intended for Final Submittal. ****


*** N.T.S ***


0.5" OVERLAY

3.2" BASE

2.0" FIL/L

Layout is based on the JM Tapered Department's understanding of the information provided. It is the contractor's responsibility to verify the existing/proposed conditions and dimensions, & that this layout meets the requirements of the job prior to any submittal or ordering of material.

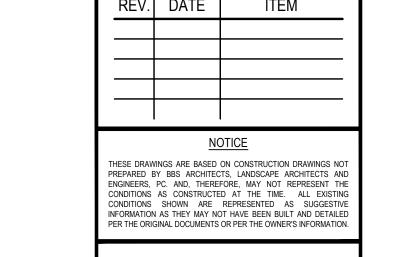

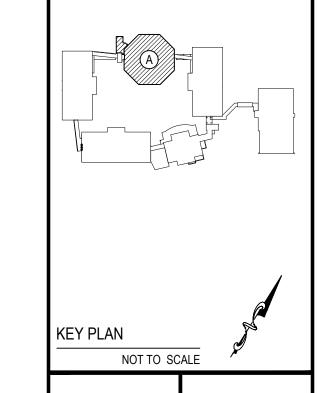


BEDFORD CENTRAL SCHOOL DISTRICT PHASE 2 - BOND IMPROVEMENTS FOX LANE MIDDLE SCHOOL	TOWN of BEDFORD / WESTCHESTER COUNTY	TAPERED INSULATION PLAN
ROJECT		WG TITLE

THIS DRAWING, PREPARED FOR THE SPECIFIC PROJECT INDICATED IS AN INSTRUMENT OF SERVICE AND THE PROPERTY OF BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PC. INFRINGEMENT OR ANY USE OF THIS DRAWING FOR ANY OTHER PROJECT IS PROHIBITED. ANY ALTERATION OR REPRODUCTION OF THIS DOCUMENT IS ALSO PROHIBITED WITHOUT THE WRITTEN CONSENT OF THE ARCHITECT OR ENGINEER.

LANDSCAPE ARCHITECTS ENGINEERS

NEW YORK 11772 NEW YORK 12203

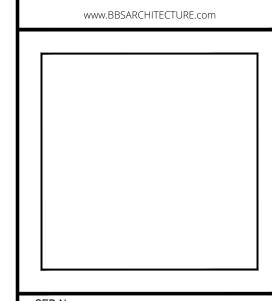


SED No.	66-01-02-06-0-007-013
DISTRICT	BEDFORD CENTRAL SCHOOL DISTRICT
PROJECT	PHASE 2 - BOND IMPROVEMENTS
DWG TITLE	

TAPERED INSULATION PLAN SCALE: AS NOTED

DATE: APRIL 2024 BID PICK-UP: FEBRUARY 24, 2025

A3.02

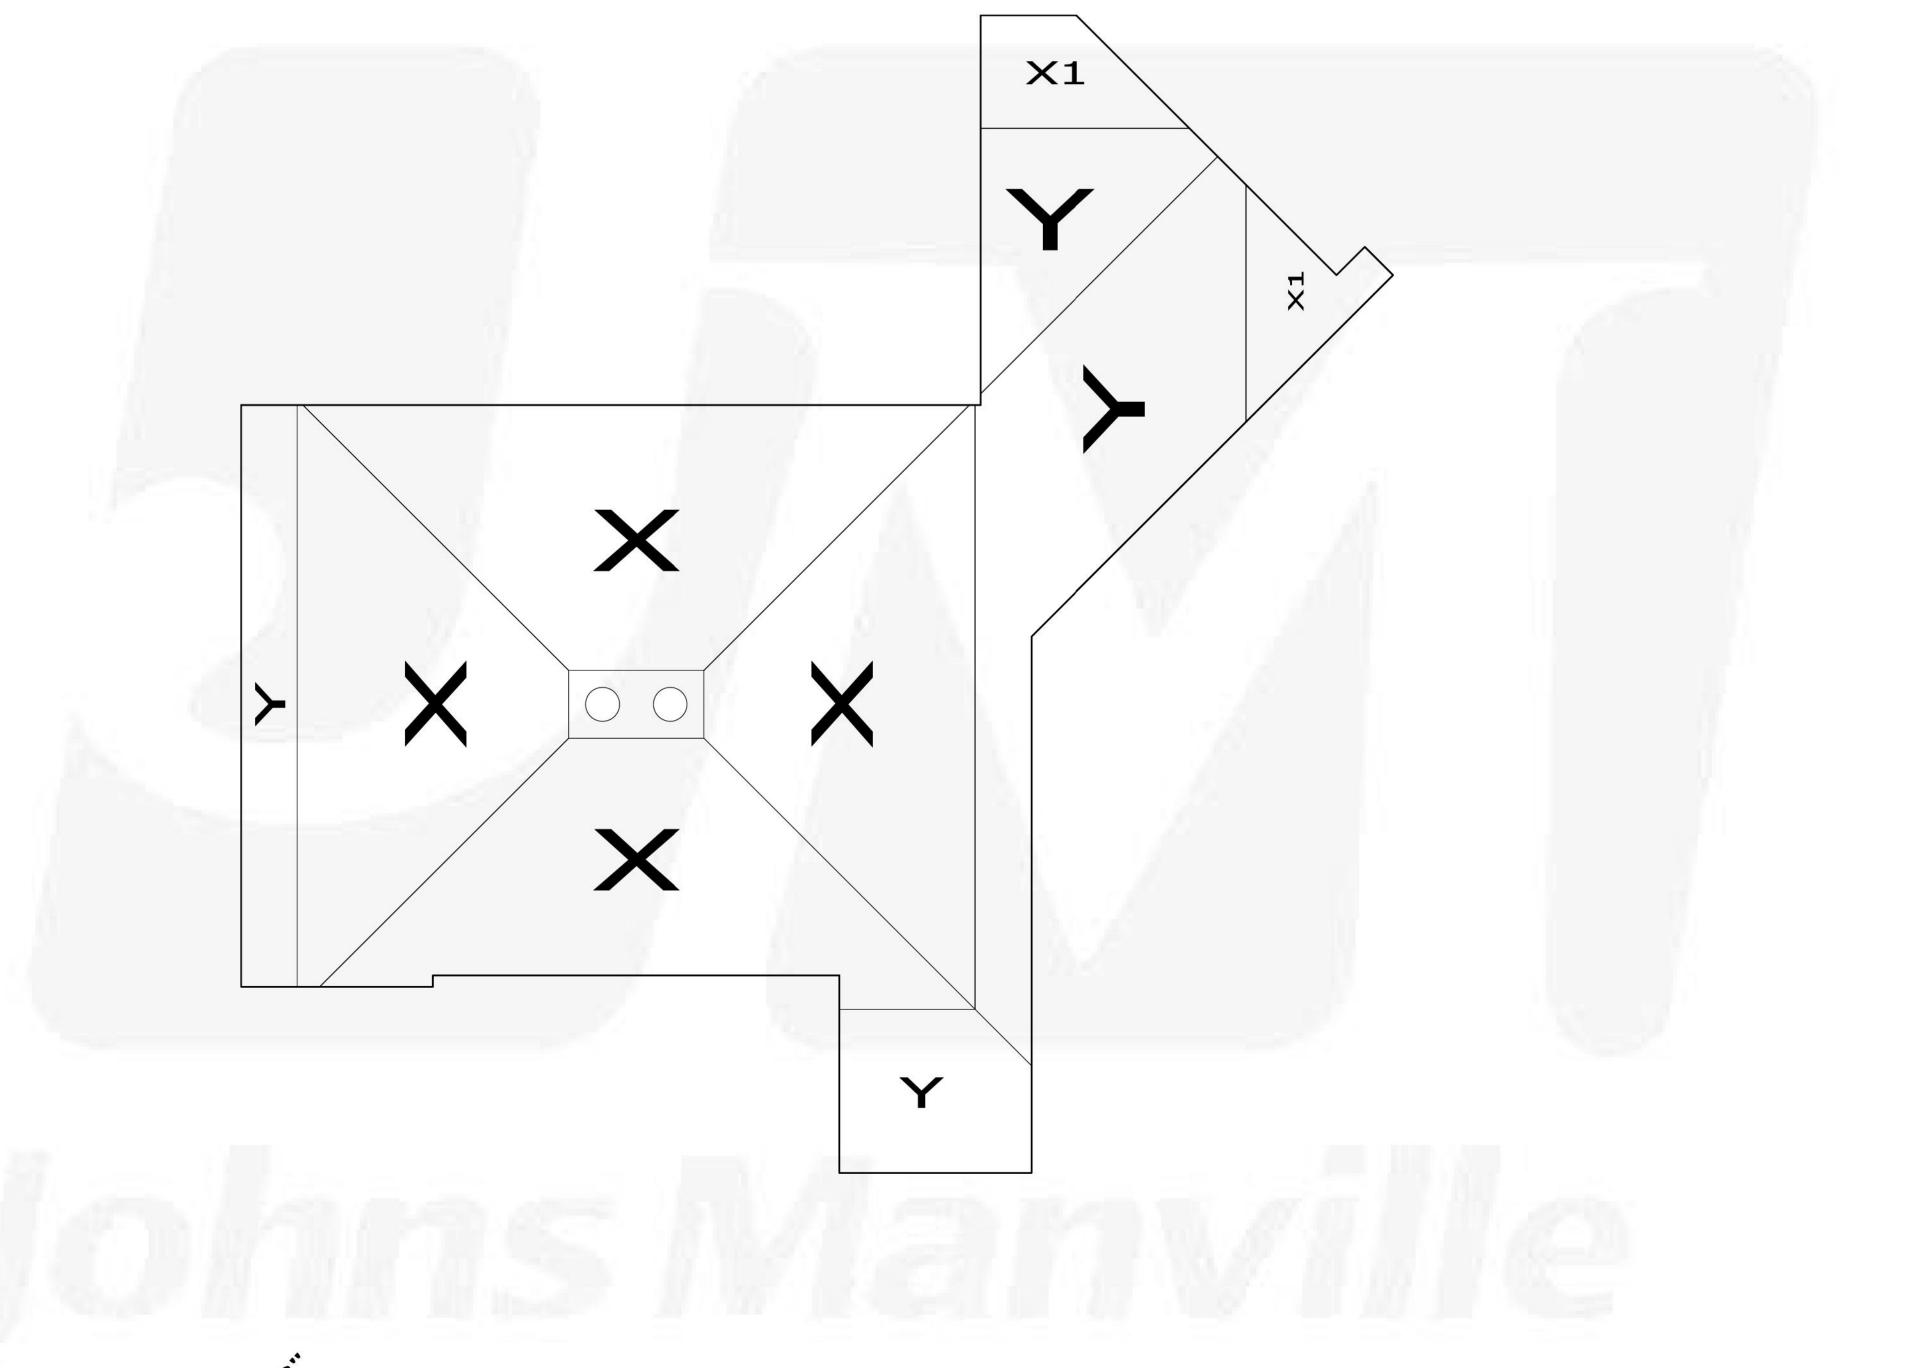

Phone # (800) 341-8032 Estimator Michael Taylor taylorm@jm.com


Project: NY24-427106C1 SMALL ROOF


BEDFORD, NY


FOX LANE MS


Tapered Systems Group 10100 W. Ute Ave. Littleton, CO 80127


FILE No: 23-131b Johns Manville

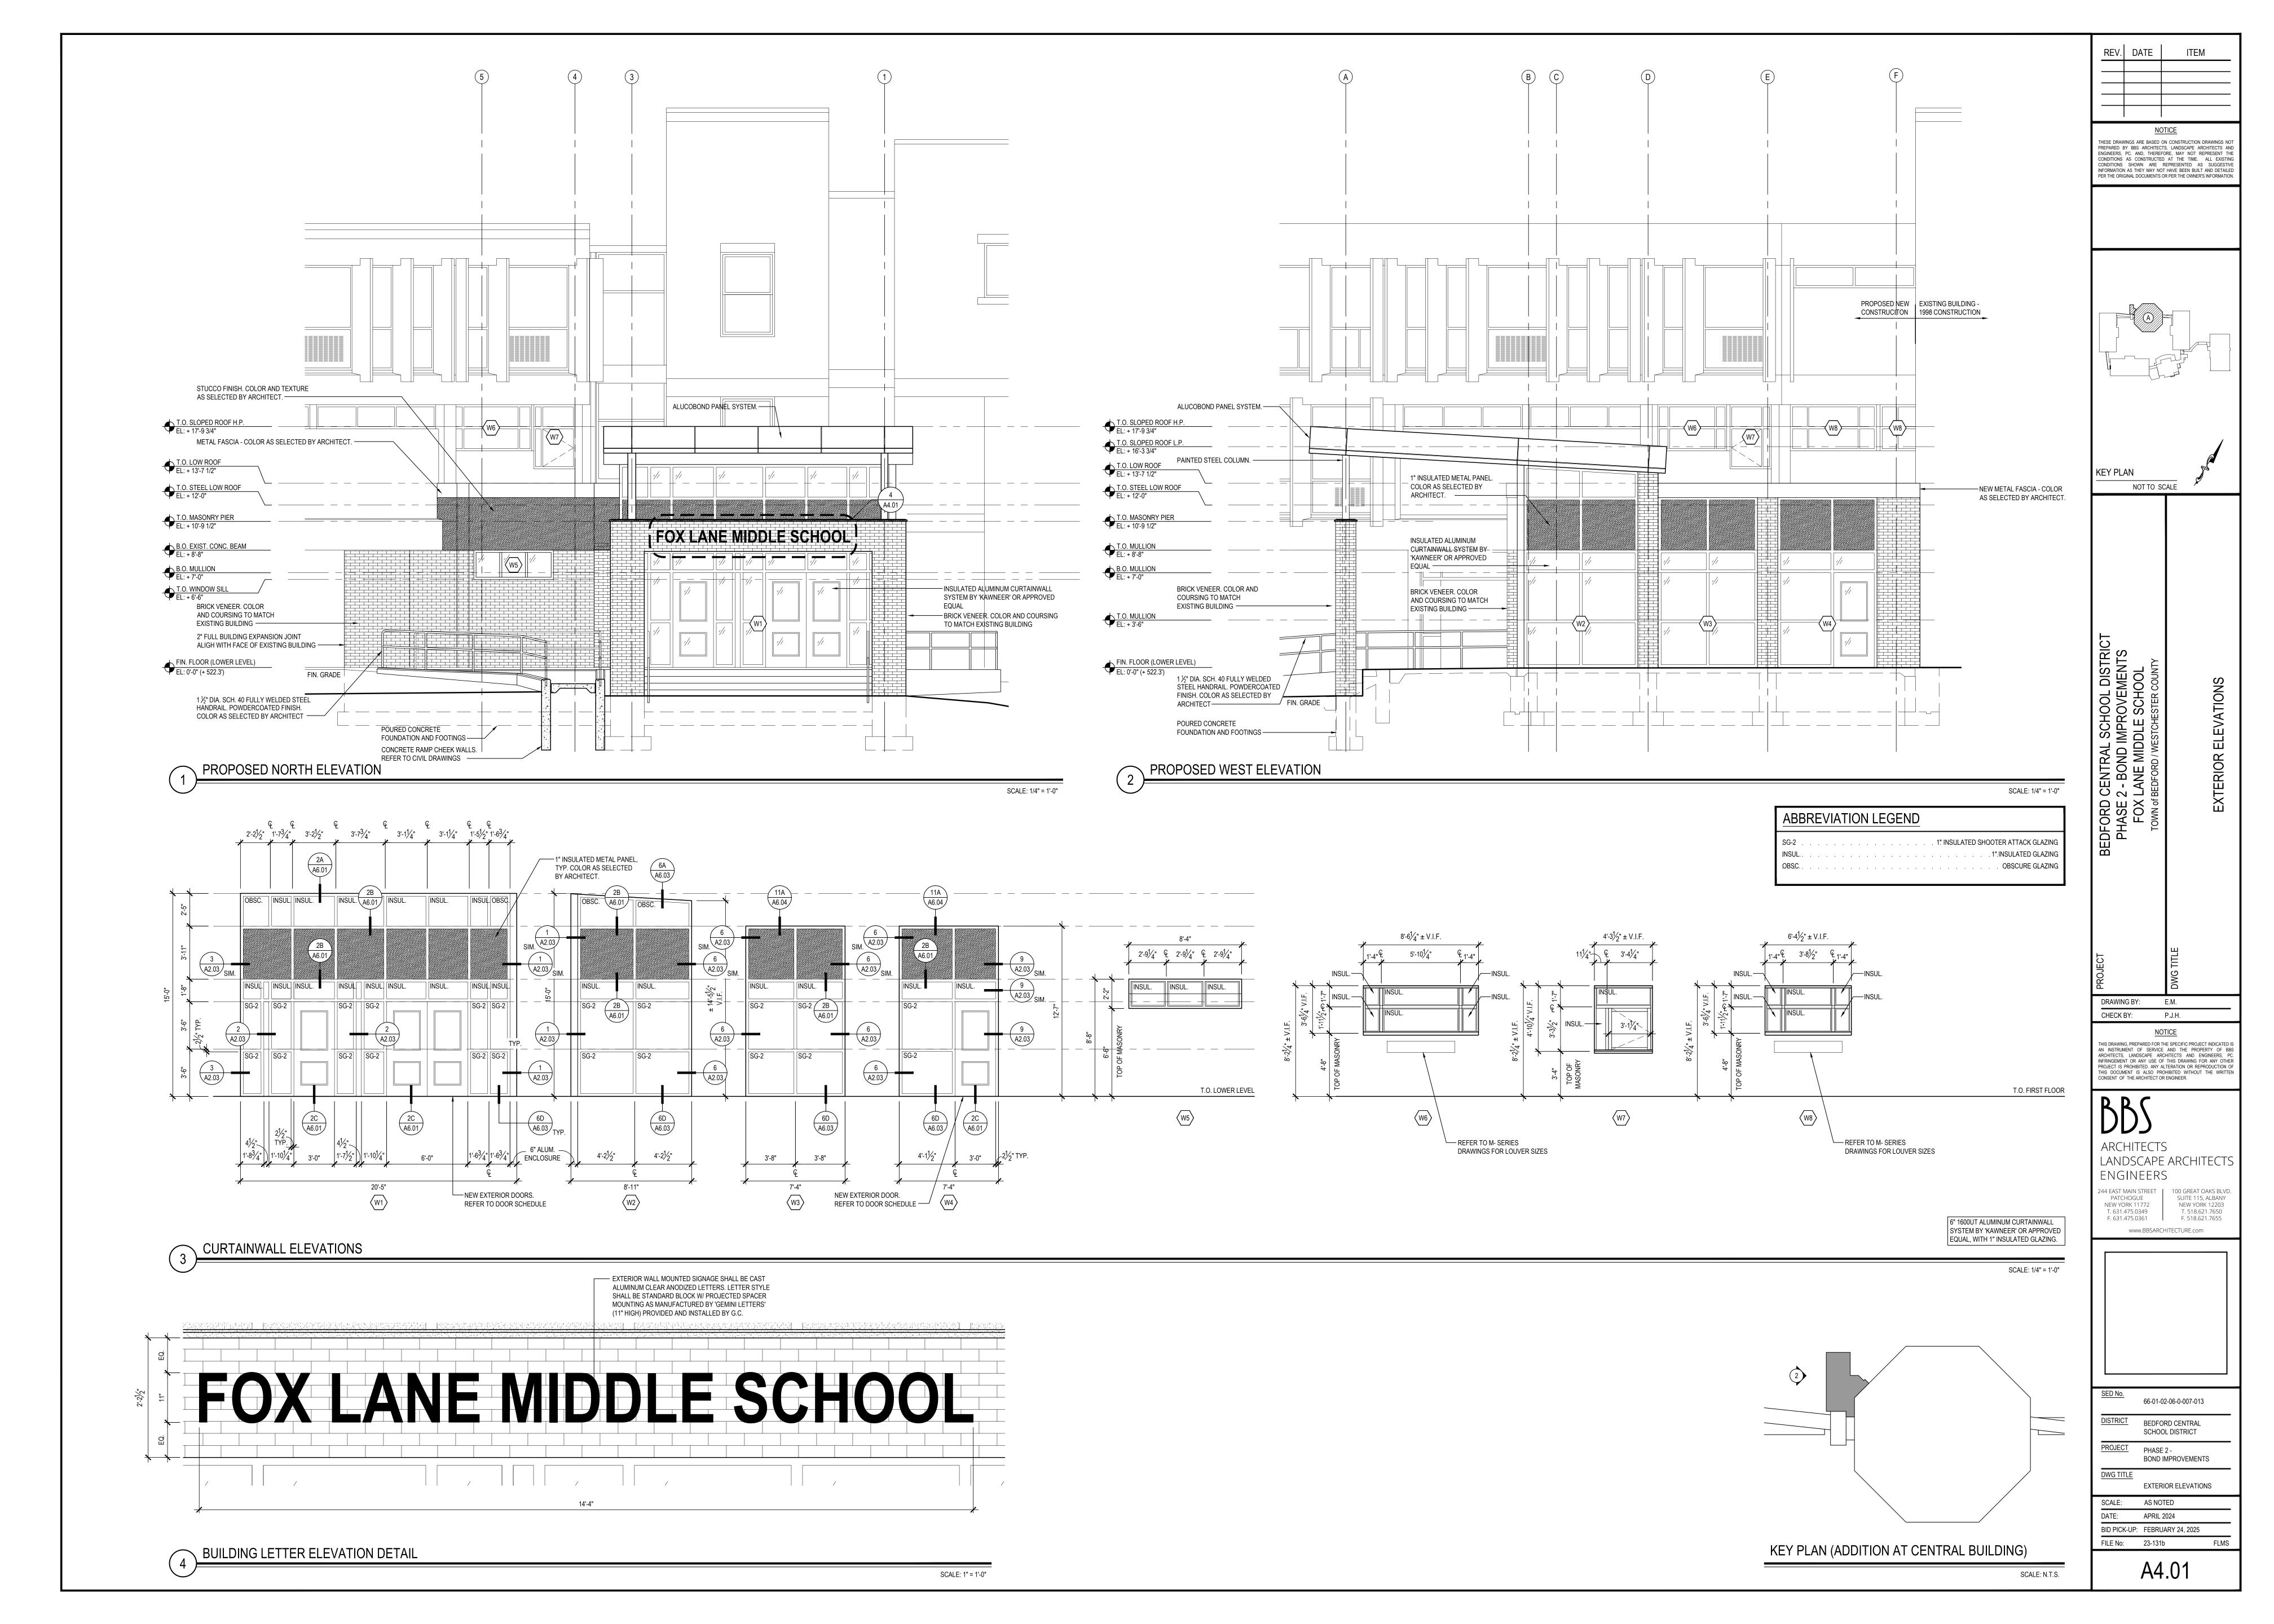


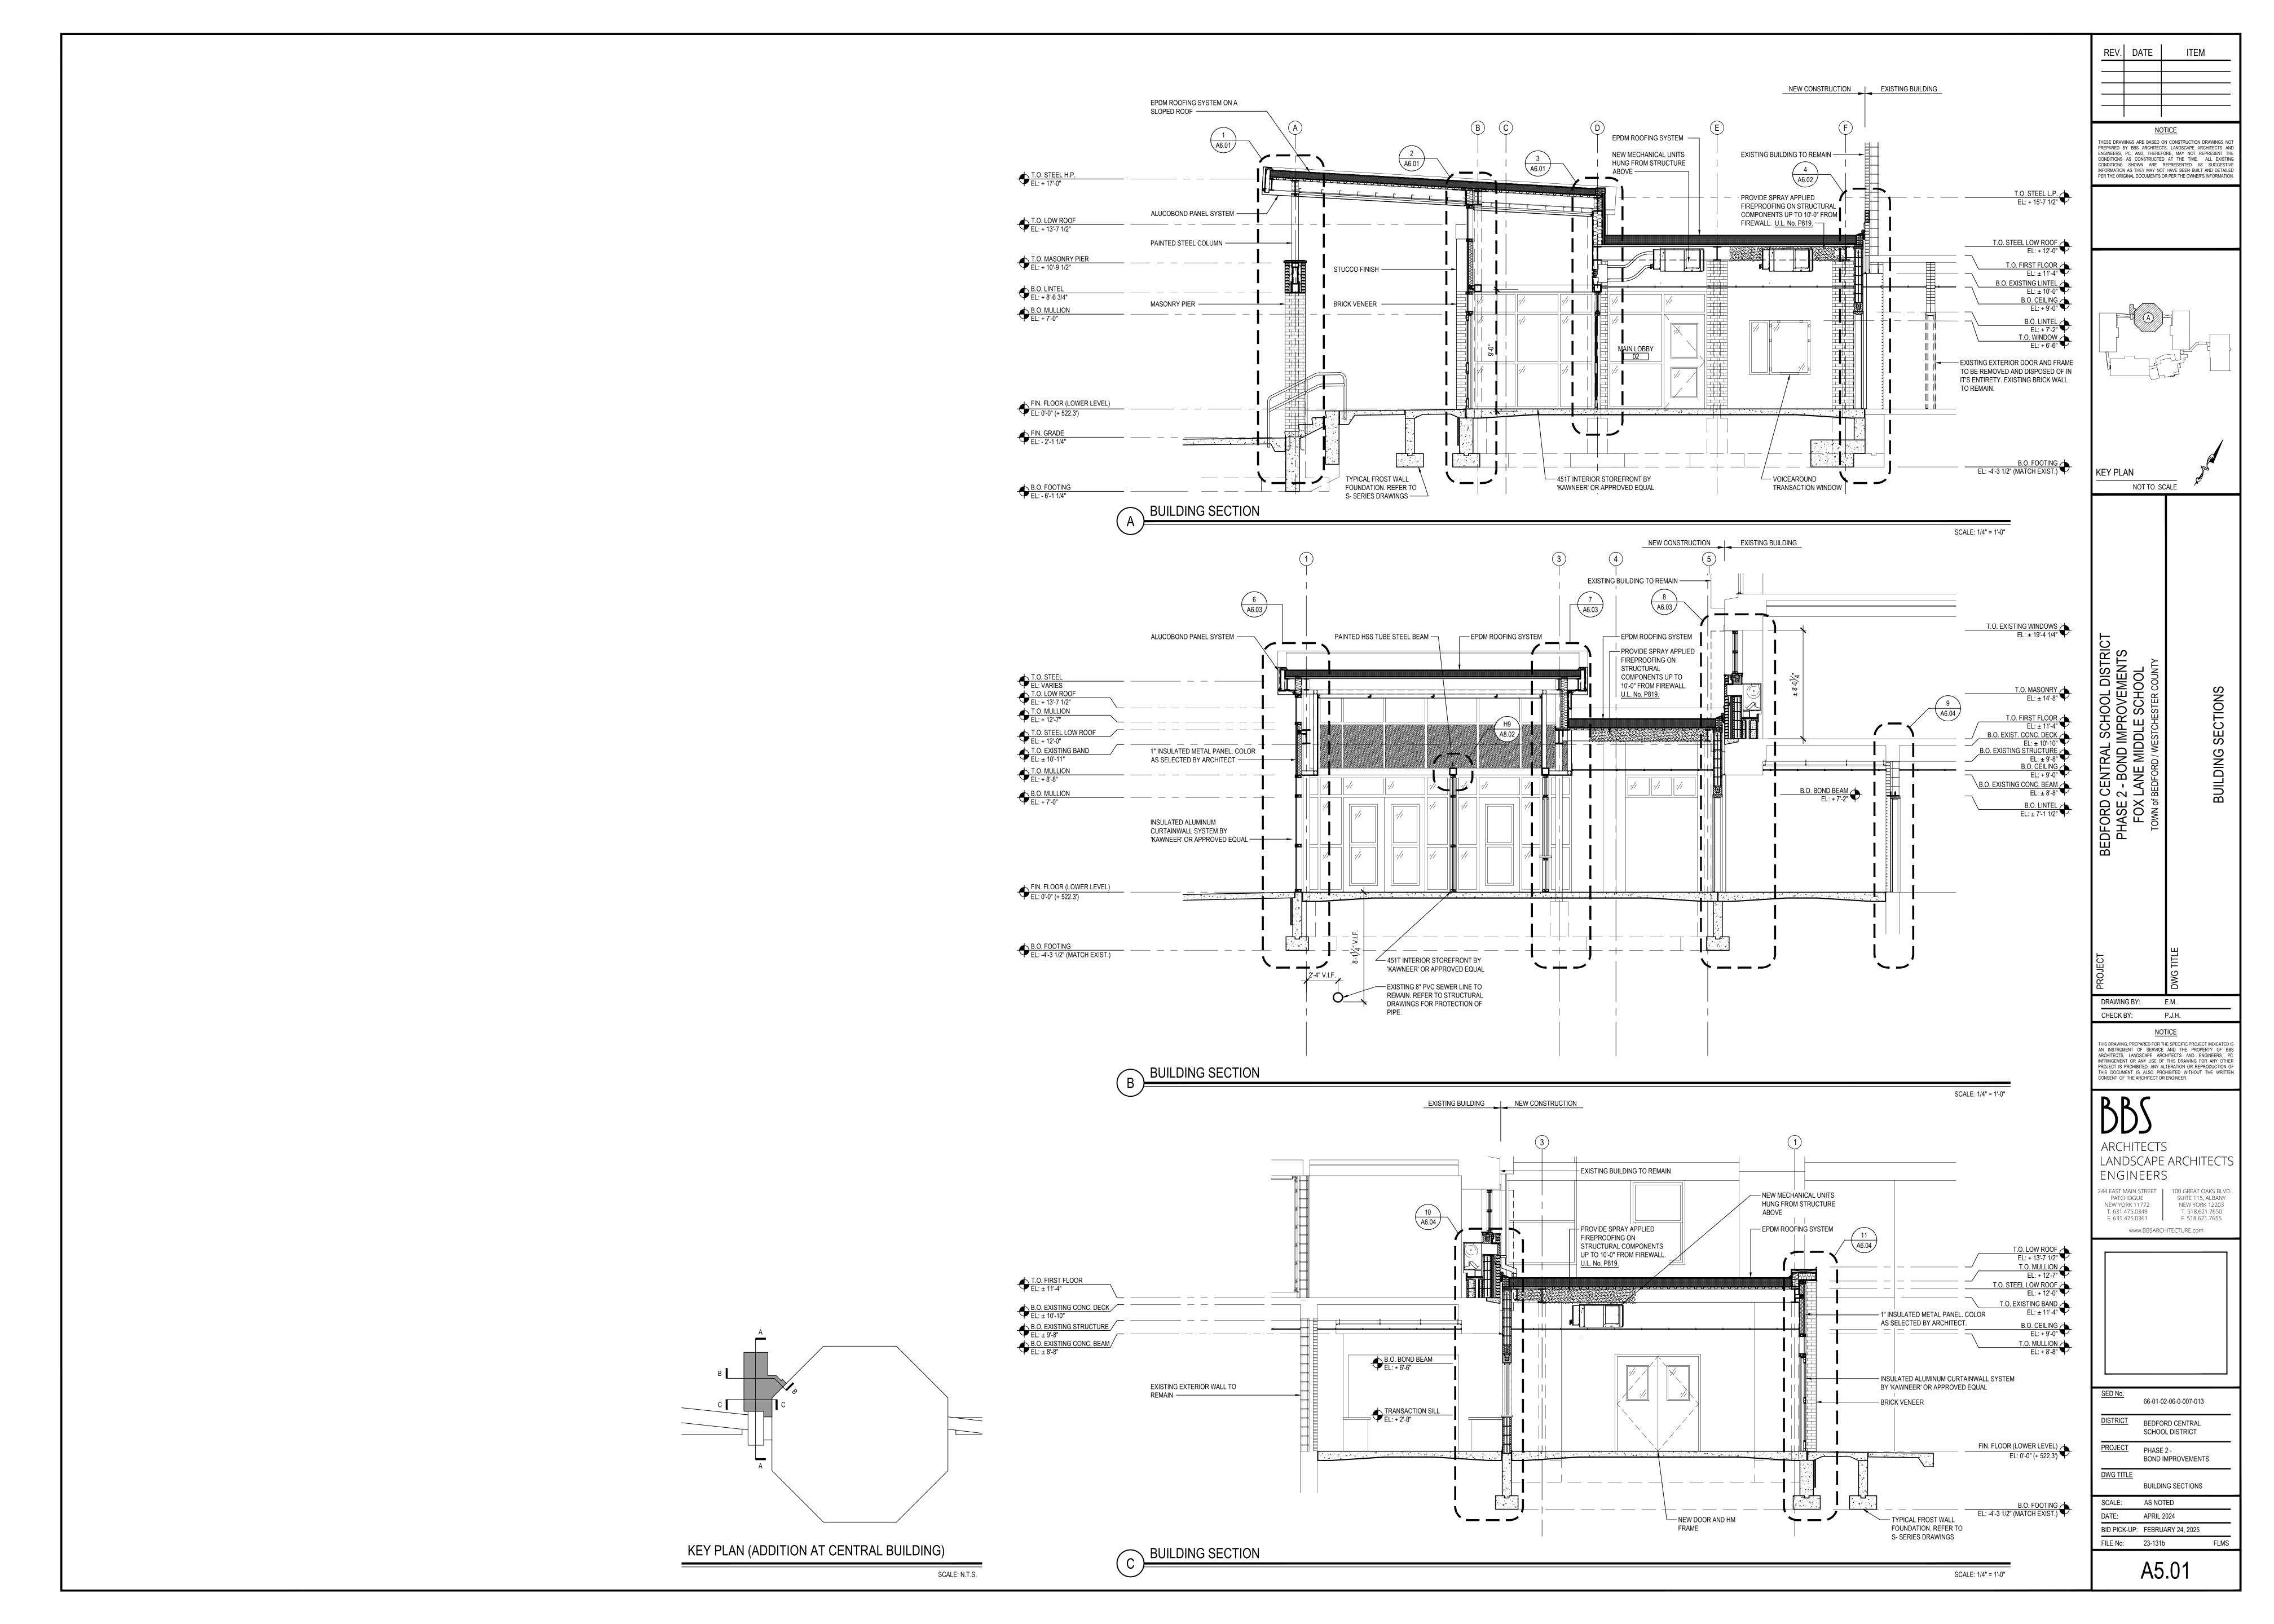


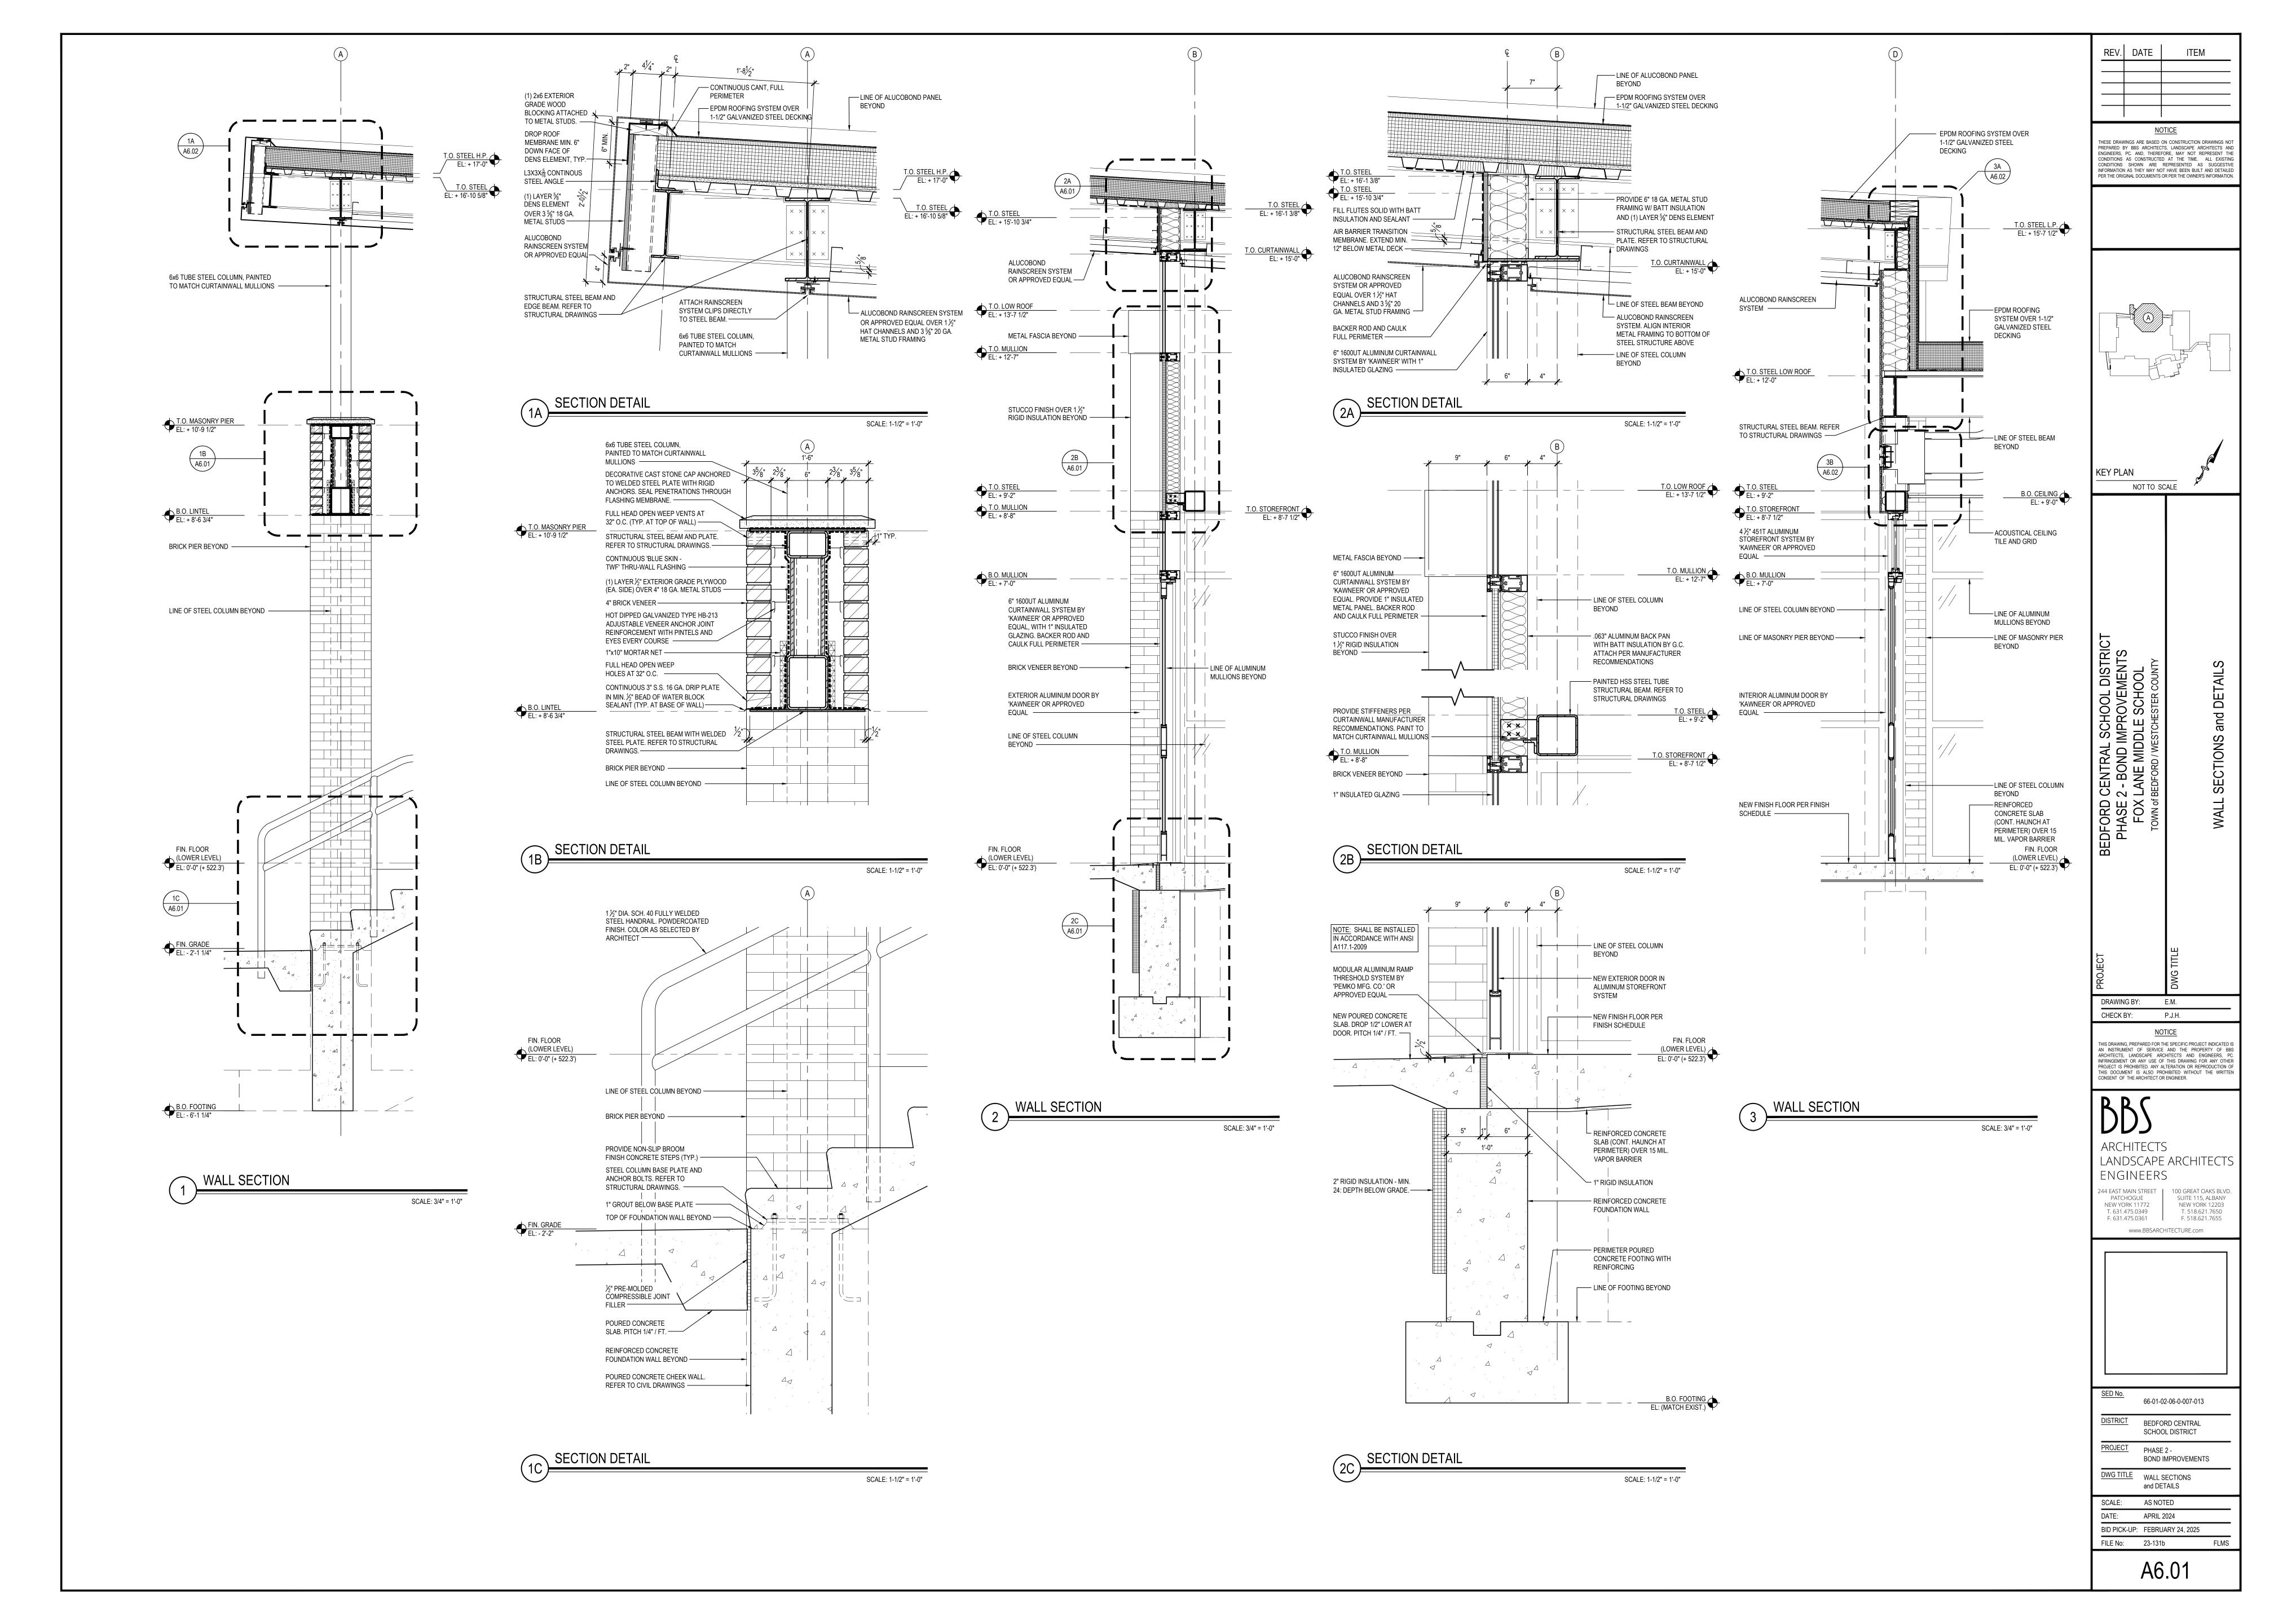


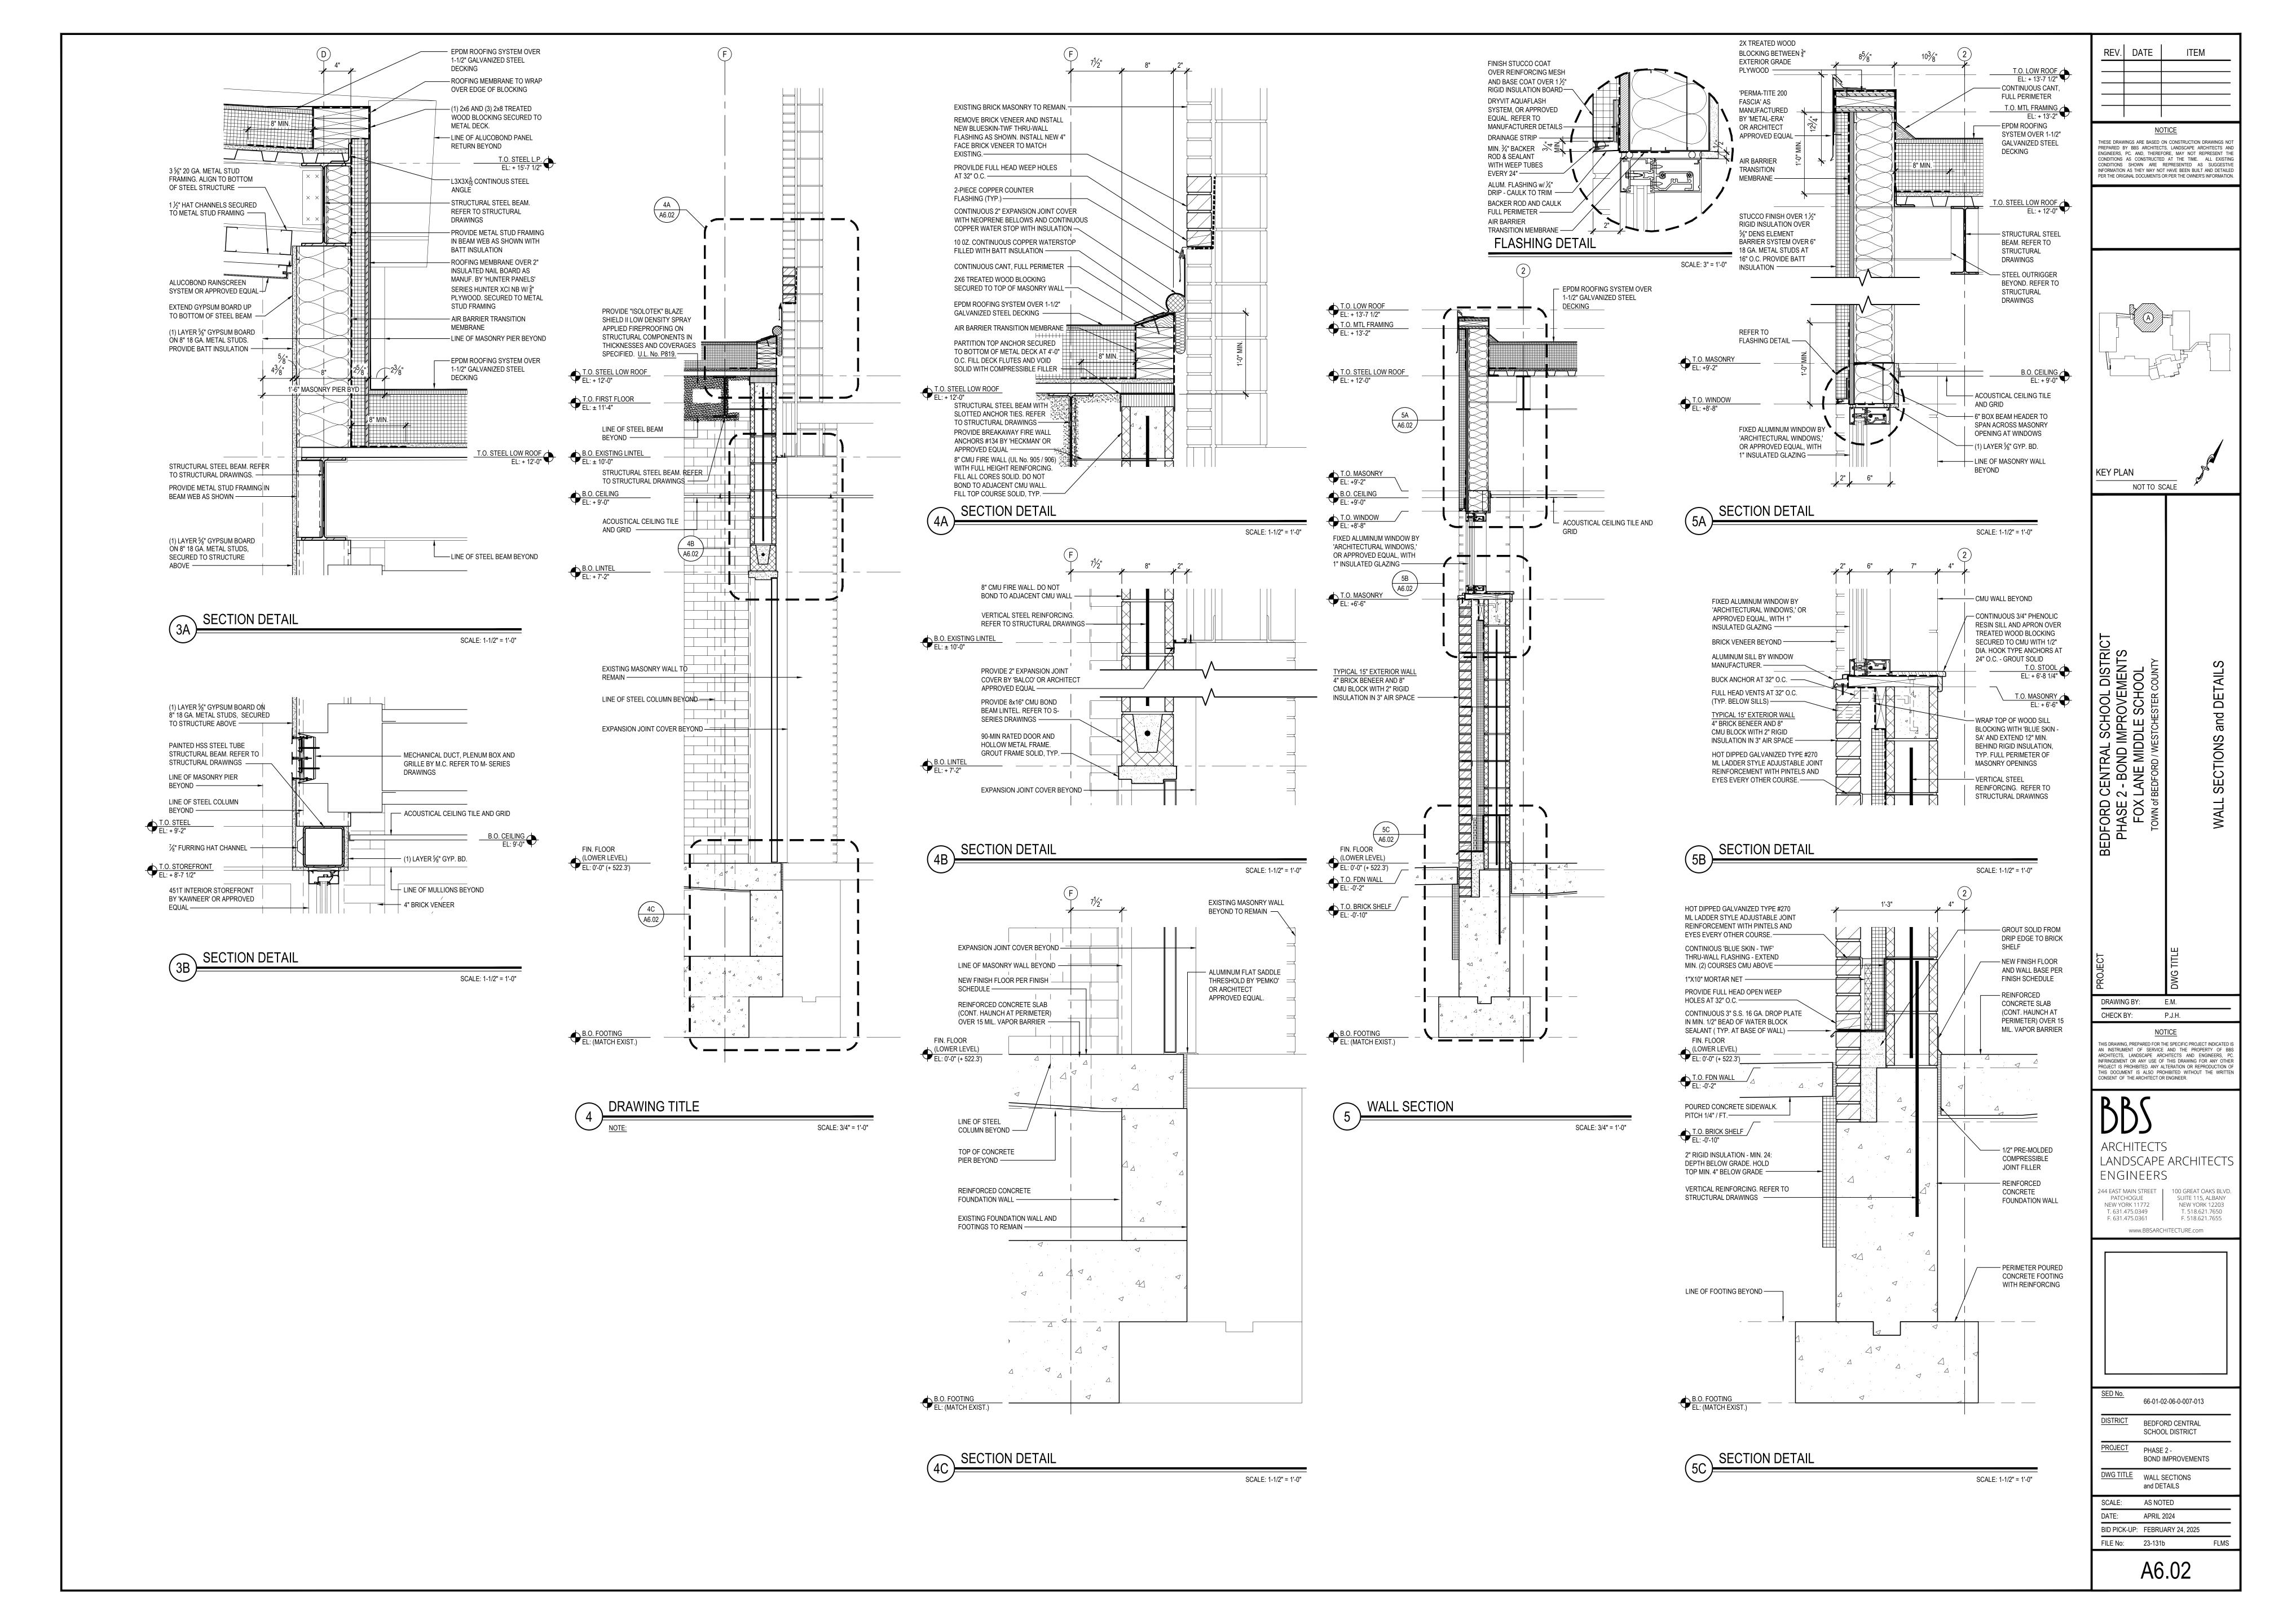


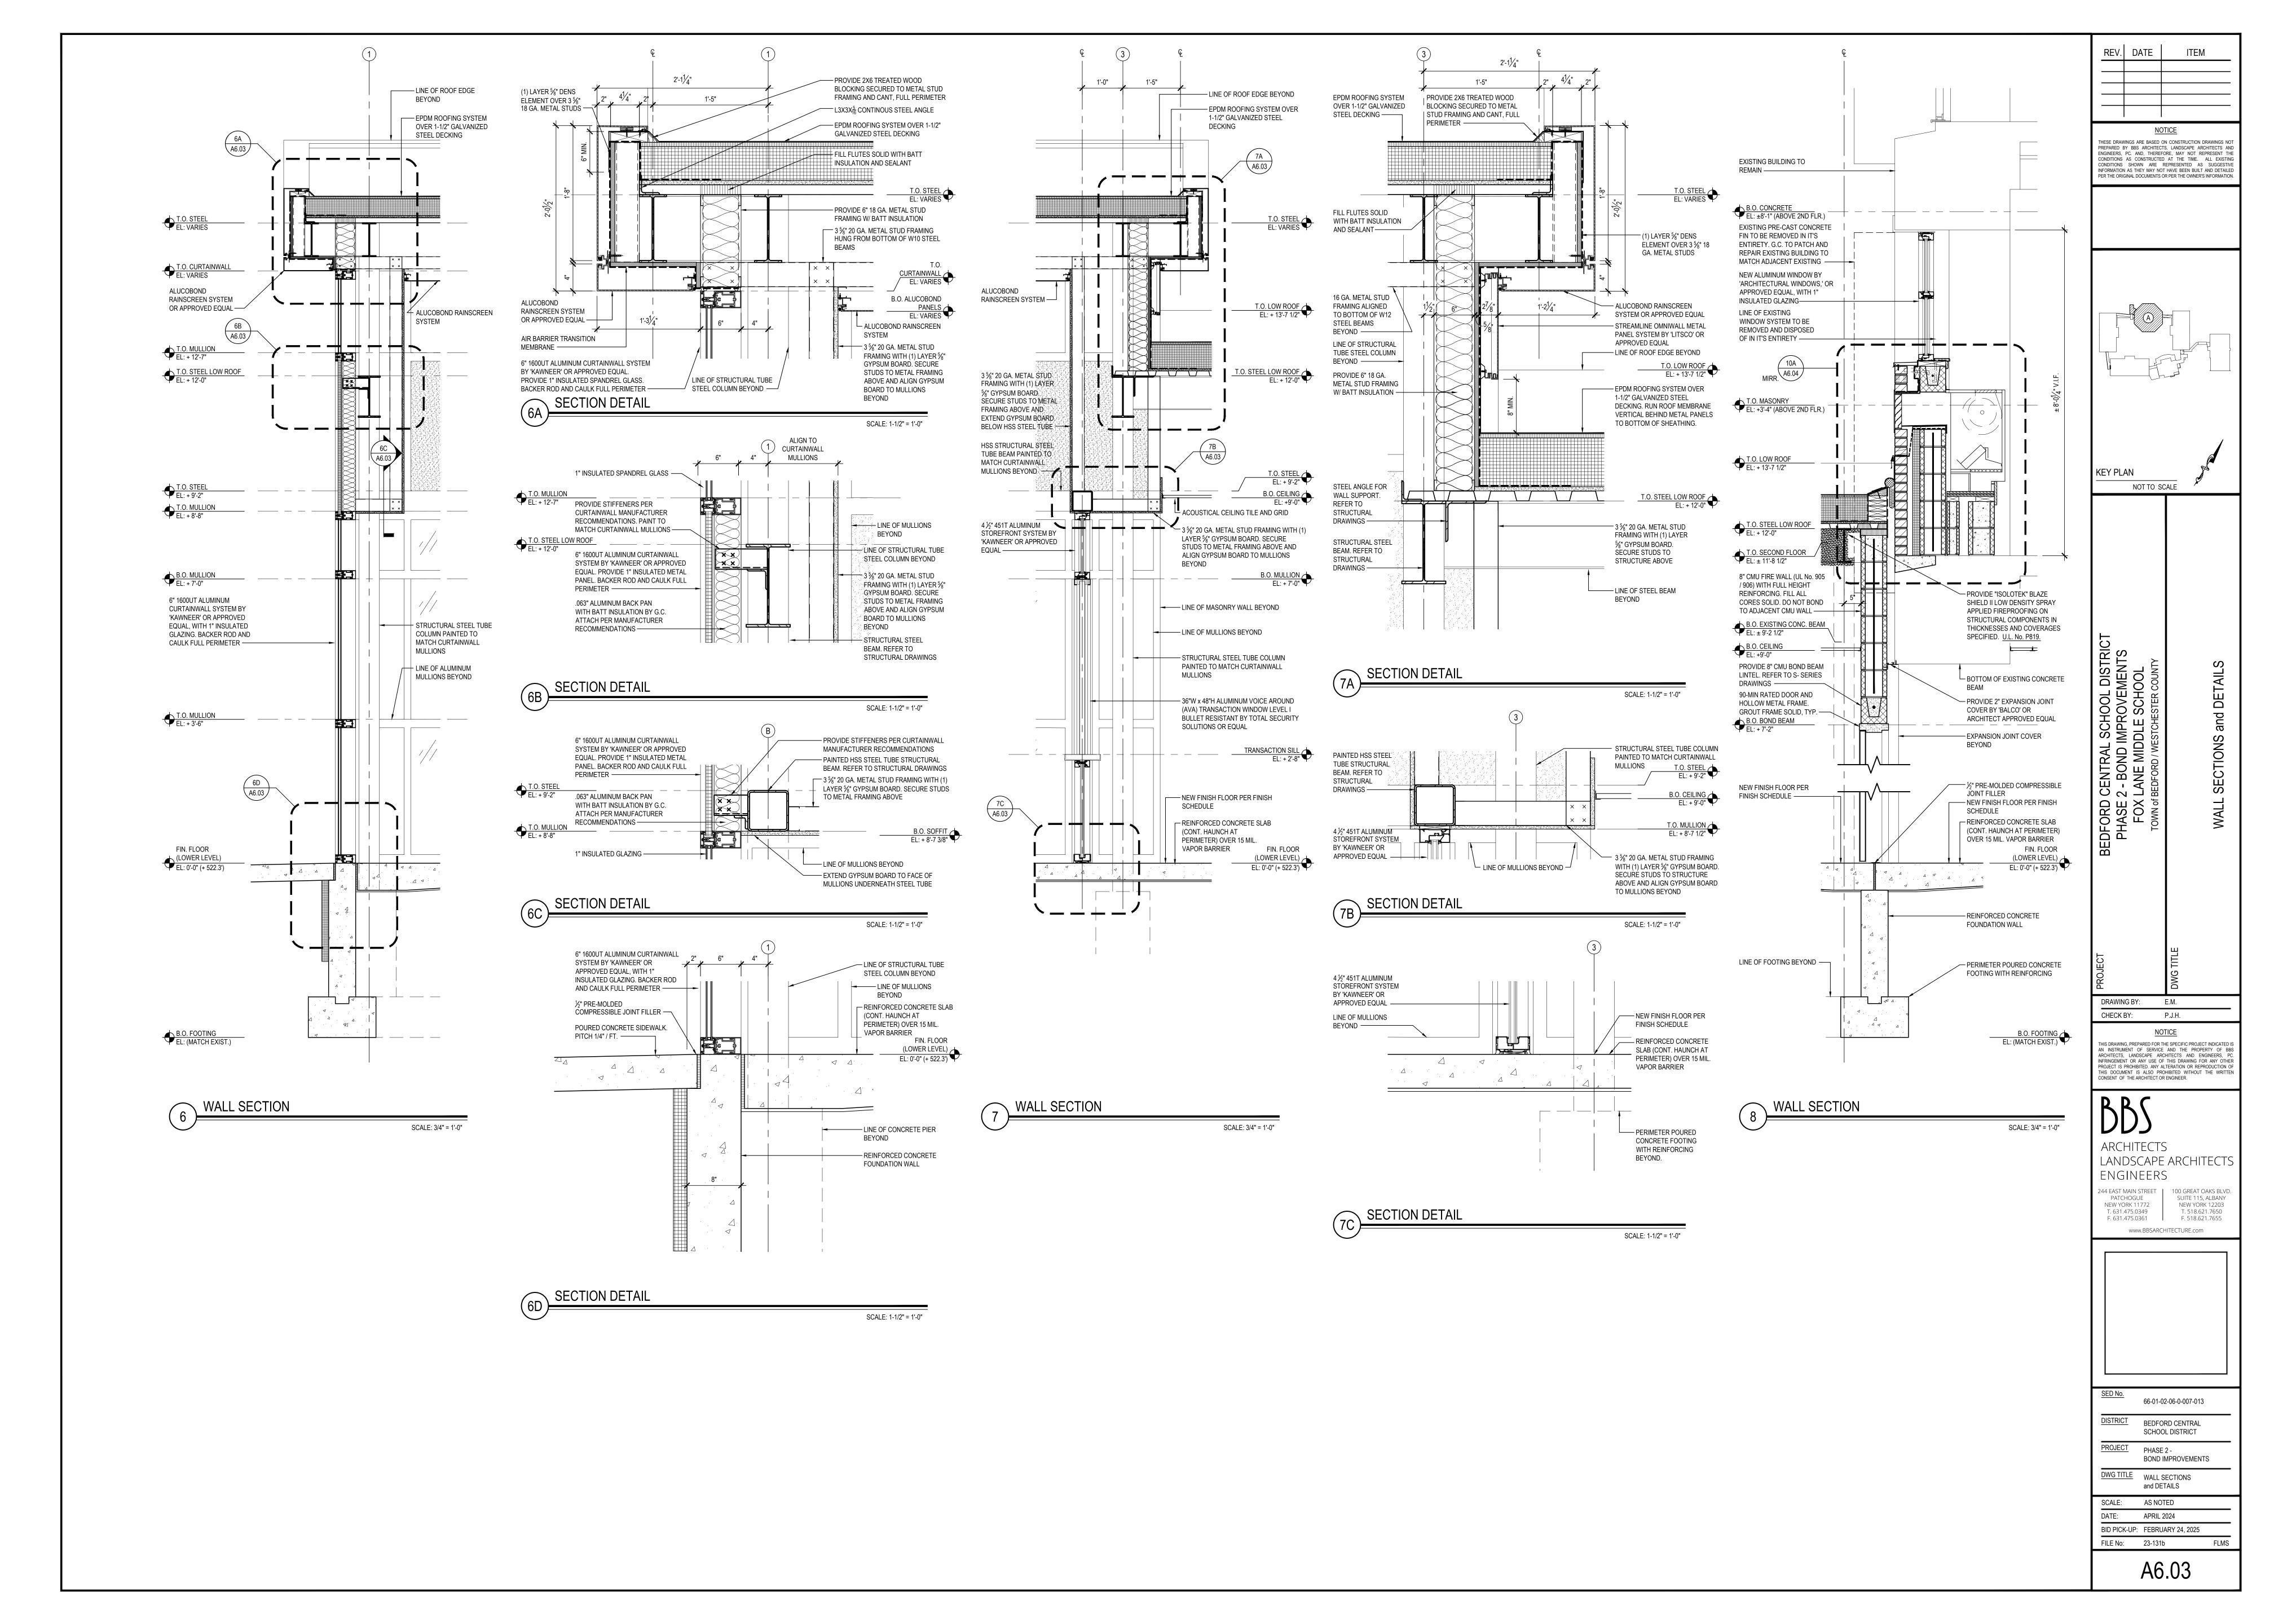


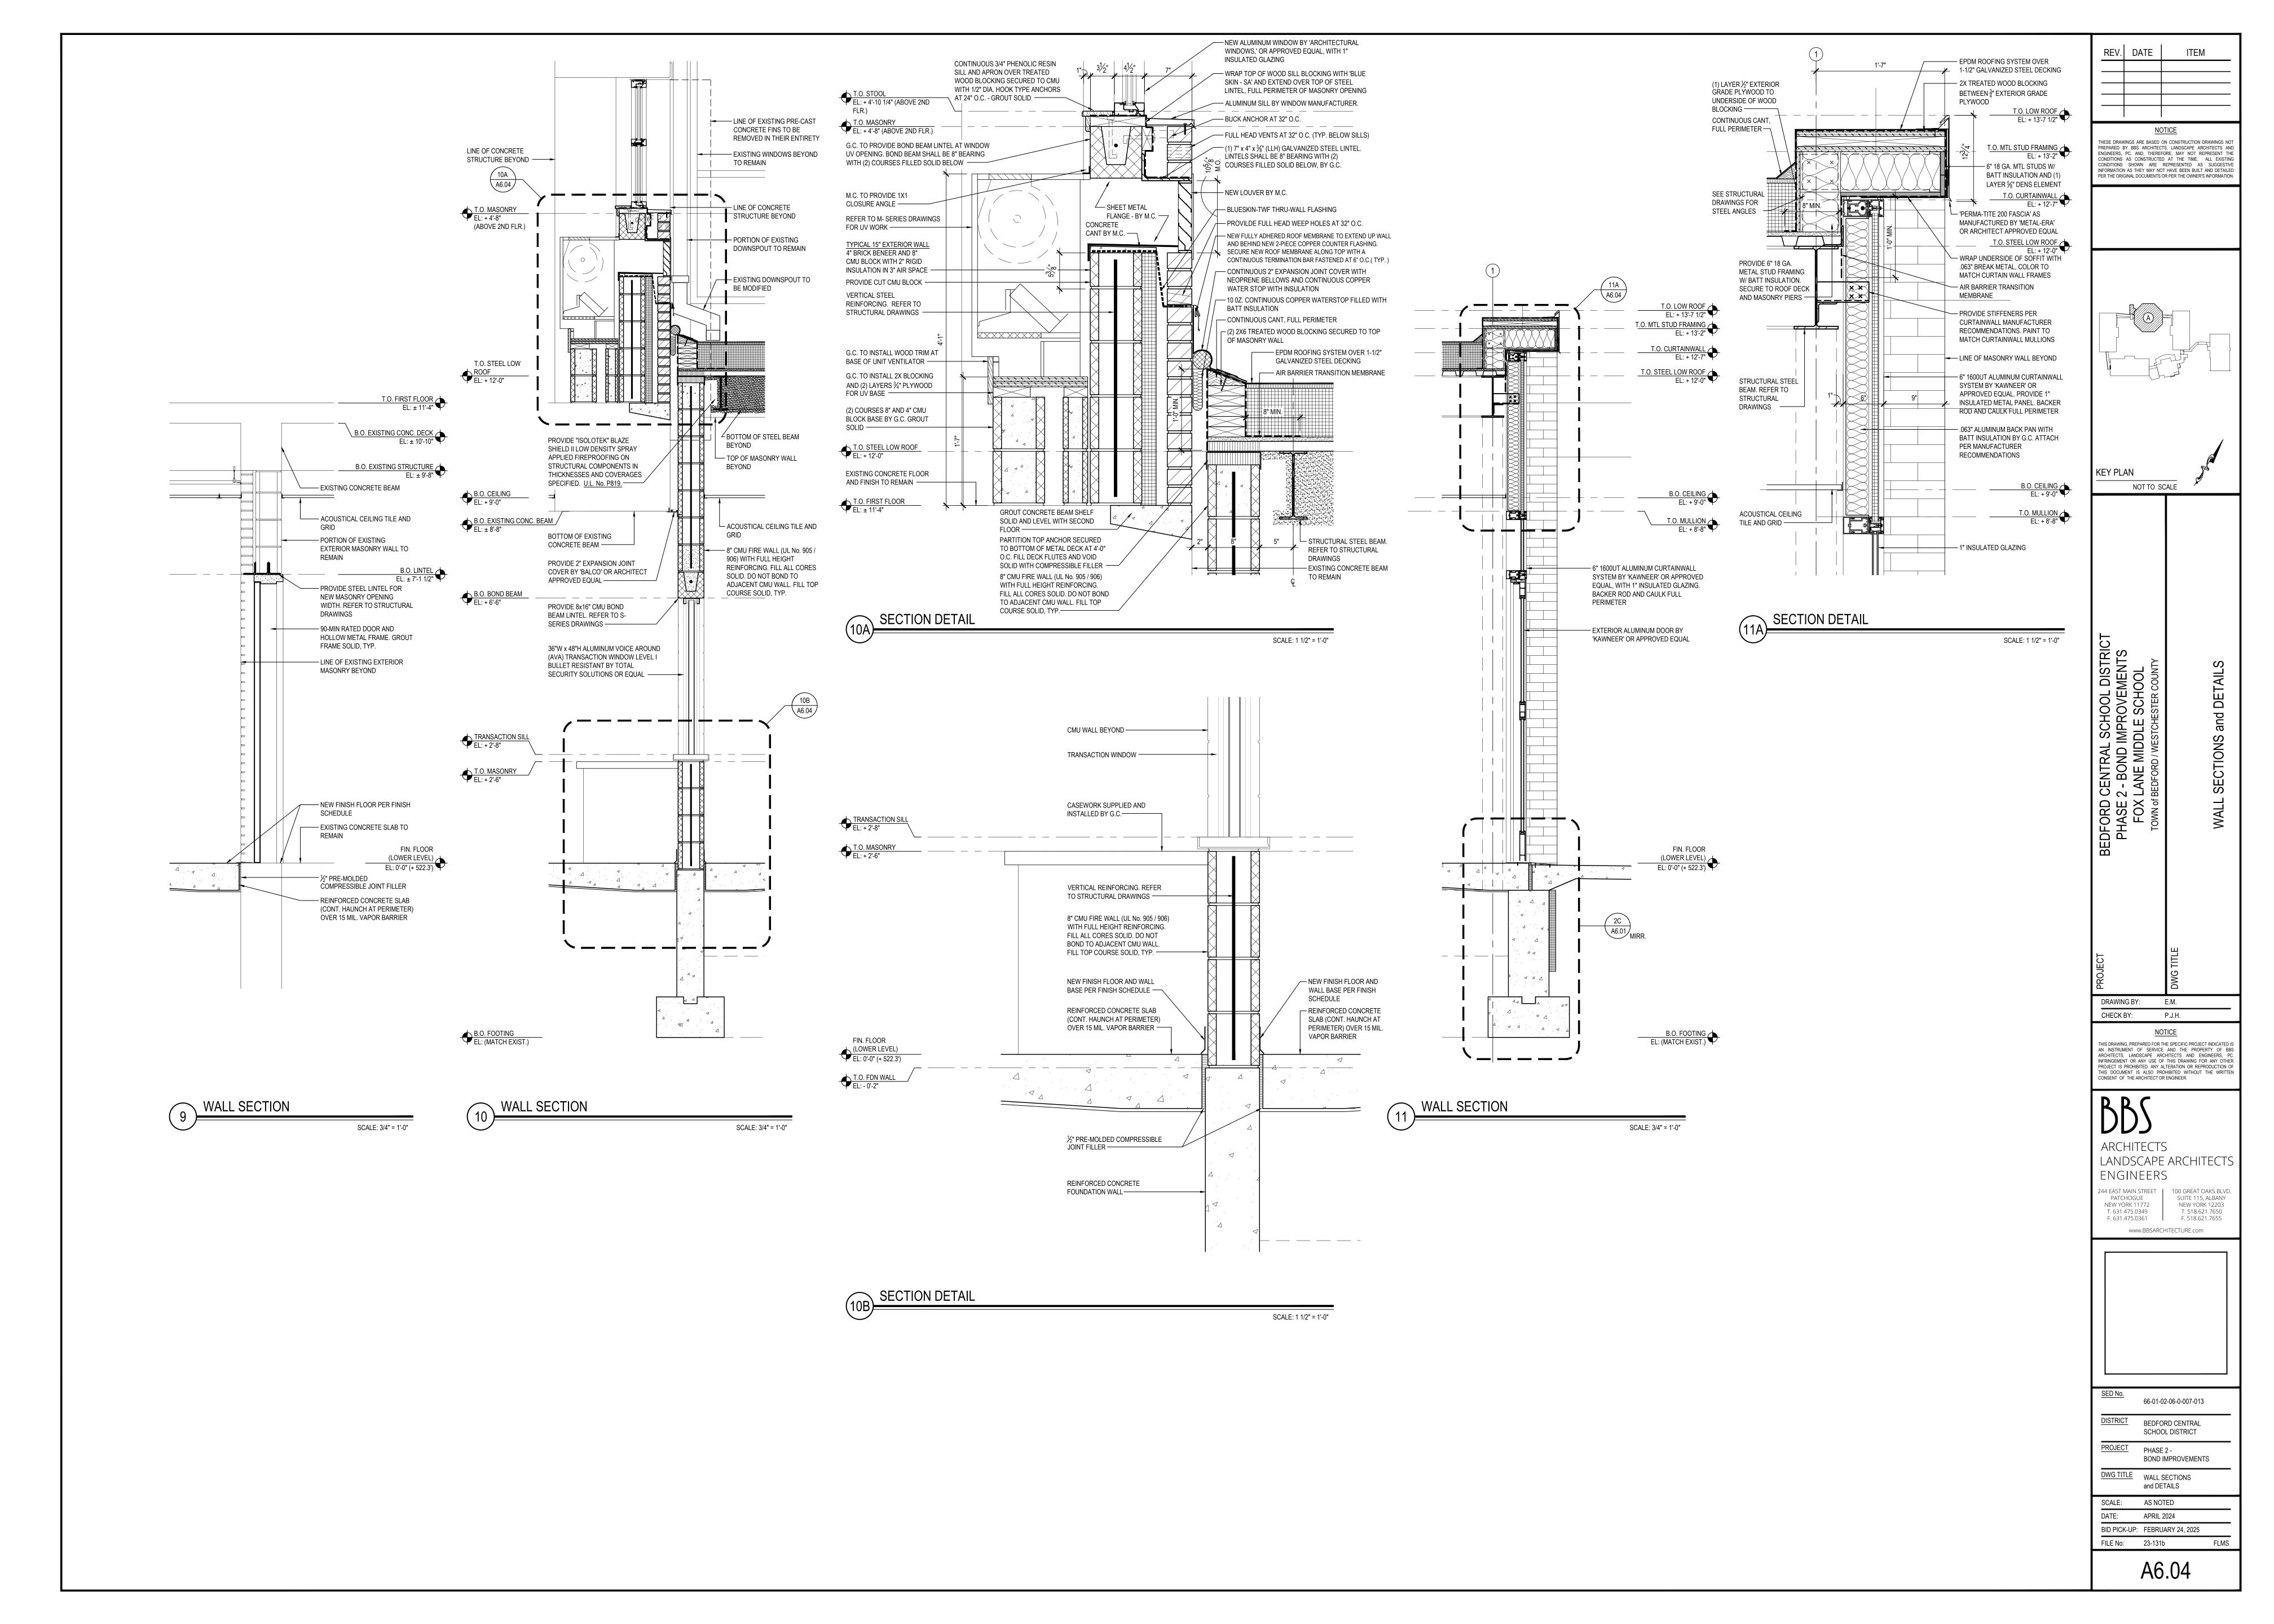

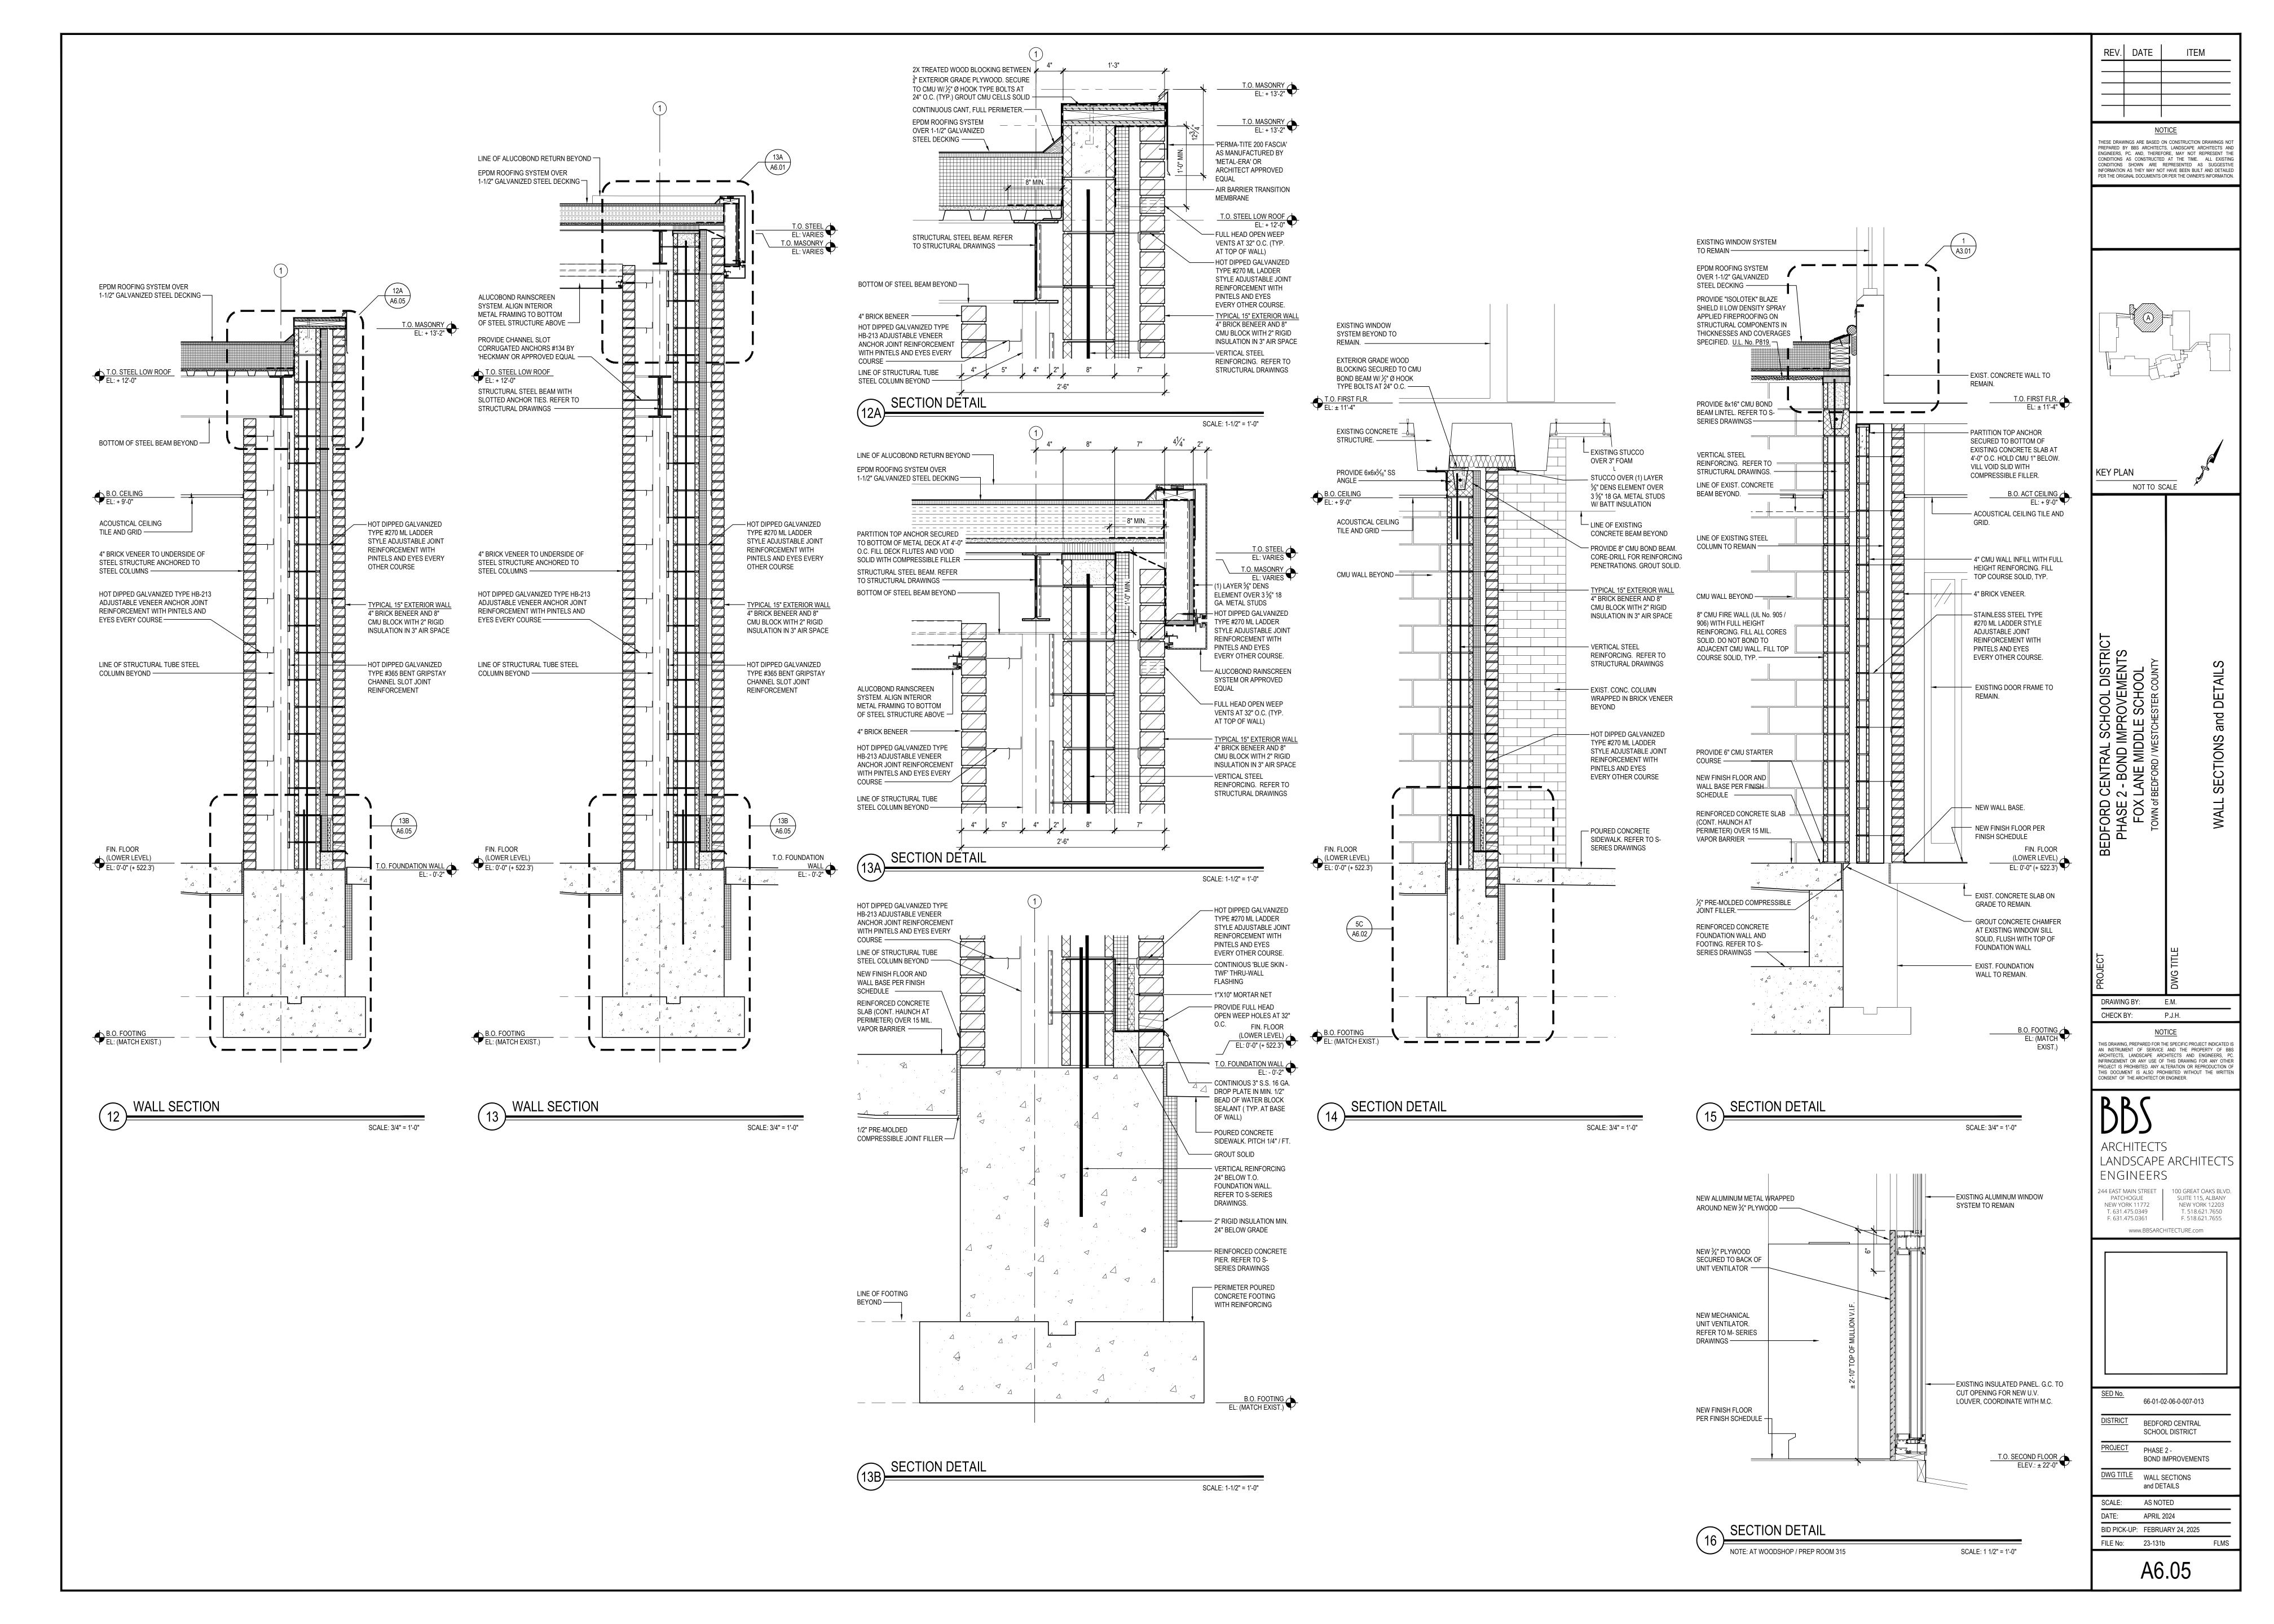

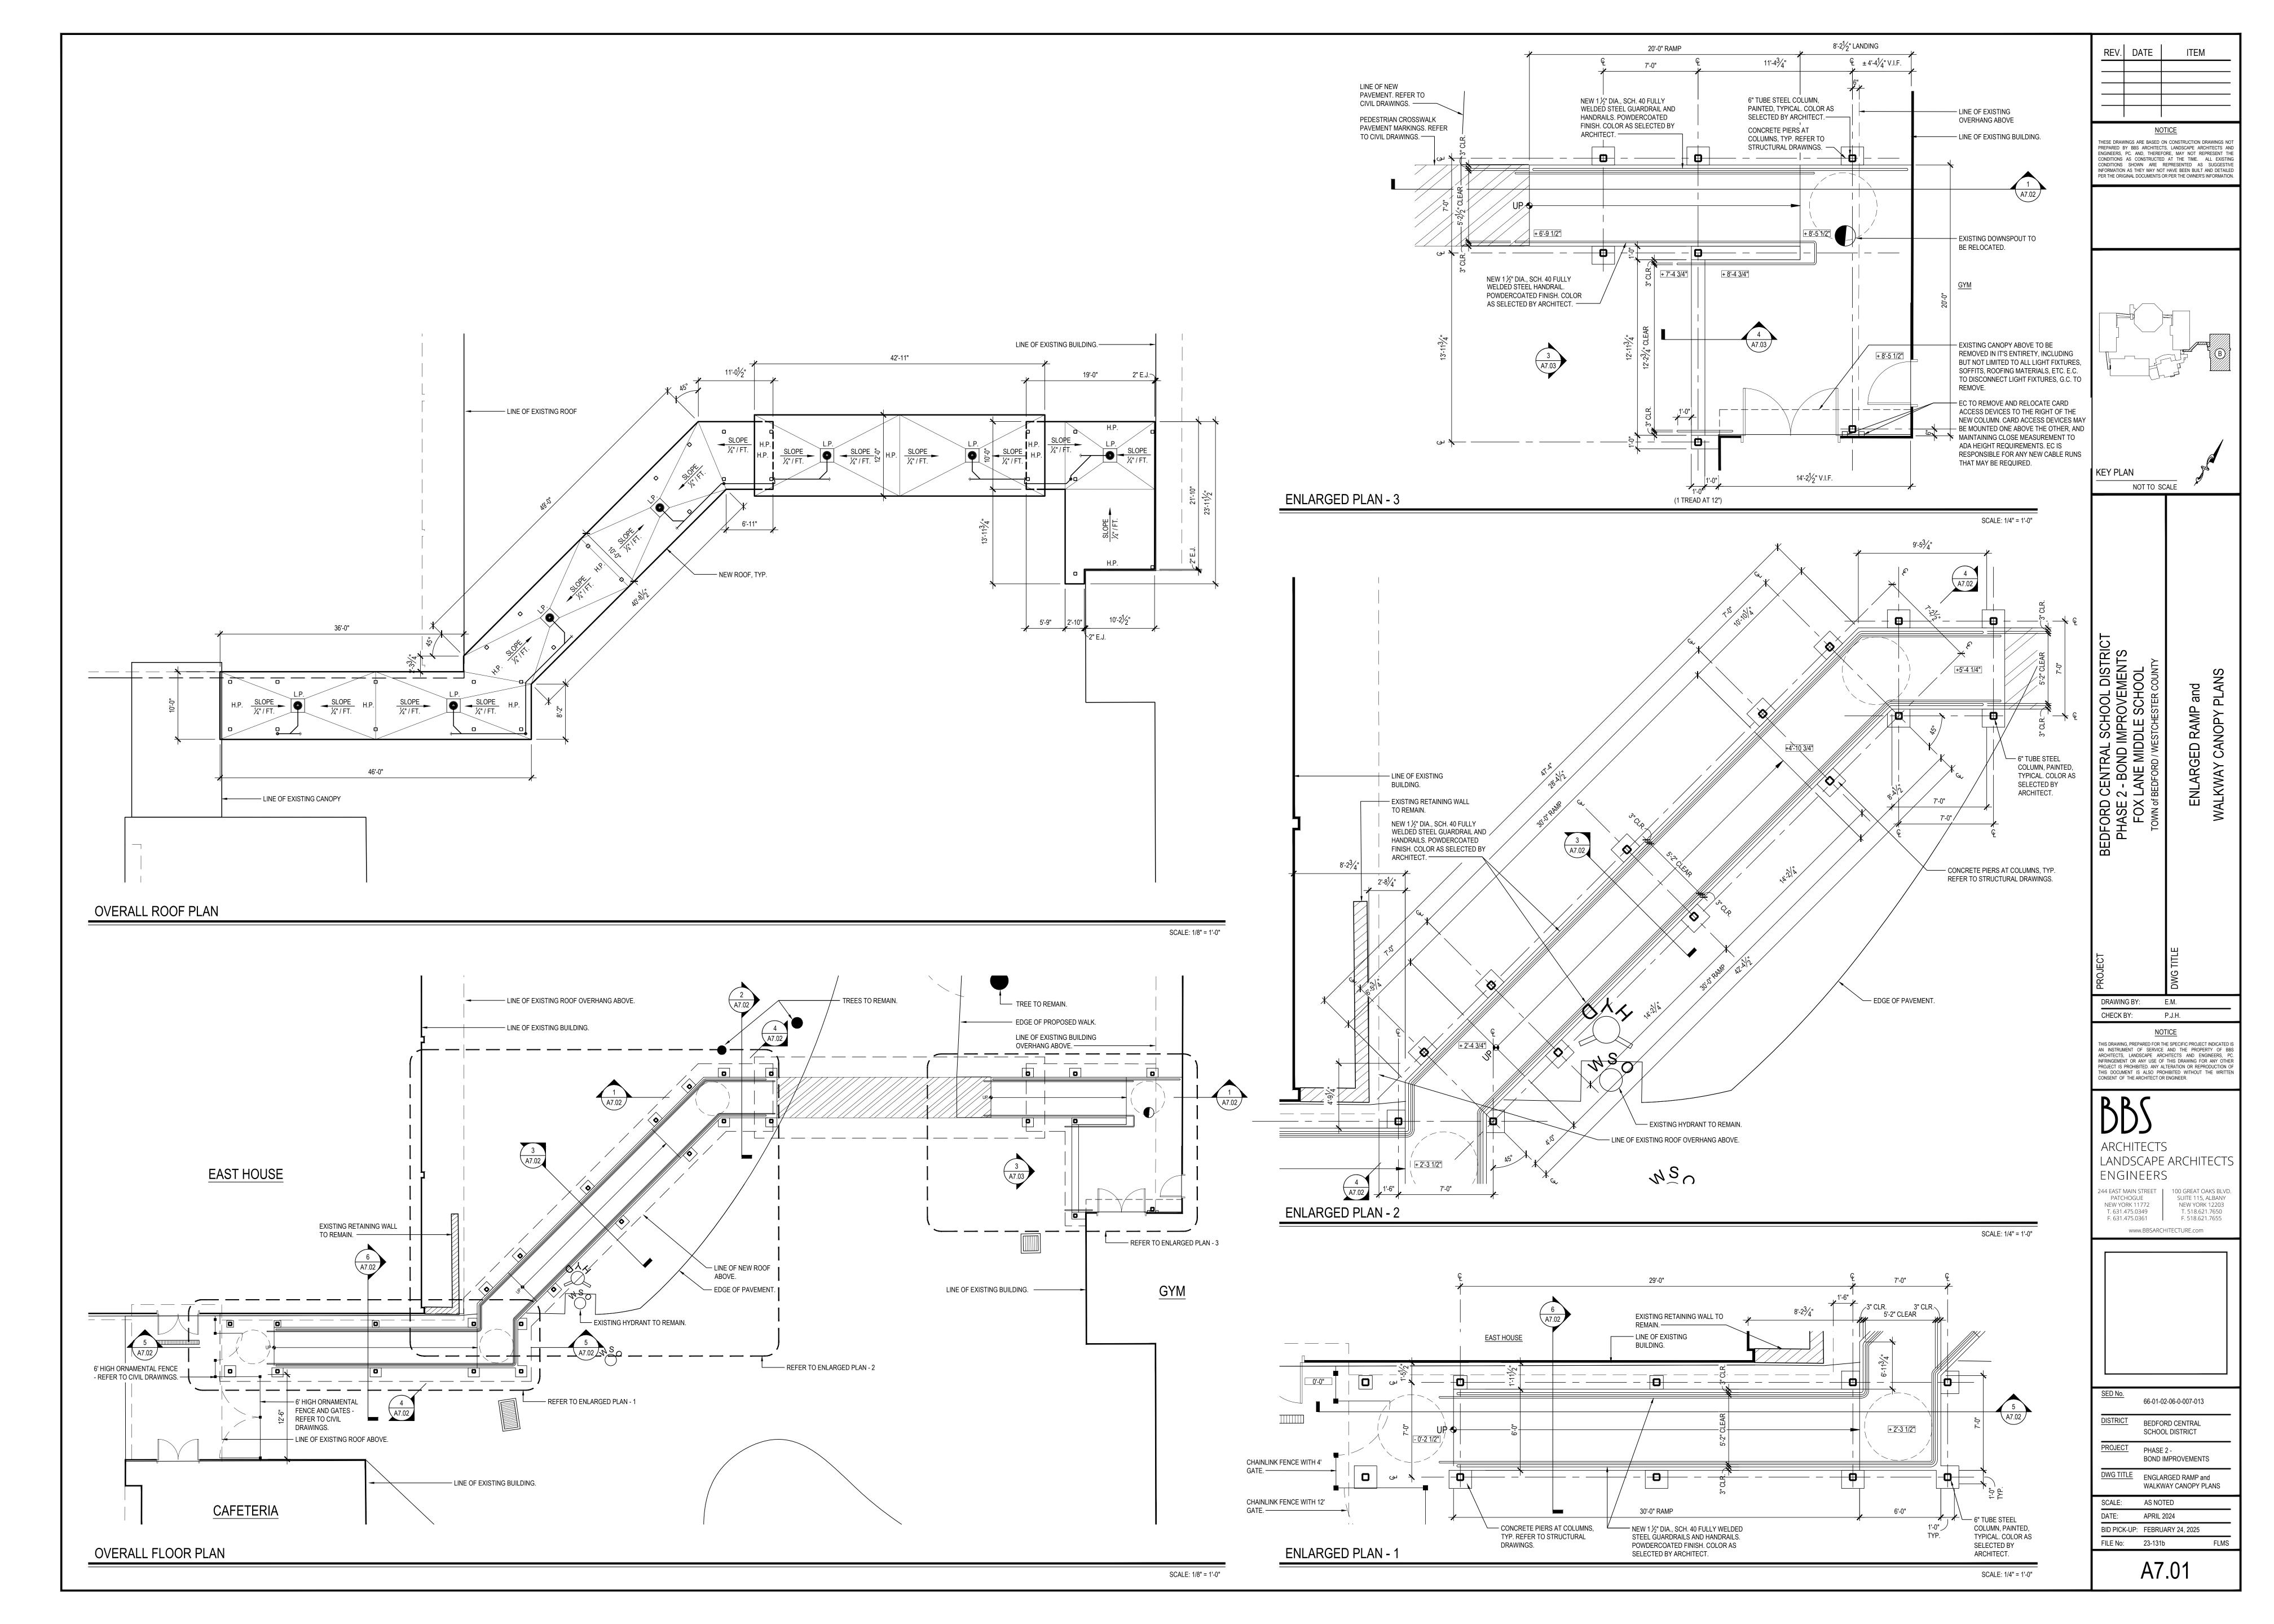

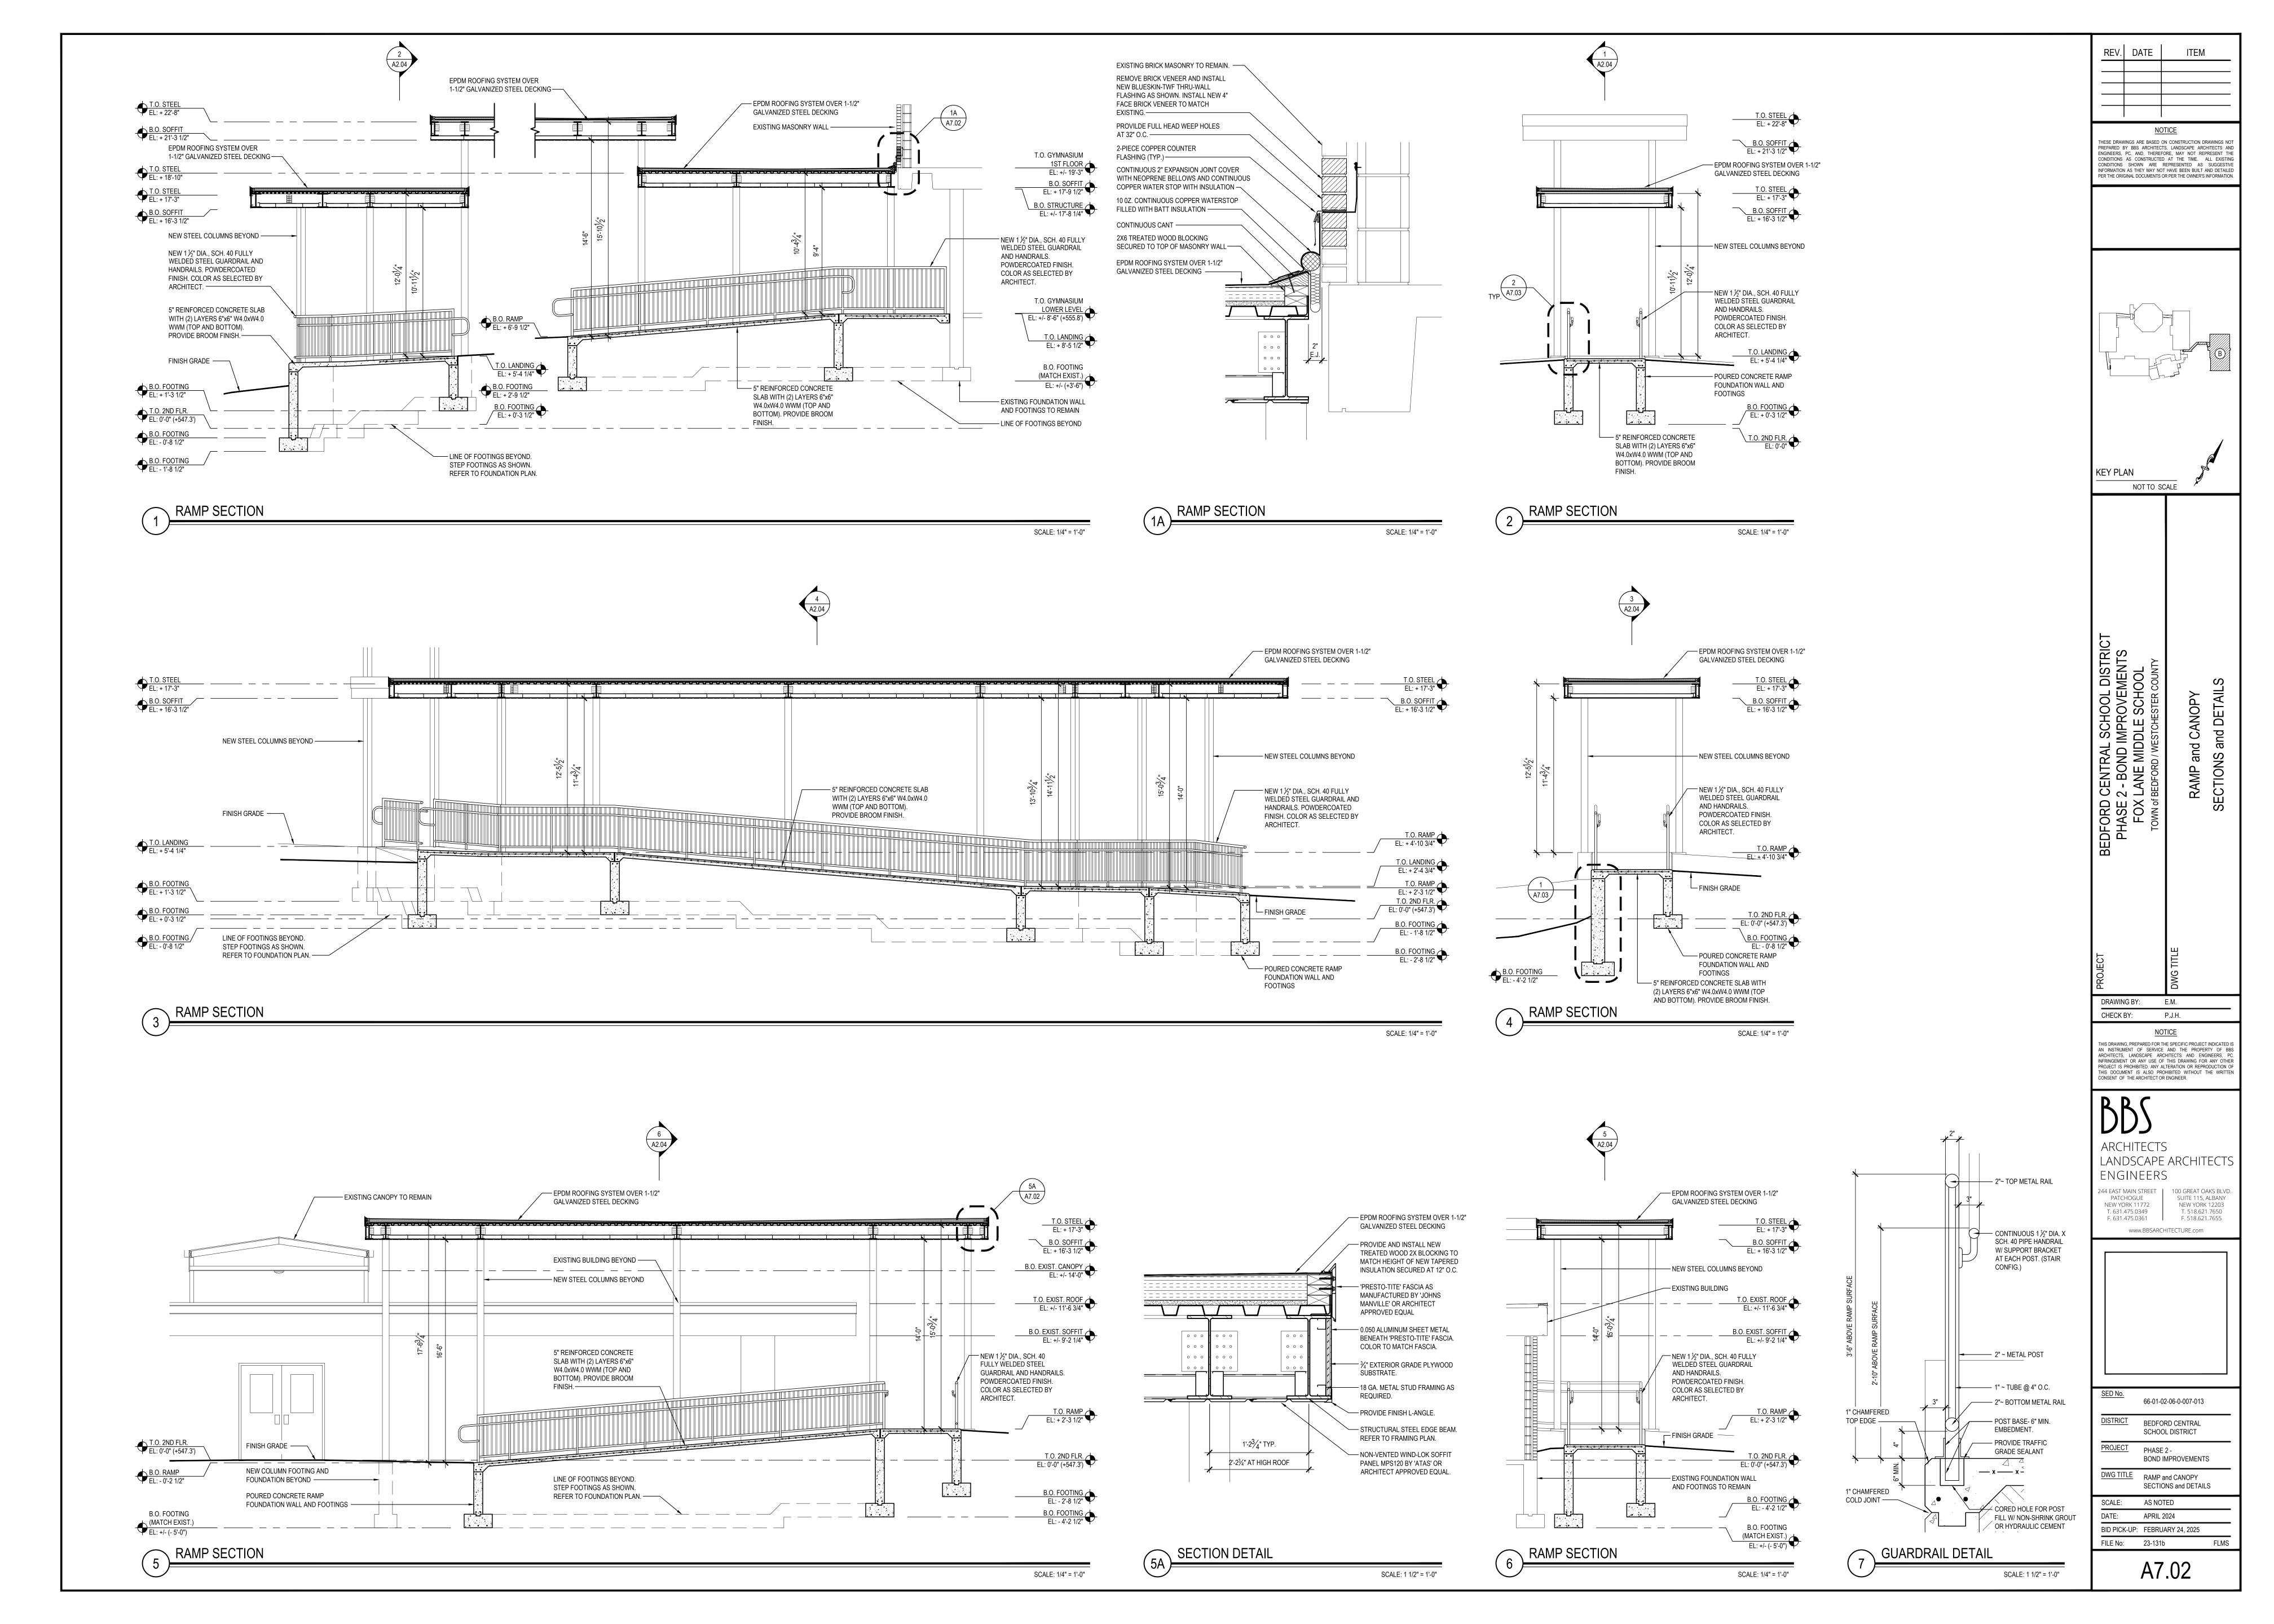

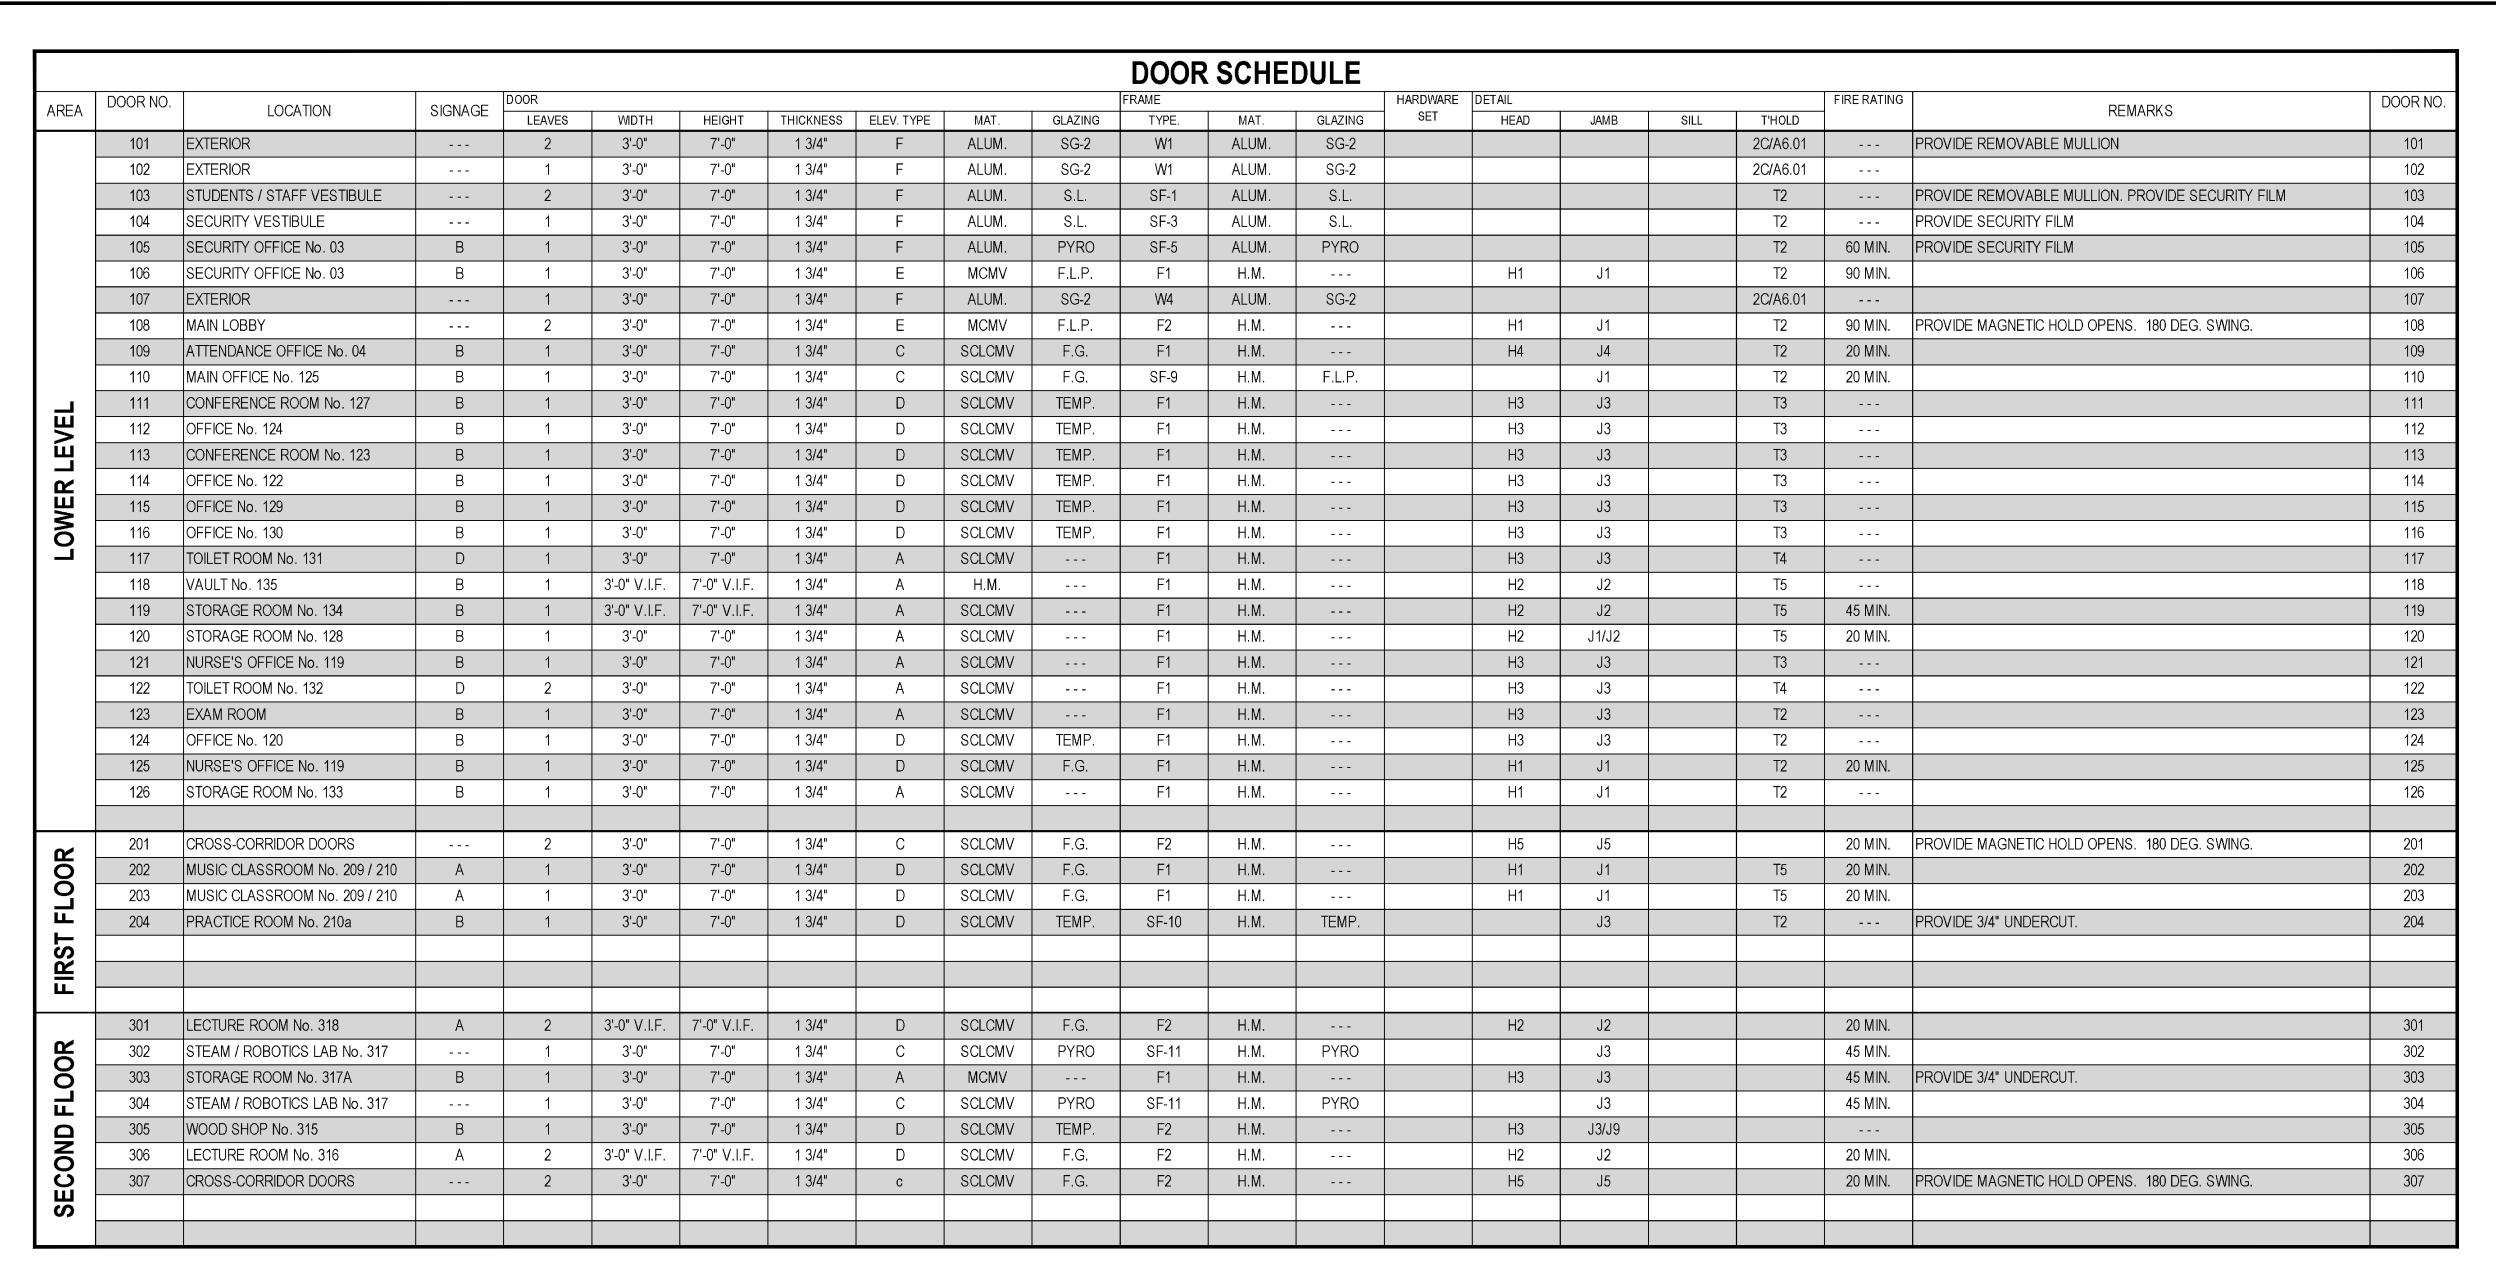


SHUTTER MOUNTED

SEE PLANS

AT B.O. CEILING

SCALE: 1/4" = 1'-0"

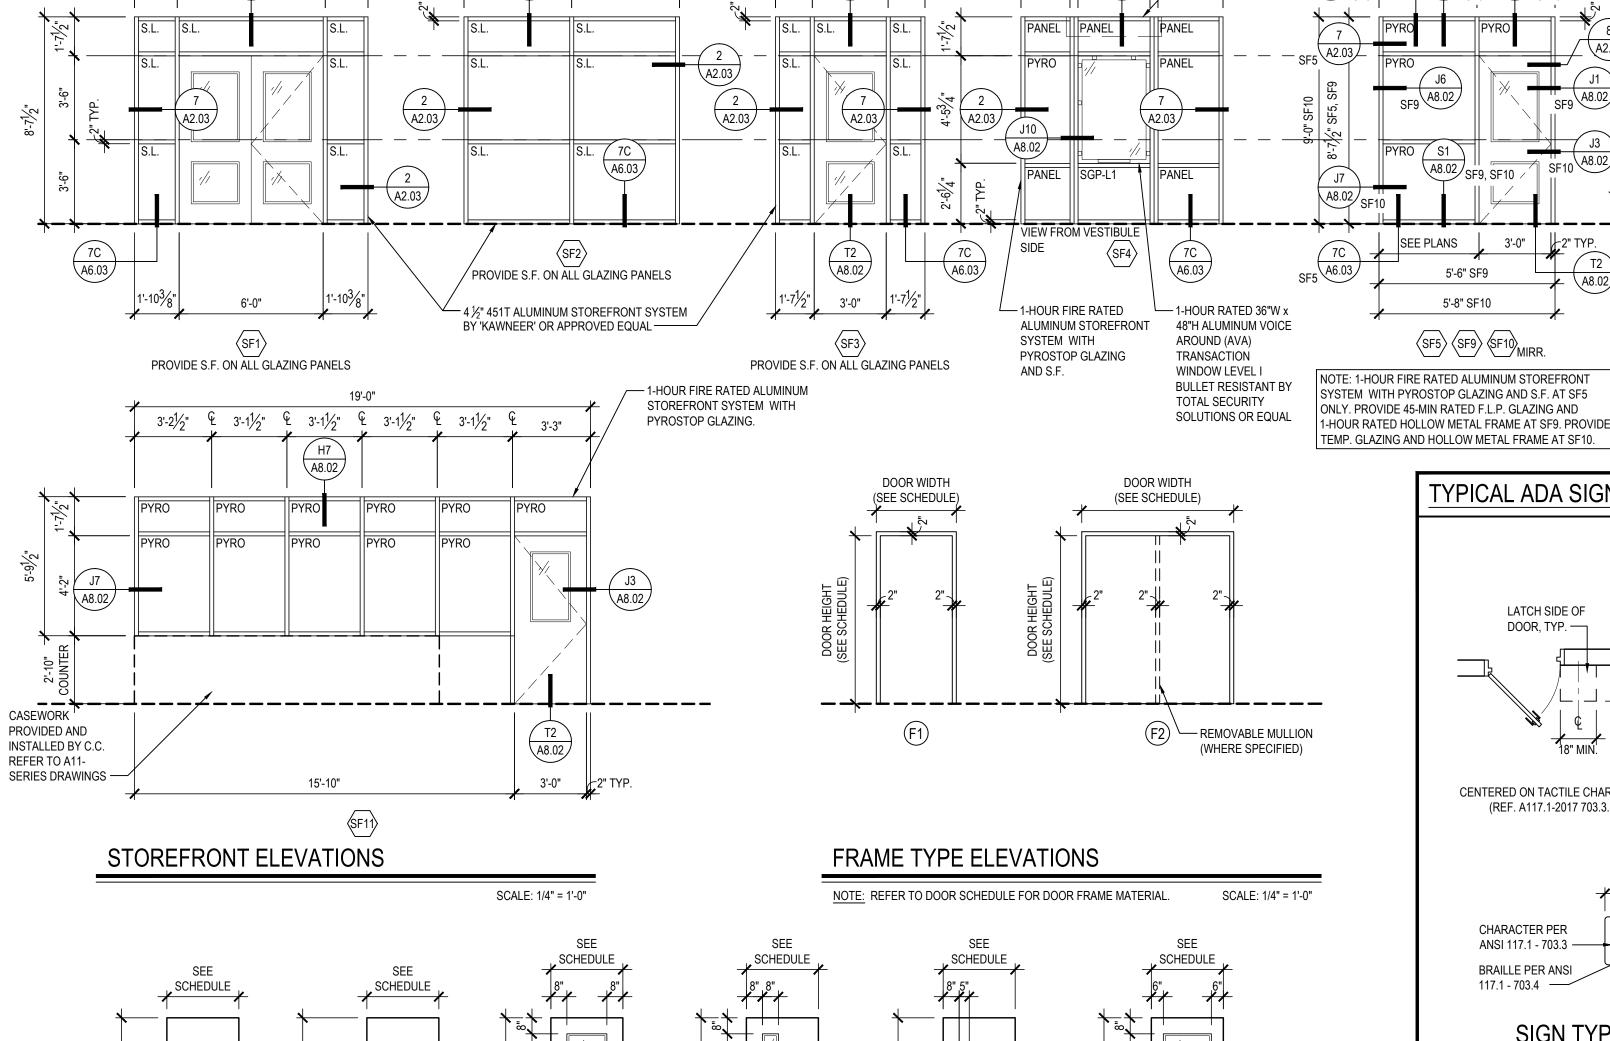


(A) — CENTERLINE OF

DOOR TYPE ELEVATIONS

HARDWARE (TYP.)

NOTE: REFER TO DOOR SCHEDULE FOR DOOR MATERIAL AND GLAZING TYPE (WHERE APPLICABLE)

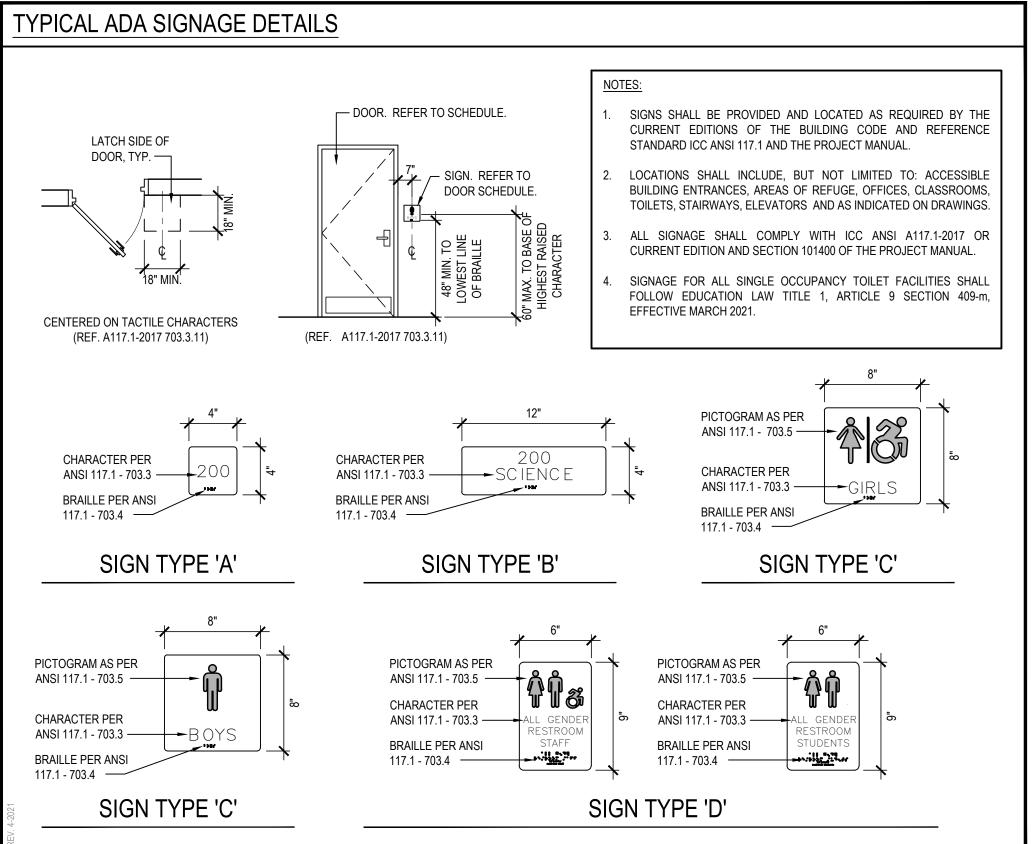

4'-1"

3'-0"

- 1-HOUR FIRE RATED

PYROSTOP GLAZING.

SYSTEM WITH

ALUMINUM STOREFRONT

- 1-HOUR FIRE RATED

PYROSTOP GLAZING.

SYSTEM WITH

ALUMINUM STOREFRONT

SHUTTER

MOUNTED AT

B.O. CEILING

- 2-HOUR FIRE RATED 36"W x

48"H ALUMINUM VOICE

TRANSACTION WINDOW

LEVEL I BULLET RESISTANT

AND 2-HOUR FIRE RATED

ALUMINUM STOREFRONT

GLAZING AND S.F.

SIDELIGHT WITH PYROSTOP

AROUND (AVA)

ABBREVIATION LEGEND	
ALUM ALUMINUM	S.F
S.C.L.C.O.V	SG-1
M.C.O.V	SG-2
S.C.L.C.M.V	SG-3
M.C.M.V	SG-4
F.R.P	SG-5
H.M	SG-6
F.G	BRG-L1
F.L.P	BRG-L2
PYRO	BRG-L3
JNSUL	SGP-L1 LEVEL 1. BULLET.RESISTANT SECURITY.PANEL
S.L.,, χ ", SAFETY, LAMINATED, GLAZING,	SGP-L2 LEVEL 2 BULLET RESISTANT SECURITY PANEL
OBS.C	SGP-L3 LEVEL 3 BULLET RESISTANT SECURITY PANEL
U.O.N	TEMP
. · ·	

 BRG-L1 LEVEL 1. BULLET.RESISTANT GLAZING		
 BRG-L2 LEVEL 2 BULLET.RESISTANT GLAZING		
 BRG-L3 LEVEL 3 BULLET RESISTANT GLAZING		
 SGP-L1 LEVEL 1 BULLET RESISTANT SECURITY PANEL		
 SGP-L2 LEVEL 2 BULLET RESISTANT SECURITY PANEL		
 SGP-L3 LEVEL 3 BULLET RESISTANT SECURITY PANEL		
 TEMP		
	ı I⊢	
		A
		\ \frac{\sqrt{2000}}{2000}

REV. DATE

ESE DRAWINGS ARE BASED ON CONSTRUCTION DRAWINGS N FPARED BY BBS ARCHITECTS LANDSCAPE ARCHITECTS AN

ONDITIONS AS CONSTRUCTED AT THE TIME. ALL EXIST

INFORMATION AS THEY MAY NOT HAVE BEEN BUILT AND DETAIL PER THE ORIGINAL DOCUMENTS OR PER THE OWNER'S INFORMAT

NOT TO SCALE

GENERAL CONTRACTOR SHALL COORDINATE ALL KEYING WITH OWNER.

DOOR NOTES

- FIRE RATED WOOD DOORS (45 MIN. AND ABOVE ONLY) SHALL HAVE SOLID MINERAL CORE, ALL OTHER WOOD DOORS SHALL HAVE SOLID COMPOSITE LUMBER CORE.
- FLUSH WOOD DOORS SHALL BE 5 PLY LAMINATED FACE SHEETS WITH 2 PLY FINISH VENEER OVER SPECIFIED CORE. AT FIRE RATED DOORS, TOP AND BOTTOM RAILS AND STILES SHALL BE FIRE RESISTANT COMPOSITION MATERIAL BONDED TO CORE. PROVIDE SOLID BLOCKING FOR CLOSER AND HARDWARE. REFER TO SPECIFICATION SECTION 081416.
- FLUSH WOOD DOORS AS MANUFACTURED BY 'VT INDUSTRIES' OR APPROVED EQUAL. SPECIES: SELECT WHITE MAPLE. COLOR: ALPINE, AL-18

ALL DOORS, FRAMES AND HARDWARE SHALL BE PROVIDED AND INSTALLED BY GENERAL CONTRACTOR UNLESS OTHERWISE NOTED

- ALL GLAZING IN DOORS SHALL BE INSTALLED IN METAL VISION KIT TO MATCH FIRE LABEL. VISION KIT COLOR SHALL BE AS SELECTED BY ARCHITECT. INTERIOR GLAZING TYPES AND SIZES SHALL CONFORM TO NFPA 80 AND/OR ASTM E119. WHERE SECURITY GLAZING IS INDICATED, VISION KIT SHALL BE THROUGH BOLT TYPE.
- ALL NEW H.M. FRAMES SHALL BE FULLY WELDED WRAP AROUND TYPE (UNLESS OTHERWISE NOTED OR DETAILED). THROATS SHALL BE SIZED ACCORDING TO WALL THICKNESS AND FINISH, REFER TO FLOOR PLAN AND ENLARGED DETAILS FOR ADDITIONAL INFORMATION.
- FOR DOOR REPLACEMENTS IN KIND, GENERAL CONTRACTOR SHALL MODIFY AND PATCH EXISTING WOOD OR H.M. DOOR FRAMES (DESIGNATED TO REMAIN) TO ACCOMMODATE NEW DOOR OPERATOR, LOCKSET, LATCH, HINGES, DOOR SWING AND/OR CLOSER, ETC. AS REQUIRED FOR COMPLETE AND FUNCTIONAL OPERATION.
- GENERAL CONTRACTOR IS RESPONSIBLE FOR VERIFYING HEIGHT AND WIDTH OF PROPOSED DOORS TO BE INSTALLED IN EXISTING FRAMES (PRIOR TO SHOP DRAWING SUBMITTAL) TO ENSURE PROPER FIT AND DOOR FUNCTION.
- ALL NEW HOLLOW METAL FRAMES AND HOLLOW METAL DOORS SHALL BE FINISH PAINTED. REFER TO SPECIFICATION SECTION 099000 FOR PAINT TYPE. COLOR AS SELECTED BY
- GENERAL CONTRACTOR SHALL PROVIDE AND INSTALL A.D.A. COMPLIANT SIGNAGE AT ALL DOORS WHERE SPECIFIED IN DOOR SCHEDULE AND/OR SHOWN ON FLOOR PLANS. INSTALL IN
- A. WHERE DENOTED IN SCHEDULE, PROVIDE 4"x4" SIGNAGE WITH BRAILLE INDICATING ROOM NUMBER (COORD. WITH OWNER), MODEL No. E-BTCUST. ▲ B. WHERE DENOTED IN SCHEDULE, PROVIDE 4"x12" SIGNAGE WITH BRAILLE INDICATING ROOM NAME AND NUMBER (COORD. WITH OWNER), MODEL No. E-BTCUST.
- · AT MULTI-USE TOILET ROOMS, PROVIDE AND INSTALL MODEL No. X-5687 (WOMEN), X-5672 (MEN), X-7095 (BOY'S), X-7096 (GIRL'S). AT MULTI-USE ACCESSIBLE TOILET ROOMS, PROVIDE AND INSTALL MODEL No. X-5688 (WOMEN), X-5671 (MEN), X-7108 (BOY'S), X-7107 (GIRL'S).
- ALL REMOVABLE MULLIONS ARE TO BE KEYED ALIKE AND TO MATCH EXISTING BUILDING SYSTEM.
- GENERAL CONTRACTOR. THE GENERAL CONTRACTOR IS RESPONSIBLE FOR ALL WIRING ASSOCIATED WITH AUTOMATIC DOOR OPERATORS, INCLUDING ELECTRONIC STRIKE, PUSH BUTTONS, TRANSFORMERS AND ANY OTHER DEVICES REQUIRED FOR A FULLY OPERATIONAL SYSTEM.
- FIRE RATED GLAZING WITH SURFACE APPLIED FILMS WILL NOT BE CONSIDERED EQUIVALENT WHERE LAMINATED FILM IS SPECIFIED.

STOREFRONT ENTRANCE and FRAMING NOTES

- REFER TO CODE COMPLIANCE DRAWINGS FOR WIND LOAD DESIGN CRITERIA.
- ALL EXTERIOR STOREFRONT, CURTAIN WALL AND EXTERIOR DOOR GLAZING SHALL BE 1" DIRECT GLAZED AS INDICATED UNLESS OTHERWISE NOTED. REFER TO PROJECT MANUAL FOR GLAZING TYPE AND CONFIGURATION.
- ALL STOREFRONT AND CURTAIN WALL FRAMING MEMBERS SHALL BE FACTORY FINISHED. COLOR: AS SELECTED BY ARCHITECT.
- STOREFRONT AND CURTAIN WALL SYSTEM SHALL BE SECURED TO STRUCTURE IN ACCORDANCE WITH MANUFACTURERS REQUIREMENTS TO MEET N.Y.S. WIND LOAD REQUIREMENTS.
- G.C. SHALL COORDINATE STOREFRONT / CURTAIN WALL OPENING LOCATIONS / QUANTITIES WITH FLOOR PLAN, ELEVATIONS, AND SCHEDULE G.C. SHALL SUBMIT SHOP DRAWINGS WITH CALCULATIONS TO SHOW COMPLIANCE WITH WIND PRESSURE LOADING, DEFLECTION AND MOVEMENT REQUIREMENTS. FRAME DEPTH 4 ½", MAX.
- FRAME DEPTH 6" (U.O.N.). EXTERIOR STOREFRONT FRAMING SYSTEM SHALL BE 4½" x 2" 'TRIFAB 451-T' BY 'KAWNEER'. INTERIOR STOREFRONT FRAMING SYSTEM SHALL BE 4½" x 2" 'TRIFAB 451' BY 'KAWNEER UNLESS
- OTHERWISE NOTED OR ARCHITECT APPROVED EQUAL. G.C. SHALL COORDINATE WIRING AND HARDWARE PREPARATION OF ELECTRONIC DOOR CONTROLS WITH E.C. FOR COMPLETE AND FUNCTIONAL OPERATION.

- SECURITY FILM (SF) SHALL BE 'SCOTCHSHIELD ULTRA S800' SAFETY AND SECURITY FILM AS MANUFACTURED BY '3M' OR ARCHITECT APPROVED EQUAL. LOCATIONS AS INDICATED ON THE
- SECURITY GLAZING (SG) AS MANUFACTURED BY 'ARMOURED ONE' OR ARCHITECT APPROVED EQUAL SHALL BE FROM THE FOLLOWING LIST. LOCATION AND TYPE AS INDICATED ON THE DRAWINGS. STRUCTURAL ADHESIVE SHALL BE USED TO BOND THE GLASS TO THE VISION KIT IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS. INSTALL SO FILM IS ON THE INBOARD (PROTECTED) SIDE.
 - SG-1: 5/6" SHOOTER / ATTACK / BOMB RESISTANT SECURITY GLASS, MODEL No. AOTSG516L
 - SG-3: 20 MINUTE FIRE RATED SHOOTER / ATTACK / BOMB RESISTANT SECURITY GLASS, MODEL No. AOTSG516FR
 - SG-5: 60 MINUTE FIRE RATED SHOOTER / ATTACK / BOMB RESISTANT SECURITY GLASS, MODEL No. AOTSG1616FR
- AS INDICATED ON THE DRAWINGS.

BRG-L1: PAS 1000 ¾"	BRG-L2: PAS 002 L/S 1"	BRG-L3: PAS 003 L/S 13/16"
THREAT SIDE	THREAT SIDE	THREAT SIDE
LAYER 1: 1/8" HEAT STRENGTHENED GLASS	LAYER 1: 1/4" ANNEALED GLASS	LAYER 1: 3/8" ANNEALED GLASS
LAYER 2: .05" URETHANE	LAYER 2: .025" URETHANE	LAYER 2: .025" URETHANE
LAYER 3: 3/8" POLYCARBONATE	LAYER 3: 3/8" ANNEALED GLASS	LAYER 3: 3/8" ANNEALED GLAS
LAYER 4: .05" URETHANE	LAYER 4: .05" URETHANE	LAYER 4: .05" URETHANE
LAYER 5: 1/8" HEAT STRENGTHENED GLASS	LAYER 5: 1/8" POLYCARBONATE	LAYER 5: 1/8" POLYCARBONATE
LAYER 6: .037 SPALL SHIELD	LAYER 6: .05 URETHANE	LAYER 6: .05 URETHANE
SAFE SIDE	LAYER 7: 3/6" ANNEALED	LAYER 7: 3/6" ANNEALED
·	GLASS	GLASS
	SAFE SIDE	SAFE SIDE

SECURITY GLAZING PANEL (SGP) SHALL BE LEVEL 1, 2 OR 3 BULLET RESISTANT COMPOSITE PANEL EQUAL. LOCATION AND TYPE AS INDICATED ON THE DRAWINGS.

SGP-L1: LEVEL 1 COMPOSITE PANEL SGP-L2: LEVEL 2 COMPOSITE PANEL LAYER 1: .032" ALUMINUM EXTERIOR SKIN LAYER 1: .032" ALUMINUM EXTERIOR SKIN LAYER 2: 4MM CEMENT BOARD LAYER 2: 4MM CEMENT BOARD LAYER 3: .25" BALLISTIC OPAQUE FIBERGLASS LAYER 4: .50" TYPE 'X' GYPSUM BOARD LAYER 5: .032" ALUMINUM INTERIOR SKIN

LAYER 3: .375" BALLISTIC OPAQUE FIBERGLASS LAYER 4: .50" TYPE 'X' GYPSUM BOARD LAYER 5: .032" ALUMINUM INTERIOR SKIN


TOTAL PANEL THICKNESS: 1" NOMINAL TOTAL PANEL THICKNESS: 11/8" NOMINAL NOTE: SKIN FINISH SHALL BE STANDARD KYNAR ON ALUMINUM (INTERIOR AND EXTERIOR)

THREAT SIDE LAYER 1: .032" ALUM LAYER 2: 4MM CEME LAYER 3: .50" BALLIS LAYER 4: .50" TYPE 'X' GYPSUM BOARD LAYER 5: .032" ALUMINUM INTERIOR SKIN SAFE SIDE

TOTAL PANEL THICKNESS: 11/4" NOMINAL

BID PICK-UP: FEBRUARY 24, 2025 FILE No: 23-131b

A8.01

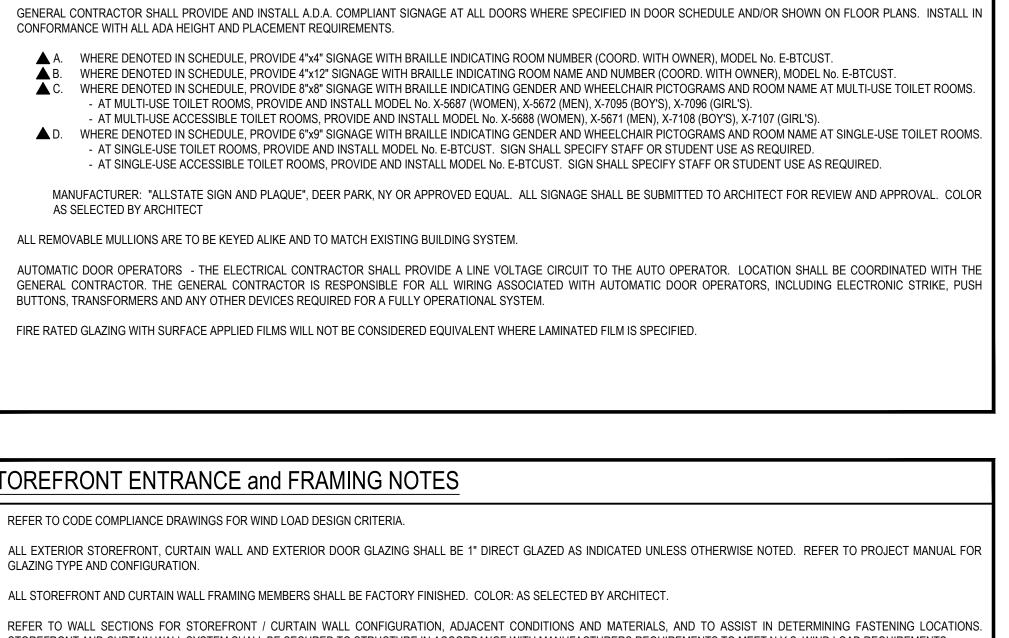

SECURITY GLAZING and PANEL NOTES

SG-2: 1" INSULATED SHOOTER / ATTACK / BOMB RESISTANT SECURITY GLASS, MODEL No. AOTSG1

SG-4: 45 MINUTE FIRE RATED SHOOTER / ATTACK / BOMB RESISTANT SECURITY GLASS, MODEL No. AOTSG1016FI

SG-6: 90 MINUTE FIRE RATED SHOOTER / ATTACK / BOMB RESISTANT SECURITY GLASS, MODEL No. AOTSG616FR

BULLET RESISTANT GLAZING (BRG) LEVEL 1, 2 OR 3 AS MANUFACTURED BY 'PATRIOT ARMOR' OR ARCHITECT APPROVED EQUAL SHALL BE FROM THE FOLLOWING LIST. LOCATION AND TYPE

BRG-L3: PAS 003 L/S 13/16"	
THREAT SIDE LAYER 1: 3/8" ANNEALED GLASS LAYER 2: .025" URETHANE LAYER 3: 3/8" ANNEALED GLASS LAYER 4: .05" URETHANE LAYER 5: 1/8" POLYCARBONATE LAYER 6: .05 URETHANE LAYER 7: 3/16" ANNEALED GLASS SAFE SIDE	
EL AS MANUFACTURED BY 'MAPES ARCHITECTURAL PANELS' OR ARCHITECT APPROVED	SED No.

SGP-L3: LEVEL 3 COMPOSITE PANEL	SED No.	66-01-02-06-0-007-013
THREAT SIDE LAYER 1: .032" ALUMINUM EXTERIOR SKIN LAYER 2: 4MM CEMENT BOARD	DISTRICT	BEDFORD CENTRAL SCHOOL DISTRICT
LAYER 3: .50" BALLISTIC OPAQUE FIBERGLASS LAYER 4: .50" TYPE 'X' GYPSUM BOARD	PROJECT	PHASE 2 - BOND IMPROVEMENTS

DWG TITLE DOOR SCHEDULE and ELEVATIONS SCALE: AS NOTED

APRIL 2024 DATE:

DRAWING BY:

CHECK BY:

HIS DRAWING, PREPARED FOR THE SPECIFIC PROJECT INDICATED
N INSTRUMENT OF SERVICE AND THE PROPERTY OF B

FRINGEMENT OR ANY USE OF THIS DRAWING FOR ANY OT

LANDSCAPE ARCHITECTS

www.BBSARCHITECTURE.com

SUITE 115, ALBANY

NEW YORK 12203

F. 518.621.7655

INSENT OF THE ARCHITECT OR ENGINEER.

ENGINEERS


4 EAST MAIN STREET

F. 631.475.0361

PATCHOGUE

NEW YORK 11772

PROJECT IS PROHIBITED. ANY ALTERATION OR REPRODUCTION (THIS DOCUMENT IS ALSO PROHIBITED WITHOUT THE WRITTE

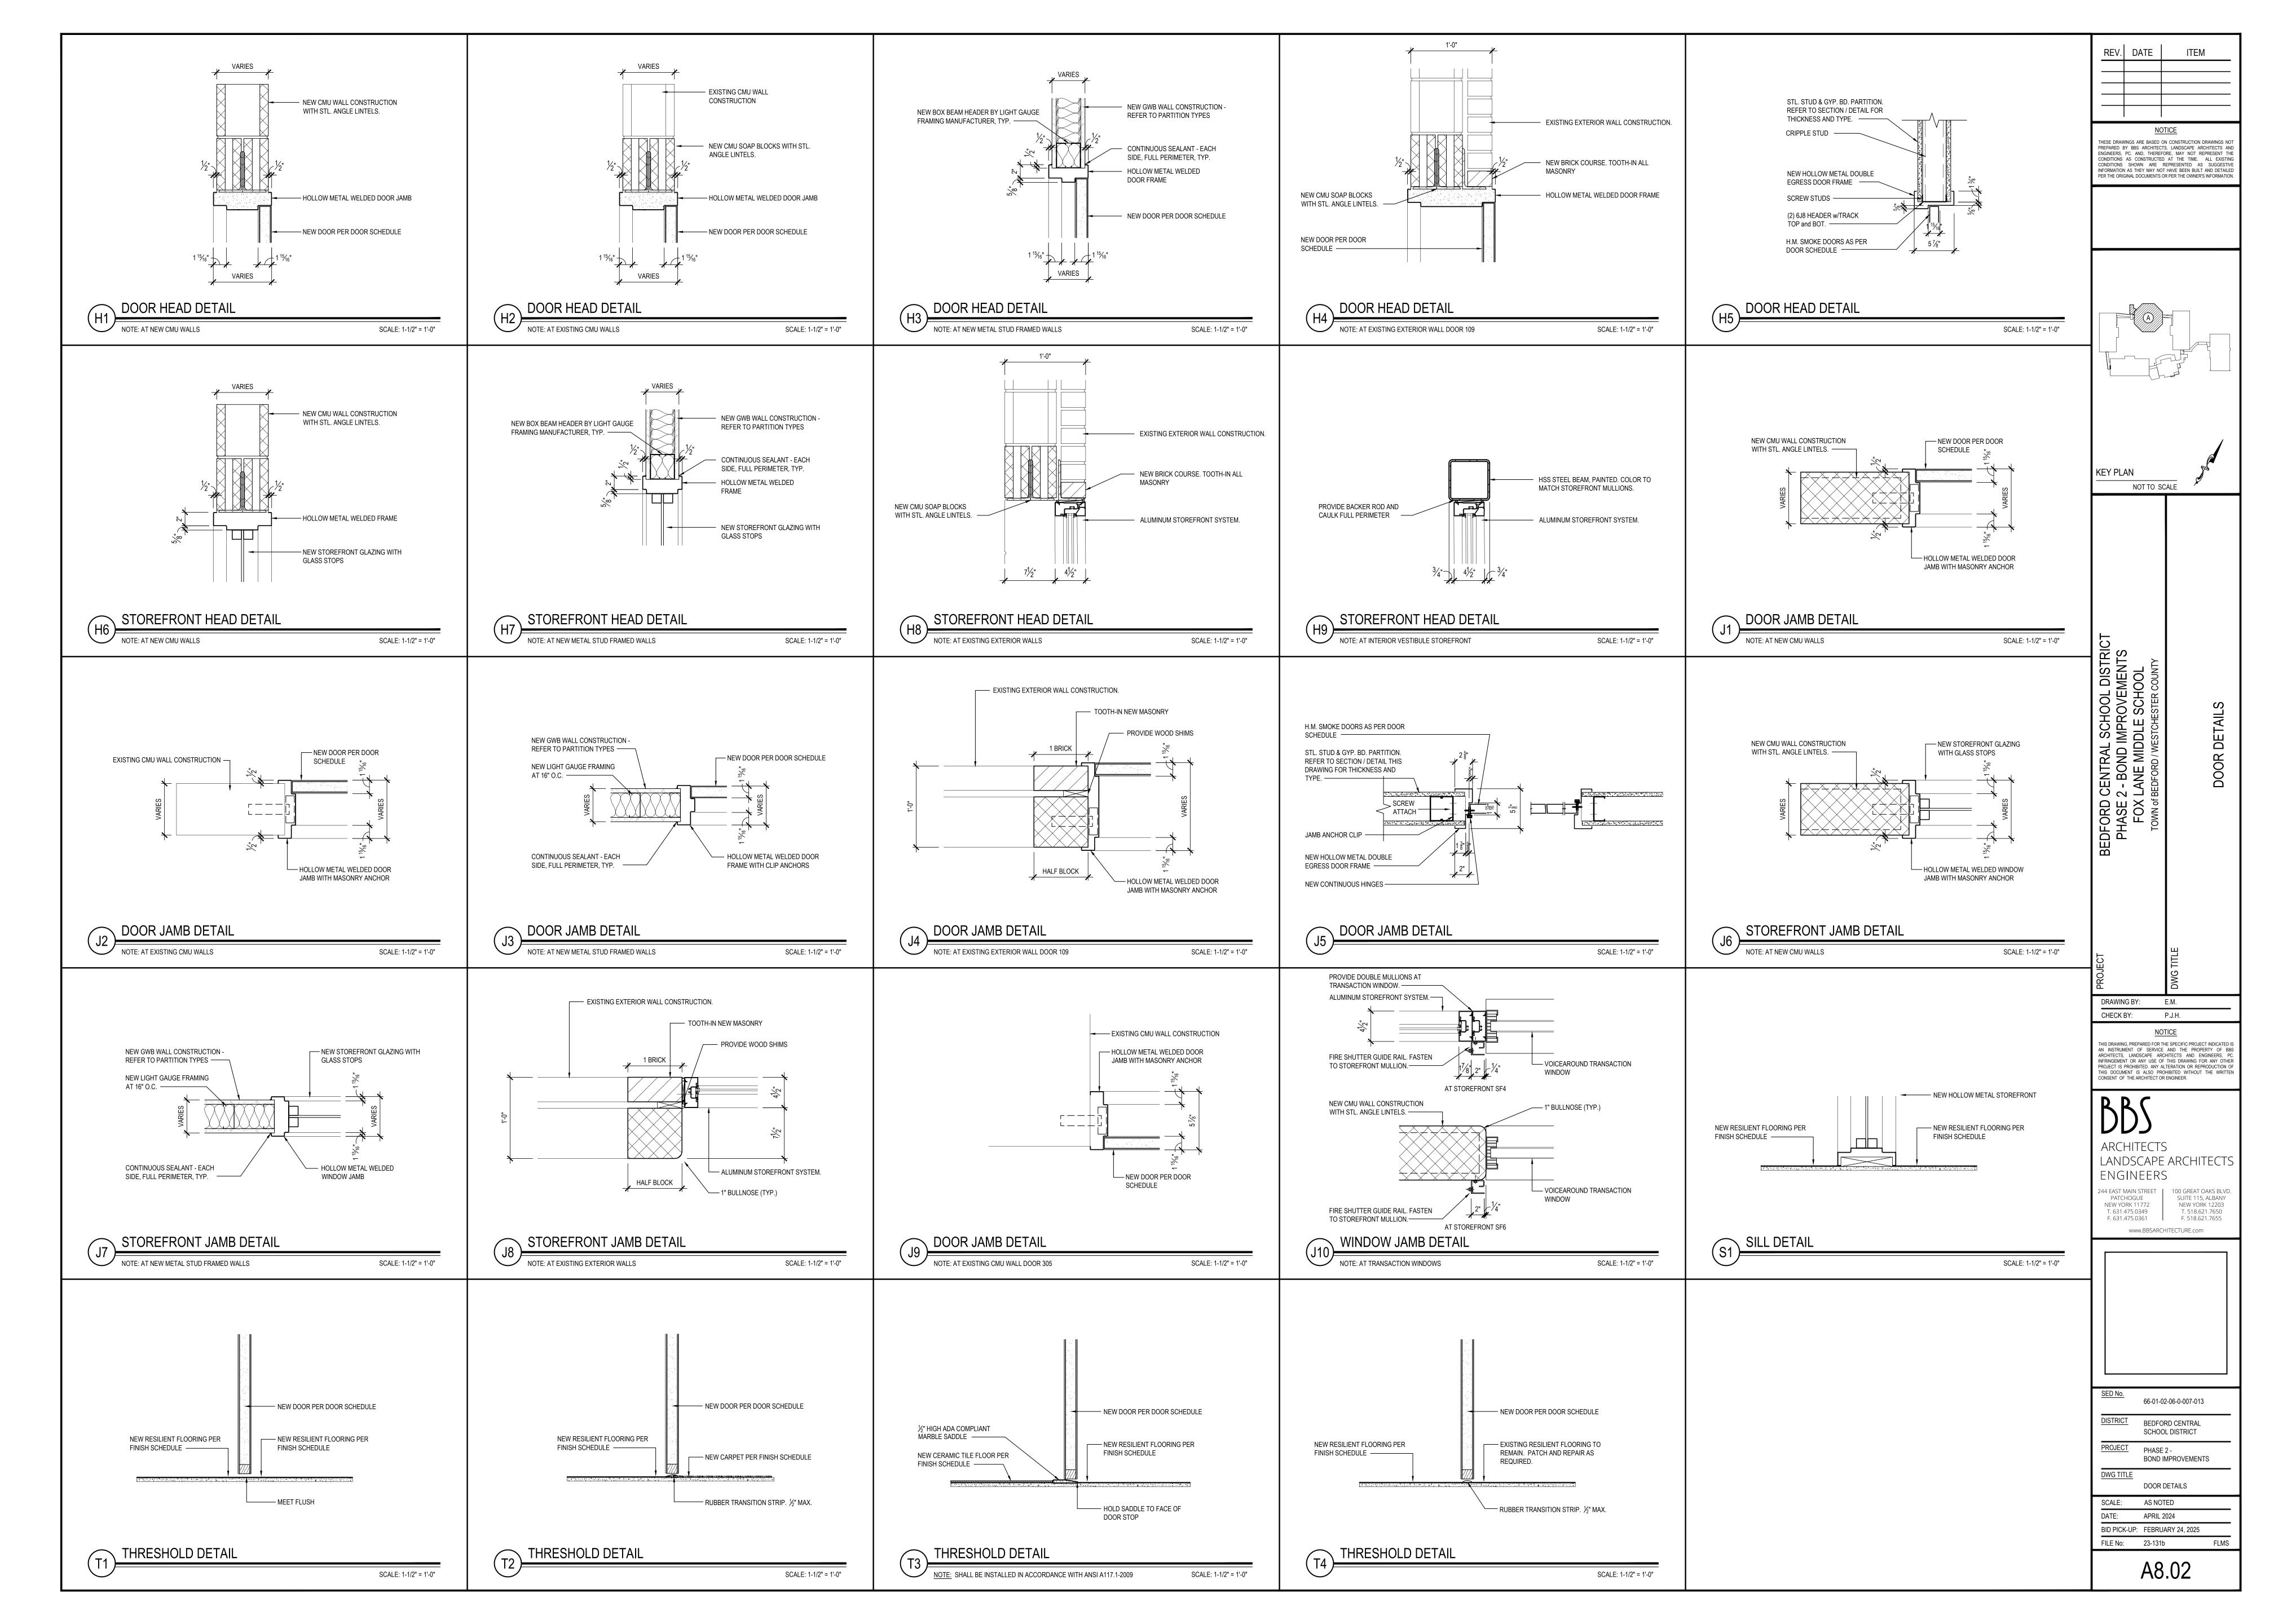

	FINISH SCHEDULE								
ROOM No.	LOCATION	FLOORS	1	la can	WALLS	I=	T	CEILINGS	REMARKS
		FIELD	ACCENT	BASE	TYPE.	FINISH	ACCENT		
	STUDENTS / STAFF VESTIBULE	CPT1		RCB1	GYP.	P1			
								A OT4	ALL BOOD EDAMES DO
									ALL DOOR FRAMES P6
			11) (70			<u> </u>			ALL DOOR FRAMES P6
									ALL DOOR FRAMES P6
			HVT2				P4		ALL DOOR FRAMES P6
									ALL DOOR FRAMES P6
									ALL DOOR FRAMES P6
									ALL DOOR FRAMES P6
120	OFFICE	HVT1		RCB1		P1	P4	ACT1	ALL DOOR FRAMES P6
122	OFFICE	HVT1		RCB1	GYP.	P1	P4	ACT1	ALL DOOR FRAMES P6
123	CONFERENCE ROOM	CPT2		RCB1	GYP.	P1	P4	ACT1	ALL DOOR FRAMES P6
124	OFFICE	CPT2		RCB1	GYP.	P1	P4	ACT1	ALL DOOR FRAMES P6
125	MAIN OFFICE	HVT1	HVT2	RCB1	GYP.	P1	P4	ACT1	ALL DOOR FRAMES P6
	KITCHEN	HVT1	HVT2	RCB1	GYP.	P1	P4	ACT1	ALL DOOR FRAMES P6
						P1	P4		ALL DOOR FRAMES P6
		2=							
129	OFFICE	CPT2		RCB1	GYP.	P1	P4	ACT1	ALL DOOR FRAMES P6
									ALL DOOR FRAMES P6
									ALL DOOR FRAMES P6
									ALL DOOR FRAMES P6
							OVVIZ		ALL DOOR FRAMES P6
		11711		INCDI	GIF.			ACIT	ALL DOOK I TAIVILS FO
130	STORAGE ROOM								
000/040	MUCIC OL ACCROOM	11/74	L)/TO	DODO	CVP		D4	A CT2 / CVD	ALL DOOD EDAMES DS
			LVIZ						ALL DOOR FRAMES P6
210A	PRACTICE ROOM	LV11		RCB2	GYP.	P1	P4	ACI3 / GYP.	ALL DOOR FRAMES P6
				RCB3		P2	P4		ALL DOOR FRAMES P5
316	INSTRUCTION CLASSROOM	EP1		RCB3	GYP.	P2	P4	EXPOSED - P3 / ACT4	ALL DOOR FRAMES P5
317	STEAM / ROBOTICS LAB	EP1		RCB3	GYP.	P2	P4	EXPOSED - P3 / ACT4	ALL DOOR FRAMES P5
317B	PROJECT STORAGE ROOM	EP1		RCB3	GYP.	P2	P4	EXPOSED - P3 / ACT4	ALL DOOR FRAMES P5
318	DESIGN / COLLABORATIVE CLASSROOM	EP1		RCB3	GYP.	P2	P4	EXPOSED - P3 / ACT4	ALL DOOR FRAMES P5
	02 03 04 05 119 119A 119B 119C 120 122 123 124 125 126 127 129 130 131 132 133 134 135 136 209/210 210A	02 SECURITY VESTIBULE 03 SECURITY OFFICE 04 ATTENDANCE OFFICE 05 MAIN LOBBY 119 NURSE'S OFFICE 119A EXAM ROOM 119C EXAM ROOM 120 OFFICE 122 OFFICE 123 CONFERENCE ROOM 124 OFFICE 125 MAIN OFFICE 126 KITCHEN 127 CONFERENCE ROOM 130 OFFICE 131 TOILET ROOM 132 TOILET ROOM 133 STORAGE ROOM 134 STORAGE ROOM 135 VAULT 136 STORAGE ROOM 209/210 MUSIC CLASSROOM 210A PRACTICE ROOM 315 WOOD SHOP / PREP ROOM 316 INSTRUCTION CLASSROOM 317 STEAM / ROBOTICS LAB 317B PROJECT STORAGE ROOM	02 SECURITY VESTIBULE CPT1 03 SECURITY OFFICE HVT1 04 ATTENDANCE OFFICE HVT1 05 MAIN LOBBY HVT1 119 NURSE'S OFFICE HVT1 119A EXAM ROOM HVT1 119B EXAM ROOM HVT1 119C EXAM ROOM HVT1 120 OFFICE HVT1 122 OFFICE HVT1 122 OFFICE HVT1 123 CONFERENCE ROOM CPT2 125 MAIN OFFICE HVT1 126 KITCHEN HVT1 127 CONFERENCE ROOM CPT2 129 OFFICE CPT2 130 OFFICE CPT2 131 TOILET ROOM PFT1 132 TOILET ROOM PFT1 133 STORAGE ROOM HVT1 134 STORAGE ROOM LVT1 209/210 MUSIC CLASSROOM LVT1 209/210	02 SECURITY VESTIBULE CPT1 03 SECURITY OFFICE HVT1 04 ATTENDANCE OFFICE HVT1 05 MAIN LOBBY HVT1 119 NURSE'S OFFICE HVT1 119A EXAM ROOM HVT1 119B EXAM ROOM HVT1 119C EXAM ROOM HVT1 120 OFFICE HVT1 121 OFFICE HVT1 122 OFFICE HVT1 123 CONFERENCE ROOM CPT2 124 OFFICE CPT2 125 MAIN OFFICE HVT1 HVT2 126 KITCHEN HVT1 HVT2 127 CONFERENCE ROOM CPT2 CPT2 130 OFFICE CPT2 CPT2 131 TOLET ROOM PFT1 133 STORAGE ROOM HVT1 LVT1 134 STORAGE ROOM HVT1 LVT2 209/210 MUSIC CLASSROOM EP1	02 SECURITY VESTIBULE OPTI RCB1 03 SECURITY OFFICE HVTI RCB1 04 ATTENDANCE OFFICE HVTI RCB1 05 MAIN LOBBY HVTI HVT2 RCB1 119 NURSE'S OFFICE HVTI HVT2 RCB1 119A EXAM ROOM HVTI RCB1 RCB1 119B EXAM ROOM HVTI RCB1 RCB1 119C EXAM ROOM HVTI RCB1 RCB1 120 OFFICE HVTI RCB1 RCB1 122 OFFICE HVTI RCB1 RCB1 122 OFFICE HVTI RCB1 RCB1 123 CONFERENCE ROOM CPT2 RCB1 RCB1 124 OFFICE CPT2 RCB1 RCB1 125 MAIN OFFICE HVT1 HVT2 RCB1 126 KITCHEN HVT1 HVT2 RCB1 127 CONFERENCE ROOM CPT2	Q2 SECURITY VESTIBULE	O2 SECURITY VESTIBULE CPT1 RCB1 GYP. P1	December December	OS SCURITY VERTIBULE CPT RG81 GYP. P1 ACT1 G8 ATTENDANCE OFFICE HYT1 RG81 GYP. P1 P4 ACT1 G8 ACT1 ACT1

PE VCT1:	12"x12"x1/8" VINYL COMPOSITE TILE AS MANUFACTURED BY ARMSTRONG FLOORING COLLECTION: STANDARD EXCELON IMPERIAL TEXTURE COLOR: TO BE SELECTED BY ARCHITECT (EXISTING 2ND LEVEL CORRIDOR- MATCH EXIST. COLORS/PATTERN)
PE VCT2:	12"x12"x1/8" VINYL COMPOSITE TILE AS MANUFACTURED BY ARMSTRONG FLOORING COLLECTION: STANDARD EXCELON IMPERIAL TEXTURE COLOR: TO BE SELECTED BY ARCHITECT (EXISTING 2ND LEVEL CORRIDOR- MATCH EXIST. COLORS/PATTERN)
E SVT1:	36" x 36" x 3.2mm SOLID VINYL TILE AS MANUFACTURED BY PATCRAFT COLLECTION: NUMIX COLOR: SEPIA FLECK INSTALL METHOD: MONOLITHIC - GLUE DOWN (NEW ADDITION / FIRST FLOOR CORRIDOR / NURSE/ MAIN OFFICE)
E SVT1:	36" x 36" x 3.2mm SOLID VINYL TILE AS MANUFACTURED BY PATCRAFT COLLECTION: NUMIX COLOR: SEPIA SOLID INSTALL METHOD: MONOLITHIC - GLUE DOWN (NEW ADDITION / FIRST FLOOR CORRIDOR / NURSE/ MAIN OFFICE)
E LVT1:	9"x59"x5MM" LUXURY VINYL TILE AS MANUFACTURED BY MOHAWK COMMERCIAL FLOORING COLLECTION: HOT ND HEAVY - LINEATE , 20 MIL COLOR: 948 FIGURED INSTALLATION: GLUE DOWN, ASHLAR (MUSIC EXPLORATION)
RPET:	
E CPT1:	24" X 24" CARPET TILE AS MANUFACTURED BY INTERFACE STEP REPEAT COLLECTION, SR899, MONOLITHIC INSTALLATION COLOR: TO BE SELECTED BY ARCHITECT (VESTIBULES)
E CPT2:	24" X 24" CARPET TILE AS MANUFACTURED BY INTERFACE STEP REPEAT COLLECTION, SR899, MONOLITHIC INSTALLATION COLOR: TO BE SELECTED BY ARCHITECT
XY:	
PE EP1:	ACCELERA C 100% SOLIDS, DECORATIVE VINYL CHIP EPOXY FLOORING SYSTEM AS MANUFACTURED BY DURAFLEX OR EQUAL. STYLE: MACROCHIP COLOR: CUSTOM MULTICOLOR PREBLEND BY ARCHITECT (STEAM LABS)

PAINT '	TYPES	
TYPE P1:	PAINT BY SHERWIN WILLIAMS: LATEX EGGSHELL ENAMEL FINISH COLOR: TO BE SELECTED BY ARCHITECT (CORRIDORS & GENERAL)	
TYPE P2:	PAINT BY SHERWIN WILLIAMS: LATEX EGGSHELL ENAMEL FINISH COLOR: TO BE SELECTED BY ARCHITECT (WHITE)	
TYPE P3:	PAINT BY SHERWIN WILLIAMS: LATEX EGGSHELL ENAMEL FINISH COLOR: TO BE SELECTED BY ARCHITECT (MEDIUM GREY)	
TYPE P4:	PAINT BY SHERWIN WILLIAMS: LATEX EGGSHELL ENAMEL FINISH COLOR: TO BE SELECTED BY ARCHITECT (RED)	
TYPE P5:	PAINT BY SHERWIN WILLIAMS: DTM ALKYD SEMI-GLOSS ENAMEL COLOR: TO BE SELECTED BY ARCHITECT (HM DOOR FRAMES-BLACK)	
TYPE P6:	PAINT BY SHERWIN WILLIAMS: DTM ALKYD SEMI-GLOSS ENAMEL COLOR: TO BE SELECTED BY ARCHITECT (HM DOOR FRAMES-GRAY)	
TYPE P7:	PAINT BY SHERWIN WILLIAMS: LATEX FLAT ENAMEL FINISH COLOR: WHITE (GYP. BD SOFFIT AND CEILINGS)	

CEILING TYPES

TYPE ACT1: ACOUSTIC CEILING TILE BY "ARMSTRONG" SIZE: 24" X 24" X 3/4"

TYPE ACT2: ACOUSTIC CEILING TILE BY "ARMSTRONG"

TYPE ACT3: ACOUSTIC CEILING TILE BY "ARMSTRONG"

(TOILET ROOMS)

STYLE: #1910 ULTIMA SQUARE LAY-IN

(CLASSROOMS, OFFICES, CORRIDORS)

SIZE: 24" X 24" X 7/8", NRC RATING .80

SIZE: 24" X 24" X 1", NRC RATING .95 STYLE: #3250 OPTIMA SQUARE TEGULAR

STYLE: #1445 ULTIMA HEALTH ZONE HIGH NRC, SQUARE LAY IN

	(MUSIC ROOMS, PRACTICE ROOMS)
TYPE ACT4:	1" THICK TECTUM DIRECT ATTACH HIGH NRC. CEILING PANELS AS MANUFACTURED BY "ARMSTRONG"- SHORT EDGES SQUARE. SIZE: 12"W X LENGTH VARRIES- REFER TO A10.01 PANEL SIZES CAN EITHER BE MADE-TO-ORDER OR FIELD CUT COLOR: RED
TYPE ACT5:	GYPSUM WALLBOARD, SQUARE EDGE LAY-IN. SIZE: 24"X24"X5/8" PRIME & PAINT WALLBOARD BM READY-MIX WHI PRIOR TO INSTALLING.
CEILING CDID I	BY "ARMSTRONG", 15/16" PRELUDE, U.O.N.
	ING TILE & GRID TO BE STANDARD WHITE UNLESS OTHERWISE NOTED
	ING TILE & GRID TO BE STANDARD WHITE UNLESS OTHERWISE NOTED
NOTE: ALL CEIL	ING TILE & GRID TO BE STANDARD WHITE UNLESS OTHERWISE NOTED
NOTE: ALL CEIL	
NOTE: ALL CEIL	R BASE TYPES 4" RUBBER COVE BASE BY "JOHNSONITE"

PORCE	LAIN/CERAMIC/QUARRY TILE TYPES
FLOORS:	
TYPE PFT1:	12" X 12" PORCELAIN FLOOR TILE BY DALTILE STYLE: HARMONIST COLOR: TO BE SELECTED BY ARCHITECT (BATHROOM FLOOR TILE)
WALLS:	
TYPE CWT1:	3" X 6" CERAMIC WALL TILE BY DALTILE STYLE: CLASSIC COLOR WHEEL COLOR: TO BE SELECTED BY ARCHITECT (BATHROOM WALL FIELD TILE)

COLOR: TO BE SELECTED BY ARCHITECT (BATHROOM WALL ACCENT TILE) COVE BASE: TYPE CTCB1: 3" X 6" CERAMIC TILE FLAT TOP COVE BASE BY DALTILE

COLOR: TO BE SELECTED BY ARCHITECT

STYLE: COLOR WHEEL A3361

(BATHROOM COVE BASE)

AMERICAN OLEAN COLOR APPEAL GLASS MOSAICS

SCHLUTER TRANSITIONS:

TYPE CWT2: 6" ACCENT BAND 1" X 1"

TYPE SCH1: PROVIDE SCHLUTER DILEX-AHK SANITARY COVE TRANSITION, INCLUDE ALL INSIDE CORNERS, CONNECTORS AND END CAPS AS REQUIRED BY LAYOUT. ANODIZED ALUMINUM FINISH (COVE BASE)

TYPE SCH2: PROVIDE SCHLUTER DILEX-AHKA COVE TRANSITION, INCLUDE ALL INSIDE CORNERS, CONNECTORS AND END CAPS AS REQUIRED BY LAYOUT. ANODIZED ALUMINUM FINISH (COVE BASE)

PROVIDE SCHLUTER JOLLY AT TOP COURSE OF TILE, INCLUDE ALL OUTSIDE CORNERS, CONNECTORS AND END CAPS AS REQUIRED BY LAYOUT. ANODIZED ALUMINUM FINISH

GROUT TYPES

FLOOR GROUT: AS MANUFACTURED BY LATICRETE OR MAPEI, SANDED, COLOR: TO BE SELECTED BY ARCHITECT

COLOR: TO BE SELECTED BY ARCHITECT

WALL GROUT: AS MANUFACTURED BY LATICRETE OR MAPEI, UNSANDED,

ACT ACOUSTIC CEILING TILE CTILE CARPET TILE	
PFT PORCELIAN FLOOR TILE CMU CONCRETE MASONRY UNIT	
CTCB	
CWT	
EPOXY EPOXY TERRAZZO	VCT

- ALL FINISHED TYPES (STYLE/COLOR/PATTERN) SHALL BE OFF THE STANDARD OF QUALITY INDICATED BY THE PROJECT MANUAL. FINAL STYLE / COLOR / PATTERN TO BE SELECTED BY
- . ALL C.M.U. SURFACES SHALL BE PRIMED WITH INTERIOR & EXTERIOR BLOCK FILLER M88 INDUSTRIAL MAINTENANCE BY BENJAMIN MOORE PRIOR TO FINISH PAINT APPLICATION.
- . ALL NEW BRICK WALLS ARE TO REMAIN NATURAL, CLEANED AND SEALED, IN ACCORDANCE WITH MANUFACTURER'S SPECIFICATIONS.
- 4. CONTRACTOR SHALL PREP, PRIME AND PAINT ALL SHEET METAL PIPE ENCLOSURES (INSTALLED BY M.C.) COLOR AS SELECTED BY ARCHITECT.
- BEFORE PAINTING, CONCRETE SURFACES MUST CURE 30 DAYS, BLOCK AND PLASTER SURFACES MUST CURE FOR 30 DAYS
- ALL INTERIOR FINISHES IN CORRIDOR SHALL BE 'CLASS A' RATED.

REFER TO REFLECTED CEILING PLANS AND FINISH FLOOR PLANS FOR ADDITIONAL INFORMATION.

- . PATCH, REPAIR AND FINISH CEILING, WALLS, AND FLOOR AT POINTS OF DEMOLITION TO MATCH EXISTING. EXISTING FINISHES TO REMAIN.
- SHOULD ANY FINISH MATERIALS BE DISCONTINUED BY MANUFACTURER, THE CONTRACTOR MUST REPLACE WITH CLOSEST MATCH AT NO ADDITIONAL COST, AND SUBMIT TO ARCHITECT FOR APPROVAL PRIOR TO INSTALLATION.
- AT ROOMS HAVING EXISTING FLOOR TILE TO BE REMOVED AND / OR ABATED, CONTRACTOR SHALL PROVIDE AND INSTALL FLOOR PATCH (PLANI/PATCH PLUS) BY 'MAPEI' OR ARCHITECT APPROVED EQUAL OVER ENTIRE EXISTING SUBSTRATE AND / OR CONCRETE SLAB TO PROVIDE A FLOOR SURFACE IN ACCORDANCE WITH MANUFACTURER'S SPECIFICATIONS AND AS SPECIFIED FOR INSTALLATION OF FINISH FLOORING AS SPECIFIED ON FINISH SCHEDULE.
- . HOLLOW METAL DOOR FRAMES, SIDE LIGHTS AND WINDOW FRAMES SHALL BE PREPPED AND PAINTED AS PER PAINTING SPECIFICATION 099000. (ALL COLORS AS SELECTED BY ARCHITECT.
- 12. CONTRACTOR SHALL PREP, PRIME AND PAINT SHEETROCK CEILINGS UNLESS OTHERWISE NOTED.
- 3. REFER TO FINISH FLOOR PLANS FOR TILE PATTERNS THE TILE PATTERNS MAY NOT REPRESENT THE FINAL PATTERNS TO BE DESIGNED, INSTALLED AND TURNED OVER TO OWNER. THE BID SHALL BE BASED ON THE TILE MIX AND PERCENTAGES AS INDICATED IN THE PROJECT MANUAL.
- 4. ALL FINISHES SHALL BE PROVIDED AND INSTALLED BY GENERAL CONTRACTOR UNLESS OTHERWISE NOTED.
- 15. REFER TO REFLECTED CEILING PLANS, TOILET ROOM TILE PLANS AND FINISHED FLOOR PLANS FOR ADDITIONAL FINISH INFORMATION.
- 16. NEW TOILET AND URINAL PARTITIONS SHALL BE 1" THICK HDPE AS MANUFACTURED BY SCRANTON, ASI GLOBAL PARTITIONS, OR APPROVED EQUAL. (COLOR AND FINISH TO BE SELECTED BY ARCHITECT).

GYPSUM BOARD FINISHING

GENERAL CONTRACTOR SHALL CONFORM TO THE REQUIREMENTS OF GYPSUM ASSOCIATION TRADE PUBLICATION GA-214-96 'RECOMMENDED LEVELS OF GYPSUM BOARD FINISH' AND SPECIFICATION SECTION 092900.

- A. LEVEL 0 FOR USE IN TEMPORARY CONSTRUCTION, OR WHERE FINAL FINISH/DECORATION HAS NOT BEEN DETERMINED.
- B. LEVEL 1 FOR USE AT PLENUM AREAS, ABOVE CEILING, IN ATTICS & IN AREAS WHERE THE ASSEMBLY WOULD GENERALLY BE CONCEALED OR IN BUILDING CORRIDORS & OTHER AREAS NOT NORMALLY OPEN TO THE PUBLIC VIEW.
- LEVEL 2 FOR USE AT LOCATIONS WHERE WATER-RESISTANT GYPSUM BACKING BOARD IS INSTALLED AS A TILE SUBSTRATE AND FOR USE IN GARAGES, WAREHOUSE STORAGE OR OTHER SIMILAR AREAS WHERE SURFACE APPEARANCES ARE NOT OF PRIMARY CONCERN.
- LEVEL 3 FOR USE IN APPEARANCE AREAS THAT ARE TO RECEIVE HEAVY OR MEDIUM TEXTURE FINISHES BEFORE FINAL PAINTING, OR WHERE HEAVY GRADE WALL COVERINGS ARE TO
- E. LEVEL 4 FOR USE WHERE LIGHT TEXTURE OR WALL COVERINGS ARE TO BE APPLIED, OR WHERE ECONOMY IS OF THE ARCHITECT'S CONCERN.
- . LEVEL 5 FOR USE WHERE GLOSS, SEMI-GLOSS, ENAMEL OR NON-TEXTURED FLAT PAINTS ARE SPECIFIED, OR WHERE SEVERE LIGHTING CONDITIONS OCCUR (IN THE OPTION OF

NOTES

- GENERAL CONTRACTOR SHALL PATCH ALL AREAS OF FLOOR DAMAGED BY THE REMOVAL OF MASTIC.
- GENERAL CONTRACTOR SHALL FLASH PATCH ALL FLOORS IN THEIR ENTIRETY WHERE MASTIC REMOVAL HAS OCCURRED WITH (PLANI/PATCH PLUS) BY 'MAPEI' OR ARCHITECT APPROVED
- GENERAL CONTRACTOR SHALL PERFORM A BOND TEST IN ACCORDANCE WITH MANUFACTURERS SPECIFICATIONS. PRIOR TO INSTALLATION OF NEW FLOORING.
- PROVIDE NEW MARBLE SADDLE AT ALL TOILET ROOM DOORS. PROVIDE BEVELED SADDLE TO MEET ADA REQUIREMENTS.
- ALL NEW V.C.T. FLOORING TO BE INSTALLED THROUGHOUT ENTIRE FLOOR AREA AS SHOWN UNLESS OTHERWISE NOTED.

WINDOW TREATMENTS

WS1: DRAPER CLUTCH OPERATED FLEXSHADE, PHIFER SHEARWEAVE PW 2500, 1% OPEN COLOR: AS SELECTED BY ARCHITECT (ALL EXTERIOR WINDOWS IN WORK SCOPE)

NOTE: G.C. SHALL PROVIDE AND INSTALL NEW WINDOW TREATMENTS FOR ALL NEW AND EXISTING AREAS OF WORK EXCEPT AS NOTED BELOW:

NEW WINDOW TREATMENTS SHALL NOT BE REQUIRED AT THE FOLLOWING LOCATIONS: VESTIBULES, CORRIDORS, STAIRS, BATHROOMS, BOILER ROOMS, STORAGE.

PROVIDE (1) UNIT PER WINDOW

PRIVACY CURTAIN

7000 SERIES CEILING CURTAIN TRACK BY HEALTH CARE CURTAINS 855-563-3364 OR EQUAL AS APPROVED BY ARCHITECT. PROVIDE 3 CARRIERS PER LINEAR FOOT OF TRACK, END STOP, AND END STOP WITH PULLOUT(S) FOR REMOVAL AND CLEANING. PROVIDE ALL OTHER REQUIRED ACCESSORIES FOR COMPLETE TRACK SYSTEM AND INSTALLATION.

FABRIC SHALL BE CLASS A RATED WITH ANTIMICROBIAL COATING - DESIGNTEX PRIVACY TEXTILE STYLE: COMPOSE 8096 OR AS SELECTED BY ARCHITECT - (ALLOW \$40/SY) COLOR AS SELECTED BY ARCHITECT

WALL COVERING

TYPE WC1: KOROSEAL WALLTALKERS MAG-RITE (M248) OR EQUAL MAGNETIC, WRITABLE WALL SURFACE PROVIDE FLOOR TO CEILING LEVEL 5 GYP. BOARD FINISH REQUIRED FOR INSTALLATION.

'WALLTALKERS WALLCOVERINGS', AS MANUFACTURED BY KOROSEAL INTERIOR PRODUCTS, LLC, 3875 EMBASSY PARKWAY, SUITE 110, FAIRLAWN, OHIO 44333, TELEPHONE: (855)753-5474, EMAIL: INFO@KOROSEAL.COM, OR APPROVED EQUAL.


'WALLTALKERS' TO BE WRITE-ABLE WITH MAGNETIC CAPABILITIES AND WILL EXTEND ENTIRE LENGTH OF WALL, FLOOR TO CEILING. 'WALLTALKERS' TO BE

WHITE WITH ALUMINUM J-CAP TRIM, SEMI-GLOSS (PRODUCT CODE M248).

- ACCESSORIES 1 SET REQUIRED FOR EACH ROOM. INCLUDE THE FOLLOWING: a. ONE SILVER ANODIZED ALUMINUM MARKER CADDY (MODEL NO. AMCM) b. STARTER KIT (8 MARKERS, ONE FELT ERASER, 8 OZ. SPRAY BOTTLE OF LIQUID CLEANER, ONE EMPTY 8 OZ. SPRAY BOTTLE FOR WATER, TWO DRY
- ERASE CLEANING CLOTHS). c. HEAVY DUTY MAGNETS (MAG1), MINIMUM OF 12 MAGNETS.
- WARRANTY: INCLUDE MANUFACTURER'S STANDARD 5 YEAR WARRANTY. INSTALL AS PER MANUFACTURER'S RECOMMENDATIONS HORIZONTALLY WITH
- CUTTING ALL SEAMS. G.C. SHALL CLEAN / PREP MATERIAL FOR FIRST USE AS RECOMMENDED BY

MANUFACTURER AN AMMONIA OR ALCOHOL BASED CLEANER OR MILD SOAP AND RINSED THOROUGHLY WITH WATER.

SEAM AT 2' A.F.F AND 6' A.F.F. REFER TO INSTALLATION INSTRUCTIONS, DOUBLE

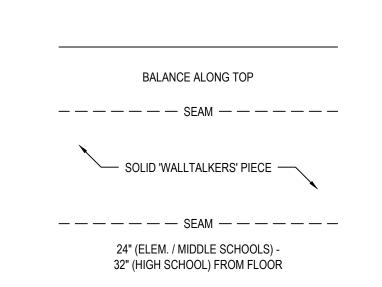


ATTIC STOCK INFORMATION

(1) ONE BOX FOR EACH (50) BOXES OF PRODUCT INSTALLED NOT LESS THAN 1% OF TOTAL PRODUCT INSTALLED NOT LESS THAN 1% OF TOTAL PRODUCT INSTALLED 10% OF EACH COLOR, TYPE AND GLOSS OF PAINT USED NOT LESS THAN 1% OF TOTAL PRODUCT INSTALLED. (1) ONE BOX FOR EACH (50) BOXES OF PRODUCT INSTALLED

ESE DRAWINGS ARE BASED ON CONSTRUCTION DRAWINGS NO REPARED BY BBS ARCHITECTS, LANDSCAPE ARCHITECTS AN ONDITIONS AS CONSTRUCTED AT THE TIME. ALL EXISTI

REV. DATE

INFORMATION AS THEY MAY NOT HAVE BEEN BUILT AND DETAILE PER THE ORIGINAL DOCUMENTS OR PER THE OWNER'S INFORMATION

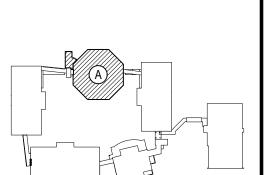

KEY PLAN NOT TO SCALE

CENTRAL SCHOC 2 - BOND IMPROV KLANE MIDDLE SC


DRAWING BY: CHECK BY:


THIS DRAWING, PREPARED FOR THE SPECIFIC PROJECT INDICATED IS AN INSTRUMENT OF SERVICE AND THE PROPERTY OF BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PINFRINGEMENT OR ANY USE OF THIS DRAWING FOR ANY OTHE PROJECT IS PROHIBITED. ANY ALTERATION OR REPRODUCTION OF THIS DOCUMENT IS ALSO PROHIBITED WITHOUT THE WRITTEN CONSENT OF THE ARCHITECT OR ENGINEER.



LANDSCAPE ARCHITECTS

ENGINEERS 100 GREAT OAKS BLVD. PATCHOGUE SUITE 115, ALBANY NEW YORK 11772 NEW YORK 12203 T. 631.475.0349 F. 631.475.0361 F. 518.621.7655 www.BBSARCHITECTURE.com




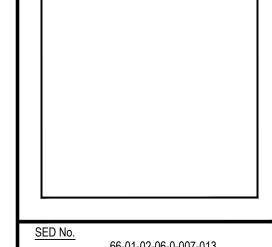


66-01-02-06-0-007-013 DISTRICT BEDFORD CENTRAL SCHOOL DISTRICT PROJECT PHASE 2 -BOND IMPROVEMENTS DWG TITLE FINISH SCHEDULE and DETAILS

SCALE: AS NOTED DATE: APRIL 2024 BID PICK-UP: FEBRUARY 24, 2025 FILE No: 23-131b

A9.00

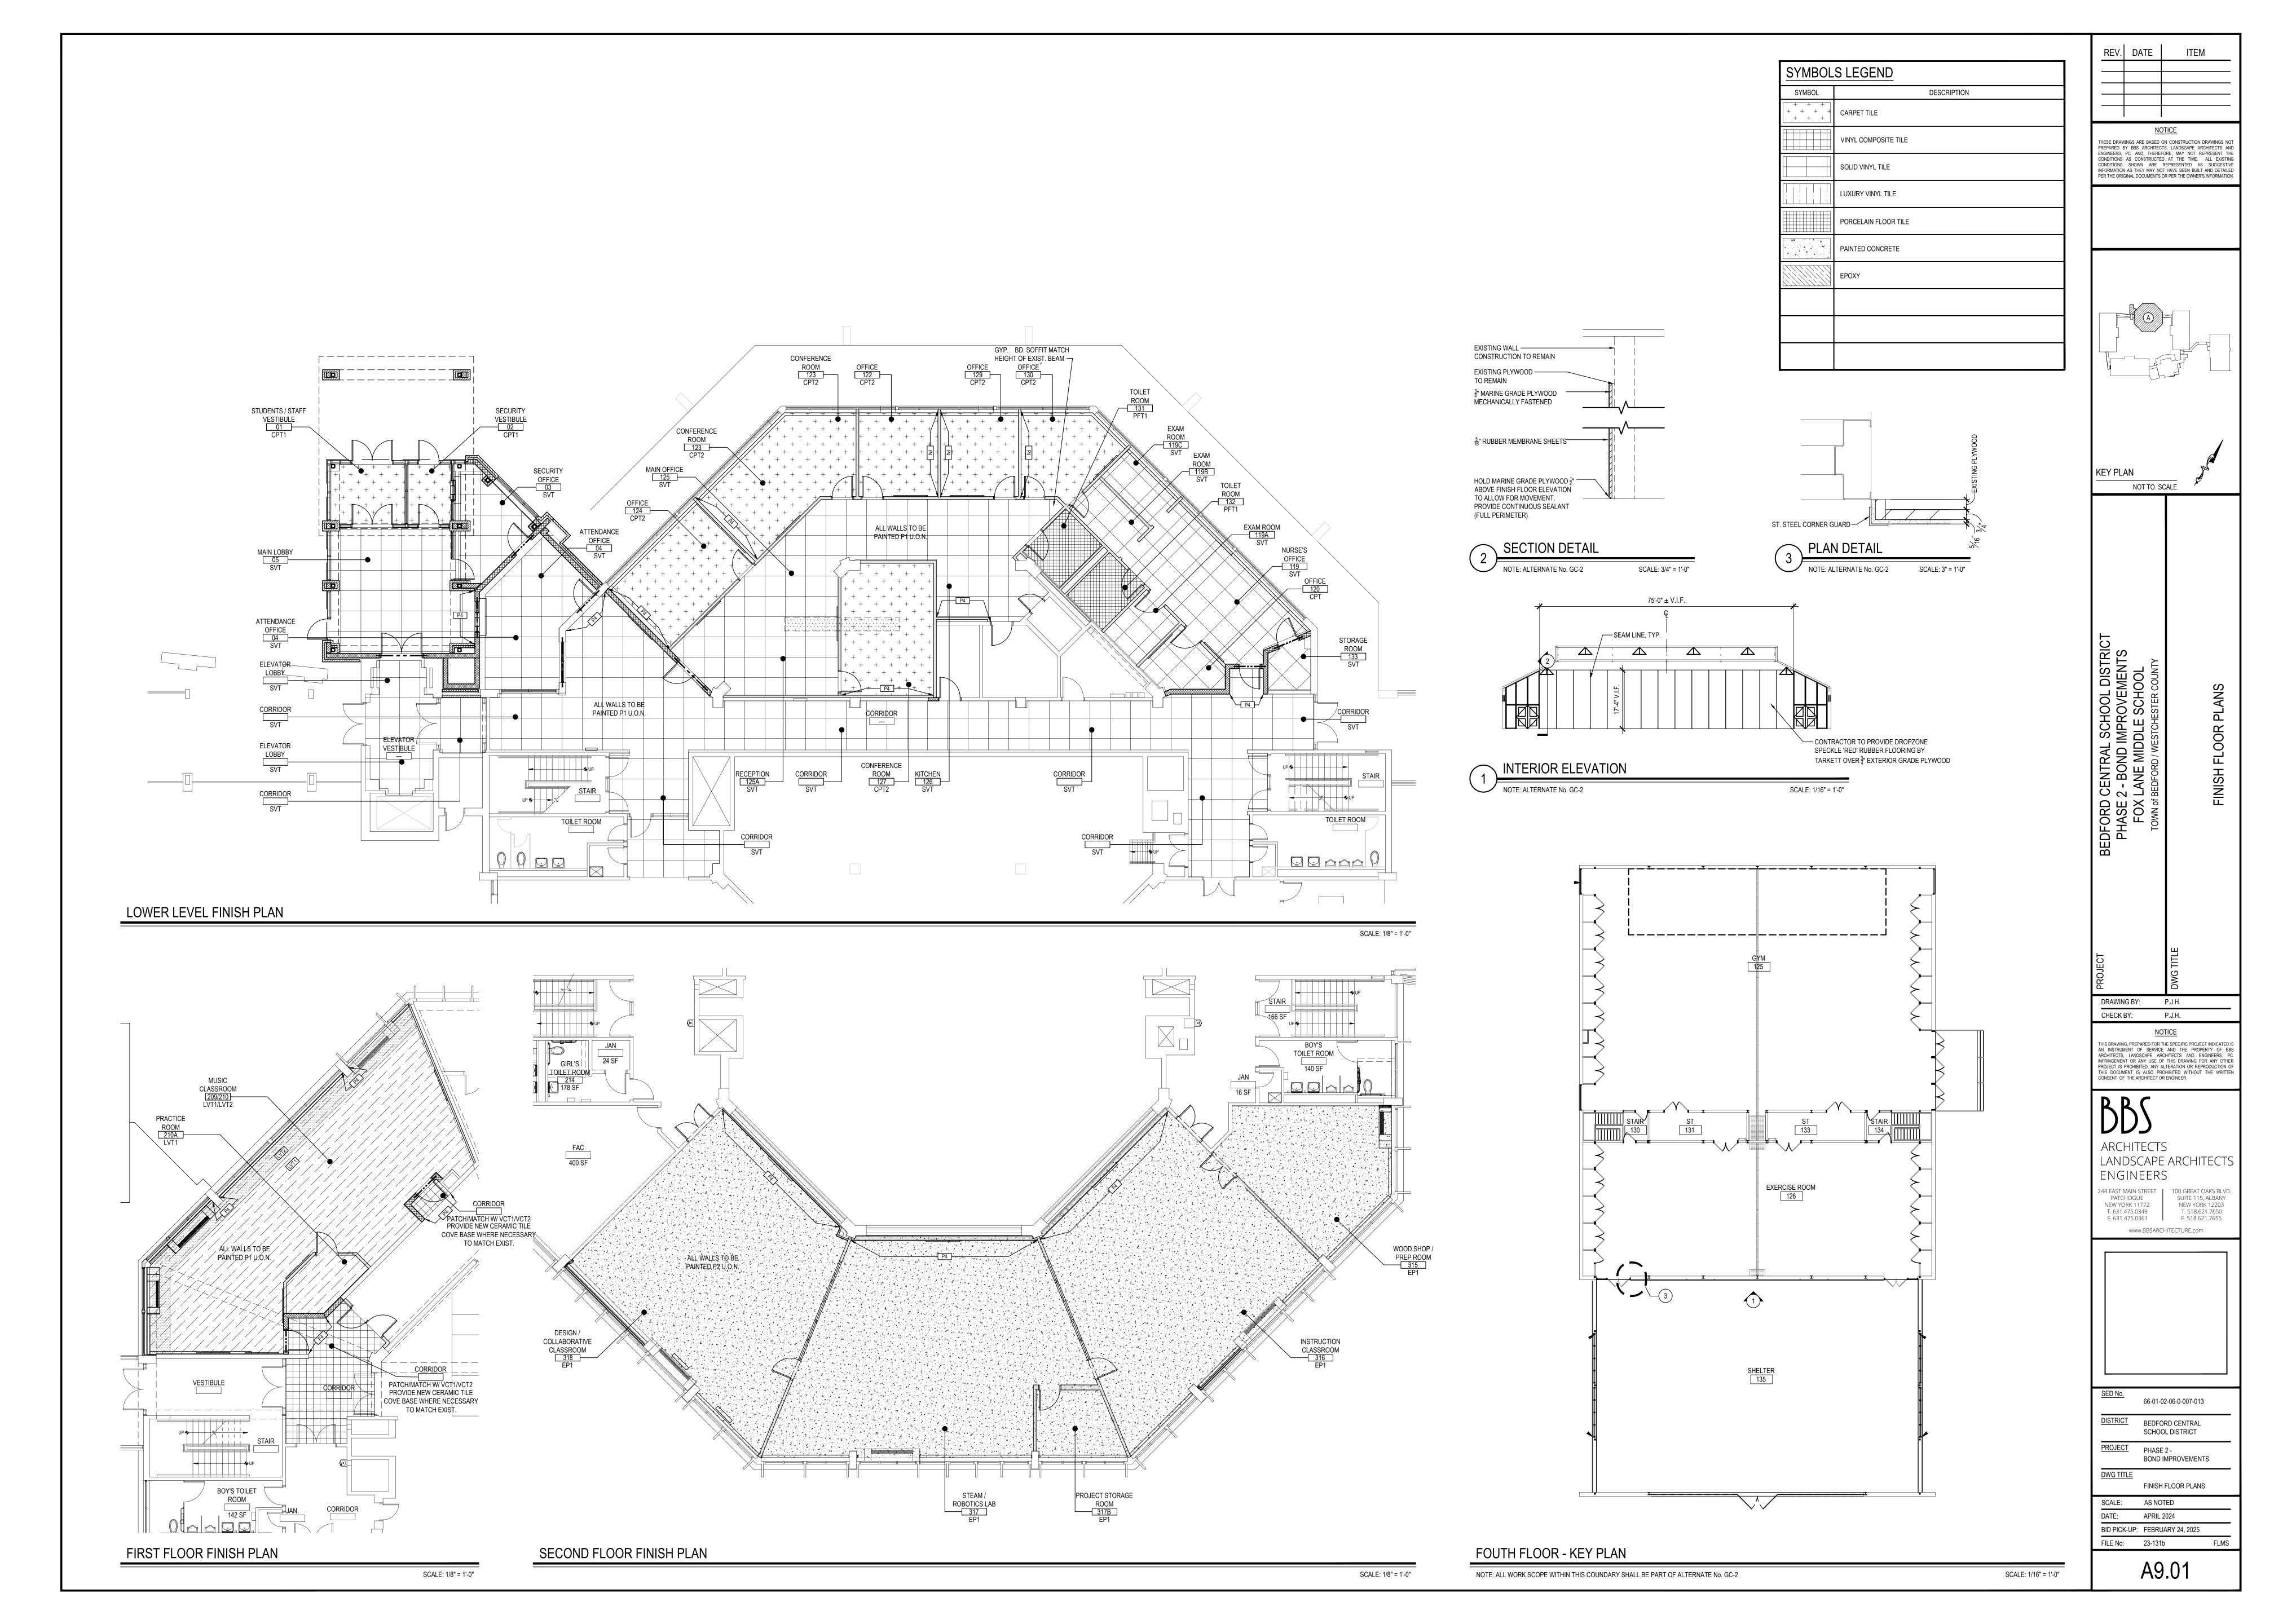


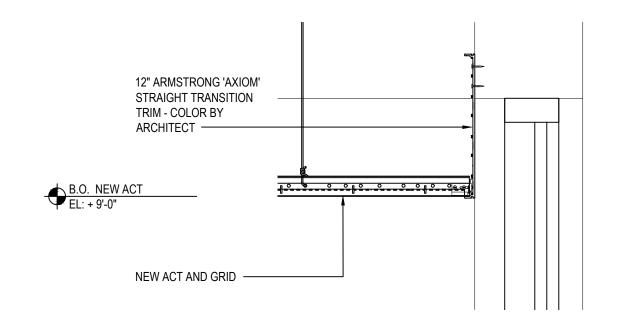


CEILING DETAI

SCALE: 1-1/2'= 1'-0"

SCALE: 1/8" = 1'-0"

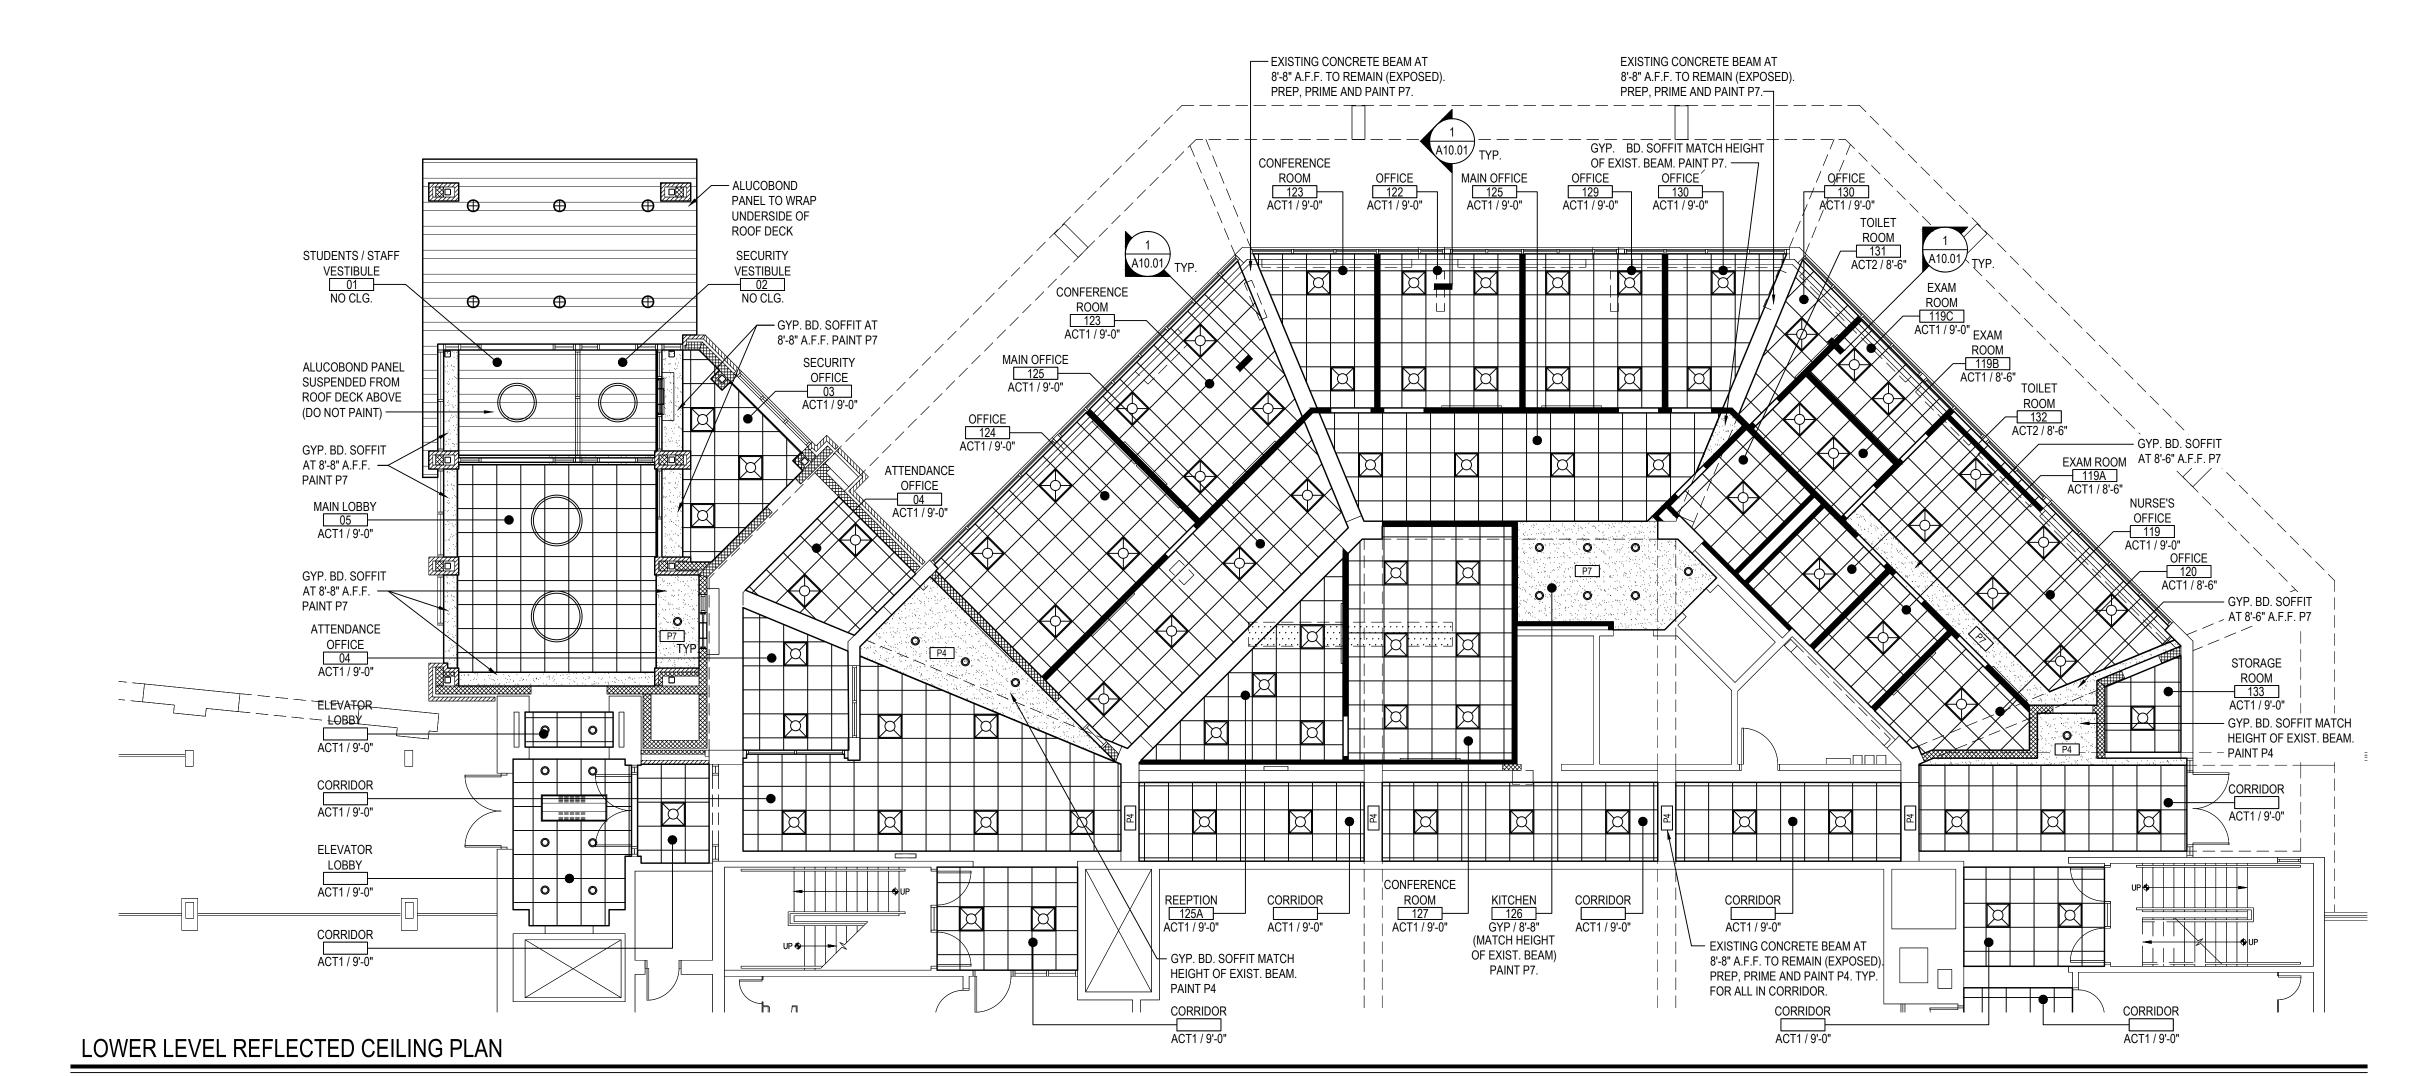

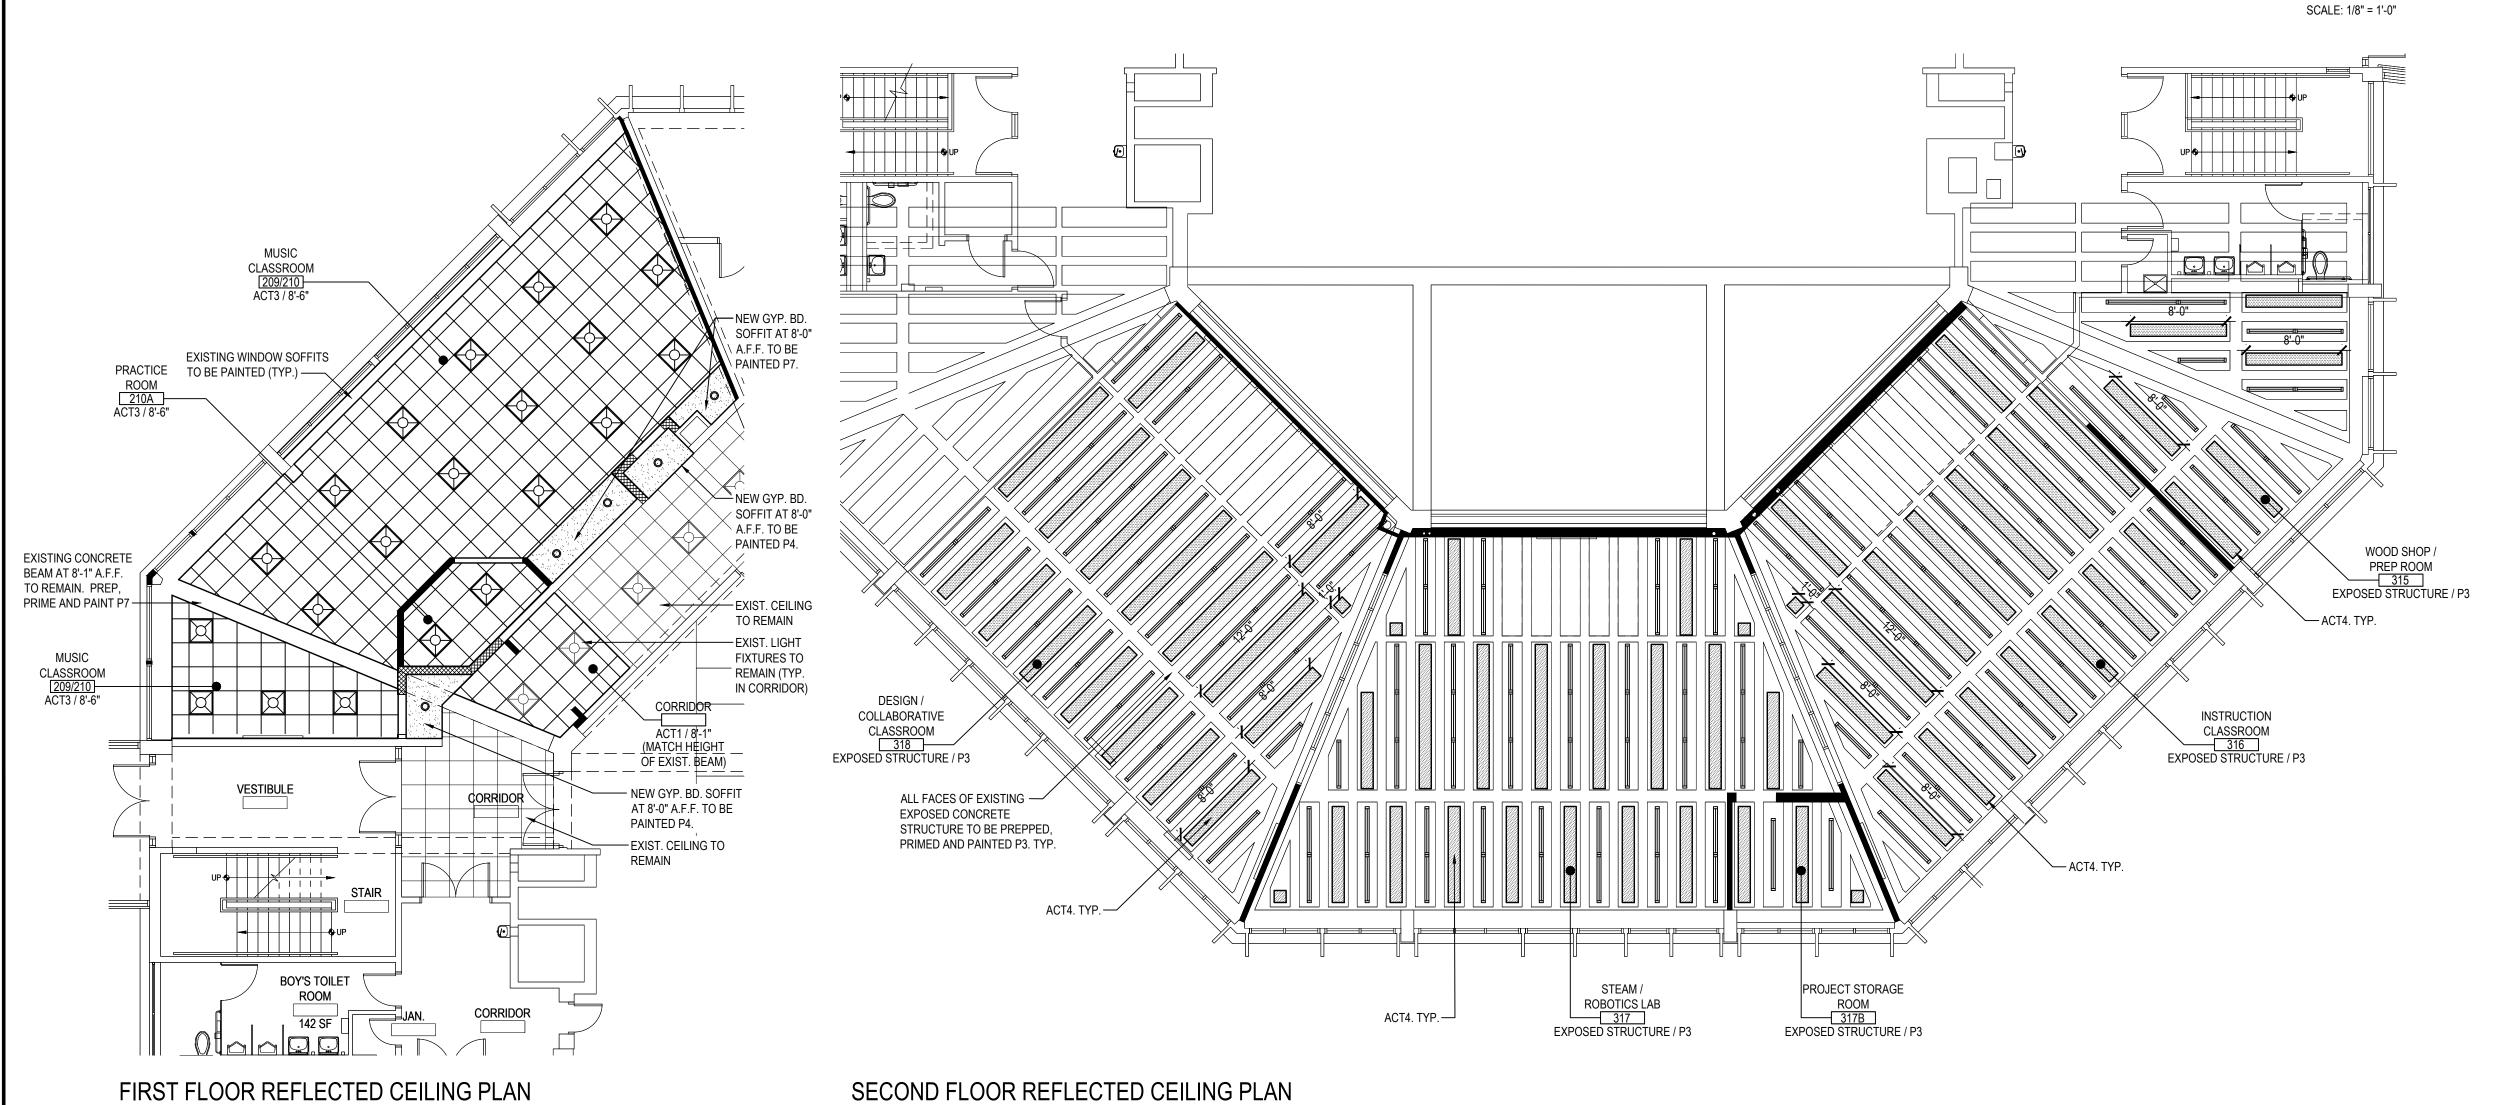

SCALE: 1/8" = 1'-0"

SYMBOL	DESCRIPTION
ROOM NAME XXX CLG. HEIGHT / TYPE	ROOM TAG, CEILING TILE TYPE AND FINISH CEILING ELEVATION (A.F.F.)
NO CLG.	OPEN TO STRUCTURE AND DECK ABOVE (PAINT)
	SUSPENDED ACOUSTICAL CEILING TILE AND GRID
	GYPSUM BOARD SOFFIT OVER METAL FRAMING. REFER TO DETAIL, THIS SHEET. TAPE, SPACKLE AND PAINT.
	RECESSED OR SURFACE MOUNTED LIGHT FIXTURE BY E.C. REFER TO E-SERIES DRAWINGS.
\bigotimes	EXIT SIGN BY E.C. REFER TO E-SERIES DRAWINGS.
	CEILING MOUNTED SPEAKER BY E.C. REFER TO E-SERIES DRAWINGS.
⟨S ⟩	SMOKE / HEAT DETECTORS BY E.C. REFER TO E-SERIES DRAWINGS.
OS)	OCCUPANCY SENSOR BY E.C. REFER TO E-SERIES DRAWINGS.
	CEILING GRILLE / REGISTER BY M.C. REFER TO M-SERIES DRAWINGS.
	EXTERIOR WALL MOUNTED LIGHT FIXTURE BY E.C. REFER TO E-SERIES DRAWINGS.
	CEILING MOUNTED CABINET HEATER BY M.C. REFER TO M-SERIES DRAWINGS.
	REVISION CLOUD AND KEYED DESIGNATION. REFER TO DRAWING TITLEBLOCK FOR ADDITIONAL INFORMATION.

TYPICAL REFLECTED CEILING PLAN NOTES

CEILING PLANS MAY NOT INDICATE ALL MECHANICAL AND / OR ELECTRICAL CEILING MOUNTED ITEMS. REFER TO M - SERIES AND E - SERIES DRAWINGS FOR ADDITIONAL INFORMATION.

- CEILING GRID SHALL BE ARRANGED TO BE SPACED EQUALLY IN EACH DIRECTION WITH NO TILE LESS THAN 6" UNLESS OTHERWISE REQUIRED.
- PROVIDE CEILING EXPANSION JOINT AT ALL NEW TO EXISTING INTERSECTIONS AND WHERE INDICATED ON PLANS.
- UNLESS OTHERWISE NOTED, ALL SOFFITS AND WINDOW POCKETS SHALL BE $\frac{5}{8}$ " TYPE 'X' GYP. BOARD OVER 18 GA. COLD FORMED FRAMING AT 16" O.C.
- 5. ALL AREAS NOTED AS 'OPEN' AND / OR 'NO CEILING (CLG.) SHALL BE PAINTED -
- INCLUDING BUT NOT LIMITED TO DECK, STRUCTURE, DUCTWORK, ETC.)6. ACOUSTICAL CEILINGS SHALL HAVE A FLAME SPREAD OF 25 OR LESS COMPLYING WITH
- PERFORMANCE REQUIREMENTS AND PHYSICAL CHARACTERISTICS OF THE SPECIFIED CEILINGS AS INDICATED IN THE REFLECTED CEILING PLAN. (ASTM E-1264)

 ACOUSTICAL CEILINGS SHALL HAVE A MINIMUM NOISE REDUCTION COEFFICIENT (NRC) RATING OF 0.65.

BEDFORD CENTRAL SCHOOL DISTRICT
PHASE 2 - BOND IMPROVEMENTS
FOX LANE MIDDLE SCHOOL
TOWN of BEDFORD / WESTCHESTER COUNTY
DEFI FOTED CEILING DIANS

REV. DATE

KEY PLAN

NOT TO SCALE

THESE DRAWINGS ARE BASED ON CONSTRUCTION DRAWINGS NOT PREPARED BY BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PC. AND, THEREFORE, MAY NOT REPRESENT THE

CONDITIONS AS CONSTRUCTED AT THE TIME. ALL EXISTING CONDITIONS SHOWN ARE REPRESENTED AS SUGGESTIVE INFORMATION AS THEY MAY NOT HAVE BEEN BUILT AND DETAILED PER THE ORIGINAL DOCUMENTS OR PER THE OWNER'S INFORMATION.

DRAWING BY: P.J.H.

CHECK BY: P.J.H.

NOTICE

THIS DRAWING, PREPARED FOR THE SPECIFIC PROJECT INDICATED IS AN INSTRUMENT OF SERVICE AND THE PROPERTY OF BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, POINFRINGEMENT OR ANY USE OF THIS DRAWING FOR ANY OTHER


PROJECT IS PROHIBITED. ANY ALTERATION OR REPRODUCTION OF THIS DOCUMENT IS ALSO PROHIBITED WITHOUT THE WRITTEN CONSENT OF THE ARCHITECT OR ENGINEER.

BBS

ARCHITECTS LANDSCAPE ARCHITECTS ENGINEERS

244 EAST MAIN STREET PATCHOGUE SUITE 115, ALBANY NEW YORK 11772 T. 631.475.0349 F. 631.475.0361 P. 518.621.7655

www.BBSARCHITECTURE.com

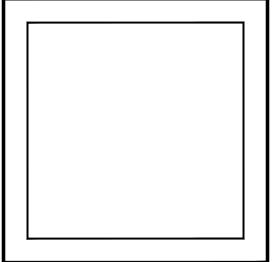

SED No.

66-01-02-06-0-007-013

DISTRICT
BEDFORD CENTRAL
SCHOOL DISTRICT

PROJECT
PHASE 2 BOND IMPROVEMENTS

DWG TITLE
REFLECTED CEILING PLANS


SCALE: AS NOTED

DATE: APRIL 2024

BID PICK-UP: FEBRUARY 24, 2025

FILE No: 23-131b

A10.01

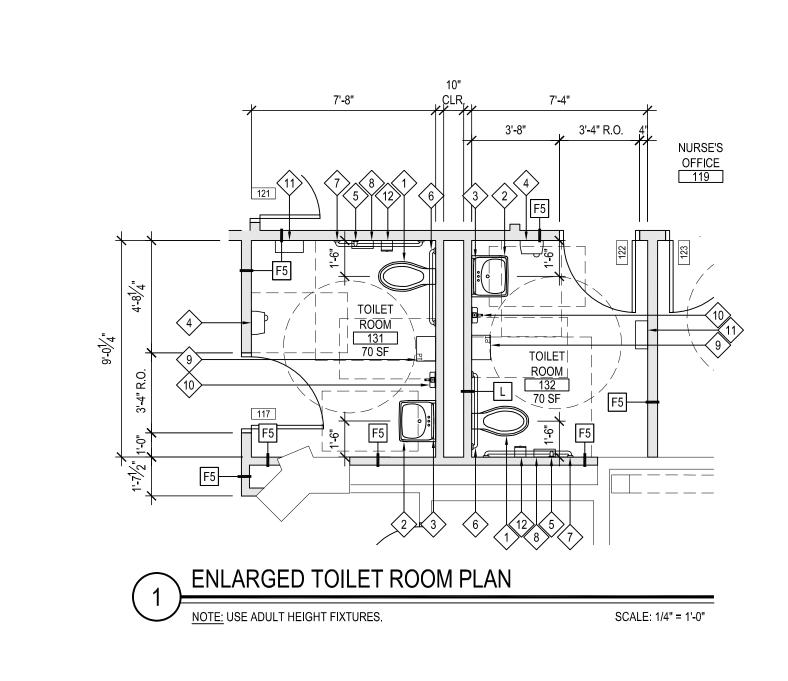

TOILET FIXTURE MOUNTING HEIGHTS

LAVATORIES, GRAB BARS, ACCESSORIES, ETC. SHALL BE MOUNTED EITHER AT ADULT HEIGHT OR CHILD HEIGHT AS INDICATED ON THE PLANS AND 'TYPICAL ADA PLUMBING ELEMENTS MOUNTING STANDARDS.'

AT ALL STUDENT USE TOILET FACILITIES, ALL TOILET FIXTURES, URINALS,

- AT ALL <u>ADULT USE</u> <u>TOILET FACILITIES</u>, ALL TOILET FIXTURES, URINALS, LAVATORIES, GRAB BARS, ACCESSORIES, ETC. SHALL BE MOUNTED AT ADULT HEIGHT AS INDICATED ON THE PLANS AND 'TYPICAL ADA PLUMBING ELEMENTS MOUNTING STANDARDS.'
- 3. THE HEIGHT OF ALL GRAB BAR MUST BE THE SAME WITHIN EACH STALL / ROOM.
- 4. THE CHILD MOUNTING HEIGHT LIMITS APPLY FOR ADA AND NON-ADA LOCATIONS.


TOILET ROOM KEY NOTES


- P.C. TO FURNISH AND INSTALL NEW ADA ACCESSIBLE WATER CLOSET AND FLUSHOMETER.
- P.C. TO FURNISH AND INSTALL NEW ADA ACCESSIBLE LAVATORY, FAUCET AND LAV SHIELD.
- 3 G.C. TO FURNISH AND INSTALL NEW MIRROR WITH SHELF.
- G.C. TO PROVIDE AND INSTALL NEW ADA COMPLIANT SURFACE MOUNTED HAND
- DRYER. E.C. TO CONNECT TO NEW OR EXISTING POWER.
- 6 G.C. TO FURNISH AND INSTALL NEW HORIZONTAL 36" GRAB BAR.
- (7) G.C. TO FURNISH AND INSTALL NEW HORIZONTAL 42" GRAB BAR.
- (8) G.C. TO FURNISH AND INSTALL NEW TOILET PAPER DISPENSER.

(5) G.C. TO FURNISH AND INSTALL NEW VERTICAL 18" GRAB BAR.

- 9 G.C. TO FURNISH AND INSTALL NEW ROLL PAPER TOWEL DISPENSER. (10) G.C. TO FURNISH AND INSTALL NEW WALL MOUNTED SOAP DISPENSER.
- (11) G.C. TO FURNISH AND INSTALL NEW SANITARY NAPKIN DISPENSER.
- (12) G.C. TO FURNISH AND INSTALL NEW SANITARY NAPKIN WASTE RECEPTACLE.

— INSTALL TILE BEHIND MIRROR WHERE REQUIRED. CERAMIC TILE WAINSCOT DETAIL

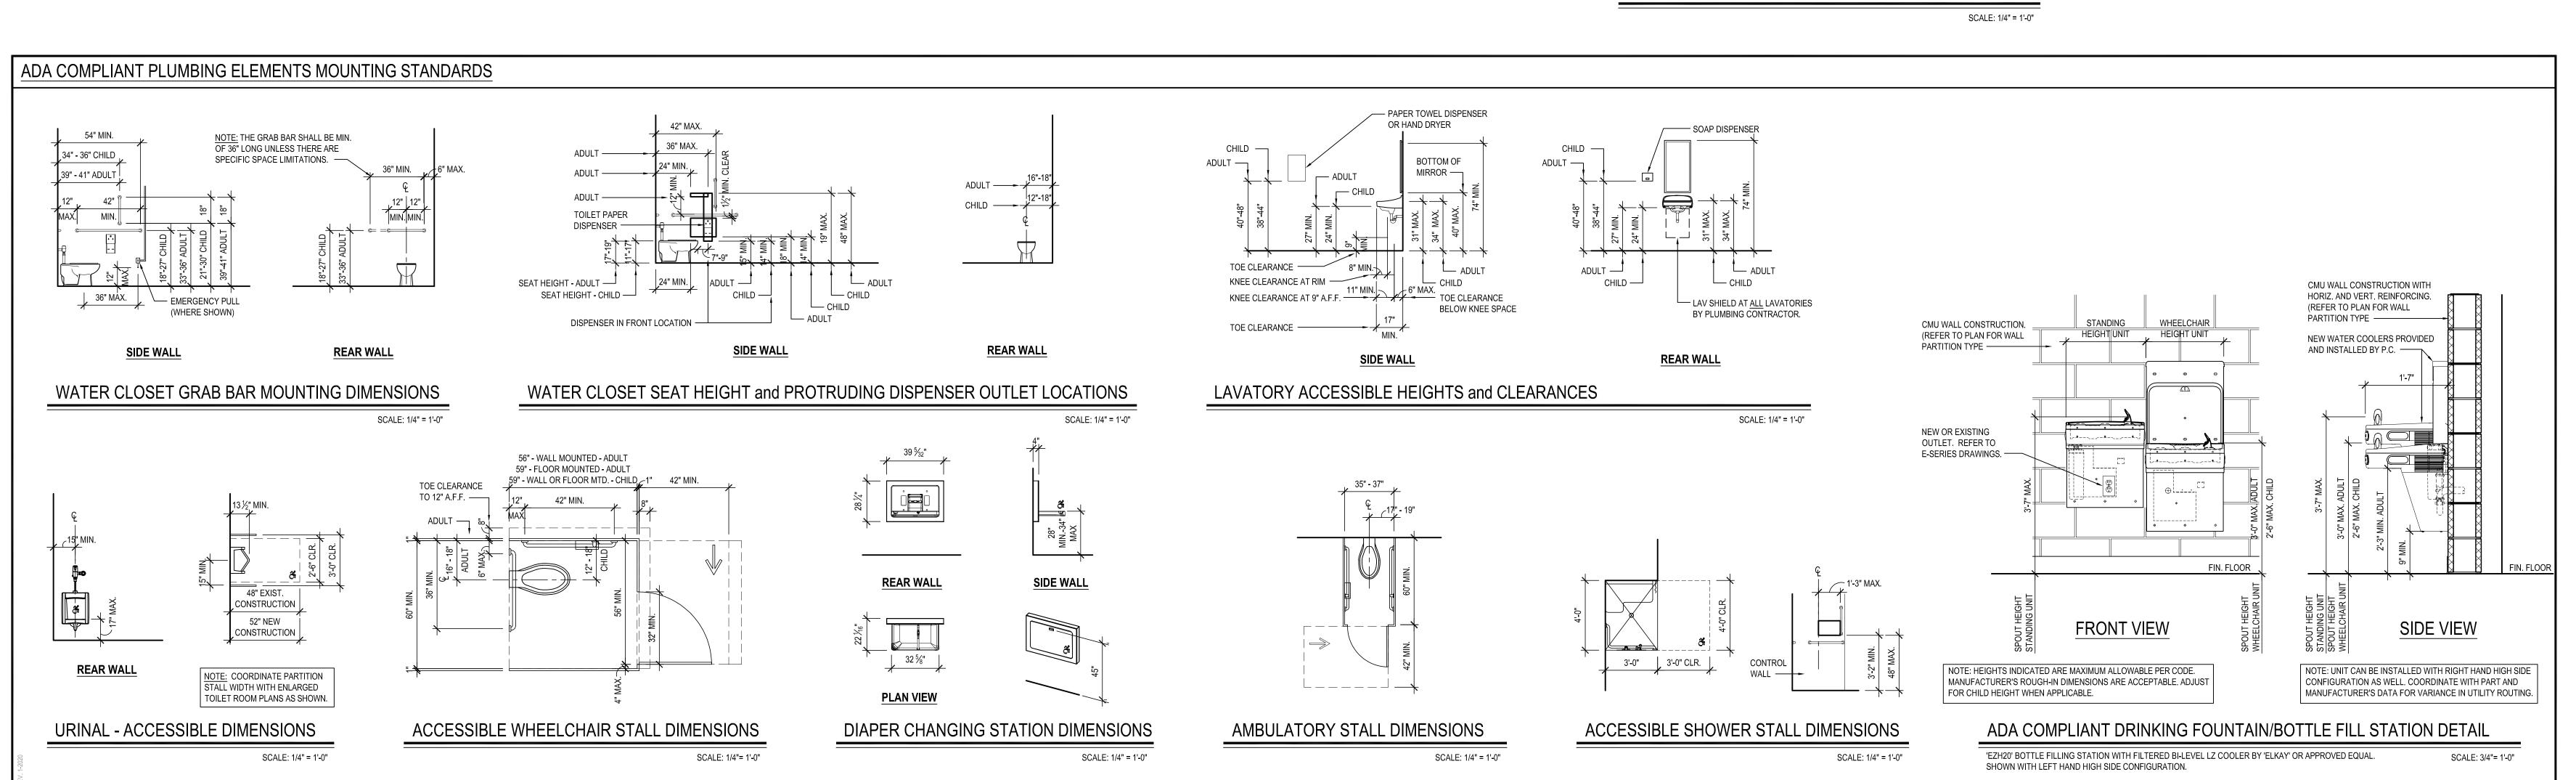

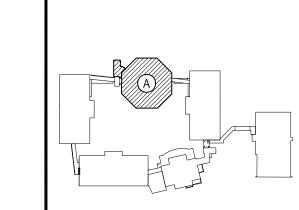

REV. DATE

NOTICE

THESE DRAWINGS ARE BASED ON CONSTRUCTION DRAWINGS NOT PREPARED BY BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND GINEERS, PC. AND, THEREFORE, MAY NOT REPRESENT THE

ONDITIONS AS CONSTRUCTED AT THE TIME. ALL EXISTING CONDITIONS SHOWN ARE REPRESENTED AS SUGGESTIVE INFORMATION AS THEY MAY NOT HAVE BEEN BUILT AND DETAILED

PER THE ORIGINAL DOCUMENTS OR PER THE OWNER'S INFORMATIO

KEY PLAN NOT TO SCALE


DRAWING BY: E.M. CHECK BY:

THIS DRAWING, PREPARED FOR THE SPECIFIC PROJECT INDICATED IS AN INSTRUMENT OF SERVICE AND THE PROPERTY OF BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, P. INFRINGEMENT OR ANY USE OF THIS DRAWING FOR ANY OTHE PROJECT IS PROHIBITED. ANY ALTERATION OR REPRODUCTION OF THIS DOCUMENT IS ALSO PROHIBITED WITHOUT THE WRITTEN CONSENT OF THE ARCHITECT OR ENGINEER.

ARCHITECTS

LANDSCAPE ARCHITECTS ENGINEERS

SUITE 115, ALBANY **NEW YORK 11772** NEW YORK 12203 F. 631.475.0361 F. 518.621.7655 www.BBSARCHITECTURE.com

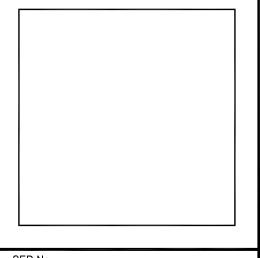



66-01-02-06-0-007-013 DISTRICT BEDFORD CENTRAL SCHOOL DISTRICT PROJECT PHASE 2 -

BOND IMPROVEMENTS DWG TITLE ENLARGED TOILET ROOM PLANS and DETAILS SCALE: AS NOTED

APRIL 2024 BID PICK-UP: FEBRUARY 24, 2025 FILE No: 23-131b


A11.01

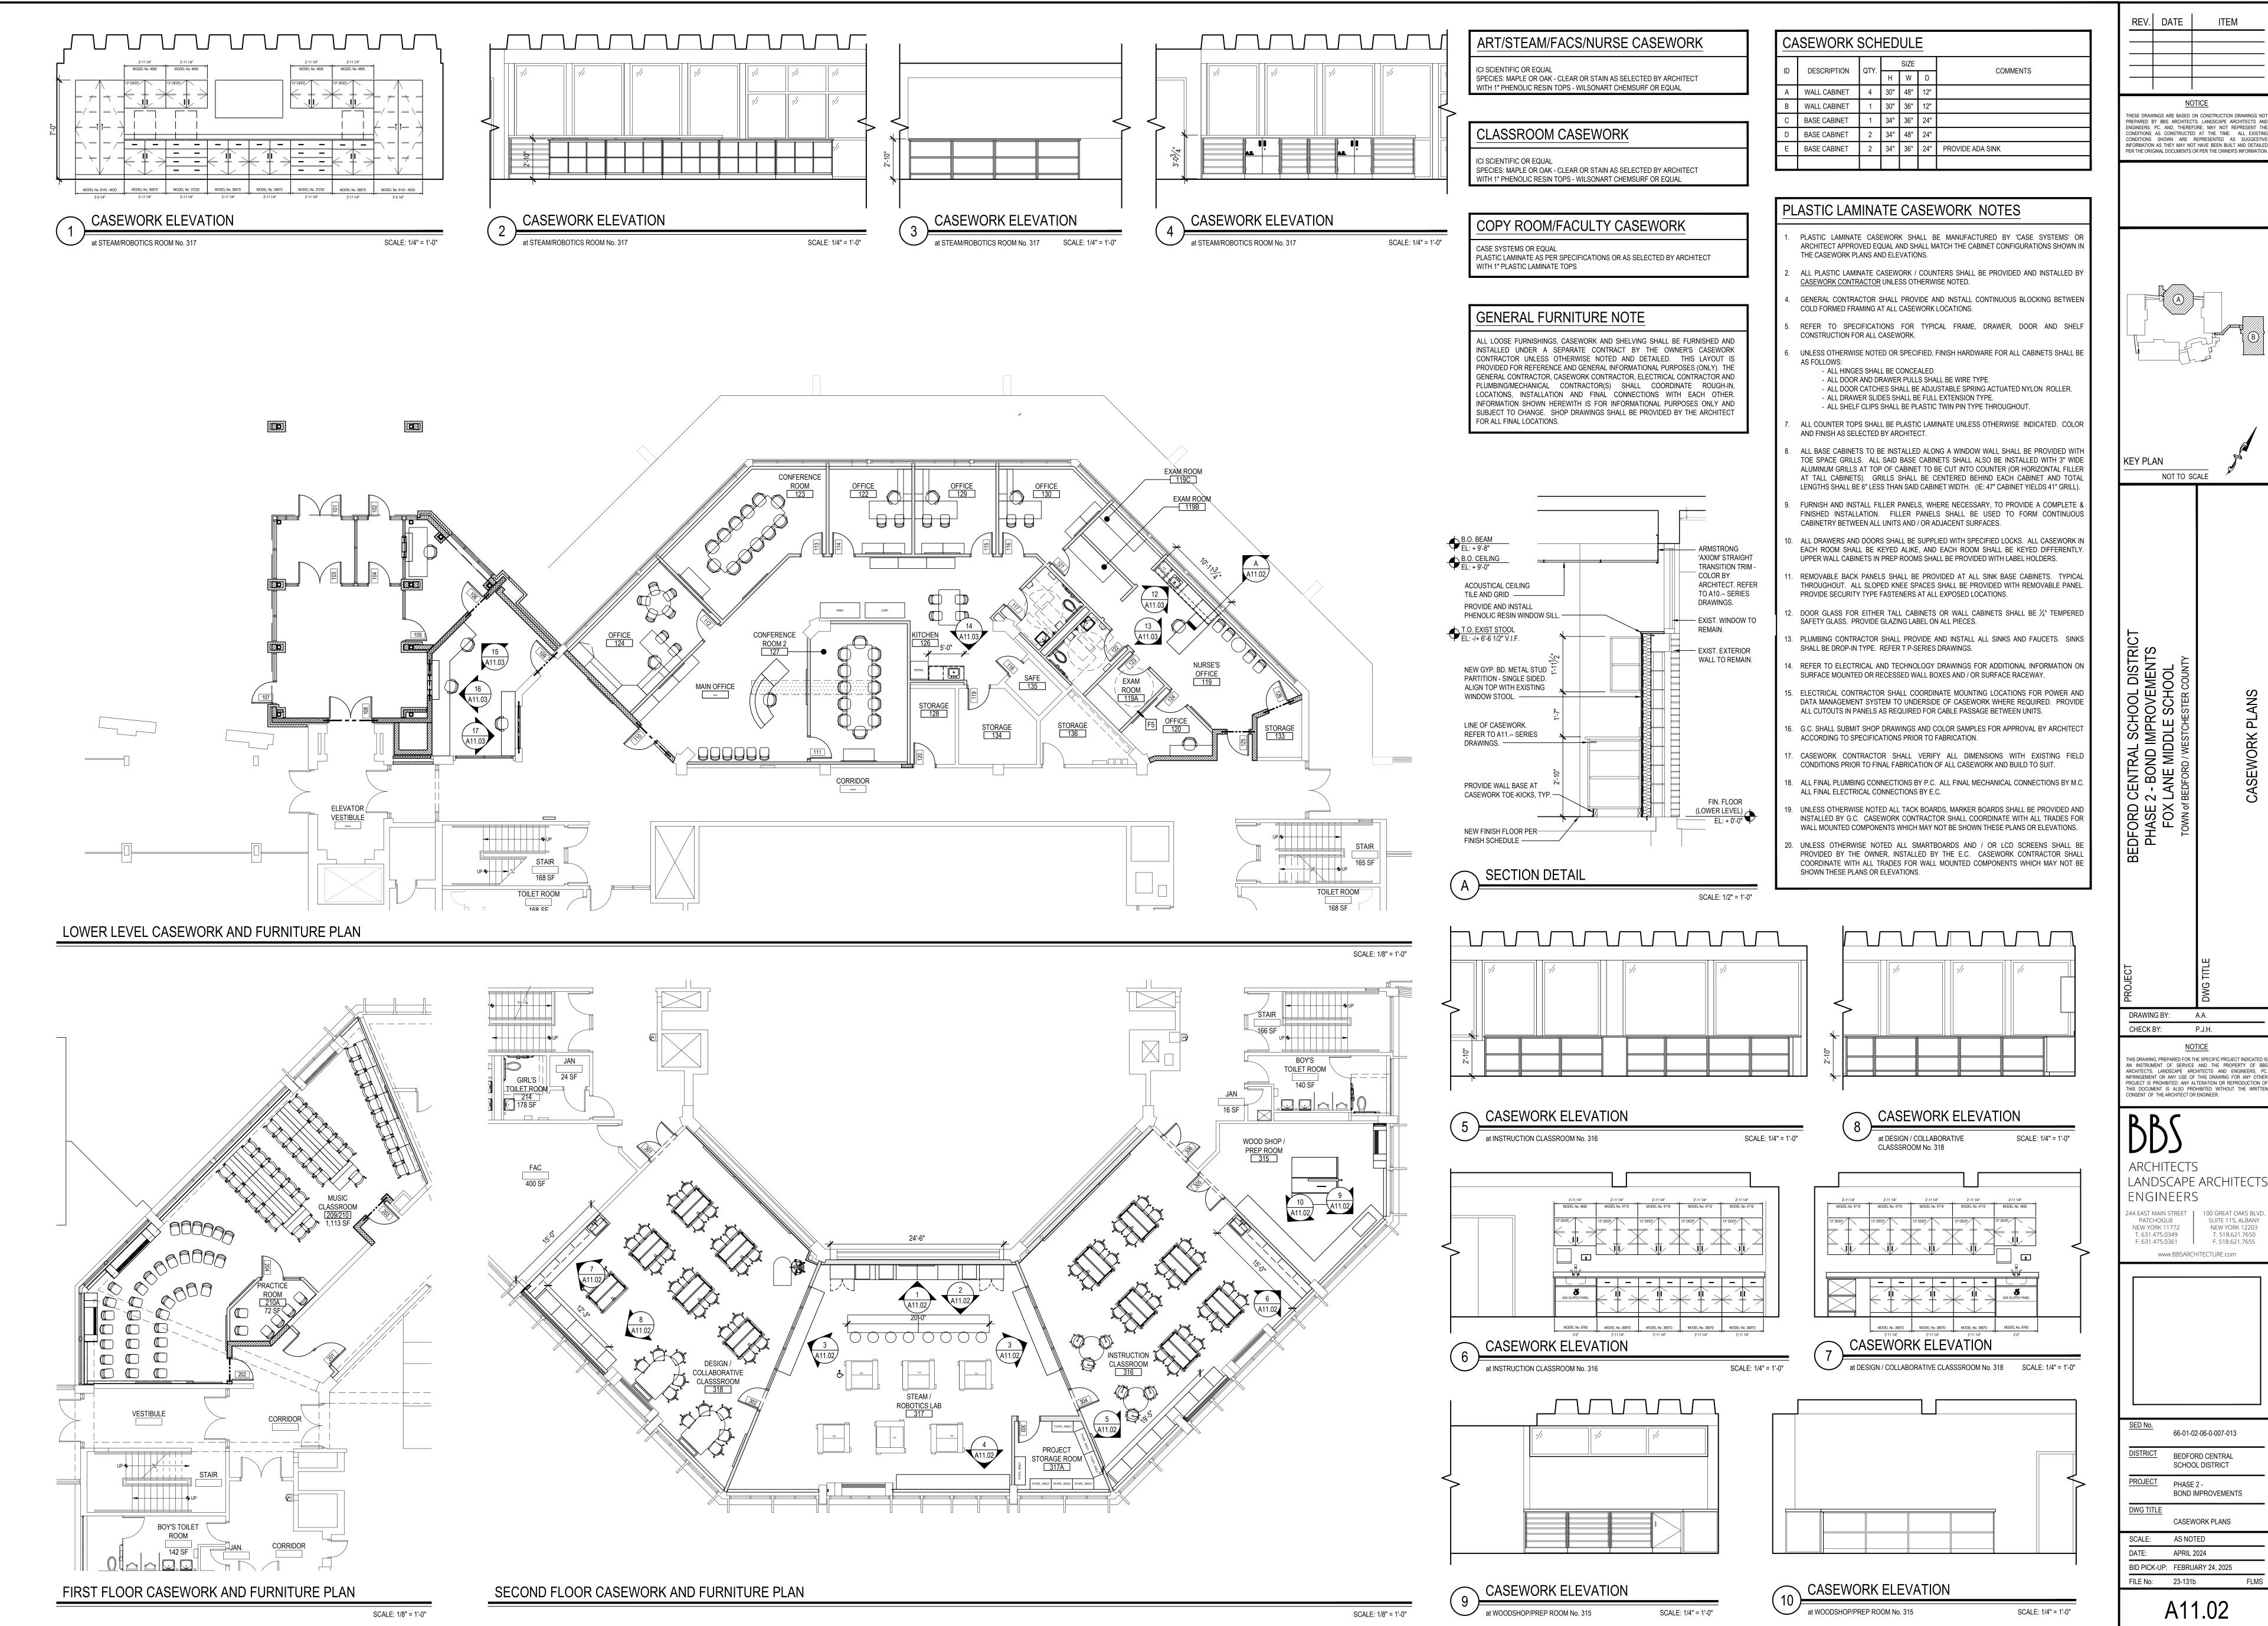

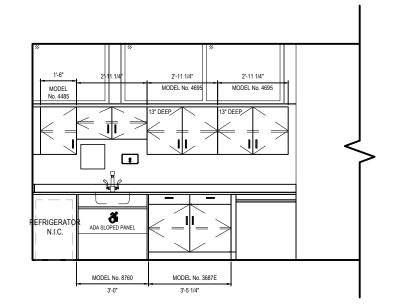


CASEWORK ELEVATION


at NURSE'S OFFICE No. 119 SCALE: 1/4" = 1'-0"

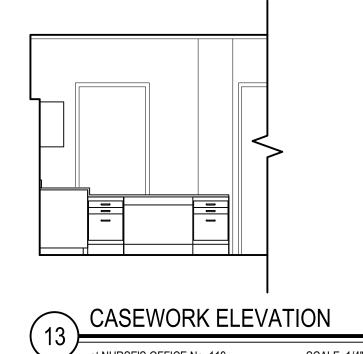


SCALE: 1/4" = 1'-0"

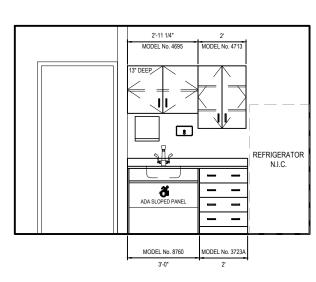

CASEWORK ELEVATION

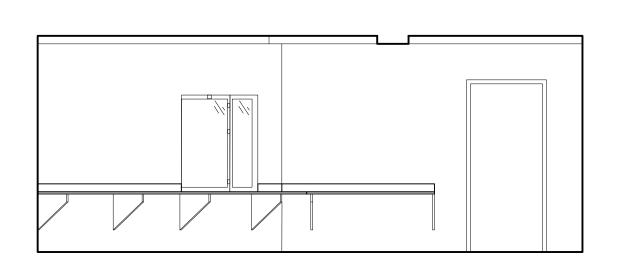

CASEWORK ELEVATION at ATTENDANCE OFFICE No. 04 SCALE: 1/4" = 1'-0"

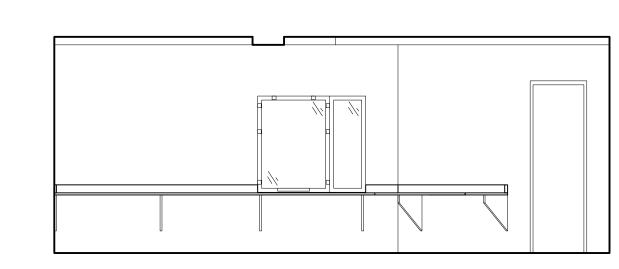

SCALE: 1/4" = 1'-0"

CASEWORK ELEVATION at ATTENDANCE OFFICE No. 04

<u>NOTICE</u>

THESE DRAWINGS ARE BASED ON CONSTRUCTION DRAWINGS NOT PREPARED BY BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PC. AND, THEREFORE, MAY NOT REPRESENT THE CONDITIONS AS CONSTRUCTED AT THE TIME. ALL EXISTING CONDITIONS SHOWN ARE REPRESENTED AS SUGGESTIVE INFORMATION AS THEY MAY NOT HAVE BEEN BUILT AND DETAILED PER THE ORIGINAL DOCUMENTS OR PER THE OWNER'S INFORMATION.

KEY PLAN NOT TO SCALE

REV. DATE


DRAWING BY: B.C.M. CHECK BY: P.J.H. NOTICE THIS DRAWING, PREPARED FOR THE SPECIFIC PROJECT INDICATED IS AN INSTRUMENT OF SERVICE AND THE PROPERTY OF BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PC. INFRINGEMENT OR ANY USE OF THIS DRAWING FOR ANY OTHER PROJECT IS PROHIBITED. ANY ALTERATION OR REPRODUCTION OF THIS DOCUMENT IS ALSO PROHIBITED WITHOUT THE WRITTEN CONSENT OF THE ARCHITECT OR ENGINEER.

BBS

ARCHITECTS
LANDSCAPE ARCHITECTS
ENGINEERS

244 EAST MAIN STREET PATCHOGUE SUITE 115, ALBANY
NEW YORK 11772 NEW YORK 12203
T. 631.475.0349 T. 518.621.7650
F. 631.475.0361 F. 518.621.7655

www.BBSARCHITECTURE.com

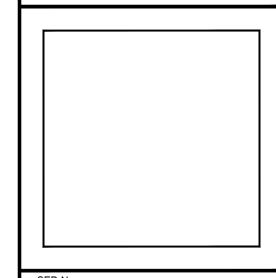

66-01-02-06-0-007-013 DISTRICT BEDFORD CENTRAL SCHOOL DISTRICT PROJECT PHASE 2 - BOND IMPROVEMENTS DWG TITLE


CASEWORK PLANS SCALE: AS NOTED

DATE: APRIL 2024

BID PICK-UP: FEBRUARY 24, 2025 FILE No: 23-131b

A11.03

CASEWORK ELEVATION at ATTENDANCE OFFICE No. 04 SCALE: 1/4" = 1'-0"

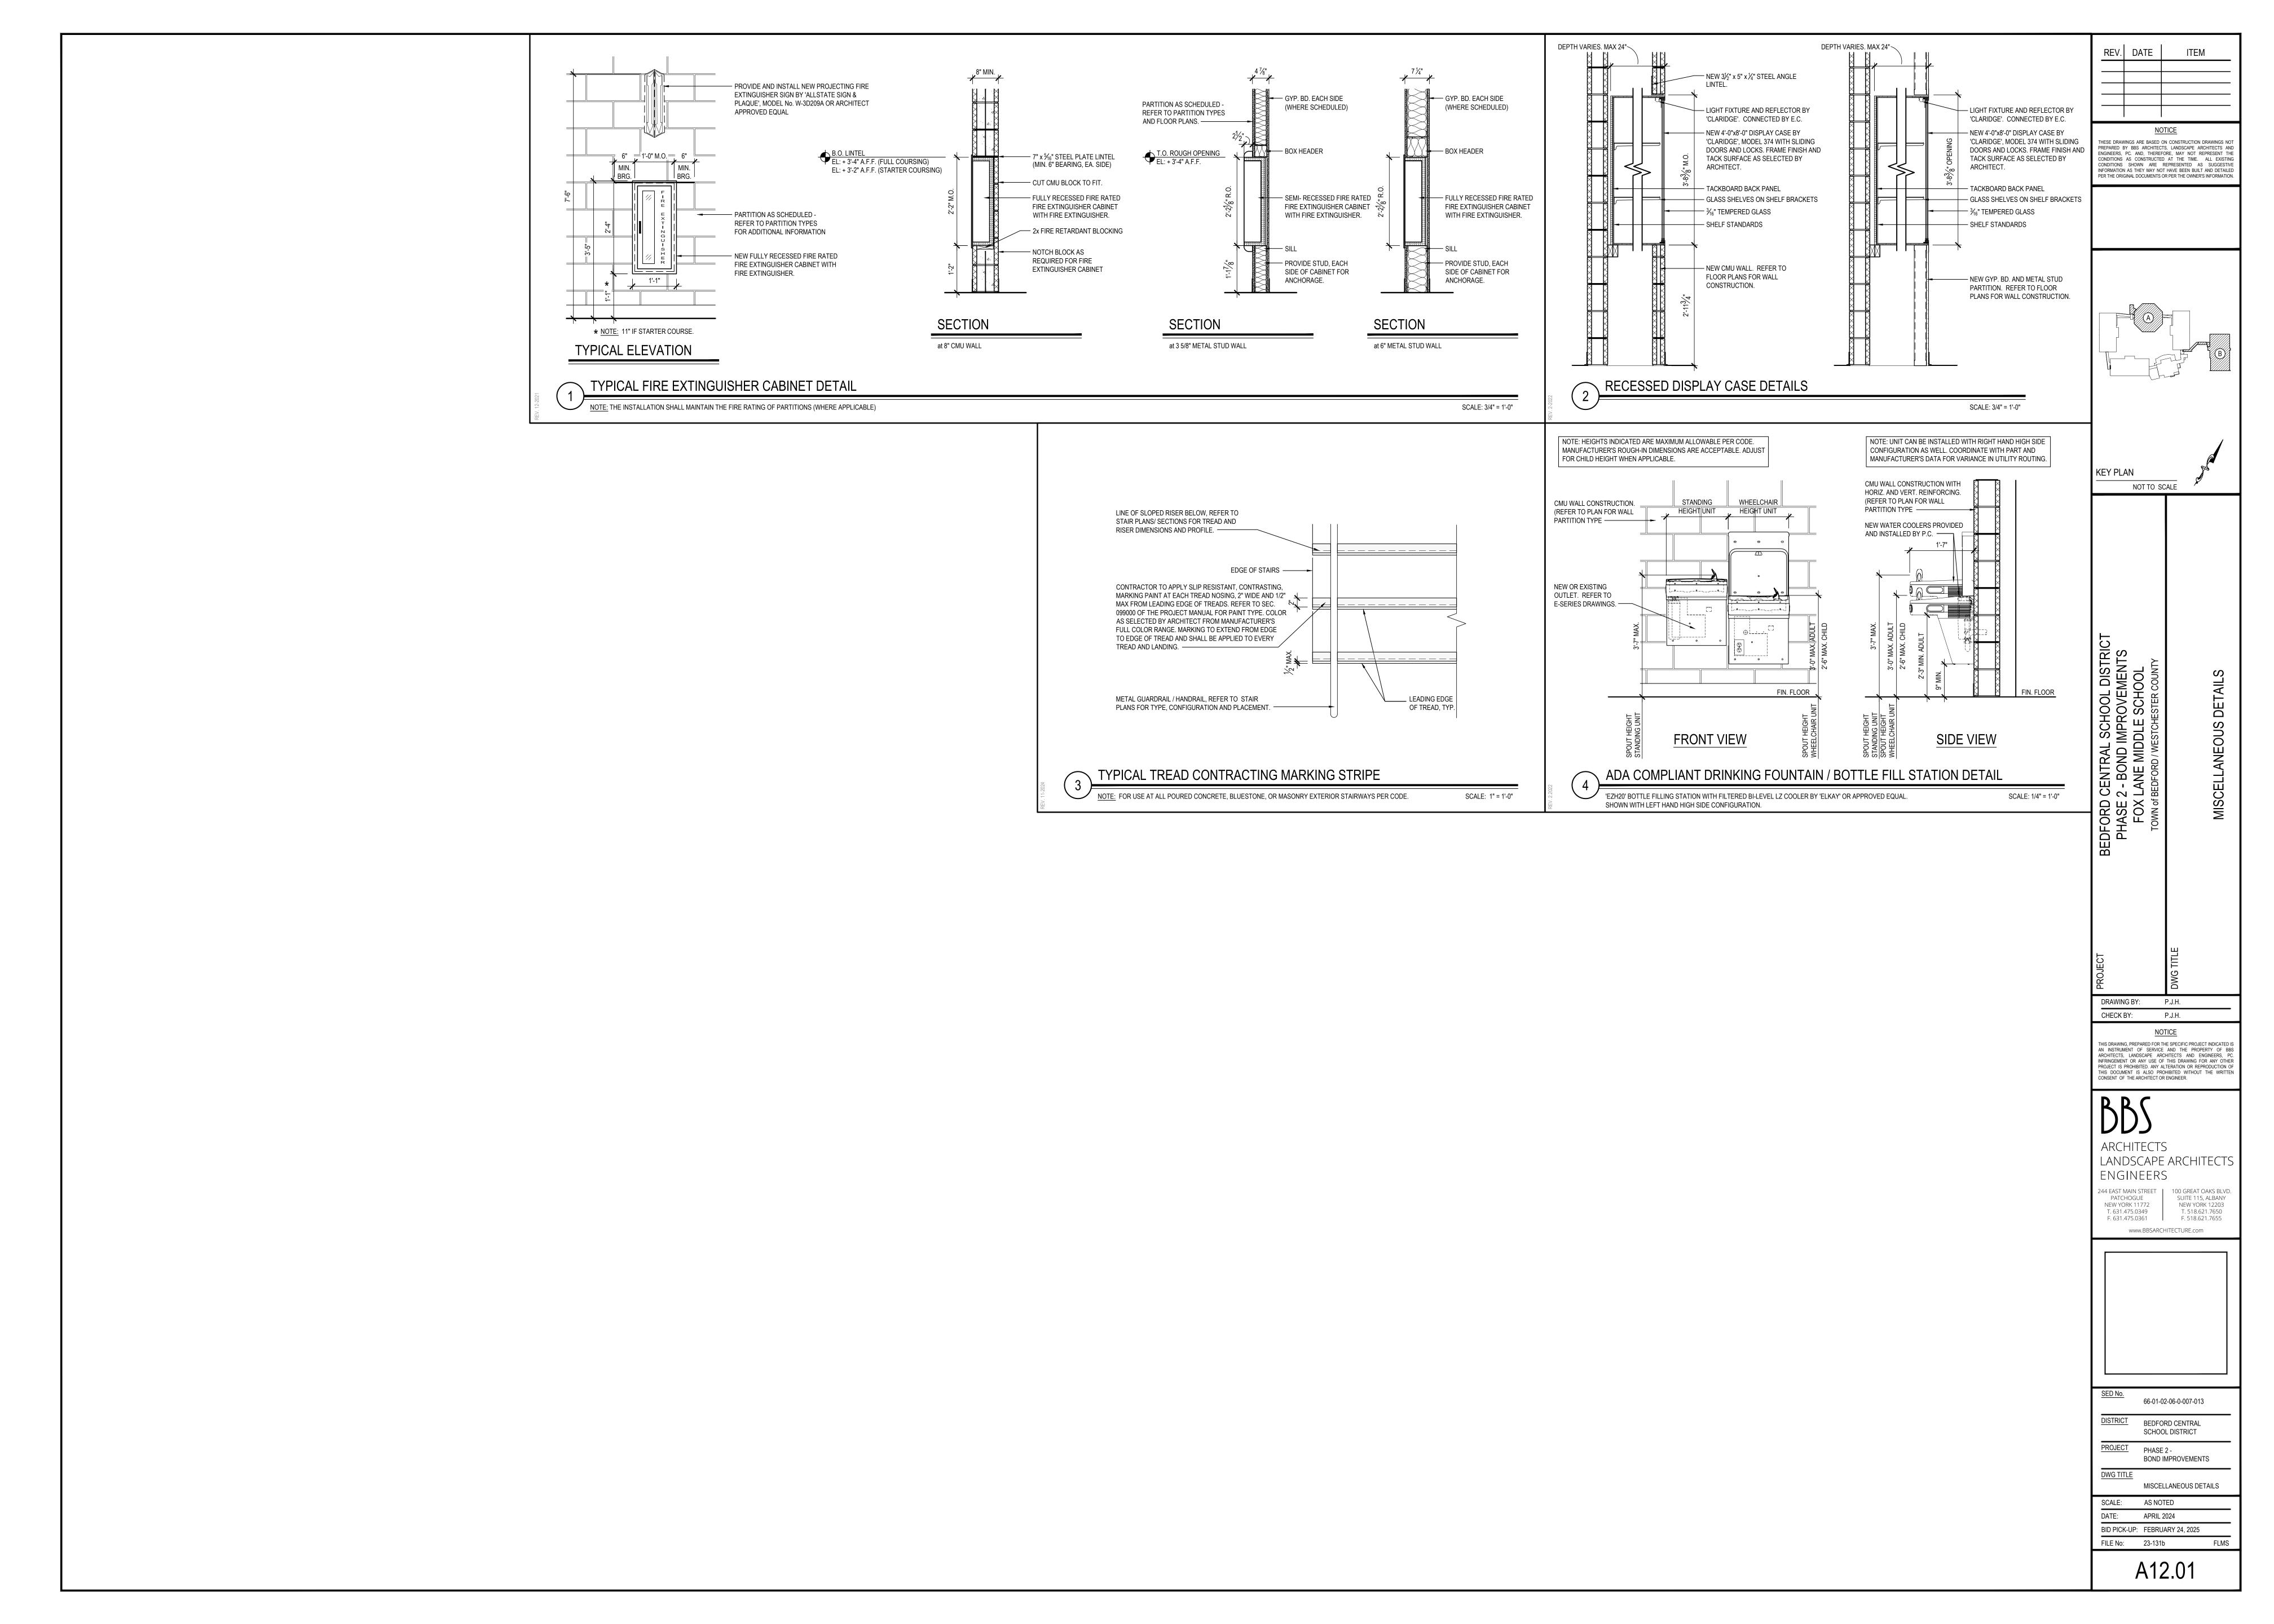

DESIGN LOADS AND CRITERIA: (FLMS ENTRY ADDITION)

NORTH-SOUTH, STEEL MOMENT FRAMES

EAST-WEST, STEEL MOMENT FRAMES

- 1. DESIGN PROVISIONS: 2020 BUILDING CODE OF NEW YORK STATE BUILDING RISK CATEGORY. III TERRAIN EXPOSURE CATEGORY, B BASIC SEISMIC/MAIN WIND FORCE RESISTING SYSTEM:
- NOTE: STEEL MOMENT FRAMES NOT SPECIFICALLY DETAILS FOR SEISMIC RESISTANCE.
- 2. ROOF DEAD LOAD, 20 PSF (TYPICAL) PORTION OF ABOVE ROOF DEAD LOAD FOR MECHANICAL EQUIPMENT AND PIPING SUSPENDED FROM STRUCTURAL FRAMING, 5 PSF CONCENTRATED LOADS SHALL BE LIMITED TO THOSE WHICH INDUCE MOMENTS AND SHEARS IN MEMBERS NOT GREATER THAN THOSE INDUCED BY THE NOTED

SNOW LOAD:

GROUND SNOW LOAD (Pg), 30 PSF FLAT ROOF SNOW LOAD (Pf), 25 PSF EXPOSURE FACTOR (C_F), 1.0 THERMAL FACTOR (C_t), 1.0 IMPORTANCE FACTOR (Is), 1.1 RAIN LOAD (PONDING), NOT APPLICABLE RAIN-ON-SNOW SURCHARGE, NOT APPLICABLE

UNIFORMLY DISTRIBUTED LOADS.

DRIFTED, UNBALANCE AND SLIDING SNOW LOADS AS INDICATED IN AMERICAN SOCIETY OF CIVIL ENGINEERS STANDARD ASCE 7-16.

WIND LOAD:

MAIN WIND FORCE RESISTING SYSTEM HAS BEEN DESIGNED USING THE PROCEDURE SIMPLE DIAPHRAGM LOW RISE BUILDINGS. BASIC WIND SPEED, 125 MPH EXPOSURE CATEGORY, B TOPOGRAPHIC FACTOR, 1.0 HEIGHT OF MAIN ROOF, 12 FEET AVERAGE NET WIND UPLIFT PRESSURE, 20 PSF (ULTIMATE)

5. SEISMIC LOADS:

RISK CATEGORY, III SITE CLASS, D SEISMIC IMPORTANCE FACTOR (I_e), 1.25 SHORT-PERIOD ACCELERATION (S_{ds}), 0.291 g ONE-SECOND ACCELERATION (S_{d1}), 0.96 g SEISMIC DESIGN CATEGORY, B SEISMIC RESPONSE COEFFICIENT (C_s), 0.1057 RESPONSE MODIFICATION COEFFICIENT (R), 3 DESIGN BASE SHEAR (V), 4 KIPS

6. GEOTECHNICAL DESIGN CRITERIA:

PRESUMTIVE SOIL BEARING PRESSURE, 2,000 PSF ASSUMED BEARING STRATA, NATIVE SOIL OR COMPACTED STRUCTURAL FILL

STRUCTURAL MATERIALS

STRUCTURAL STEEL AND MISCELLANEOUS STEEL ROLLED STEEL W SHAPES: ASTM A 992 ROLLED STEEL C, MC SHAPES: ASTM A 36 ROLLED STEEL PLATES, BARS, AND ANGLES: ASTM A 36 HIGH-STRENGTH BOLTS: ASTM A 325 OR ASTM A 490 THREADED ANCHORS: ASTM A 36

WELD ELECTRODES: AWS E70XX FOR CONNECTIONS, PROVIDE HIGHER GRADE OR AS REQUIRED FOR CAPACITY.

POWDER ACTUATED FASTENERS (PAF): HILTI 0.177 DIA DS/EDS ADHESIVE ANCHORS (SOLID CONC OR MASONRY): HILTI HIT HY 200

FOOTINGS, FOUNDATION WALLS, PIERS, GRADE BEAMS, MISC: 28 DAY COMPRESSIVE STRENGTH, f'c= 3,000 PSI SLUMP, 3 TO 5 INCHES

INTERIOR SLABS ON GRADE:

AIR ENTRAINMENT, 5 % ± 1 %

28 DAY COMPRESSIVE STRENGTH, f'c = 3,500 PSI SLUMP, 3 TO 5 INCHES AIR ENTRAINMENT, 3 % (MAX). DO NOT ADD AIR ENTRAINING ADMIXTURE. AIR ENTRAINMENT OCCURS AS A RESULT OF MIXING.

SEE SPECIFICATIONS AND NOTES FOR ADDITIONAL INFORMATION.

CONCRETE BLOCK: ASTM C 90, 2,800 PSI NET COMPRESSIVE STRENGTH, MORTAR -ASTM C 270, TYPE S UNIT MASONRY: ASTM C 90 CMU, 2,800 PSI NET COMPRESSIVE STRENGTH, MORTAR -ASTM C 270, TYPE S, f 'm=2,000PSI GROUT: ASTM C 476, 2,500 PSI COMPRESSIVE STRENGTH, 8 TO 10 INCH SLUMP

REINFORCING, CONCRETE: ASTM A 615. GRADE 60

GENERAL NOTES:

- 1. DIMENSIONS TO, OF, AND IN EXISTING STRUCTURE SHALL BE VERIFIED IN FIELD BY CONTRACTOR.
- 2. DO NOT SCALE DRAWINGS. CONTRACTOR SHALL NOTIFY ENGINEER OF ANY DISCREPANCIES IN DIMENSIONS BETWEEN THE EXISTING CONDITIONS, ARCHITECTURAL DRAWINGS, AND STRUCTURAL DRAWINGS.
- 3. DO NOT CHANGE SIZE OR SPACING OF STRUCTURAL ELEMENTS.
- 4. SECTIONS, AND DETAILS SHOWN ARE TYPICAL.. SIMILAR DETAILS APPLY TO SIMILAR CONDITIONS, UNLESS OTHERWISE INDICATED.
- 5. THE NOTES ON THIS DRAWING ARE TYPICAL UNLESS OTHERWISE INDICATED.
- 6. CONTRACTOR SHALL DETERMINE EXACT LOCATION OF EXISTING UTILITIES BEFORE COMMENCING WORK. CONTRACTOR SHALL BE FULLY RESPONSIBLE FOR DAMAGES WHICH MIGHT BE OCCASIONED BY FAILURE TO EXACTLY LOCATE AND PRESERVE EXISTING UTILITIES.
- 7. CONTRACTOR SHALL NOTIFY THE ENGINEER IN WRITING OF PROPOSED DEVIATIONS OR SUBSTITUTIONS FROM DIMENSIONS, MATERIALS, OR COMPONENTS SHOWN ON THE DRAWINGS AND MAKE ONLY THOSE DEVIATIONS OR SUBSTITUTIONS ACCEPTED BY THE ENGINEER.
- 8. DO NOT SUSPEND MECHANICAL, ELECTRICAL, OR PLUMBING ITEMS FROM ROOF DECK. REFER TO THE MECHANICAL, ELECTRICAL, AND PLUMBING DRAWINGS AND SPECIFICATIONS FOR HANGERS AND SUPPLEMENTAL FRAMING REQUIRED TO ATTACH THESE ITEMS TO THE MAIN ROOF FRAMING.
- 9. BRACE BUILDING UNTIL STRUCTURAL ELEMENTS NEEDED FOR STABILITY ARE INSTALLED. THESE ELEMENTS ARE AS FOLLOWS: ROOF DECK, MOMENT FRAMES, BRACING MEMBERS, AND CONNECTIONS.
- 10. THESE DRAWINGS DO NOT INCLUDE NECESSARY COMPONENTS FOR CONSTRUCTION SAFETY. CONTRACTOR SHALL BE SOLELY RESPONSIBLE FOR CONSTRUCTION SAFETY.
- 11. REFER TO ARCHITECTURAL DRAWINGS FOR DEMOLITION AND REMOVALS REQUIRED FOR EXISTING CONDITIONS.
- 12. COORDINATE THE NUMBER AND LOCATION OF ROOF DRAINS AND OPENINGS WITH ARCHITECTURAL AND MECHANICAL DRAWINGS.

- 1. BEAR FOOTINGS ON FIRM UNDISTURBED SOIL, OR COMPACTED STRUCTURAL FILL OR BEDROCK.
- 2. FOOTING BEARING STRATUM SHALL BE VERIFIED IN FIELD BY A LICENSED GEOTECHNICAL ENGINEER BEFORE CASTING CONCRETE FOOTINGS.
- 3. UNLESS OTHERWISE NOTED, BOTTOM OF EXTERIOR FOOTINGS IS 4 FEET MINIMUM BELOW FINISHED GRADE. FOOTINGS MAY BE STEPPED DOWN OR LOWERED TO REACH AN ACCEPTABLE BEARING STRATUM AS DETERMINED BY GEOTECHNICAL ENGINEER.
- 4. WHERE FOOTING ELEVATIONS ARE LOWERED DUE TO SOIL CONDITIONS, LOWER ADJACENT FOOTINGS IN ELEVATION IN ORDER THAT RATIO OF CLEAR DISTANCE BETWEEN NEAREST EDGE OF FOOTINGS TO DIFFERENCE IN ELEVATION BETWEEN BOTTOMS OF FOOTINGS SHALL NOT EXCEED 2H:1V
- 5. ELEVATIONS OF BOTTOM OF FOOTINGS ARE FOR ESTIMATING PURPOSES AND WILL BE ADJUSTED TO REQUIRED BEARING STRATA AS DETERMINED UPON EXCAVATION.
- 6. DO NOT PLACE FOOTINGS IN WATER OR ON FROZEN GROUND.
- 7. DO NOT ALLOW GROUND BENEATH FOOTINGS OR SLABS TO FREEZE.
- 8. BEARING SURFACES PREVIOUSLY ACCEPTED BY GEOTECHNICAL ENGINEER

- WHICH ARE ALLOWED TO BECOME SATURATED, FROZEN, OR DISTURBED SHALL BE REWORKED TO THE SATISFACTION OF GEOTECHNICAL ENGINEER.
- 9. CENTER FOOTINGS UNDER WALLS, PIERS, OR GRADE BEAMS UNLESS NOTED OTHERWISE.
- 10. PROVIDE FOUNDATION WALL CONTROL JOINTS WHERE INDICATED ON PLAN. WHERE CONTROL JOINTS ARE NOT INDICATED ON PLAN, PROVIDE CONTROL JOINTS SPACED AT 35 FEET. MAXIMUM.
- 11. REINFORCE ALL FOUNDATION WALLS IN ACCORDANCE WITH THE TYPICAL CONCRETE WALL REINFORCING DETAIL, UNLESS NOTED OTHERWISE.
- 12. FOUNDATION PREPARATION: REFER TO SPECIFICATIONS FOR "STRUCTURAL EXCAVATION, BACKFILL, AND COMPACTION (BUILDING AREA)".
- 13. CONCRETE WALLS SHALL ATTAIN A MINIMUM STRENGTH OF 70 % fc BEFORE PLACING BACKFILL AGAINST THEM.

CAST-IN-PLACE CONCRETE NOTES:

DESIGN DATA NOTES.

- REINFORCE CONCRETE ELEMENTS INCLUDING FOOTINGS, WALLS, GRADE BEAMS, PIERS, AND SLABS. REINFORCEMENT SHOWN PERTAINS TO TYPICAL CONDITIONS.
- COORDINATE CONCRETE MIX DESIGNS WITH CONCRETE MIX SCHEDULE AND
- 3. LAP SPLICE CONCRETE REINFORCEMENT AS SHOWN IN BAR LAP SPLICE SCHEDULE, UNLESS NOTED OTHERWISE. PROVIDE CLASS B LAP UNLESS NOTED
- 4. PROVIDE CORNER BARS IN CONTINUOUS FOOTINGS, THE SAME SIZE AND NUMBER AS CONTINUOUS REINFORCEMENT. LAP SPLICE WITH MAIN REINFORCEMENT AS SHOWN IN BAR LAP SPLICE SCHEDULE BUT NOT LESS THAN
- 5. EXTEND WALL FOOTING REINFORCEMENT INTO COLUMN FOOTINGS WITH A MINIMUM EMBEDMENT EQUAL TO THE MINIMUM BAR DEVELOPMENT LENGTH.
- CAST STEPPED FOOTINGS MONOLITHICALLY.
- DOWEL CONCRETE WALLS AND PIERS INTO FOOTINGS WITH DOWELS THE SAME SIZE AND SPACING AS VERTICAL REINFORCEMENT. EXTEND DOWELS TO WITHIN 3 INCHES OF BOTTOM OF FOOTING, TERMINATED WITH ACI STANDARD 90 DEGREE HOOK. LAP SPLICE WITH VERTICAL REINFORCEMENT UNLESS NOTED OTHERWISE.
- 8. CAST CONCRETE PIERS IN CONCRETE WALLS MONOLITHICALLY WITH WALLS.
- 9. VERIFY SIZE AND LOCATION OF MECHANICAL OPENINGS THROUGH CONCRETE MEMBERS PRIOR TO PLACING CONCRETE. PROVIDE SLEEVE OR CHASE FOR
- PIPING, CONDUIT, OR DUCT PENETRATIONS. CORE DRILLING IS NOT PERMITTED.
- 11. DO NOT LOCATE PENETRATIONS THROUGH PIERS, COLUMNS, BEAMS OR GRADE BEAMS UNLESS SHOWN IN DRAWINGS OR ACCEPTED BY ENGINEER.

10. DO NOT LOCATE PENETRATIONS FOR THROUGH FOOTINGS. STEP FOOTINGS

12. INSTALL EMBEDDED PIPES OR CONDUIT IN STRUCTURAL CONCRETE AS

DOWN AS REQUIRED TO LOCATE PENETRATION IN WALL.

- a. ALUMINUM CONDUITS AND PIPES ARE NOT PERMITTED. b. CONDUIT AND PIPE OUTSIDE DIAMETER SHALL NOT EXCEED 1/3 THE THICKNESS OF SLAB, BEAM OR WALL IN WHICH THEY ARE EMBEDDED. c. SPACE CONDUIT AND PIPE A MINIMUM OF 3 DIAMETERS (WIDTHS) ON CENTER OR 4 INCHES WHICHEVER IS GREATER.
- d. PROVIDE A MINIMUM OF 1 1/2 INCH COVER FOR CONCRETE EXPOSED TO EARTH OR WEATHER OR 3/4 INCH COVER OTHERWISE, UNLESS NOTED OTHERWISE e. REFER TO ACI 318, SECTION 6.3 FOR ADDITIONAL REQUIREMENTS.
- 13. CHAMFER EXPOSED CONCRETE CORNERS AND EDGES 3/4 INCH UNLESS NOTED
- 14. CONCRETE COVER FOR REINFORCEMENT SHALL BE AS INDICATED IN CONCRETE COVER SCHEDULE.

STRUCTURAL STEEL NOTES:

- DO NOT BEGIN STEEL ERECTION UNTIL SUPPORTING CONCRETE OBTAINS 75 PERCENT OF THE MATERIAL STRENGTHS NOTED IN DESIGN DATA NOTES.
- 2. LOCATE ROOFTOP MECHANICAL UNITS AS SHOWN: COORDINATE WITH MECHANICAL DRAWINGS. NOTIFY ENGINEER IF ACTUAL UNIT WEIGHTS EXCEED THE WEIGHTS SHOWN ON DRAWINGS.
- 3. WHERE BEAM SPACING IS NOT NOTED, SPACE BEAMS EQUALLY BETWEEN COLUMNS OR BETWEEN COLUMNS AND WALLS.
- 4. MINIMUM CAPACITY OF BEAM CONNECTIONS; FOR CONNECTIONS NOT DETAILED, PROVIDE CONNECTION CAPACITY FOR REACTIONS SHOWN ON DRAWINGS OR, IF NOT SHOWN, BASED ON EITHER ALLOWABLE STRESS DESIGN OR LOAD AND
- RESISTANCE FACTOR DESIGN AS FOLLOWS: A. AT LEAST 50 PERCENT OF THE ALLOWABLE UNIFORM LOAD FROM ALLOWABLE UNIFORM LOAD TABLES IN AISC ASD MANUAL, PART 2, FOR
- THE GIVEN STEEL MEMBER. B. AT LEAST 50 PERCENT OF THE MAXIMUM TOTAL FACTORED UNIFORM LOAD FROM MAXIMUM TOTAL FACTORED UNIFORM LOAD TABLES IN AISC LRFD MANUAL, PART 5, FOR THE GIVEN STEEL MEMBER.
- C. FOR BEAMS AND GIRDERS WITH SHEAR CONNECTORS, PROVIDE CONNECTION CAPACITY OF AT LEAST 70 PERCENT OF THE UNIFORM LOAD VALUES (ASD OR LRFD, AS APPROPRIATE), UNLESS INDICATED OTHERWISE ON DRAWINGS. D. CONCENTRATED LOADS NEAR SUPPORTS MUST BE ADDED.
- PROVIDE HOT DIP GALVANIZED FASTENERS FOR GALVANIZED FRAMING CONNECTIONS AND STAINLESS STEEL FASTENERS FOR STAINLESS STEEL
- 6. FABRICATE AND ERECT STEEL IN ACCORDANCE WITH THE AISC CODE OF STANDARD PRACTICE FOR STEEL BUILDINGS AND BRIDGES.
- 7. SLOPE ROOF STEEL UNIFORMLY BETWEEN ELEVATIONS SPECIFIED ON PLANS.
- 8. REMOVE ALL PAINT AND OTHER DEBRIS FROM STEEL PRIOR TO FIELD WELDING TO STRUCTURE. FIELD WELDS AND ADJACENT AREAS SHALL BE FIELD PRIMED AFTER INSPECTED.
- 9. ALL SAFETY REGULATION AND PRECAUTIONS WITH REGARDS TO FIELD WELDING SHALL BE COMPLIED WITH TO PROTECT EXISTING CONSTRUCTION TO REMAIN, FINISHES, AND ON SITE WORKERS (SCREENS & BARRIERS).
- 10. WHERE FILLET WELD SIZES ARE NOT SPECIFICALLY NOTED, THE FABRICATOR SHALL DETAIL A MINIMUM SIZE FILLET WELD IN ACCORDANCE WITH AWS STANDARDS. THE ACTUAL SIZES SHALL BE SHOWN ON THE SHOP DRAWINGS.
- 11. BACKER BARS AT COMPLETE JOINT PENETRATION WELDS MUST BE REMOVED IF "R" IS GREATER THAN 3 OR IF STEEL IS "AESS". 12. CONNECTION DESIGN BY FABRICATOR WILL BE SUBJECT TO REVIEW BY
- ENGINEER. USE DOUBLE ANGLE SHEAR CONNECTIONS WITH 3/4" DIAMETER ASTM A325 BOLTS WITH AT LEAST THE FOLLOWING NUMBER OF BOLT ROWS: NUMBER OF BOLT ROWS

W8, W10 W12, W14, W16 W18, W21, W24

- 13. DO NOT PLACE HOLES THROUGH STRUCTURAL STEEL MEMBERS EXCEPT UNLESS INDICATED IN STRUCTURAL DRAWINGS.
- 14. BOLTED CONNECTIONS SHALL UTILIZE TYPE 3 ASTM A 325 BOLTS, UNO. ALL CONNECTIONS SHALL BE INSTALLED SNUG TIGHT.
- 15. REMOVE BURRS, DIRT, AND OTHER FOREIGN MATERIALS FROM FRAYING SURFACES AND SURFACES ADJACENT TO BOLT HEADS AND NUTS. BURRS LESS THAN OR EQUAL TO 1/16" IN HEIGHT ARE PERMITTED TO REMAIN ON FAYING
- 16. FABRICATE BOLTED CONNECTIONS WITH STANDARD SIZED HOLES, UNLESS NOTED OTHERWISE.
- 17. COMPLY WITH AISC SPECIFICATIONS FOR STRUCTURAL JOINTS USING HIGH STRENGTH BOLTED CONNECTIONS.

COLD-FORMED METAL FRAMING NOTES:

SURFACES.

- 1. MINIMUM MEMBER MATERIAL THICKNESS IS 18 GAUGE UNLESS NOTED
- 2. CUT FRAMING COMPONENTS SQUARELY OR ON AN ANGLE AS REQUIRED TO FIT TIGHTLY WITH FULL BEARING AGAINST ABUTTING MEMBERS. TEMPORARILY BRACE MEMBERS AS REQUIRED PRIOR TO FINAL FASTENING.
- 3. FIELD CUTTING OF MEMBERS SHALL BE PERFORMED BY SHEARING OR SAWING. TORCH CUTTING IS NOT ACCEPTABLE.
- 4. SPLICES ARE NOT PERMITTED IN STUDS, JOISTS, OR OTHER LOAD-CARRYING

- MEMBERS UNLESS CALCULATIONS AND DETAILS HAVE BEEN SUBMITTED TO ENGINEER FOR REVIEW AND ACCEPTED.
- 5. WHEN COLD-FORMED STUDS ARE TO BE USED FOR TRUSS, RAFTER, OR HEADER APPLICATIONS, STUDS SHALL BE UN-PUNCHED THROUGH THE WEB. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO SPECIFY UN-PUNCHED STUDS WHEN ORDERING MATERIALS.
- 6. FIELD-INSTALLED HOLES ARE NOT PERMITTED IN MEMBERS UNLESS INDICATED IN DRAWINGS.
- 7. DO NOT SCREW OR WELD STUDS TO VERTICAL DEFLECTION TRACKS. DO NOT CONNECT SHEATHING TO VERTICAL DEFLECTION TRACKS. PROVIDE GAP IN SHEATHING TO ACCOMMODATE VERTICAL DEFLECTION.
- 8. ABUTTING TRACK MEMBERS SHALL BE SPLICED TOGETHER USING A TYPICAL STUD/JOIST SCREWED TO THE TRACK ON BOTH SIDES OF JOINT. BUTT-WELDING
- IS ALSO ACCEPTABLE. 9. FOR LOAD BEARING CONSTRUCTION, THE CONTRACTOR SHALL ENSURE THAT ADEQUATE BRACING IS IN PLACE UNTIL SHEATHING IS ATTACHED TO BOTH STUD
- 10. THE CONTRACTOR IS SOLELY RESPONSIBLE FOR ERECTION BRACING.

MINIMUM FASTENER SPACING = 1 INCH

MINIMUM FASTENER SPACING = 4 INCHES

FLANGES. DO NOT OVERLOAD STUDS DURING CONSTRUCTION.

- 11. MINIMUM SCREW SPACING AND EDGE DISTANCE IS 3/4 INCH UNLESS NOTED OTHERWISE.
- 12. THE FOLLOWING SHALL BE USED FOR POWDER-ACTUATED FASTENERS IN STEEL UNLESS NOTED OTHERWISE: MINIMUM EDGE DISTANCE = 1/2 INCH
- 13. THE FOLLOWING SHALL BE USED FOR POWDER-ACTUATED FASTENERS IN CONCRETE UNLESS NOTED OTHERWISE: MINIMUM EDGE DISTANCE = 3 INCHES
- 14. WELDING SHALL BE PERFORMED IN ACCORDANCE WITH AWS D1.3 "STRUCTURAL WELDING CODE - SHEET STEEL".
- 15. MINIMUM WELD THROAT THICKNESS EQUALS THE BASE METAL THICKNESS OF THE THINNEST CONNECTED MATERIAL UNLESS NOTED OTHERWISE.

16. TOUCH-UP WELDS WITH GALVANIZED REPAIR PAINT.

USE PREFABRICATED CORNERS AND TEES.

MASONRY NOTES:

DETAILED.

- 1. MASONRY WALLS SHALL HAVE STANDARD WEIGHT JOINT REINFORCEMENT EVERY SECOND COURSE AND TOP TWO COURSES UNLESS NOTED OTHERWISE. PROVIDE LADDER TYPE JOINT REINFORCING FOR REINFORCED MASONRY WALLS. LAP SPLICE JOINT REINFORCEMENT A MINIMUM OF 6 INCHES TYPICALLY.
- 2. PLACE JOINT REINFORCEMENT CONTINUOUSLY THROUGH PILASTERS.
- 3. BEARING AND OTHER EXTERIOR WALLS MADE OF BRICK AND BLOCK SHALL BE BUILT SIMULTANEOUSLY AS COMPOSITE WALLS, BONDED TOGETHER WITH FULL WIDTH HORIZONTAL JOINT REINFORCEMENT AT 16 INCHES ON CENTER. FILL
- COLLAR JOINTS SOLID WITH MORTAR. 4. SUBMIT PROPOSED GROUTING PROGRAM FOR GROUTING CONCRETE MASONRY WALLS. GROUTING SHALL BE IN ACCORDANCE WITH RECOMMENDATIONS OF NCMA-TEK 3-2A, "GROUTING CONCRETE MASONRY WALLS." STOP GROUT 2 INCHES BELOW TOP OF BLOCK AT EACH POUR TO ENABLE AN INTERLOCK WITH NEXT POUR. GROUT CORES SOLID AT REINFORCING BARS AND ELSEWHERE AS INDICATED ON DRAWINGS.
- 5. REINFORCE WALLS WITH # AT ON CENTER. SEE / FOR ELEVATION OF MASONRY WALL REINFORCING. LAP #4 BARS 20 INCHES. LAP #5 BARS 25 INCHES.
- 6. FILL CORES IN HOLLOW CONCRETE MASONRY UNITS WITH GROUT THREE COURSES (24 INCHES) UNDER BEARING PLATES, BEAMS, LINTELS, POSTS, AND
- SIMILAR ITEMS, UNLESS OTHERWISE INDICATED. 7. PROVIDE BOND BEAM AT TOPS OF WALLS, AT EACH FLOOR, AND ELSEWHERE AS
- 8. FILL COLUMN AND BEAM POCKETS WITH MASONRY AFTER COLUMN OR BEAM IS
- 9. NON-LOAD BEARING PARTITIONS SHALL NOT BE BUILT TIGHT TO STRUCTURE ABOVE. LEAVE GAP BETWEEN TOP OF PARTITION AND STRUCTURE, AND BRACE TOP OF PARTITION AS INDICATED ON DRAWINGS.
- 10. STRUCTURAL DRAWINGS DO NOT SHOW FLASHINGS, WEEPS, AND DRIPS; HOWEVER, THEY ARE ESSENTIAL TO MAINTAINING THE WATER TIGHTNESS OF THE BUILDING AND PROTECTION OF THE FRAMING. REFER TO ARCHITECTURAL DRAWINGS AND SPECIFICATIONS FOR DETAILS AND INFORMATION.
- 11. VENEER ANCHORS, TIES, WEEPS, AND FLASHING ARE INDICATED ON THE ARCHITECTURAL DRAWINGS AND IN THE SPECIFICATIONS UNLESS DETAILED OR

12. LAP REINFORCEMENT BARS AS SHOWN IN CMU BAR LAP SCHEDULE.

SHEET LIST			
SHEET NUMBER	SHEET NAME		
S0.01	DESIGN DATA AND GENERAL NOTES		
S0.02	SPECIAL INSPECTON NOTES AND SCHEDULE		
S1.00	PARTIAL FOUNDATION PLAN		
S2.00	PARTIAL ROOF FRAMING PLAN		
S3.00	FOUNDATION SECTIONS AND DETAILS		
S3.01	FOUNDATION SECTIONS, PIER AND BASEPLATE DETAILS		
S4.00	MASONRY ELEVATIONS, SECTIONS AND DETAILS		
S5.00	STEEL FRAMING SECTIONS AND DETAILS		
S5.01	STEEL FRAMING SECTIONS AND DETAILS		

SHEET LIST			
SHEET NUMBER	SHEET NAME		
S0.01	DESIGN DATA AND GENERAL NOTES		
S0.02	SPECIAL INSPECTON NOTES AND SCHEDULE		
S1.00	PARTIAL FOUNDATION PLAN		
S2.00	PARTIAL ROOF FRAMING PLAN		
S3.00	FOUNDATION SECTIONS AND DETAILS		
S3.01	FOUNDATION SECTIONS, PIER AND BASEPLATE DETAILS		
S4.00	MASONRY ELEVATIONS, SECTIONS AND DETAILS		
S5.00	STEEL FRAMING SECTIONS AND DETAILS		
S5.01	STEEL FRAMING SECTIONS AND DETAILS		

		AB	BREVIATIONS		
ADDL	ADDITIONAL	ENGR	EDGE OF DECK	OPP	OPPOSITE
ADJ	ADJACENT	FD	FLOOR DRAIN	OF	OUSIDE FACE
APPROX	APPROXIMATE	FT	FOOT		
ARCH	ARCHITECTURAL	FDN	FOUNDATION	PL	PLATE
AESS	ARCHITECTURAL EXPOSED STRUCTUAL STEEL	FTG	FOOTING	PAF	POWDER ACTUATED FASTENER
		GALV	GALVANIZED	PE	PROFESSIONAL ENGINEER
B/ , BO	BOTTOM OF	GA	GAUGE	PERP	PERPENDICULAR
BLDG	BUILDING			PLF	POUNDS PER LINEAL FOOT
BLKG	BLOCKING	HSS	HOLLOW STEEL SECTION	PSF	POUNDS PER SQUARE FOOT
BP	BASEPLATE	HORIZ	HORIZONTAL	PSI	POUNDS PER SQUARE INCH
BRG	BEARING	НІ	HIGH	PCF	POUNDS PER CUBIC FOOT
BTWN	BETWEEN	HP	HIGH POINT	PC	PRECAST
			HEATING, VENTILATION,	PSL	PARALLEL STRAND LUMBER
CANT	CANTILEVER	HVAC	AIR CONDITIONING	PT	PRESSURE TREATED
CIP	CAST IN PLACE	IF	INSIDE FACE	- •	
CJ	CONTROL JOINT	INFO	INFORMATION	R	RADIUS
CL	CENTER LINE	INT	INTERIOR	RD	ROOF DRAIN
CLR	CLEAR	INV	INVERT	טוו	
CMU	CONCRETE			RDP	REGISTERED DESIGN PROFESSIONAL
	MASONRY UNIT(S)	K	KIPS	REQD	REQUIRED
COL	COLUMN	KSF	KIPS PER SQUARE FOOT	REINF	REINFORCING
CONC	CONCRETE			REV	REVISION
CONT	CONTINUOUS	L	ANGLE	RO	ROUGH OPENING
CFMF	COLD-FORMED	LBS	POUNDS		
OI WII	METAL FRAMING	LG	LONG	SIM	SIMILAR
COORD	COORDINATE	LLH	LONG LEG HORIZONTAL	SPA	SPACE
		LLV	LONG LEG VERTICAL	STD	STANDARD
DET	DETAIL	LO	LOW	SF	SQUARE FEET
DIA	DIAMETER	LOC	LOCATION	SS	STAINLESS STEEL
DIM	DIMENSION	LW	LIGHT WEIGHT	STL	STEEL
DN	DOWN	LVL	LAMINATED VENEER	SQ	SQUARE
DO	DITTO	LVL	LUMBER		
DWLS	DOWELS			THK	THICK
DWG	DRAWINGS	MFR	MANUFACTURER	T/ , TO	TOP OF
		MAX	MAXIMUM	TYP	TYPICAL
EA	EACH	MIN	MIN	T&B	TOP AND BOTTOM
EF	EACH FACE	MECH	MECHANICAL		
ES	EACH SIDE	MISC	MISCELLANEOUS	UNO	THICK
EL	ELEVATION	МО	MASONRY OPENING		
ELEV	ELEVATOR			VERT	VERTICAL
EOS	EDGE OF SLAB	NA	NOT APPLICABLE	VIF	VERIFY IN FIELD
EOD	EDGE OF DECK	NIC	NOT IN CONTRACT		
EQ	EQUAL	NOM	NOMINAL	W	WIDTH, WIDE
EQUIP	EQUIPMENT	NW	NORMAL WEIGHT	W/	WITH
EW	EACH WAY	NS	NEAR SIDE	WD	WOOD
EXIST	EXIST	NTS	NOT TO SCALE	WP	WORK POINT
EXT	EXTERIOR			WWF	WELDED WIRE FABRIC
		OC	ON CENTER	WCJ	WALL CONTROL JOINT
EIFS	EXTERIOR INSULATION FINISH SYSTEM	OD	OUTSIDE DIAMETER	*****	LE CONTINUE CONTI
EXP	EXPANSION	OPNG			

NOTICE
RAWINGS ARE BASED ON CONSTRUCTION DRAWINGS NOT ED BY BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND RS, PC. AND, THEREFORE, MAY NOT REPRESENT THE DNS AS CONSTRUCTED AT THE TIME. ALL EXISTING DNS SHOWN ARE REPRESENTED AS SUGGESTIVE DITON AS THEY MAY NOT HAVE BEEN BUILT AND DETAILED ORIGINAL DOCUMENTS OR PER THE OWNER'S INFORMATION.
Dalto Engineering 7 Maureen Court, Clifton Park, NY www.daltoplic.com p.518.466.3317

REV. DATE

BEDFORD CENTRAL SCHOOL DISTRICT CAPITAL IMPROVEMENTS - BOND PHASE 2 FOX LANE MIDDLE SCHOOL TOWN of BEDFORD / WESTCHESTER COUNTY	DESIGN DATA AND GENERAL NOTES
PROJECT	DWG TITL
DRAWING BY:	AED
CHECK BY:	AED
THIS DRAWING, PREPARED FOR AN INSTRUMENT OF SERVIC	OTICE THE SPECIFIC PROJECT INDICATED IS E AND THE PROPERTY OF BBS RCHITECTS AND ENGINEERS. PC.

ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, INFRINGEMENT OR ANY USE OF THIS DRAWING FOR ANY OTH

PROJECT IS PROHIBITED. ANY ALTERATION OR REPRODUCTION (
THIS DOCUMENT IS ALSO PROHIBITED WITHOUT THE WRITTE

LANDSCAPE ARCHITECTS

www.BBSARCHITECTURE.com

SUITE 115, ALBANY

NEW YORK 12203

ONSENT OF THE ARCHITECT OR ENGINEER.

ARCHITECTS

ENGINEERS

NEW YORK 11772

F. 631.475.0361

66-01-02-06-0-007-013

DISTRICT BEDFORD CENTRAL SCHOOL DISTRICT CAPITAL IMPROVEMENTS -BOND PHASE 2 <u>DWG TITLE</u> DESIGN DATA AND GENERAL NOTES SCALE: AS NOTED

DATE: APRIL 2024

BID PICK-UP: FEBRUARY 24, 2025

FILE No: 23-131b

CONCRETE COVER SCHEDULE	
LOCATION	COVER
CONCRETE CAST AGAINST AND PERMANENTLY IN CONTACT WITH GROUND	3"
CONCRETE EXPOSED TO WEATHER OR IN CONTACT WITH GROUND	
#6 BARS AND LARGER	2"
#5 BARS AND SMALLER	1 1/2"
CONCRETE NOT EXPOSED TO WEATHER OR IN CONTACT WITH GROUND	
SLABS, WALLS, JOIST	3/4"
BEAMS, GIRDERS, COLUMNS, AND PIERS	1 1/2"

	CL	ASS B	IENS	ION LA	P SPLI	ICE SC	CHEDU	LE	
		fc' =3,000 P	SI				fc' = 4,000 P	SI	
BAR SIZE	TOP	BAR	OTHE	R BAR	BAR SIZE	TOP	BAR	OTHE	R BAR
DAK SIZE	CASE 1	CASE 2	CASE 1	CASE 2	DAR SIZE	CASE 1	CASE 2	CASE 1	CASE 2
#3	28	42	21	32	#3	24	36	18	28
#4	37	56	28	43	#4	32	48	25	37
#5	46	69	36	53	#5	40	60	31	46
#6	56	83	43	64	#6	48	72	37	55
#7	81	131	62	93	#7	70	105	54	81
#8	93	139	71	107	#8	80	120	62	92
#9	104	157	80	120	#9	90	136	70	104

- TABULATED VALUES ARE IN INCHES. 2. TOP BARS ARE HORIZONTAL BARS PLACED WITH MORE THAN 12 INCHES OF FRESH CONCRETE
- PLACED BELOW THE DEVELOPMENT LENGTH OR SPLICE. 3. CASE 1 APPLIES TO CLEAR SPACING GREATER THAN OR EQUAL TO 2 BAR DIAMETERS AND COVER
- GREATER THAN OR EQUAL TO 1 DIAMETER.
- 4. CASE 2 APPLIES TO CLEAR SPACING LESS THAN 2 BAR DIAMETERS AND COVER LESS THAN 1 DIAMETER.
- 5. FOR VALUES OF COVER AND SPACING BETWEEN TABULATED VALUES USE THE LONGER LAP LENGTH. DO NOT INTERPOLATE.
- 6. CALCULATE CENTER TO CENTER SPACING OF BARS AT LAP SPLICE LOCATIONS. 7. FOR EPOXY COATED BARS INCREASE THE TABULATED VALUES AS FOLLOWS; TOP BARS MULTIPLY
- TABULATED VALUE BY 1.3, FOR OTHER BARS MULTIPLY TABULATED VALUE BY 1.5. 8. FOR LIGHTWEIGHT CONCRETE MULTIPLY TABULATED VALUE BY 1.3

CONCRETE MIX							
APPLICATION	EXPOSURE	F'c	MAXIMUM W/C RATIO	AIR CONTENT	NOMINAL MAX. AGGREGATE SIZE (NOTE 4)		
FOOTINGS	F0	3,000 PSI	SEE NOTE 2	4.5% ± 1.5%	-		
EXT SLAB ON GRADE	F1	4,500 PSI	0.45	4.5% ± 1.5%	-		
SLAB ON GRADE	F0	3,500 PSI	SEE NOTE 2	SEE NOTE 3	-		
FOUNDATION WALLS	F0	3,000 PSI	SEE NOTE 2	4.5% ± 1.5%	-		
SITE WALLS	F1	4,000 PSI	0.45	4.5% ± 1.5%	-		
SLAB ON DECK	F0	3,500 PSI	SEE NOTE 2	SEE NOTE 3	-		
PIERS	F0	3,000 PSI	SEE NOTE 2	4.5% ± 1.5%	-		


NOTES:

BLISTERING AND DELAMINATION.

- 1. EXPOSURE CATEGORIES AND CLASSES FOR SULFATES, PERMEABILITY AND CORROSION PROTECTION OF REINFORCEMENT IS CLASS ZERO UNLESS NOTED OTHERWISE.
- 2. WHERE NO MAXIMUM WATER TO CEMENT RATIO IS NOTED, PROPORTION WATER TO CEMENT RATIO FOR SPECIFIED CONCRETE MIX DESIGN STRENGTH.
- 3. DO NOT AIR ENTRAIN INTERIOR SLABS ON GRADE OR SLABS ON METAL DECK. AIR ENTRAINMENT IS NOT PERMITTED FOR CONCRETE TO RECEIVE HARD TROWEL FINISH AND ENTRAPPED AIR SHALL NOT EXCEED 3%. SLABS SHALL BE FINISHED TO AVOID SURFACE IMPERFECTIONS, INCLUDING
- 4. COARSE AGGREGATE SHALL BE AS INDICATED IN SPECIFICATIONS. MAXIMUM CONCRETE UNIT WEIGHT NOT TO EXCEED 150 POUNDS PER CUBIC FEET.


MASONRY REINFORCEMENT LAP SPLICE				
BAR LAP LENGTHS IN CMU WITH I'm	= 2,000 psi			
LOCATION	#4	#5	#6	
(1) BAR AT CENTER OF 6" CMU CORE OR BOND BEAM	23"	36"	73"	
(1) BAR AT CENTER OF 8" CMU CORE OR BOND BEAM	23"	27"	50"	
(1) BAR AT CENTER OF 12" CMU CORE OR BOND BEAM	23"	36"	73"	
(2) BARS IN 8" CMU CORE LOCATED 5" FROM EACH FACE SHELL	23"	36"	73"	
(2) BARS IN 12" CMU CORE LOCATED 9" FROM EACH FACE SHELL	23"	36"	73"	
(2) BARS IN 8", 10", 12" BOND BEAMS LOCATED 3/4" FOR INSIDE FACE OF FACE SHELL	22"	22"	22"	

BAR LAP LENGTHS IN CMU WITH f'm	= 1,500 psi		
LOCATION	#4	#5	#6
(1) BAR AT CENTER OF 6" CMU CORE OR BOND BEAM	23"	36"	73"
(1) BAR AT CENTER OF 8" CMU CORE OR BOND BEAM	23"	27"	50"
(1) BAR AT CENTER OF 12" CMU CORE OR BOND BEAM	23"	36"	73"
(2) BARS IN 8" CMU CORE LOCATED 5" FROM EACH FACE SHELL	23"	36"	73"
(2) BARS IN 12" CMU CORE LOCATED 9" FROM EACH FACE SHELL	23"	36"	73"
(2) BARS IN 8", 10", 12" BOND BEAMS LOCATED 3/4" FOR	22"	22"	00"
INSIDE FACE OF FACE SHELL	22"	22"	22"

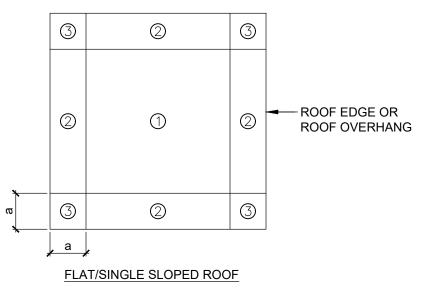


ROOF PLAN -1 ROOF WIND PRESSURE ZONES S0.1 SCALE: 3/4= 1'-0"

a = 10 PERCENT OF LEAST HORIZONTAL DIMENSION OR 0.4XROOF HEIGHT WHICHEVER IS SMALLER, BUT NOT LESS THAN EITHER 4 PERCENT OF LEAST HORIZONTAL DIMENSION OR 3 FEET.

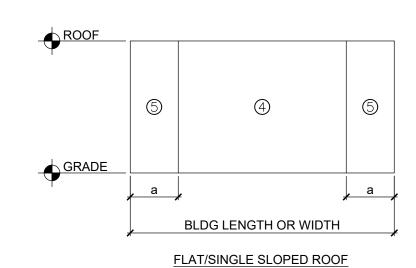



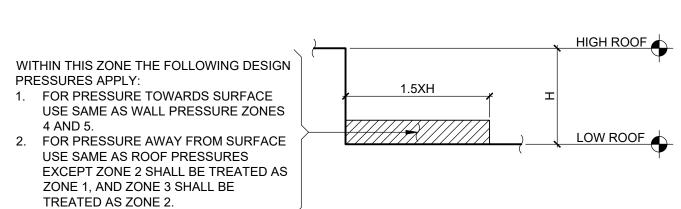

SECTION - ROOF WIND 3 PRESSURE ZONE AT ROOF STEPS S0.1 SCALE: 3/4= 1'-0"

	COMPONE	ENTS AND CLADDIN	G MATERIALS	
ROOF SLOPE	SURFACE	EFFECTIVE WIND AREA (sf)	WIND PRESSURE TOWARD SURFACE (psf)	WIND PRESSURE AWAY FROM SURFACE (psf)
	ZONE 1 ROOF	10 20 50 100	10 10 10 10	17 16 16 15
	ZONE 2 ROOF EDGES	10 20 50 100	10 10 10 10	28 25 21 18
0° TO 7°	ZONE 2 ROOF OVERHANG AT ROOF EDGES	10 20 50 100	0 0 0 0	24 24 23 23
	ZONE 3 ROOF CORNERS	10 20 50 100	10 10 10 10	42 35 25 18
	ZONE 3 ROOF OVERHANG AT ROOF CORNERS	10 20 50 100	0 0 0 0	40 31 20 12
	ZONE 1 ROOF	10 20 50 100	10 10 10 10	15 15 14 14
	ZONE 2 ROOF EDGES	10 20 50 100	10 10 10 10	27 25 22 20
> 7° TO 27°	ZONE 2 ROOF OVERHANG AT ROOF EDGES	10 20 50 100	0 0 0 0	31 31 31 31
	ZONE 3 ROOF CORNERS	10 20 50 100	10 10 10 10	39 37 33 31
	ZONE 3 ROOF OVERHANG AT ROOF CORNERS	10 20 50 100	0 0 0 0	53 47 41 36
	ZONE 1 ROOF	10 20 50 100	15 15 14 14	17 16 15 14
	ZONE 2 ROOF EDGES	10 20 50 100	15 15 14 14	20 19 18 17
> 27° TO 45°	ZONE 2 ROOF OVERHANG AT ROOF EDGES	10 20 50 100	0 0 0 0	28 28 26 25
	ZONE 3 ROOF CORNERS	10 20 50 100	15 15 14 14	20 19 18 17
	ZONE 3 ROOF OVERHANG AT ROOF CORNERS	10 20 50 100	0 0 0 0	28 28 26 26
	ZONE 4 WALL	10 20 50 100 500	17 16 15 14 13	18 17 16 16 14
NA	ZONE 5 WALL CORNERS	10 20 50 100 500	17 16 15 14 13	22 21 19 17 14

DESIGN WIND PRESSURE FOR EXTERIOR

HOT WEATHER MASONRY CONSTRUCTION REQUIREMENTS CONSTRUCTION - BASED ON PROTECTION - BASED ON ANTICIPATED AMBIENT TEMPERATURES MEAN DAILY TEMPERATURES 1. NORMAL MASONRY PROCEDURES BELOW 90°F 1. NORMAL MASONRY PROCEDURES 1. MAINTAIN SAND PILES IN A DAMP, LOOSE CONDITION. 1. FOG SPRAY NEWLY CONSTRUCTED MASONRY UNTIL 2. PROVIDE NECESSARY CONDITIONS AND EQUIPMENT DAMP, AT LEAST THREE TIMES A DAY UNTIL THE TO PRODUCE MORTAR HAVING A TEMPERATURE MASONRY IS THREE DAYS OLD. BELOW 120°F. 3. MAINTAIN TEMPERATURE OF MORTAR AND GROUT BELOW 120°F. 90°F - 105°F 4. FLUSH MIXER, MORTAR TRANSPORT CONTAINER, AND MORTAR BOARDS WITH COOL WATER BEFORE THEY COME INTO CONTACT WITH MORTAR INGREDIENTS OR MORTAR. 5. MAINTAIN MORTAR CONSISTENCY BY RETEMPERING WITH COOL WATER. 6. USE MORTAR WITHIN 2 HOURS OF INITIAL MIXING. 1. MAINTAIN SAND PILES IN A DAMP, LOOSE CONDITION. 1. FOG SPRAY NEWLY CONSTRUCTED MASONRY UNTIL 2. PROVIDE NECESSARY CONDITIONS AND EQUIPMENT DAMP, AT LEAST THREE TIMES A DAY UNTIL THE TO PRODUCE MORTAR HAVING A TEMPERATURE MASONRY IS THREE DAYS OLD. BELOW 120°F.

3. SHADE MATERIALS AND MIXING EQUIPMENT FROM

4. USE COOL MIXING WATER FOR MORTAR AND GROUT. ICE IS PERMITTED IN THE MIXING WATER PRIOR TO USE. DO NOT PERMIT ICE IN THE MIXING WATER WHEN ADDED TO THE OTHER MORTAR OR GROUT

ABOVE 105°F DIRECT SUNLIGHT.

MATERIALS.

COLD WEATHER MASONRY CONSTRUCTION REQUIREMENTS

	CONSTRUCTION - BASED ON AMBIENT TEMPERATURES	PROTECTION - BASED ON ANTICIPATED MEAN DAILY TEMPERATURES
ABOVE 40°F	1. NORMAL MASONRY PROCEDURES	1. NORMAL MASONRY PROCEDURES
40°F - 32°F	HEAT MORTAR AND MIXING WATER TO PRODUCE MORTAR TEMPERATURE BETWEEN 40°F AND 120°F AT TIME OF MIXING. MAINTAIN MORTAR ABOVE 40°F UNTIL USED IN MASONRY. KEEP GROUT AGGREGATES ABOVE 32°F.	COVER TOP 2 FEET OF UNFINISHED MASONRY WORK WITH A WATER RESISTIVE MEMBRANE FOR AT LEAST 24 HOURS AND AT THE END OF EACH DAY'S WORK.
32°F - 25°F	 HEAT MORTAR AND MIXING WATER TO PRODUCE MORTAR TEMPERATURE BETWEEN 40°F AND 120°F AT TIME OF MIXING. MAINTAIN MORTAR ABOVE 40°F UNTIL USED IN MASONRY. HEAT GROUT AGGREGATES AND MIXING WATER TO PRODUCE GROUT TEMPERATURE BETWEEN 70°F AND 120°F AT TIME OF MIXING. MAINTAIN GROUT TEMPERATURES ABOVE 70°F AT TIME OF PLACEMENT. 	COVER TOP 2 FEET OF UNFINISHED MASONRY WORK WITH A WATER RESISTIVE MEMBRANE FOR AT LEAST 24 HOURS AND AT THE END OF EACH DAY'S WORK.
25°F - 20°F	 HEAT MORTAR AND MIXING WATER TO PRODUCE MORTAR TEMPERATURE BETWEEN 40°F AND 120°F AT TIME OF MIXING. MAINTAIN MORTAR ABOVE 40°F UNTIL USED IN MASONRY. HEAT GROUT AGGREGATES AND MIXING WATER TO PRODUCE GROUT TEMPERATURE BETWEEN 70°F AND 120°F AT TIME OF MIXING. MAINTAIN GROUT TEMPERATURES ABOVE 70°F AT TIME OF PLACEMENT. HEAT MASONRY SURFACES UNDER CONSTRUCTION OT 40°F, AND USE WIND BREAKS OR ENCLOSURES WHEN WIND VELOCITY EXCEEDS 15 MPH. HEAT MASONRY TO A MINIMUM OF 40°F PRIOR TO GROUTING. 	COVER NEWLY CONSTRUCTED MASONRY (LESS THAN 48 HOURS OLD) COMPLETELY WITH WEATHER-RESISTIVE INSULATING BLANKETS, OR EQUAL PROTECTION, FOR AT LEAST 48 HOURS AFTER CONSTRUCTION OF WORK.
BELOW 20°F	 HEAT MORTAR AND MIXING WATER TO PRODUCE MORTAR TEMPERATURE BETWEEN 40°F AND 120°F AT TIME OF MIXING. MAINTAIN MORTAR ABOVE 40°F UNTIL USED IN MASONRY. HEAT GROUT AGGREGATES AND MIXING WATER TO PRODUCE GROUT TEMPERATURE BETWEEN 70°F AND 120°F AT TIME OF MIXING. MAINTAIN GROUT TEMPERATURES ABOVE 70°F AT TIME OF PLACEMENT. HEAT MASONRY SURFACES UNDER CONSTRUCTION OT 40°F, AND USE WIND BREAKS OR ENCLOSURES WHEN WIND VELOCITY EXCEEDS 15 MPH. HEAT MASONRY TO A MINIMUM OF 40°F PRIOR TO GROUTING. PROVIDE AN ENCLOSURE AND AUXILIARY HEAT TO MAINTAIN AIR TEMPERATURE ABOVE 40°F IN ENCLOSURE. 	 COVER NEWLY CONSTRUCTED MASONRY (LESS THAN 48 HOURS OLD) COMPLETELY WITH WEATHER-RESISTIVE INSULATING BLANKETS, OR EQUAL PROTECTION, FOR AT LEAST 48 HOURS AFTER CONSTRUCTION OF WORK. MAINTAIN NEWLY CONSTRUCTED MASONRY (LESS THAN 48 HOURS OLD) ABOVE 32°F FOR AT LEAST 48 HOURS AFTER BEING CONSTRUCTED USING HEATED ENCLOSURES OR OTHER ACCEPTABLE METHODS. PROVIDE HIGH-LOW RECORDING THERMOMETERS TO DOCUMENT TEMPERATURES OR MASONRY.

1. DO NOT LAY MASONRY UNITS HAVING EITHER A TEMPERATURE BELOW 40°F OR CONTAINING FROZEN MOISTURE, VISIBLE ICE, OR

3. DO NOT LAY GLASS MASONRY WHEN THE AMBIENT TEMPERATURE IS BELOW 40°F.

2. REMOVE VISIBLE ICE AND SNOW FROM THE TOP SURFACE OF EXISTING FOUNDATIONS AND MASONRY TO RECEIVE NEW CONSTRUCTION. HEAT THESE SURFACES ABOVE FREEZING USING METHODS THAT DO NOT RESULT IN DAMAGE.

> DRAWING BY: CHECK BY: AED

REV. DATE

HESE DRAWINGS ARE BASED ON CONSTRUCTION DRAWINGS NOT PREPARED BY BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PC. AND, THEREFORE, MAY NOT REPRESENT THE

CONDITIONS AS CONSTRUCTED AT THE TIME. ALL EXISTIN

CONDITIONS SHOWN ARE REPRESENTED AS SUGGESTIVE INFORMATION AS THEY MAY NOT HAVE BEEN BUILT AND DETAILED

THIS DRAWING, PREPARED FOR THE SPECIFIC PROJECT INDICATED IS AN INSTRUMENT OF SERVICE AND THE PROPERTY OF BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, P INFRINGEMENT OR ANY USE OF THIS DRAWING FOR ANY OTHE PROJECT IS PROHIBITED. ANY ALTERATION OR REPRODUCTION OF THIS DOCUMENT IS ALSO PROHIBITED WITHOUT THE WRITTEN CONSENT OF THE ARCHITECT OR ENGINEER.

LANDSCAPE ARCHITECTS

ENGINEERS 244 EAST MAIN STREET PATCHOGUE SUITE 115, ALBANY NEW YORK 11772 NEW YORK 12203

F. 631.475.0361 F. 518.621.7655 www.BBSARCHITECTURE.com



66-01-02-06-0-007-013 DISTRICT BEDFORD CENTRAL PROJECT CAPITAL IMPROVEMENTS -BOND PHASE 2 DWG TITLE DESIGN DATA AND

GENERAL NOTES SCALE: AS NOTED DATE: APRIL 2024 BID PICK-UP: FEBRUARY 24, 2025

FILE No: 23-131b

STATEMENT OF SPECIAL INSPECTIONS:

SPECIAL INSPECTION NOTES:

- 1. THE SCHEDULE OF SPECIAL INSPECTIONS, AND SPECIAL INSPECTION NOTES INDICATE THE REQUIRED STRUCTURAL TESTS AND INSPECTIONS FOR THE PROJECT AND SHALL BE CONSIDERED THE STATEMENT OF SPECIAL INSPECTIONS. THE FOLLOWING TYPES OF CONSTRUCTION REQUIRE INSPECTION:
- A. SOILS AND FOUNDATIONS
- B. CAST-IN-PLACE CONCRETE C. COLD-FORMED METAL FRAMING
- D. MASONRY E. STRUCTURAL STEEL
- 2. THE OWNER WILL ENGAGE THE SERVICES OF A QUALIFIED SPECIAL INSPECTOR FOR THIS PROJECT, WHO WILL PROVIDE AND/OR COORDINATE INSPECTION AND TESTING REQUIREMENTS IN ACCORDANCE WITH THE PROVISIONS OF CHAPTER 17 OF THE "2020 BUILDING CODE OF NEW YORK STATE".
- 3. STRUCTURAL TESTS AND SPECIAL INSPECTIONS SHALL BE PROVIDED IN ACCORDANCE WITH THE "2020 BUILDING CODE OF NEW YORK STATE" AND AS INDICATED IN THE SCHEDULE OF SPECIAL INSPECTIONS. THE SPECIAL INSPECTOR, INSPECTION AGENT OR TESTING AGENT SHALL BE A QUALIFIED PERSON OR AGENCY WHO HAVE RELEVANT CERTIFICATIONS, QUALIFICATIONS AND EXPERIENCE FOR EACH CATEGORY OF TESTING OR INSPECTION TO BE PERFORMED. ALL PERSONNEL PERFORMING SPECIAL INSPECTIONS AND TESTING ARE SUBJECT TO THE APPROVAL OF THE CODE ENFORCEMENT OFFICIAL. SUBMIT CREDENTIALS
- 4. THE SPECIAL INSPECTOR SHALL BE A PROFESSIONAL ENGINEER EXPERIENCED IN THE DESIGN OF BUILDINGS AND REGISTERED IN THE STATE OF NEW YORK.

OF SPECIAL INSPECTORS AND TESTING TECHNICIANS FOR REVIEW WHEN REQUESTED.

- 5. THE CONTRACTOR SHALL HOLD A PRE-CONSTRUCTION MEETING AT LEAST 7 DAYS PRIOR TO THE START OF CONSTRUCTION TO REVIEW THE REQUIRED SPECIAL INSPECTION AND TESTING REQUIREMENTS, NOTIFICATIONS, AND REPORTING PROCEDURES FOR THE PROJECT. ATTENDEES SHALL INCLUDE THE REGISTERED DESIGN PROFESSIONAL FOR STRUCTURAL ENGINEERING AND FOR ARCHITECTURE, OWNER OR OWNER'S REPRESENTATIVE, SPECIAL INSPECTOR, TESTING AGENCY, AND AFFECTED SUB-CONTRACTORS. THE CONTRACTOR SHALL DISTRIBUTE CONSTRUCTION SCHEDULES TO EACH ATTENDEE.
- 6. SPECIAL INSPECTIONS AND TESTING SHALL BE PERFORMED ON A CONTINUOUS OR PERIODIC BASIS DURING THE PERFORMANCE OF THE WORK, AS INDICATED IN THE SCHEDULE. CONTINUOUS AND PERIODIC INSPECTIONS SHALL BE DEFINED AS FOLLOWS:
- A. CONTINUOUS SPECIAL INSPECTION IS THE FULL TIME OBSERVATION OF WORK WHILE THE WORK IS BEING PERFORMED.
- B. PERIODIC SPECIAL INSPECTION IS THE PART-TIME OBSERVATION OF WORK WHILE THE WORK IS BEING PERFORMED OR AFTER IT HAS BEEN COMPLETED.
- 7. THE CONTRACTOR SHALL NOTIFY THE SPECIAL INSPECTOR OR TESTING AGENCY AT LEAST 48 HOURS IN ADVANCE OF A REQUIRED INSPECTION OR TEST.
- 8. THE CONTRACTOR SHALL COOPERATE WITH SPECIAL INSPECTOR AND TESTING AGENCIES INCLUDING ADVANCE NOTIFICATION OF REQUIRED INSPECTION OR TEST, PROVIDING INCIDENTAL LABOR, AND SAFE ACCESS TO THE WORK AREAS INCLUDING SCAFFOLDING, AND ACCESS TO CONTRACT DOCUMENTS SO THAT INSPECTIONS AND TESTING MAY BE PERFORMED WITHOUT HINDRANCE.
- 9. THE SPECIAL INSPECTOR SHALL NOTIFY THE CONTRACTOR IMMEDIATELY OF DISCREPANCIES FOR CORRECTIVE ACTION. REPORTS SHALL NOTE WHEN AND HOW DEFICIENCIES WERE CORRECTED. ITEMS IMMEDIATELY CORRECTED AND SUBSEQUENTLY INSPECTED OR TESTED NEED NOT BE IDENTIFIED AS A NON-CONFORMANCE ITEM.
- 10. IF NON-CONFORMING WORK IS NOT CORRECTED WHILE SPECIAL INSPECTOR OR TESTING AGENT IS ON SITE, SPECIAL INSPECTOR OR TESTING AGENT SHALL NOTIFY REGISTERED DESIGN PROFESSIONAL AND CODE ENFORCEMENT OFFICIAL WITHIN 24 HOURS AND ISSUE A REPORT NOTING THE NON-CONFORMANCE.
- 11. CONTRACTOR SHALL PERFORM REMEDIAL/CORRECTIVE WORK IF REQUIRED AND SIGN NON-CONFORMANCE OR FIELD REPORTS STATING REMEDIAL/CORRECTIVE WORK HAS BEEN COMPLETED. CONTRACTOR SHALL SUBMIT SIGNED REPORTS TO THE REGISTERED DESIGN PROFESSIONAL AND SPECIAL INSPECTOR AS WORK
- 12. THE SPECIAL INSPECTOR OR TESTING AGENCY SHALL SUBMIT INTERIM REPORTS TO THE REGISTERED DESIGN PROFESSIONAL, CODE ENFORCEMENT OFFICIAL, AND SPECIAL INSPECTOR (IF PREPARED BY A TESTING AGENCY) WITHIN 7 DAYS OF INSPECTION. REPORTS SHALL BE SIGNED BY THE PERSON PERFORMING THE INSPECTION OR TEST AND THE PERSON SUPERVISING.
- 13. SPECIAL INSPECTOR AND EACH TESTING AGENT SHALL USE A LOG TO RECORD AND TRACK NON-CONFORMING WORK DURING CONSTRUCTION. AN UPDATED LOG SHALL BE ATTACHED TO EACH REPORT. NON-CONFORMANCE LOG SHALL INCLUDE THE FOLLOWING INFORMATION:
- -DESCRIPTION OF NON-CONFORMANCE -DATE OF NON-CONFORMANCE -DESCRIPTION OF RDP RESPONSE, IF RECEIVED -STATUS OF NON-CONFORMANCE: 'OPEN' OR 'CLOSED'.
- 14. IF NON-CONFORMING WORK IS NOT CORRECTED AT TIME OF SUBSTANTIAL COMPLETION OF STRUCTURE OR OTHER APPROPRIATE TIME, SPECIAL INSPECTOR SHALL NOTIFY CODE ENFORCEMENT OFFICIAL AND REGISTERED DESIGN PROFESSIONAL.
- 15. AT THE COMPLETION OF SPECIAL INSPECTIONS, A FINAL REPORT OF SPECIAL INSPECTIONS SHALL BE PREPARED BY THE SPECIAL INSPECTOR AND EACH TESTING AGENCY PERFORMING INSPECTIONS. THE FINAL REPORT SHALL INDICATE THE INSPECTIONS PERFORMED, NON-CONFORMANCES HAVE BEEN REPORTED AND RESOLVED OR IDENTIFY ANY UNRESOLVED NON-CONFORMANCE ITEMS. THE FINAL REPORT SHALL BE SUBMITTED TO THE REGISTERED DESIGN PROFESSIONAL(S), CODE ENFORCEMENT OFFICIAL, AND SPECIAL INSPECTOR (IF PREPARED BY A TESTING AGENCY).
- 16. THE SPECIAL INSPECTION PROGRAM SHALL IN NO WAY RELIEVE THE CONTRACTOR OF THE OBLIGATION TO PERFORM THE WORK IN ACCORDANCE WITH THE REQUIREMENTS OF THE CONTRACT DOCUMENTS OR FROM IMPLEMENTING AN EFFECTIVE QUALITY CONTROL PROGRAM.
- 17. CONTRACTOR SHALL BE SOLELY RESPONSIBLE FOR CONSTRUCTION SITE SAFETY.

SCHEDULE OF SPECIAL INSPECTIONS:

SOILS AND FOUNDATIONS:

INSPECTION TASK	REFERENCED STANDARD	INSPECTION FREQUENCY	TESTING/INSPECTION QUANTITY AND EXTENT
VERIFY SITE PREPARATION IN ACCORDANCE WITH THE PROJECT GEOTECHNICAL EVALUATION:			
A. IDENTIFY SOILS REQUIRING UNDERCUTTING AND REPLACING WHILE OBSERVING PROOF ROLLING AND WHEN SUBGRADE IS EXPOSED.		CONT	
B. VERIFY FOOTING BEARING STRATA		PERIODIC	
C. REVIEW AND ACCEPT FILL MATERIALS		PERIODIC	
D. OBSERVE AND ACCEPT BACKFILLING AND COMPACTION PROCEDURES		CONT	
E. OBSERVE AND ACCEPT PREPARATION OF SLAB SUBGRADE AND SUBBASE		CONT	
F. VERIFY USE OF FILL MATERIAL AND LIFT THICKNESS IN FIELD		PERIODIC	
2. COMPACTION AND MOISTURE CONTENT TESTING:	ASTM D 1557 ASTM D 6938		
A. TEST OF SUBGRADE AT FOOTINGS			EACH SPREAD FOOTING AND EACH 20-FOOT LENGTH OF STRIP FOOTING
B. TEST OF SUBGRADE AND SUBBASE BELOW SLABS			EACH 2000 SF OF SLAB-ON-GRADE, BUT NOT LESS THAN 4 TESTS
C. FILL MATERIALS			EACH 2000 SF OF BUILDING AREA, BUT NOT LESS THAN 4 TESTS FOR EACH LIFT

CAST-IN-PLACE CONCRETE:

ONOT INTENDE CONCINETE.			
INSPECTION TASK	REFERENCED STANDARD	INSPECTION FREQUENCY	TESTING/INSPECTION QUANTITY AND EXTENT
INSPECT REINFORCING STEEL, INCLUDING SIZE, SPACING AND PLACEMENT			
A. FOOTINGS, FOUNDATION WALLS AND PIERS		PERIODIC	50% OF FOOTINGS
B. SLABS ON GRADE		PERIODIC	50% OF SLAB AREA
C. SLABS ON DECK		PERIODIC	50% OF SLAB AREA
D. STRUCTURAL SLABS		PERIODIC	100% OF SLAB
2. INSPECT ANCHOR RODS PRIOR TO PLACEMENT OF CONCRETE			
A. AT COLUMN BASE PLATES, BEAM POCKETS AND ELSEWHERE WHERE ANCHORS ARE SUBJECT TO SHEAR OR TENSION		PERIODIC	50% OF ANCHORS
B. AT COLUMNS IN BRACED FRAMES		PERIODIC	100% OF ANCHORS
3. VERIFY USE OF ACCEPTED DESIGN MIX			
4. SAMPLE AND TEST FRESH CONCRETE	ASTM C 172 ASTM C 31 ASTM C 94	CONT	
A. TAKE SIX CYLINDERS			EACH 50 CY OR EACH 5,000 SF OF SLAB FOR EACH CLASS OF CONCRETE
B. RECORD TIME CONCRETE IS BATCHED, SAMPLED AND TRUCK IS EMPTY			EACH TRUCK
C. PERFORM SLUMP TEST			ONE TEST EACH TRUCK; TWO TESTS IF CONCRETE IS PUMPED - ONE AT TRUCK AND ONE AT HOSE END
D. MEASURE AIR CONTENT	ASTM C 231		EACH TRUCK
E. RECORD CONCRETE AND AMBIENT AIR TEMPERATURE			EACH TRUCK
F. RECORD UNIT WEIGHT OF CONCRETE	ASTM C 138 ASTM C 567		1 TEST EACH CLASS OF CONCRETE FOR EACH DAY
G. PERFORM COMPRESIVE STRENGTH TESTS	ASTM C 39		TEST 2 CYLINDERS AT 7 DAYS AND AT 28 DAYS - RETAIN REMAINING CYLINDERS & TEST AS DIRECTED
5. INSPECT CONCRETE PLACEMENT FOR PROPER APPLICATION TECHNIQUES	ACI 318 5.9, 5.10	CONT	EACH PLACEMENT
6. INSPECT FOR MAINTENANCE OF SPECIFIED CURING TEMPERATURE AND TECHNIQUES	ACI 318 5.11, 5.13	PERIODIC	EACH PLACEMENT
7. INSPECT AND TEST CONCRETE SLABS ON GRADE AND METAL DECK			
A. FLOOR FLATNESS AND LEVELNESS	ASTM E 1155	PERIODIC	ENTIRE SLAB AREA
B. MOISTURE VAPOR EMISSION AND ALKALINITY	ASTM F 1869 ASTM F 710	PERIODIC	ENTIRE SLAB AREA
8. INSPECT WELDING OF REINFORCING STEEL	AWS D1.4		SEE STEEL SPECIAL INSPECTION TABLE

STRUCTURAL STEEL, STEEL JOIST, JOIST GIRDERS, AND METAL DECK:

STRUCTURAL STEEL, STEEL JOIST, JOIST GIRDERS, AND METAL INSPECTION TASK	REFERENCED	INSPECTION	TESTING/INSPECTION
	STANDARD	FREQUENCY	QUANTITY AND EXTENT
VERIFY FABRICATOR(S) MAINTAINS DETAILED FABRICATION AND QUALITY CONTROL PROCEDURES	AISC 360-10 CHAPTER N	PERIODIC	
2. MATERIAL VERIFICATION OF HIGH-STRENGTH BOLTS, NUTS, AND WASHERS:		PERIODIC	ALL BOLTS
A. IDENTIFICATION MARKINGS TO CONFORM TO ASTM STANDARDS SPECIFIED IN THE APPROVED CONSTRUCTION DOCUMENTS			
B. MANUFACTURE'S CERTIFICATE OF COMPLIANCE			
C. TEST 3-HIGH STRENGTH BOLT ASSEMBLIES FROM EACH LOT FOR USE AT PRETENSIONED AND SLIP CRITICAL JOINTS.			
3. INSPECTION OF HIGH-STRENGTH BOLTSING:	AISC 360-10 N5.6		
A. BEARING TYPE CONNECTIONS		PERIODIC	100% OF JOINTS
B. SLIP-CRITICAL CONNECTIONS, INCLUDING PREPARATION OF THE FAYING SUFACES AND TIGHTENING		CONT	
4. MATERIAL VERIFICATION OF STRUCTURAL STEEL AND METAL DECK:	ASTM A 6, A 568 OR A 653		
A. IDENTIFICATION MARKINGS TO CONFORM TO ASTM STANDARDS SPECIFIED IN CONSTRUCTION DOCUMENTS		PERIODIC	100% OF JOINTS
B. MANUFACTURER'S CERTIFIED MILL TEST REPORTS REQUIRED		PERIODIC	100% OF JOINTS
5. MATERIAL VERIFICATION OF WELD FILLER MATERIALS:	AISC 360-10 A3.5		
A. IDENTIFICATION MARKINGS TO CONFORM TO AWS SPECIFIED IN CONSTRUCTION DOCUMENTS		CONT	
B. MANUFACTURER'S CERTIFICATE OF COMPLIANCE REQUIRED			
6. INSPECTION OF WELDING OF STRUCTURAL STEEL:	AISC 360-10, N5.4, N5.5 AWS D1.1		
A. COMPLETE AND PARTIAL PENETRATION GROOVE WELDS. 100% VISUAL INSPECTION AND 10% ULTRASONIC TESTING	ASTM E 587	PERIODIC	CONTINUOUS INSPECTION FOR UT TESTING
B. FILLET WELDS. 100% VISUAL INSPECTION AND 10% MAGNETIC PARTICAL TESTING	ASTM E 709 AWS D1.1		
1. SINGLE PASS (5/16 OR LESS)		PERIODIC	
2. MULTIPASS (GREATER THAN 5/16)		CONT	
C. METAL DECK WELDS	AWS D1.3		50% OF WELDS
D. SHEAR CONNECTOR WELDS	AISC 360-10 N6	PERIODIC	VERIFY 50% OF CONNECTOR WELDS. HAMMER BEND TEST TO BE PERFORMED BY CONTRACTOR
7. INSPECTION OF ERECTED STEEL FRAME:	AISC 360-10 N5.7	PERIODIC	100% OF FRAME
A. JOINT DETAILS FOR COMPLIANCE WITH ACCEPTED CONSTRUCTION DOCUMENTS			
B. BRACED FRAMES AND MOMENT FRAMES			
C. APPLICATION OF JOINT DETAILS AT EACH JOINT			
8. INSPECT CONDITION OF ERECTED MATERIALS		PERIODIC	100% OF MATERIALS
VERIFY COLUMN PLUMBNESS AND SPLICES		PERIODIC	100% OF COLUMNS
o. VEI III I GOLOIMITI LOMBITEGO / IIID OI LIGEO		-	

	INSPECTION TASK	REFERENCED		TESTING/INSPECTION
	INOFECTION TASK	STANDARD	FREQUENCY	QUANTITY AND EXTENT
FO	MASONRY CONSTRUCTION BEGINS, VERIFY THE LLOWING TO ENSURE COMPLIANCE WITH CONTRACT OCUMENTS:			
A.	PROPORTION OF SITE PREPARED MORTAR	TMS 602 ART 2.6A	PERIODIC	FIRST 5 DAYS OF MASONRY CONSTRUCTION A TWICE PER WEEK FOR EVERY 2,500 SF OF WAL
B.	PLACEMENT OF MASONRY UNITS AND CONSTRUCTION OF MORTAR JOINTS	TMS 602 ART 3.5B	PERIODIC	FIRST 3 DAYS OF MASONRY CONSTRUCTION AND TWICE PER WEEK FOR EVERY 2,500 SF OF WALL
C.	LOCATION OF REINFORCEMENT AND CONNECTORS	TMS 602 ART 3.4, 3.6A	PERIODIC	50% OF WALL
	IOR TO GROUTING, VERIFY THE FOLLOWING ARE IN			
A.	GROUT SPACE	TMS 602 ART 3.2 D & F	CONT	
B.	GRADE, TYPE AND SIZE OF REINFORCMENT AND ANCHOR BOLTS	TMS 602 ART 2.4, 3.4	PERIODIC	
C.	PLACEMENT OR REINFORCEMENT, AND CONNECTORS	TMS 602-ART 3.2E, 3.4, 3.6A	CONT	
D.	PROPORTIONS OF SITE PREPARED GROUT	TMS 602 ART 2.6B	PERIODIC	
E.	CONSTRUCTION OF MORTAR JOINTS	TMS 602 ART 3.3B	PERIODIC	
3. VE	RIFY THE FOLLOWING DURING CONSTRUCTION:			
A.	SIZE AND LOCATION OF STRUCTURAL ELEMENTS	TMS 602 ART 3.3F	PERIODIC	
B.	TYPE SIZE AND LOCATION OF ANCHORS, INCLUDING DETAILS OF ANCHORAGE TO STRUCTURAL MEMBERS, FRAMES AND OTHER CONSTRUCTION	TMS 402 - Sec 1.2.1(e), 6.1.4.3, 6.2.1	CONT	
C.	PLACEMENT OF GROUT	TMS 602 ART 3.5	CONT	
D.	PROTECTION OF MASONRY DURING HOT AND COLD WEATHER	TMS 602 ART 1.8C & D	PERIODIC	
	SERVE PREPARATION OF GROUT SPECIMENS, MORTAR ECIMENS, AND/OR PRISMS	TMS 602 - ART 1.2B, 1.4B.3, 1.4B.4	CONT	

INSPECTION TASK	REFERENCED STANDARD	INSPECTION FREQUENCY	TESTING/INSPECTION QUANTITY AND EXTENT
VERIFY FABRICATOR MAINTAINS DETAILED FABRICATION AND QUALITY CONTROL PROCEDURES FOR PREFABRICATED WALL PANELS		PERIODIC	EACH FABRICATOR
2. INSPECT FRAMING AS FOLLOWS:	ASTM A 90	PERIODIC	3 RANDOM TESTS FOR EACH MEMBER TYPI SIZE, AND GAUGE
A. MEMBER SIZE AND MATERIAL THICKNESS			
B. WEIGHT OF GALVANIZING COATING			
3. VERIFY MATERIAL CONFORMS TO ASTM STANDARDS AND ACCEPTED CONSTRUCTION DOCUMENTS		PERIODIC	
4. INSPECT ERECTED FRAMING, CONNECTION AND CONNECTORS:			
A. JOINT DETAILS FOR COMPLIANCE WITH ACCEPED CONSTRUCTION DOCUMENTS		PERIODIC	50% OF JOINTS
B. STRAP BRACING AND HOLD DOWN CONNECTORS		PERIODIC	100% OF JOINTS
C. APPLICATION AT JOINT DETAIL AT EACH CONNECTION		PERIODIC	50% OF JOINTS
5. INSPECT WELDING OF COLD-FORMED METAL FRAMING	AWS D1.3	PERIODIC	50% OF WELDS
6. INSPECT CONDITION OF ERECTED FRAMING		PERIODIC	50% OF FRAMING

THESE DRAWINGS ARE BASED ON CONSTRUCTION DRAWINGS NOT PREPARED BY BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND CONDITIONS AS CONSTRUCTED AT THE TIME. ALL EXISTIN CONDITIONS SHOWN ARE REPRESENTED AS SUGGESTIVE INFORMATION AS THEY MAY NOT HAVE BEEN BUILT AND DETAILED

REV. DATE


DRAWING BY: CHECK BY: THIS DRAWING, PREPARED FOR THE SPECIFIC PROJECT INDICATED IS AN INSTRUMENT OF SERVICE AND THE PROPERTY OF BBS

ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, POINFRINGEMENT OR ANY USE OF THIS DRAWING FOR ANY OTHER PROJECT IS PROHIBITED. ANY ALTERATION OR REPRODUCTION OF THIS DOCUMENT IS ALSO PROHIBITED WITHOUT THE WRITTEN CONSENT OF THE ARCHITECT OR ENGINEER.

LANDSCAPE ARCHITECTS ENGINEERS 244 EAST MAIN STREET

PATCHOGUE SUITE 115, ALBANY NEW YORK 11772 NEW YORK 12203 F. 631.475.0361

F. 518.621.7655 www.BBSARCHITECTURE.com

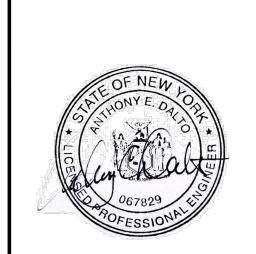


66-01-02-06-0-007-013 <u>DISTRICT</u> BEDFORD CENTRAL SCHOOL DISTRICT PROJECT CAPITAL IMPROVEMENTS -BOND PHASE 2

<u>DWG TITLE</u> SPECIAL INSPECTION NOTES AND SCHEDULE SCALE: AS NOTED

DATE: APRIL 2024 BID PICK-UP: FEBRUARY 24, 2025 FILE No: 23-131b

S0.03

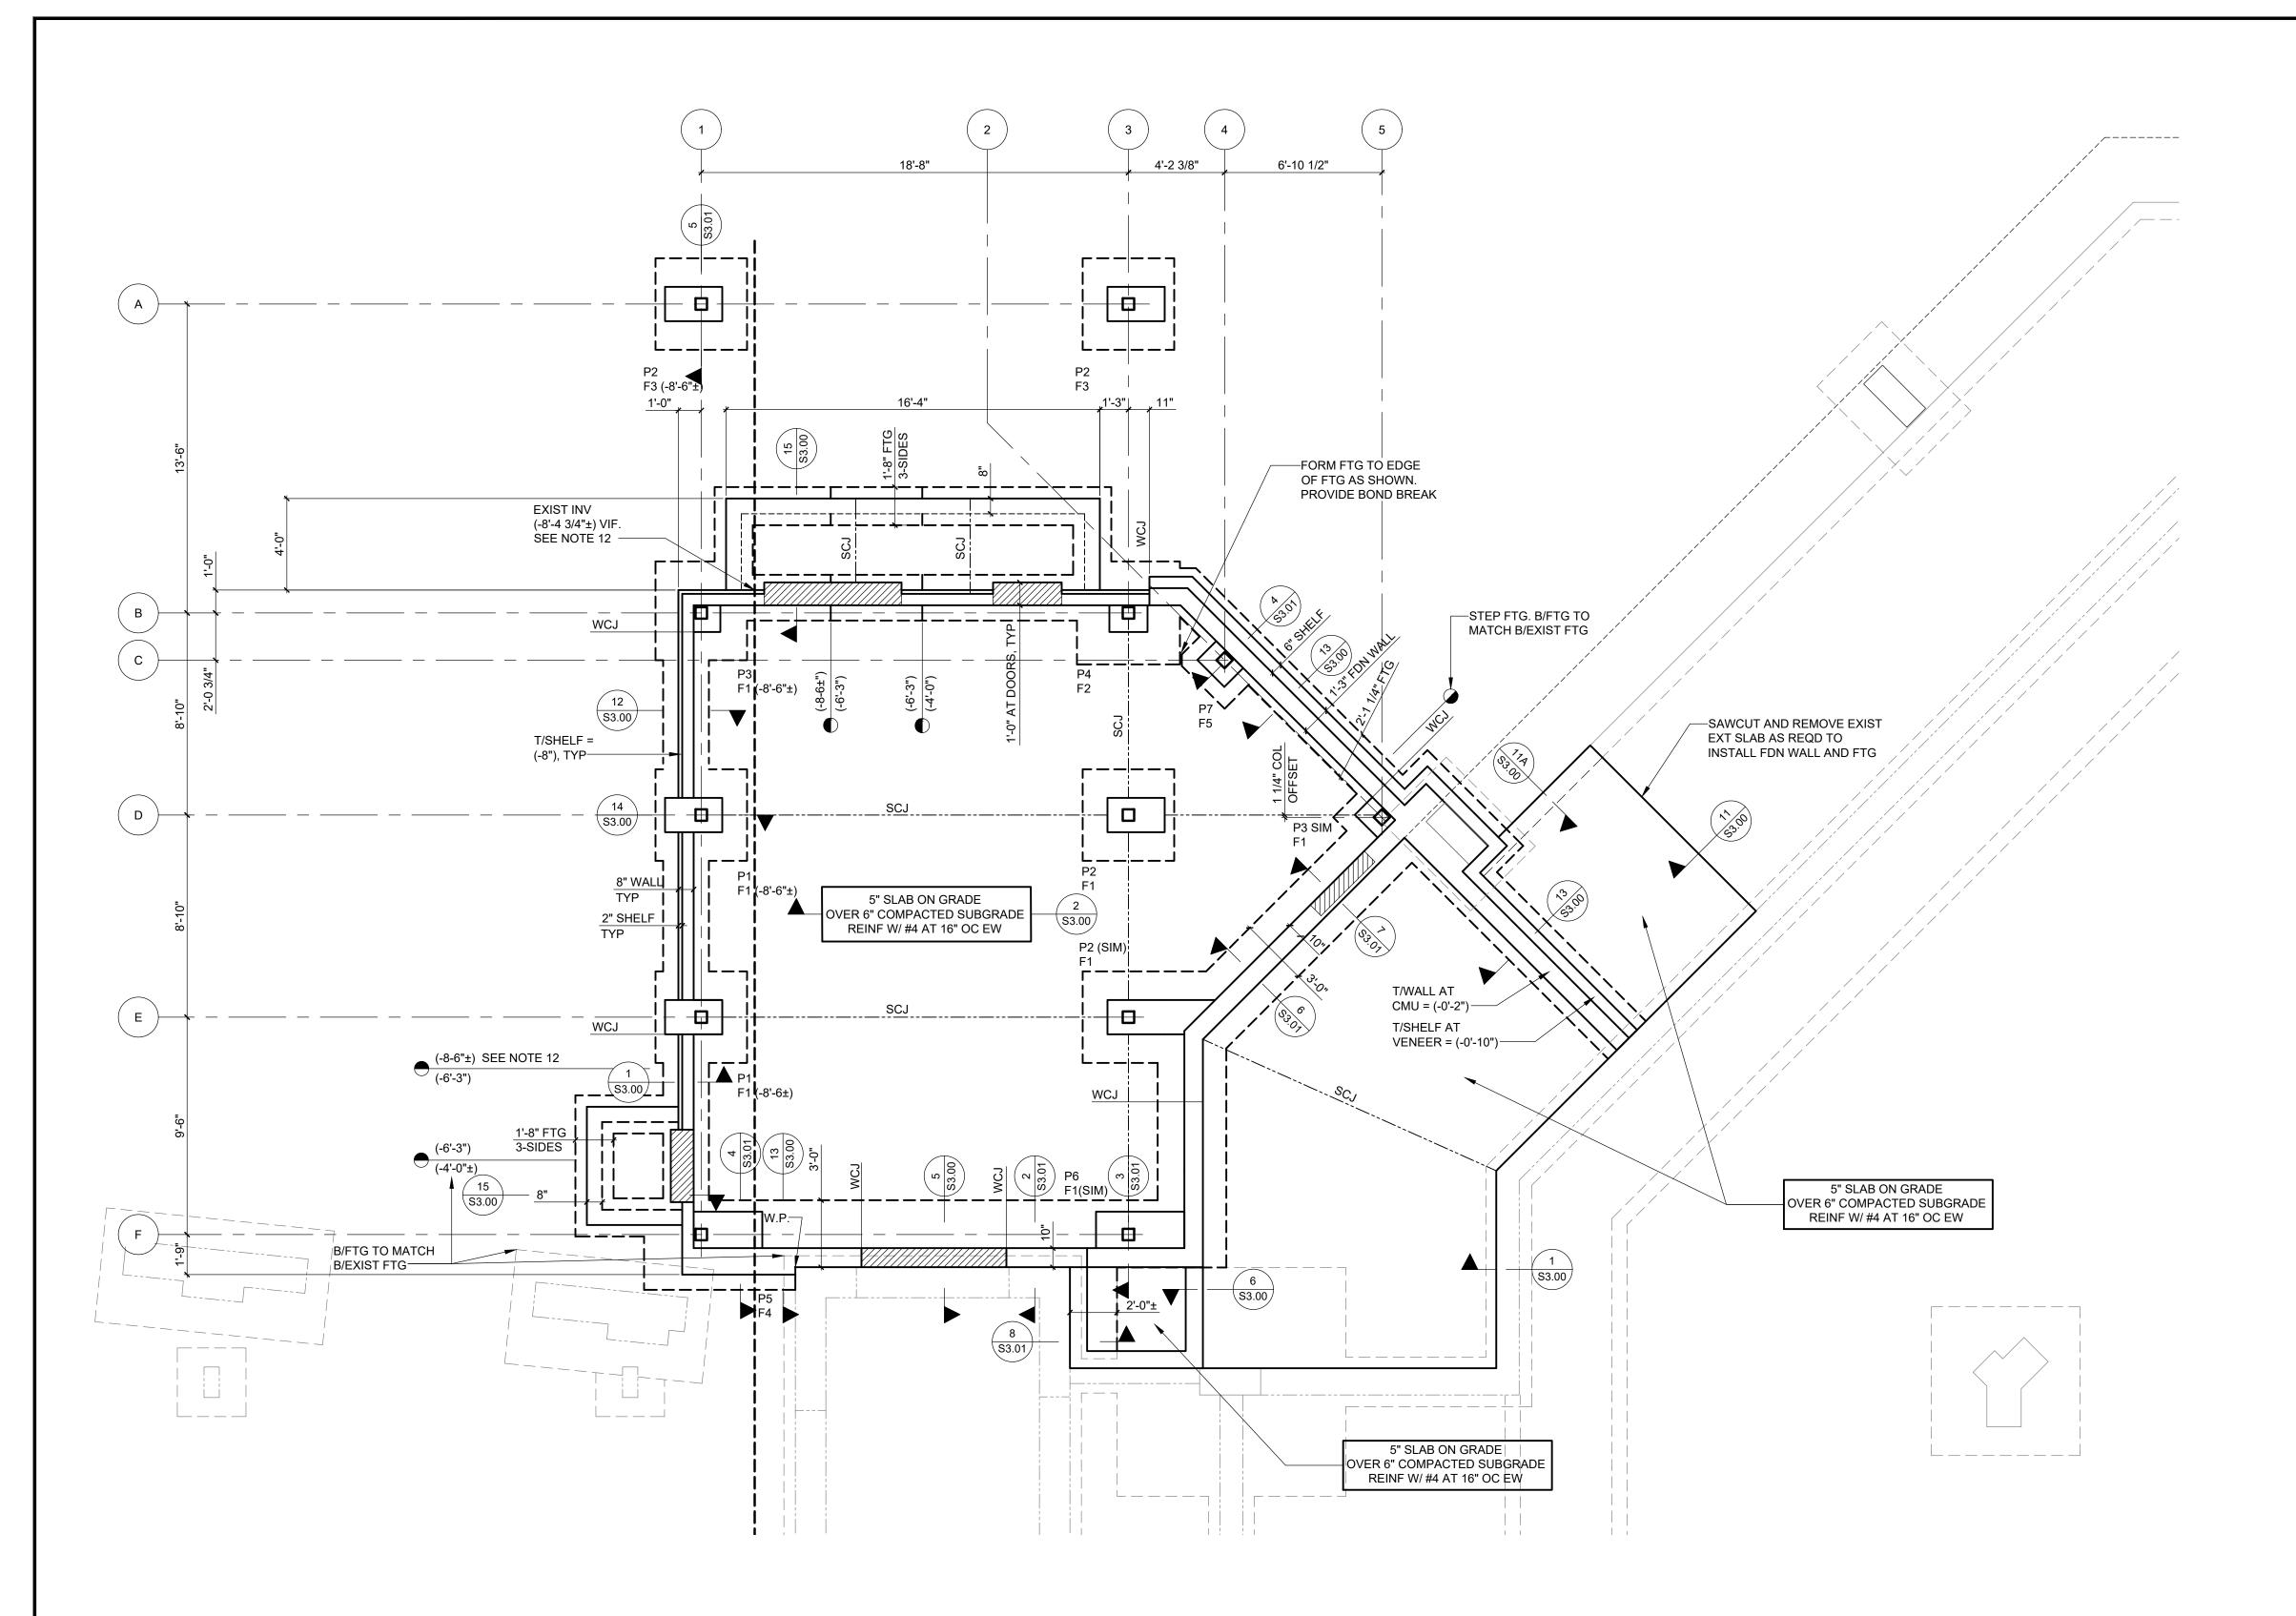

ENTRY FOUNDATION PLAN

1/4" = 1'-0"

NOTES: 1. T/EXIST

1. T/EXIST FINISHED FLOOR ELEVATION (522.30' ±) EQUALS REFERENCE ELEVATION (0'-0"). T/SLAB ELEVATION (0'-0"), TYPICAL UNLESS NOTED OTHERWISE.

2. ELEVATIONS NOTED THUS () ARE WITH RESPECT TO (0'-0").

3. T/EXTERIOR FOOTING (-4'-0") TYPICAL UNLESS NOTE OTHERWISE. T/INTERIOR FOOTING (-2'-0") TYPICAL UNLESS NOTED OTHERWISE. F_-

INDICATES FOOTING (-2-0) TYPICAL UNLESS NOTED OTHERWISE. F_INDICATES FOOTING TYPE. SEE S1.00 FOR FOOTING SCHEDULE.

4. T/WALL ELEVATION (-0'-2") TYPICAL UNLESS NOTED OTHERWISE. T/SHELF

ELEVATION (-0'-5") TYPICAL UNLESS NOTED OTHERWISE.

5. T/PIER ELEVATION (-0'-8") TYPICAL UNLESS NOTED OTHERWISE. P_

 W.P. - INDICATES WORK POINT FOR ADDITION LAYOUT.
 WCJ - INDICATES WALL CONTROL OR CONSTRUCTION JOINT LOCATION; ALIGN WITH MASONRY WALL CONTROL JOINTS. COORDINATE LOCATIONS

INDICATES PIER TYPE. SEE S3.01 FOR PIER AND BASEPLATE DETAILS.

 SEE 8/S3.00 FOR WALL REINFORCING AT CORNERS AND INTERSECTIONS.
 DRILL AND GROUT WALL AND FOOTING REINFORCING 6" INTO EXISTING FOUNDATIONS (TYPICAL, UNLESS NOTED OTHERWISE, FOR ALL LOCATIONS

WHERE NEW FOUNDATIONS INTERFACE WITH EXISTING).

10. SLEEVE OPENINGS THROUGH WALLS AND SLABS AT PIPING AND CONDUIT;
DO NOT CORE. COORDINATE SLEEVE SIZES, QUANTITIES, AND LOCATIONS
WITH MECHANICAL, ELECTRICAL, AND PLUMBING DRAWINGS. NOT ALL
LOCATIONS ARE SHOWN ON THE STRUCTURAL DRAWINGS.

SLABS ON GRADE.

12. STEP FOOTING TO LOCATE PIPE THROUGH FOUNDATION WALL. PROVIDE SLEEVE TO SUIT PIPE DIAMENTS. FIELD VERIFY EXISTING PIPE INVERT

11. PROVIDE (1)#4X4'-0" LONG DIAGONAL BAR AT CORNERS AND OPENINGS IN

ELEVATION.

13. SEE S0.01 FOR ADDITIONAL NOTES.

WITH ARCHITECTURLA DRAWINGS.

FOUNDATION PLAN LEGEND

- F# INDICATES FOOTING TYPE OR DESIGNATION. SEE FOOTING SCHEDULE THIS DRAWING FOR SIZE AND REINFORCING. SEE DETAILS ON DRAWINGS \$3.00 AND \$3.01 FOR ADDITIONAL INFORMATION.
- P# INDICATES PIER TYPE OR DESIGNATION. SEE DRAWING 9/S3.01 FOR PIER DETAILS
- HIGH INDICATES STEPPED FOOTING LOCATION AND ASSOCIATED T/FOOTING ELEVATIONS. SEE DETAIL 7/S3.00.
- INDICATES LOCATION OF RECESSED FOUNDATION WALL FOR SLAB OVERPOUR.
 T/WALL AT RECESS IS 8" BELOW T/SLAB SPECIFIED, UNLESS NOTED OTHERWISE.
 SEE DETAIL 5/S3.00, 6/S3.00, AND 15/S3.00 FOR ADDITIONAL INFORMATION.
- ____SCJ____ INDICATES SLAB CONTROL OR CONTRACTION JOINT LOCATION. VERIFY AND COORDINATE LOCATIONS WITH ARCHITECTURAL DRAWINGS. SEE TYPICAL

DETAILS ON DRAWING \$3.00 FOR MORE INFORMATION.

WCJ

WCJ

INDICATES FOUNDATION WALL CONTROL OR CONSTRUCTION JOINT LOCATION.

VERIFY AND COORDINATE LOCATIONS WITH ARCHITECTURAL DRAWINGS AND

MASONRY WALL CONTROL JOINT LOCATIONS. SEE 9/S3.00 AND 10/S3.00 FOR

MORE INFORMATION.

	ENTRY COLUMN FOOTING SCHEDULE					
MARK	SIZE	REINFORCING	REMARKS			
F1	4'-0"X4'-0"X1'-0"	(5) #5 EA WAY	воттом			
F2	4'-6"X4'-6"X1'-0"	(6) #5 EA WAY	воттом			
F3	4'-0"X4'-0"X1'-6"	(5) #5 EA WAY	TOP AND BOTTOM			
F4	6'-0"X4'-0"X1'-0"	#5 AT 1'-0" OC, EA WAY	воттом			
F5	3'-0"X3'-0"X1'-0"	(4) #4 EA WAY	воттом			


NOTICE

THESE DRAWINGS ARE BASED ON CONSTRUCTION DRAWINGS NOT PREPARED BY BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PC. AND, THEREFORE, MAY NOT REPRESENT THE

REV. DATE

CONDITIONS AS CONSTRUCTED AT THE TIME. ALL EXISTING CONDITIONS SHOWN ARE REPRESENTED AS SUGGESTIVE INFORMATION AS THEY MAY NOT HAVE BEEN BUILT AND DETAILED PER THE ORIGINAL DOCUMENTS OR PER THE OWNER'S INFORMATION.

Dalto Engineering

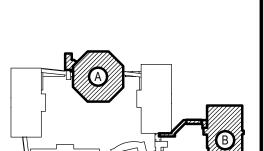

B

KEY PLAN

NOT TO SCALE

BEDFORD CENTRAL SCHOOL DISTRICT
PHASE 2 - BOND IMPROVEMENTS
FOX LANE MIDDLE SCHOOL
TOWN of BEDFORD / WESTCHESTER COUNTY
FOLINDATION PLAN

DRAWING BY: AED

CHECK BY: AED

NOTICE

THIS DRAWING, PREPARED FOR THE SPECIFIC PROJECT INDICATED IS AN INSTRUMENT OF SERVICE AND THE PROPERTY OF BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PC. INFRINGEMENT OR ANY USE OF THIS DRAWING FOR ANY OTHER PROJECT IS PROHIBITED. ANY ALTERATION OR REPRODUCTION OF THIS DOCUMENT IS ALSO PROHIBITED WITHOUT THE WRITTEN CONSENT OF THE ARCHITECT OR ENGINEER.



ARCHITECTS
LANDSCAPE ARCHITECTS
ENGINEERS

244 EAST MAIN STREET
PATCHOGUE
NEW YORK 11772
T. 631.475.0349
F. 631.475.0361

100 GREAT OAKS BLVD
SUITE 115, ALBANY
NEW YORK 12203
T. 518.621.7650
F. 518.621.7655



SED No.	66-01-02-06-0-007-0

DISTRICT
BEDFORD CENTRAL
SCHOOL DISTRICT

PROJECT
PHASE 2 BOND IMPROVEMENTS


SCALE: AS NOTED


DATE: APRIL 2024

BID PICK-UP: FEBRUARY 24, 2025

<u>DWG TITLE</u> FOUNDATION PLAN

FILE No: 23-131b **S1.00**

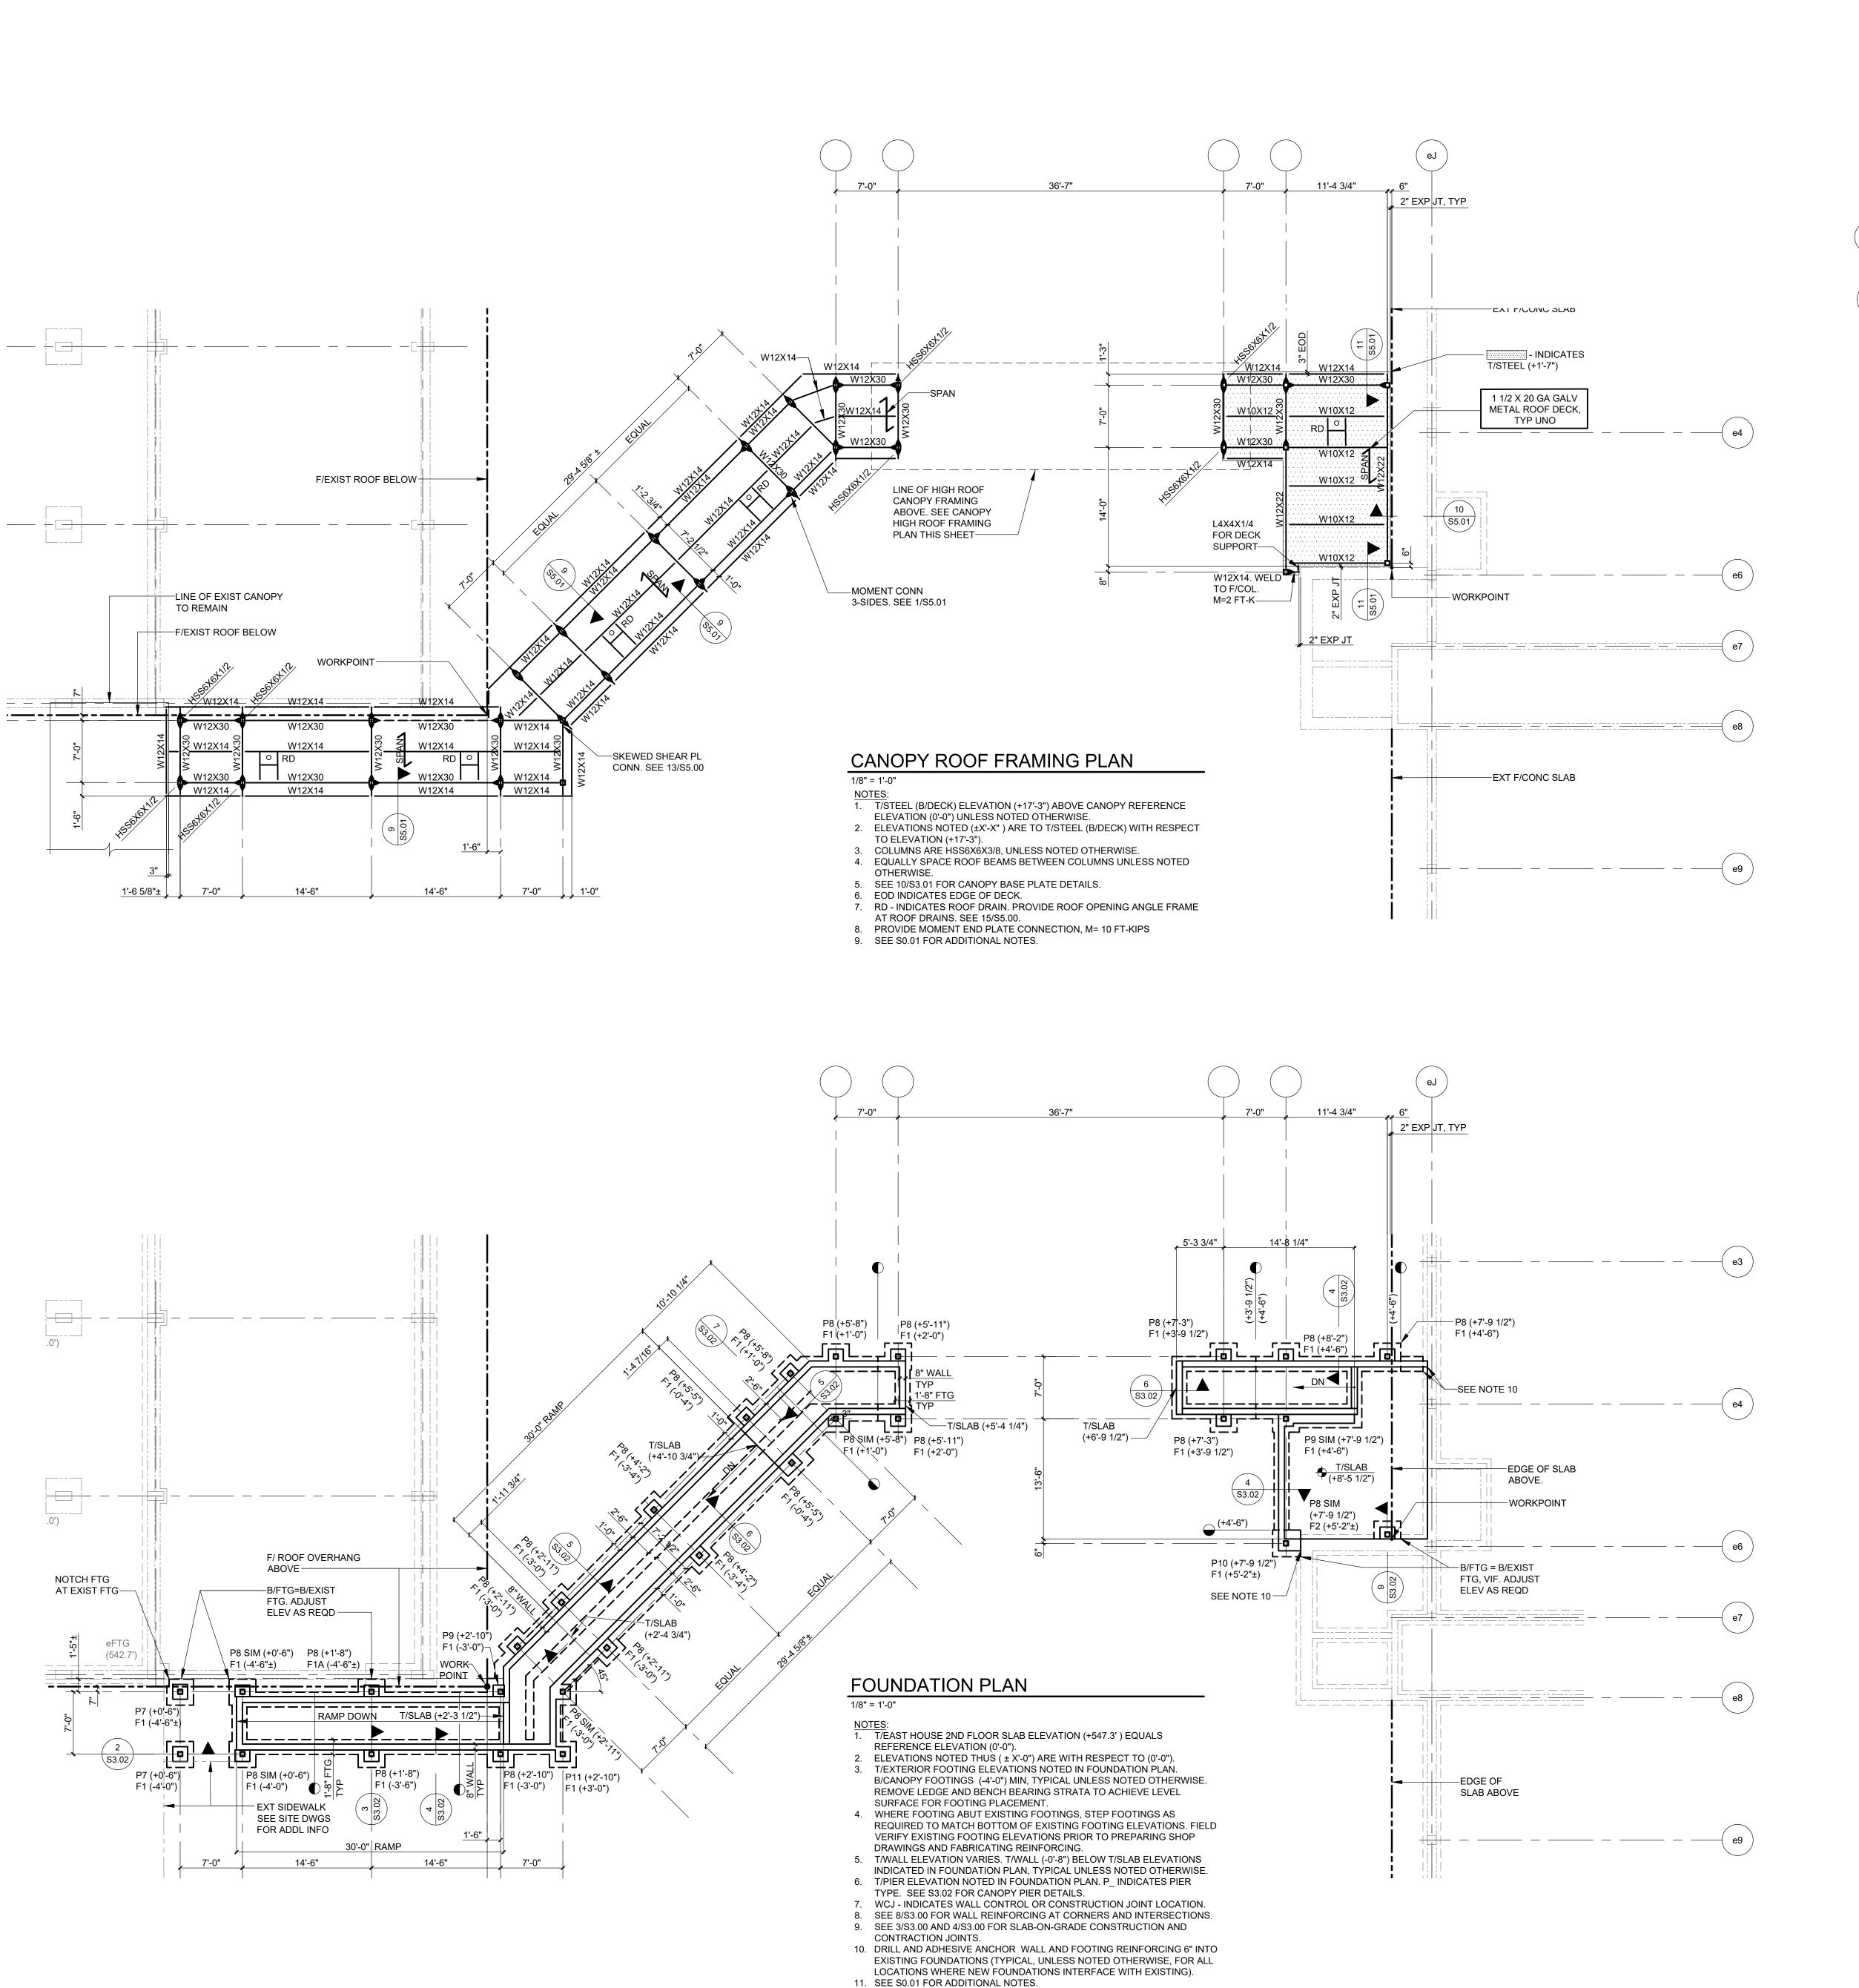

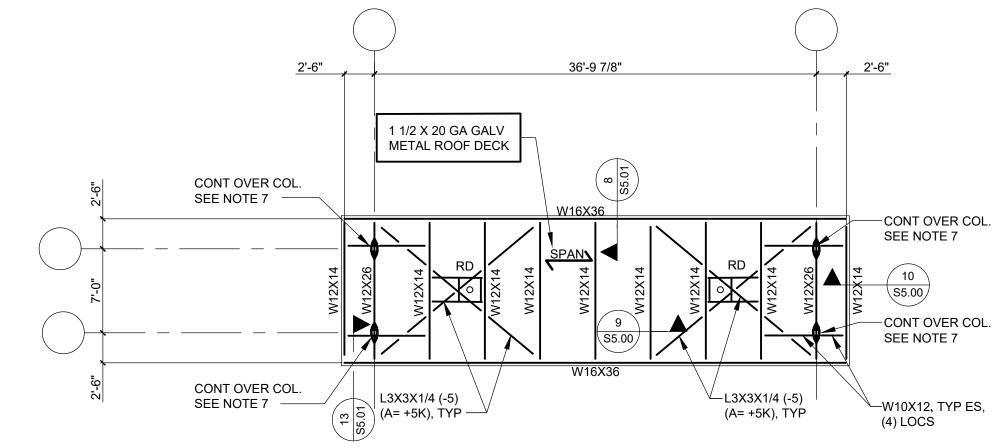

CANOPY HIGH ROOF FRAMING PLAN

1/8" = 1'-0"

NOTES:

1. T/STEEL (B/DECK) ELEVATION (+21'-2") ABOVE CANOPY REFERENCE ELEVATION (0'-0") UNLESS NOTED OTHERWISE.

- ELEVATIONS NOTED (± X'-X") ARE TO T/STEEL (B/DECK) WITH RESPECT TO ELEVATION (+21'-2").
 EQUALLY SPACE ROOF BEAMS BETWEEN COLUMNS UNLESS NOTED
- OTHERWISE.
 4. SEE 10/S3.01 FOR CANOPY BASE PLATE DETAILS.
- 5. EOD INDICATES EDGE OF DECK.
- 6. RD INDICATES ROOF DRAIN. PROVIDE ROOF OPENING ANGLE FRAME AT ROOF DRAINS. SEE15/S5.00.
- 7. PROVIDE MOMENT END PLATE CONNECTION, M= 10 FT-KIPS8. SEE S0.01 FOR ADDITIONAL NOTES.


FOUNDATION PLAN LEGEND


- F# INDICATES FOOTING TYPE OR DESIGNATION. SEE FOOTING SCHEDULE THIS DRAWING FOR SIZE AND REINFORCING. SEE DETAILS ON DRAWINGS \$3.02 FOR ADDITIONAL INFORMATION.
- P# INDICATES CANOPY PIER TYPE OR DESIGNATION. SEE CANOPY PIER DETAILS 1/S3.02 FOR PIER DETAILS.
- HIGH INDICATES STEPPED FOOTING LOCATION AND ASSOCIATED T/FOOTING ELEVATIONS. SEE DETAIL 11/S301 FOR ADDITIONAL INFORMATION.
- SCJ INDICATES SLAB CONTROL OR CONTRACTION JOINT LOCATION. VERIFY AND COORDINATE LOCATIONS WITH ARCHITECTURAL DRAWINGS.
- WCJ INDICATES FOUNDATION WALL CONTROL OR CONSTRUCTION JOINT LOCATION.


CANOPY COLUMN FOOTING SCHEDULE				
MARK	RK SIZE REINFORCING REMAR			
F1	3'-0"X3'-0"X1'-0"	(4) #4 EA WAY	TOP AND BOTTOM	
F1A	3'-0"X3'-0"X1'-10"	(4) #4 EA WAY	TOP AND BOTTOM	
F2	2'-0"X3'-0"X1'-10"	#5 AT 1'-0" OC, EA WAY	TOP AND BOTTOM	
F3	4'-0"X10'-0"X1'-3"	#5 AT 1'-0" OC, EA WAY	TOP AND BOTTOM	
F4	3'-0"X10'-0"X1'-3"	#5 AT 1'-0" OC, EA WAY	TOP AND BOTTOM	

PF EN C(NOTICE THESE DRAWINGS ARE BASED ON CONSTRUCTION DRAWINGS NOT PREPARED BY BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PC. AND, THEREFORE, MAY NOT REPRESENT THE CONDITIONS AS CONSTRUCTED AT THE TIME. ALL EXISTING CONDITIONS SHOWN ARE REPRESENTED AS SUGGESTIVE INFORMATION AS THEY MAY NOT HAVE BEEN BUILT AND DETAILED PER THE ORIGINAL DOCUMENTS OR PER THE OWNER'S INFORMATION.					
	企	/ / Mauree	n Court, (ineering Clifton Park, NY p.518.466.3317		

REV. DATE



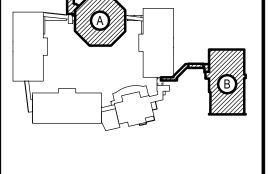

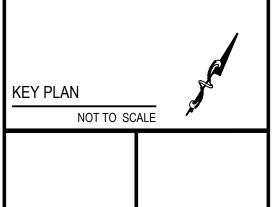

DRAWING BY:	AED	
CHECK BY:	AED	
	NOTICE	
	ED FOR THE SPECIFIC P	

THIS DRAWING, PREPARED FOR THE SPECIFIC PROJECT INDICATED IS AN INSTRUMENT OF SERVICE AND THE PROPERTY OF BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PC. INFRINGEMENT OR ANY USE OF THIS DRAWING FOR ANY OTHER PROJECT IS PROHIBITED. ANY ALTERATION OR REPRODUCTION OF THIS DOCUMENT IS ALSO PROHIBITED WITHOUT THE WRITTEN CONSENT OF THE ARCHITECT OR ENGINEER.



LANDSCAPE ARCHITECTS
ENGINEERS

244 EAST MAIN STREET | 100 GREAT OAKS BLVD SUITE 115, ALBANY

NEW YORK 11772 T. 631.475.0349 F. 631.475.0361

NEW YORK 12203 T. 518.621.7650 F. 518.621.7655

www.BBSARCHITECTURE.com



SED No.	66-01-02-06-0-007-013
DISTRICT	BEDFORD CENTRAL SCHOOL DISTRICT
PROJECT	PHASE 2 - BOND IMPROVEMENTS

ROOF FRAMING PLANS

SCALE: AS NOTED


DATE: APRIL 2024

BID PICK-UP: FEBRUARY 24, 2025

FILE No: 23-131b

DWG TITLE CANOPY FOUNDATION AND


S1.01

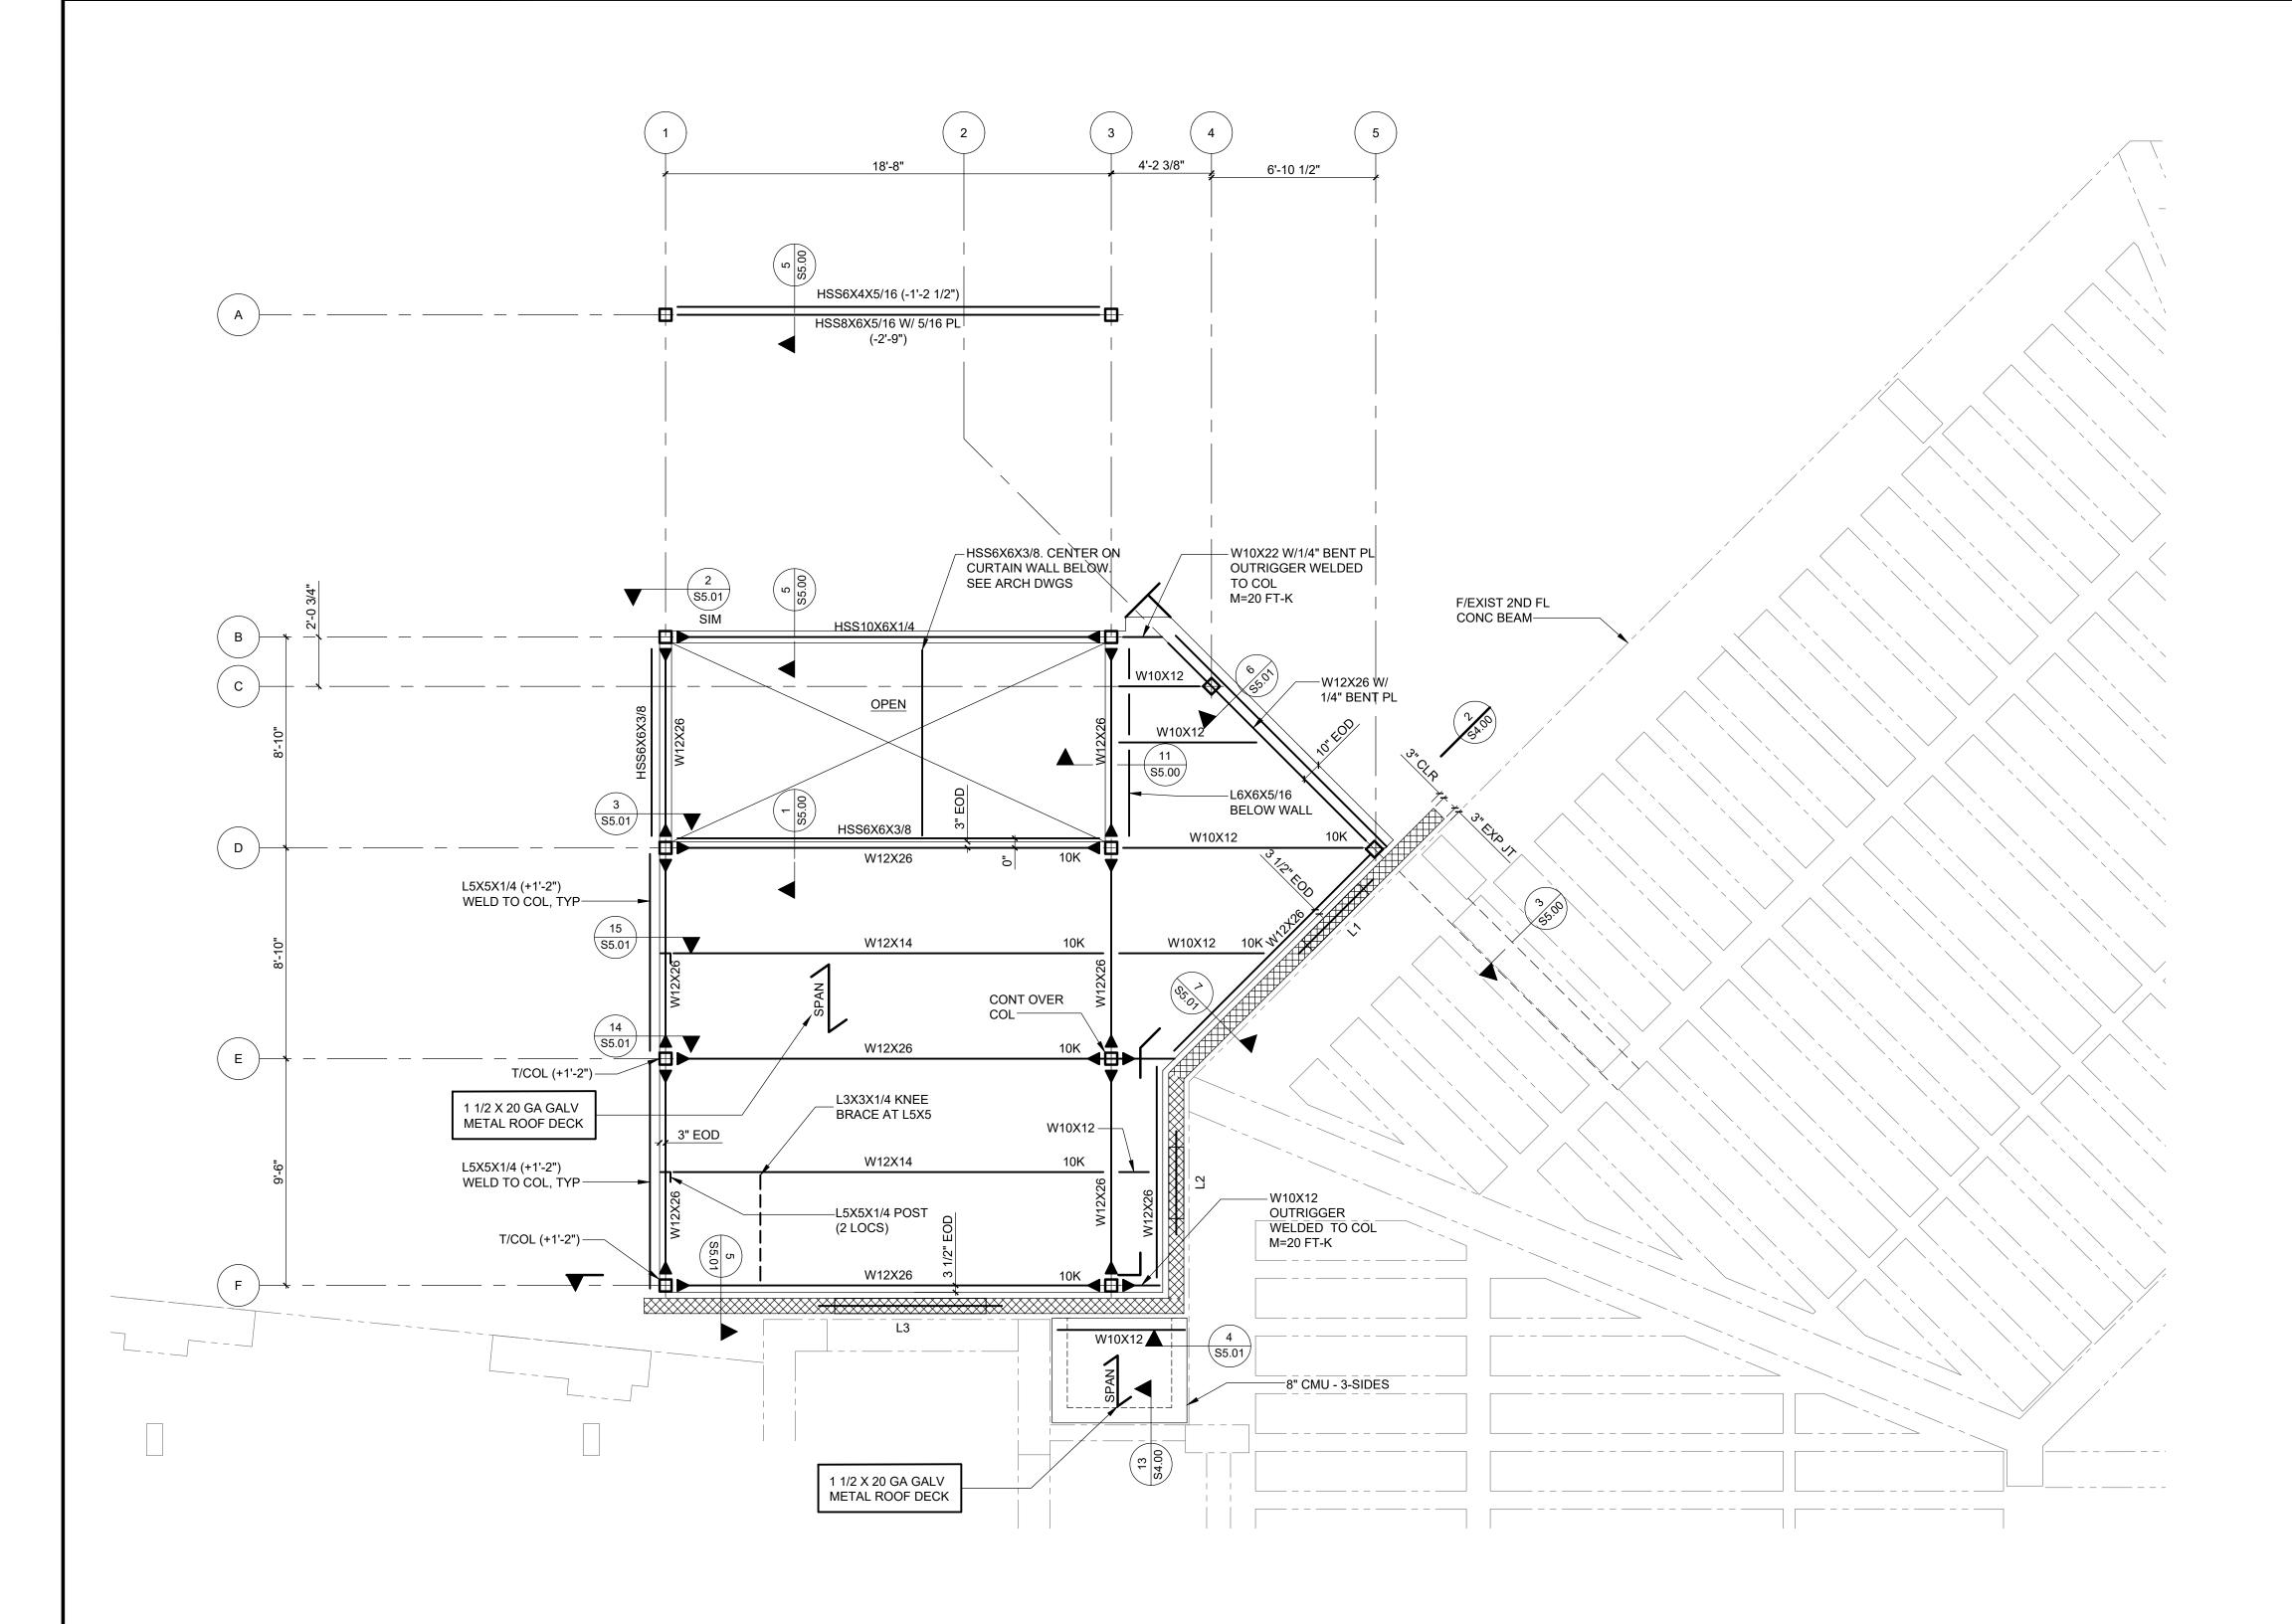

LOW ROOF FRAMING PLAN AT ENTRANCE

- NOTES:

 1. T/STEEL (B/DECK) ELEVATION (+12'-0") ABOVE REFERENCE ELEVATION (0'-0") UNLESS NOTED OTHERWISE.
- 2. ELEVATIONS NOTED (±X'-XX") ARE TO T/STEEL (B/DECK) WITH RESPECT TO ELEVATION (+12'-0"). 3. COLUMNS ARE HSS6X6X3/8 UNLESS NOTED OTHERWISE.
- 4. EQUALLY SPACE BEAMS BETWEEN COLUMNS UNLESS NOTED OTHERWISE. 5. SEE 12/S5.00 FOR TYPICAL FRAMING CONNECTIONS TO HSS COLUMNS.
- 6. EOD INDICATES EDGE OF DECK. 7. SEE 1/S4.00 FOR LINTEL SCHEDULE AND NOTES. NOT ALL LINTELS IN WALLS ARE
- 8. SEE 1/S4.00 AND 2/S4.00 FOR MASONRY WALL AND FIREWALL REINFORCING REQUIREMENTS. 9. RD - INDICATES ROOF DRAIN, EF - INDICATES EXHAUST FAN, RV - INDICATES ROOF
- VENT. COORDINATE SIZE AND LOCATION WITH MECHANICAL AND ARCHITECTURAL DRAWINGS. PROVIDE ROOF OPENING ANGLE FRAME AT ROOF DRAINS, VENTS,
- EXHAUST FANS, AND HATCHES. SEE 15/S5.00. 10. SEE S0.01 FOR ADDITIONAL NOTES.

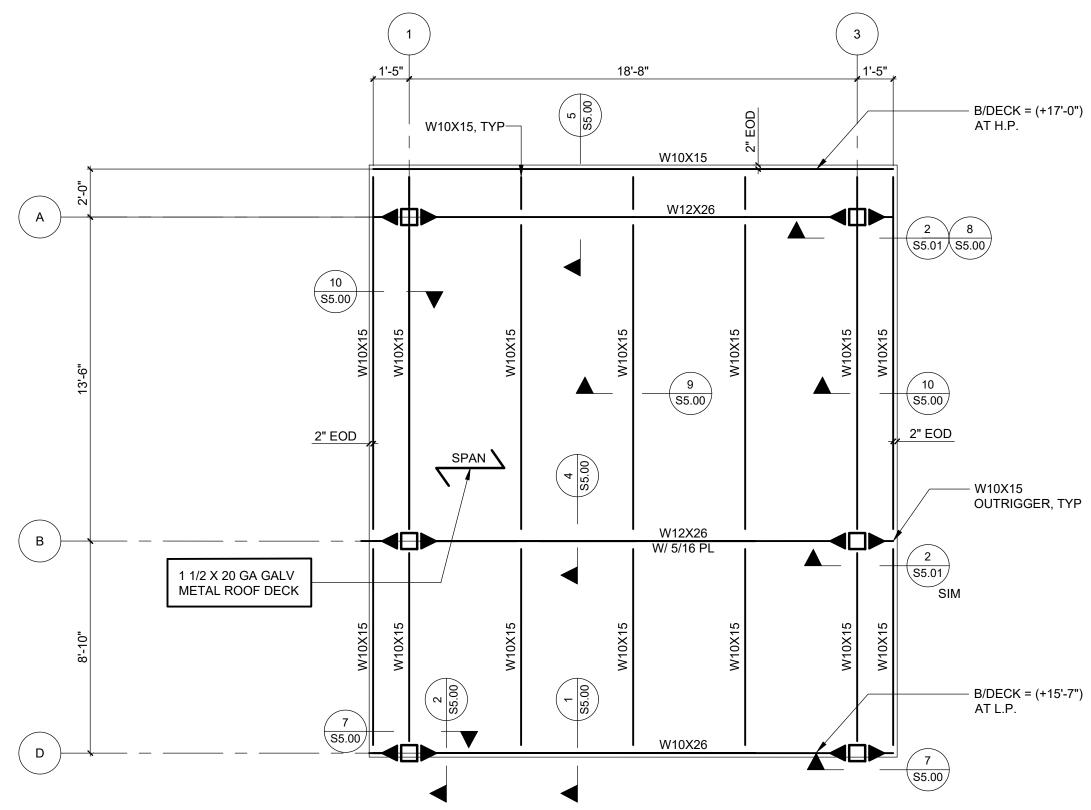

HIGH ROOF FRAMING PLAN AT ENTRANCE 1/4" = 1'-0"

T/STEEL (B/DECK) ELEVATION ABOVE REFERENCE ELEVATION (0'-0") INDICATED ON PLAN AT GRID LINES A AND D. SLOPE STEEL UNIFORMLY TO ROOF SLOPE INDICATED IN ARCHITECTURAL DRAWINGS.

2. ELEVATIONS NOTED (±X'-XX") ARE TO T/STEEL (B/DECK) ELEVATION. 3. SLOPE ROOF STEEL UNIFORMLY BETWEEN CONTROL ÉLEVATIONS SPECIFIED

4. SEE LOW ROOF FRAMING PLAN AT ENTRANCE NOTES FOR ADDITIONAL INFORMATION

FRAMING PLAN LEGEND

MC-X

INDICATES THE EDGE OF DECK.

INDICATES LOCATIONS AND DIRECTION OF SPAN FOR METAL ROOF DECK.

COORDINATE ALL LOCATIONS WITH ARCHITECTURAL AND MECHANICAL

SPECIFIES DIRECTION OF DOWNWARD ROOF DECK SLOPE.

INDICATES ROOF DRAIN. PROVIDE METAL DECK EDGE SUPPORT FRAMING AT PERIMETER. SEE ROOF OPENING FRAMING DETAIL FOR MORE INFORMATION.

INDICATES LOCATION OF ROOF OPENING. PROVIDE EDGE SUPPORT FRAMING AT PERIMETER (TYP UNO). SEE ROOF OPENING FRAMING DETAIL FOR INFORMATION. COORDINATE ALL LOCATIONS WITH ARCHITECTURAL AND MECHANICAL DRAWINGS.

DRAWINGS.

SPECIFIES LOCATIONS AND DESIGNATION FOR BRACED FRAME WITH HIGH (H) AND LOW (L) ENDS. SEE DRAWING S05.03 FOR SCHEMATICS AND DETAILS. DESIGNATES LOCATION AND TYPE OF MOMENT CONNECTION

BEAM SIZE -- UPWARD CAMBER AT MID-SPAN OF BEAM END SHEAR ---T/STEEL ELEVATION (IF REACTION W14X22[#] < c + #" > (± X'-X") # k DIFFERENT THAN NOTED END AXIAL ON FRAMING PLAN REACTION — M = # k-ftM = # k-ft - MOMENT CONNECTION QUANTITY OF UNIFORMLY — -MOMENT REACTION SPACED $\frac{3}{4}$ "Ø HEADED SHEAR STUD CONNECTORS

BEAM LEGEND SCHEMATIC

- LEGEND NOTES:

 1. REFER TO THE NOTES DRAWING S0.01 FOR CONNECTION DESIGN CRITERIA WHERE LOADS AND MOMENTS ARE NOT
- 2. LOADS AND MOMENTS SHOWN ARE LRFD (ULTIMATE STRENGTH DESIGN) UNLESS NOTED OTHERWISE.

THESE DRAWINGS ARE BASED ON CONSTRUCTION DRAWINGS NOT PREPARED BY BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PC. AND, THEREFORE, MAY NOT REPRESENT THE CONDITIONS AS CONSTRUCTED AT THE TIME. ALL EXISTI CONDITIONS SHOWN ARE REPRESENTED AS SUGGESTIVINFORMATION AS THEY MAY NOT HAVE BEEN BUILT AND DETAILE

KEY PLAN

NOT TO SCALE

REV. DATE

DRAWING BY: CHECK BY: AED

THIS DRAWING, PREPARED FOR THE SPECIFIC PROJECT INDICATED IS AN INSTRUMENT OF SERVICE AND THE PROPERTY OF BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PC. INFRINGEMENT OR ANY USE OF THIS DRAWING FOR ANY OTHER PROJECT IS PROHIBITED. ANY ALTERATION OR REPRODUCTION OF THIS DOCUMENT IS ALSO PROHIBITED WITHOUT THE WRITTEN

CONSENT OF THE ARCHITECT OR ENGINEER.

ARCHITECTS LANDSCAPE ARCHITECTS ENGINEERS

44 EAST MAIN STREET 100 GREAT OAKS BLVD. PATCHOGUE SUITE 115, ALBANY NEW YORK 11772 NEW YORK 12203 F. 631.475.0361

www.BBSARCHITECTURE.com




66-01-02-06-0-007-013 DISTRICT BEDFORD CENTRAL SCHOOL DISTRICT PHASE 2 -BOND IMPROVEMENTS

SCALE: AS NOTED DATE: APRIL 2024 BID PICK-UP: FEBRUARY 24, 2025 FILE No: 23-131b

FRAMING PLANS


<u>DWG TITLE</u> HIGH AND LOW ROOF


S2.00

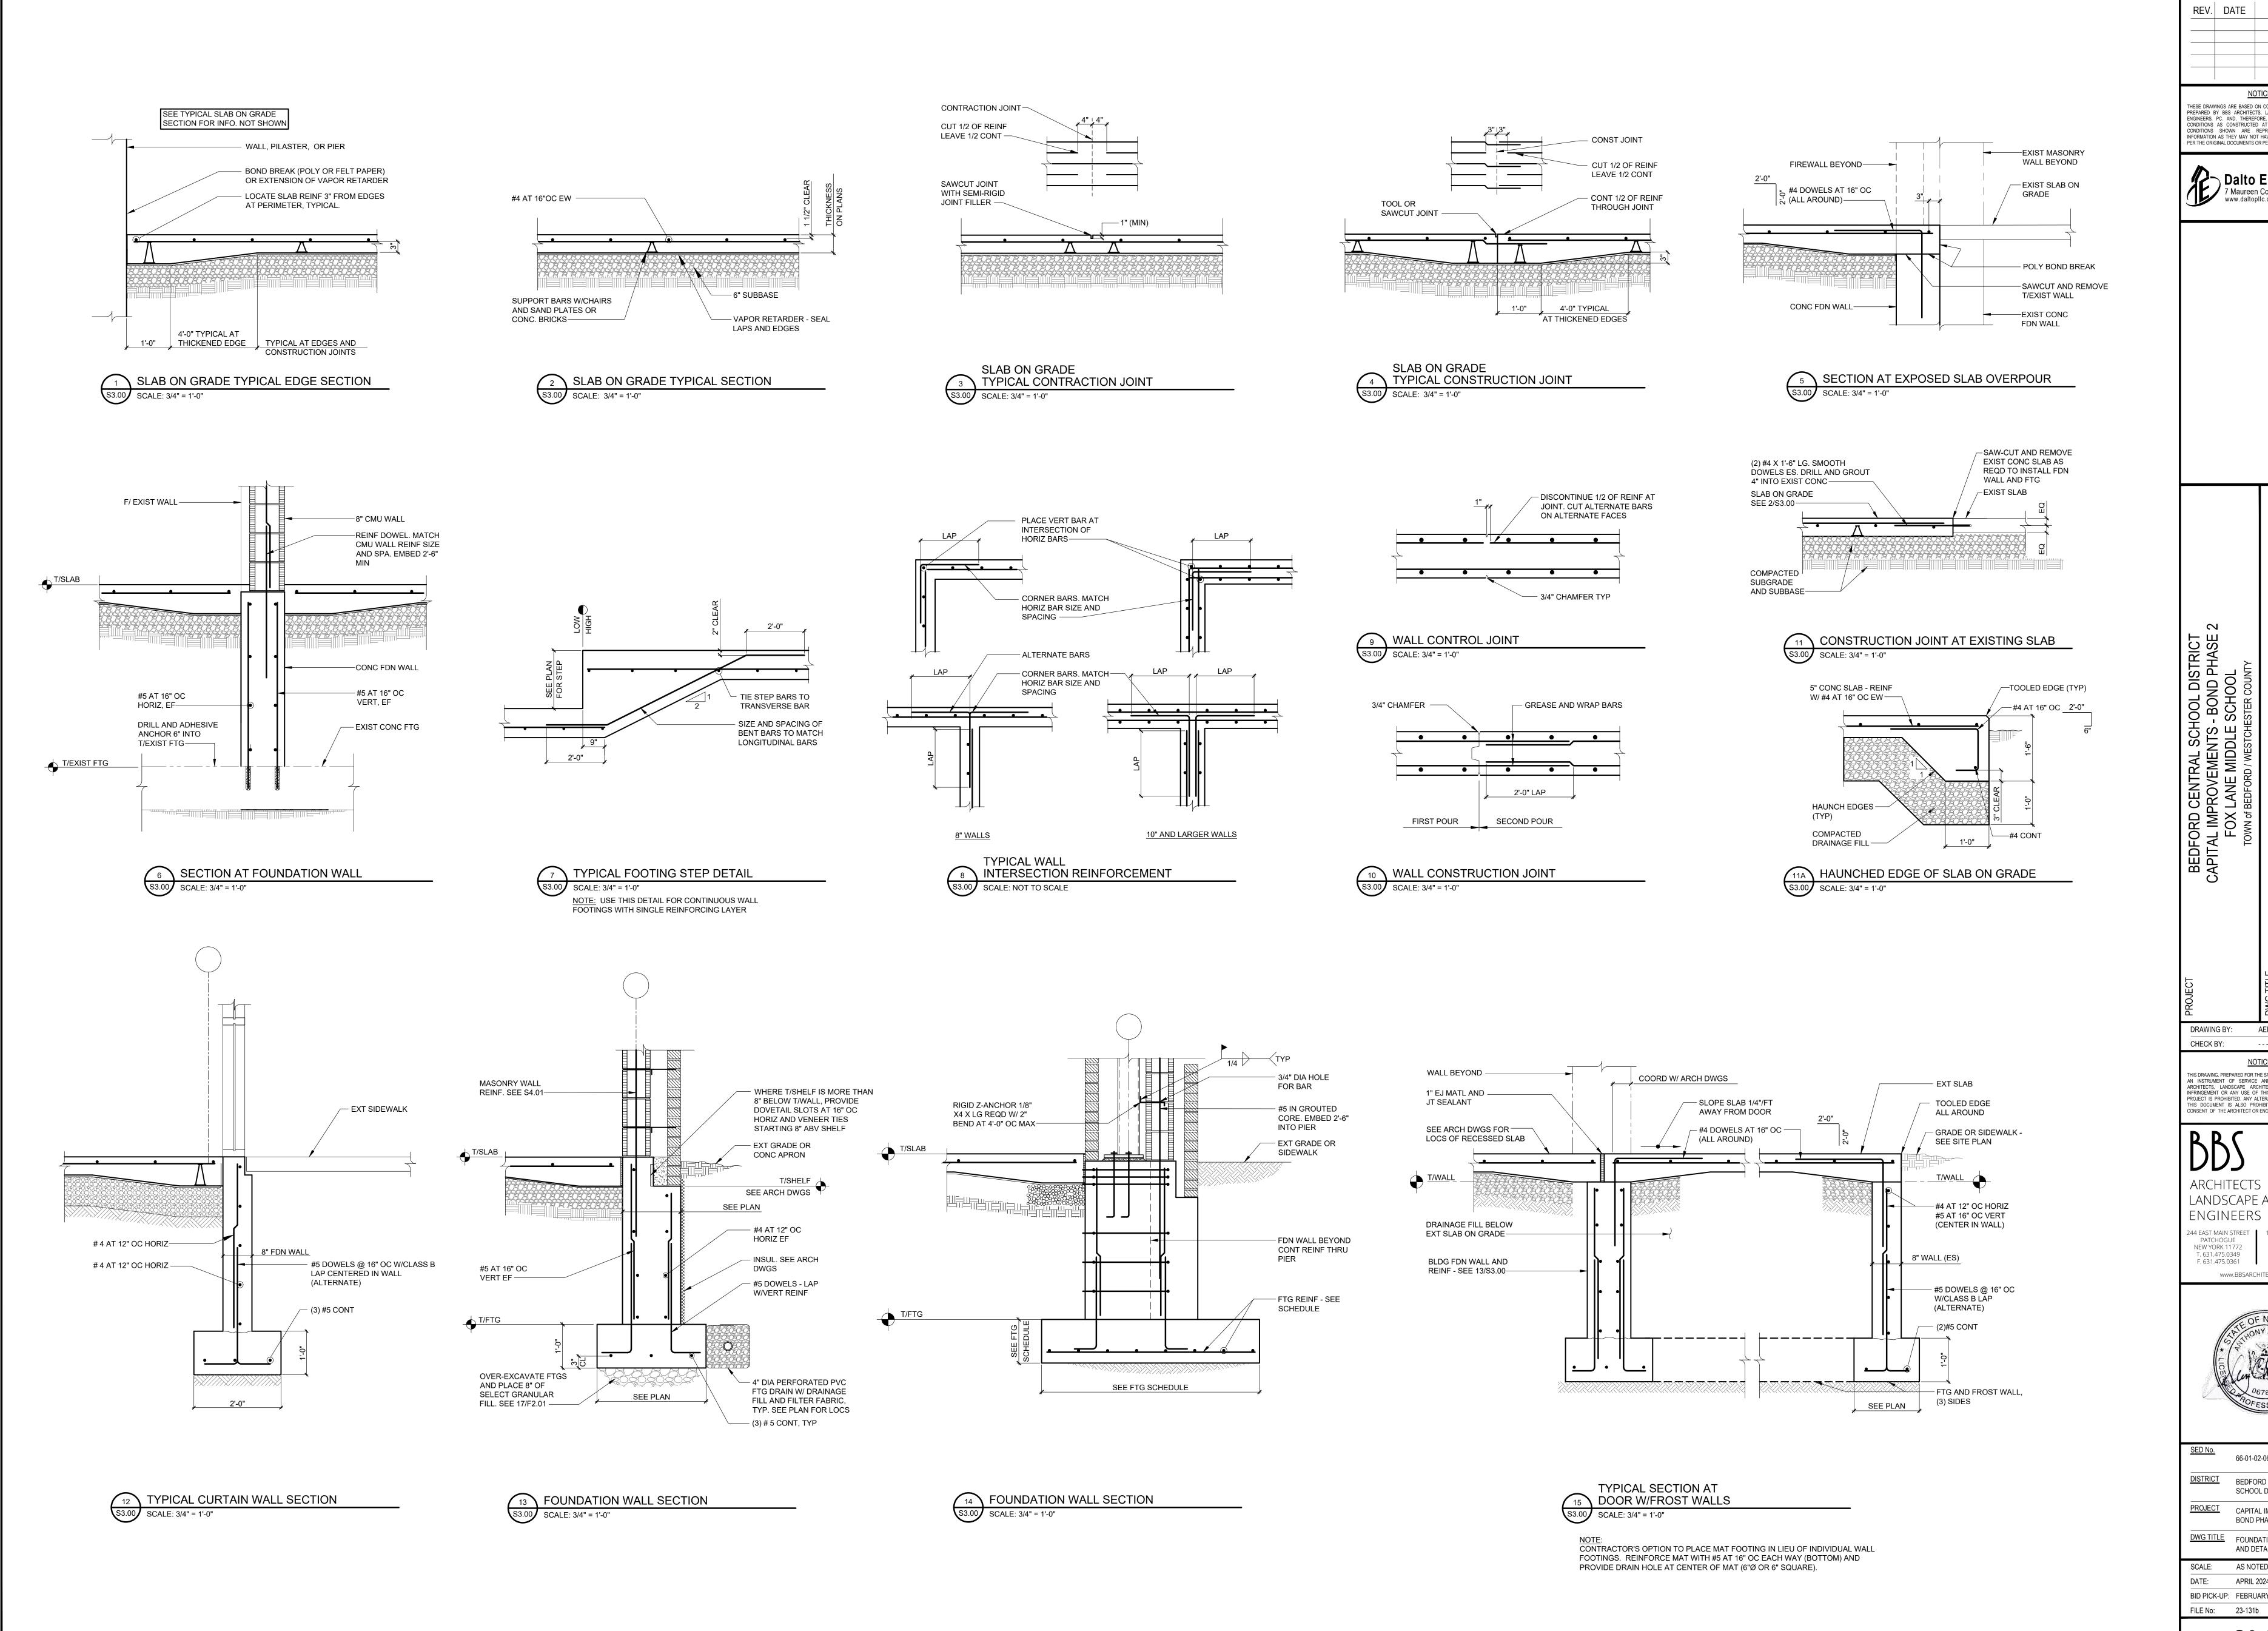


REV. DATE NOTICE THESE DRAWINGS ARE BASED ON CONSTRUCTION DRAWINGS NOT PREPARED BY BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PC. AND, THEREFORE, MAY NOT REPRESENT THE CONDITIONS AS CONSTRUCTED AT THE TIME. ALL EXISTING CONDITIONS SHOWN ARE REPRESENTED AS SUGGESTIVE INFORMATION AS THEY MAY NOT HAVE BEEN BUILT AND DETAILED PER THE ORIGINAL DOCUMENTS OR PER THE OWNER'S INFORMATION. Dalto Engineering
7 Maureen Court, Clifton Park, NY
www.daltopllc.com p.518.466.3317 DRAWING BY: CHECK BY: <u>NOTICE</u> THIS DRAWING, PREPARED FOR THE SPECIFIC PROJECT INDICATED IS AN INSTRUMENT OF SERVICE AND THE PROPERTY OF BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PINFRINGEMENT OR ANY USE OF THIS DRAWING FOR ANY OTHE PROJECT IS PROHIBITED. ANY ALTERATION OR REPRODUCTION OF THIS DOCUMENT IS ALSO PROHIBITED WITHOUT THE WRITTEN CONSENT OF THE ARCHITECT OR ENGINEER. ARCHITECTS LANDSCAPE ARCHITECTS ENGINEERS 244 EAST MAIN STREET 100 GREAT OAKS BLVD PATCHOGUE SUITE 115, ALBANY NEW YORK 11772 NEW YORK 12203 T. 631.475.0349 T. 518.621.7650 F. 631.475.0361 F. 518.621.7655 www.BBSARCHITECTURE.com 66-01-02-06-0-007-013 BEDFORD CENTRAL SCHOOL DISTRICT CAPITAL IMPROVEMENTS -BOND PHASE 2 <u>DWG TITLE</u> FOUNDATION SECTIONS AND DETAILS SCALE: AS NOTED DATE: APRIL 2024 BID PICK-UP: FEBRUARY 24, 2025

S3.00

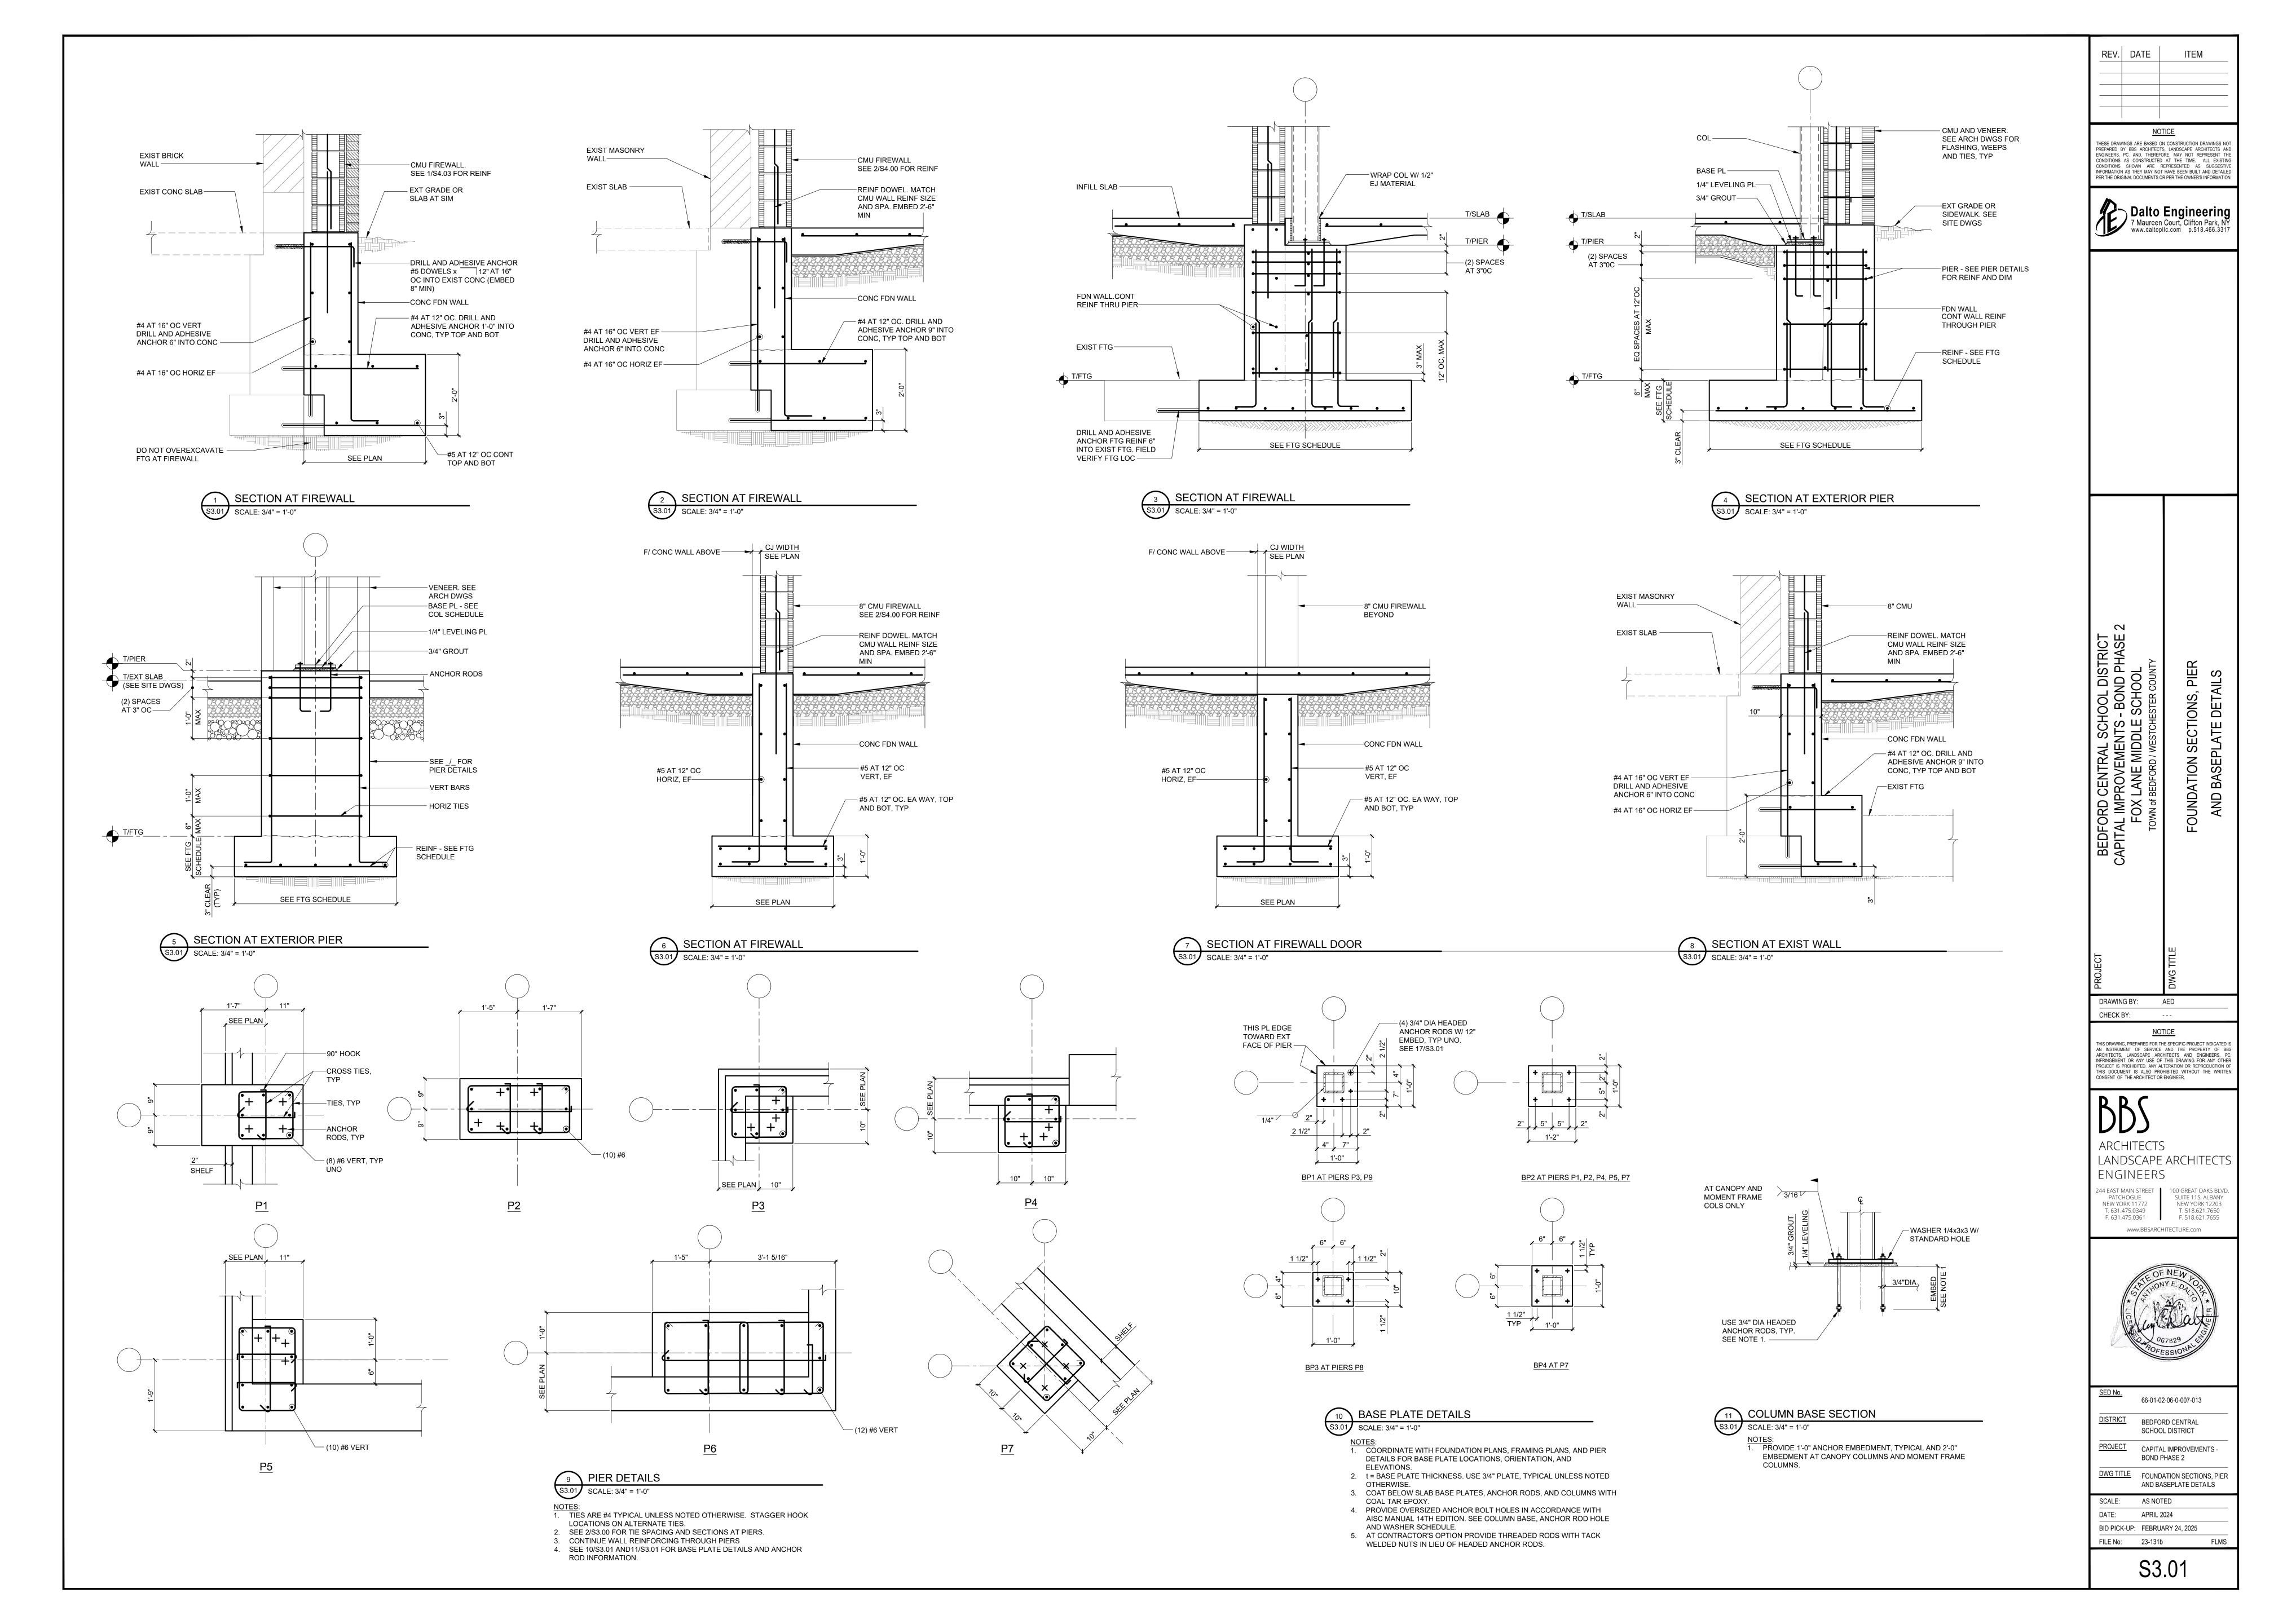

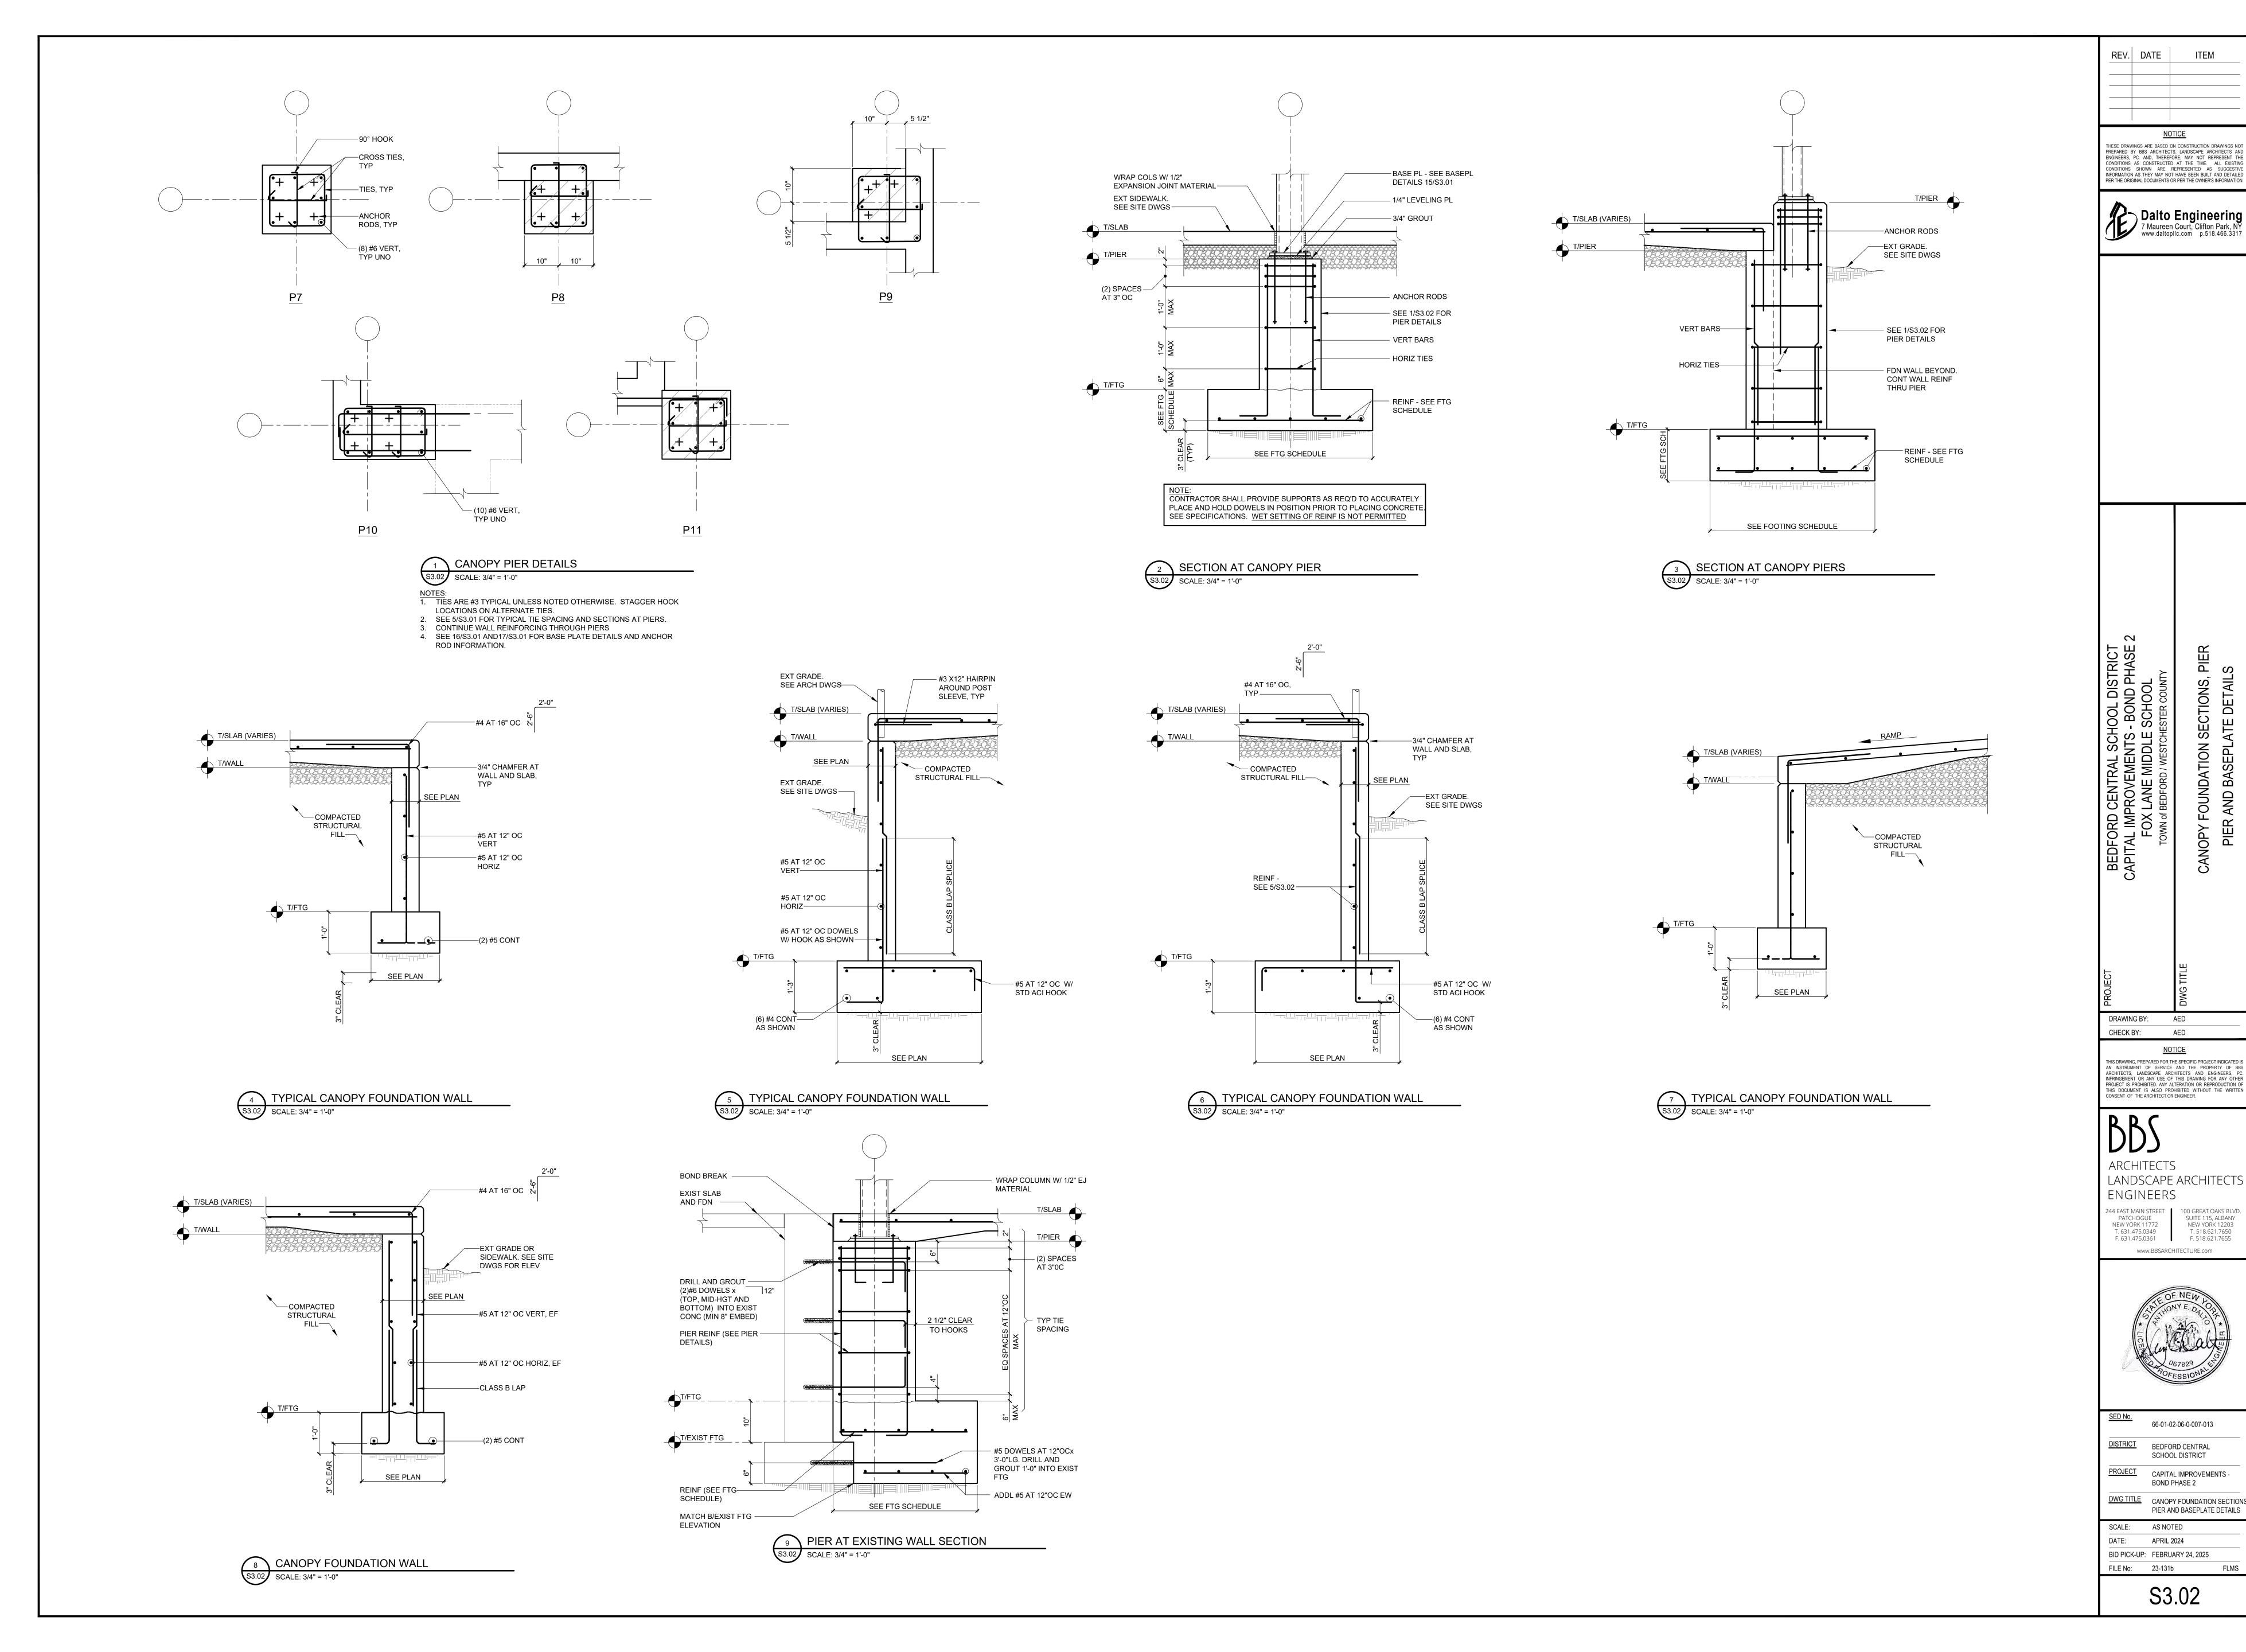

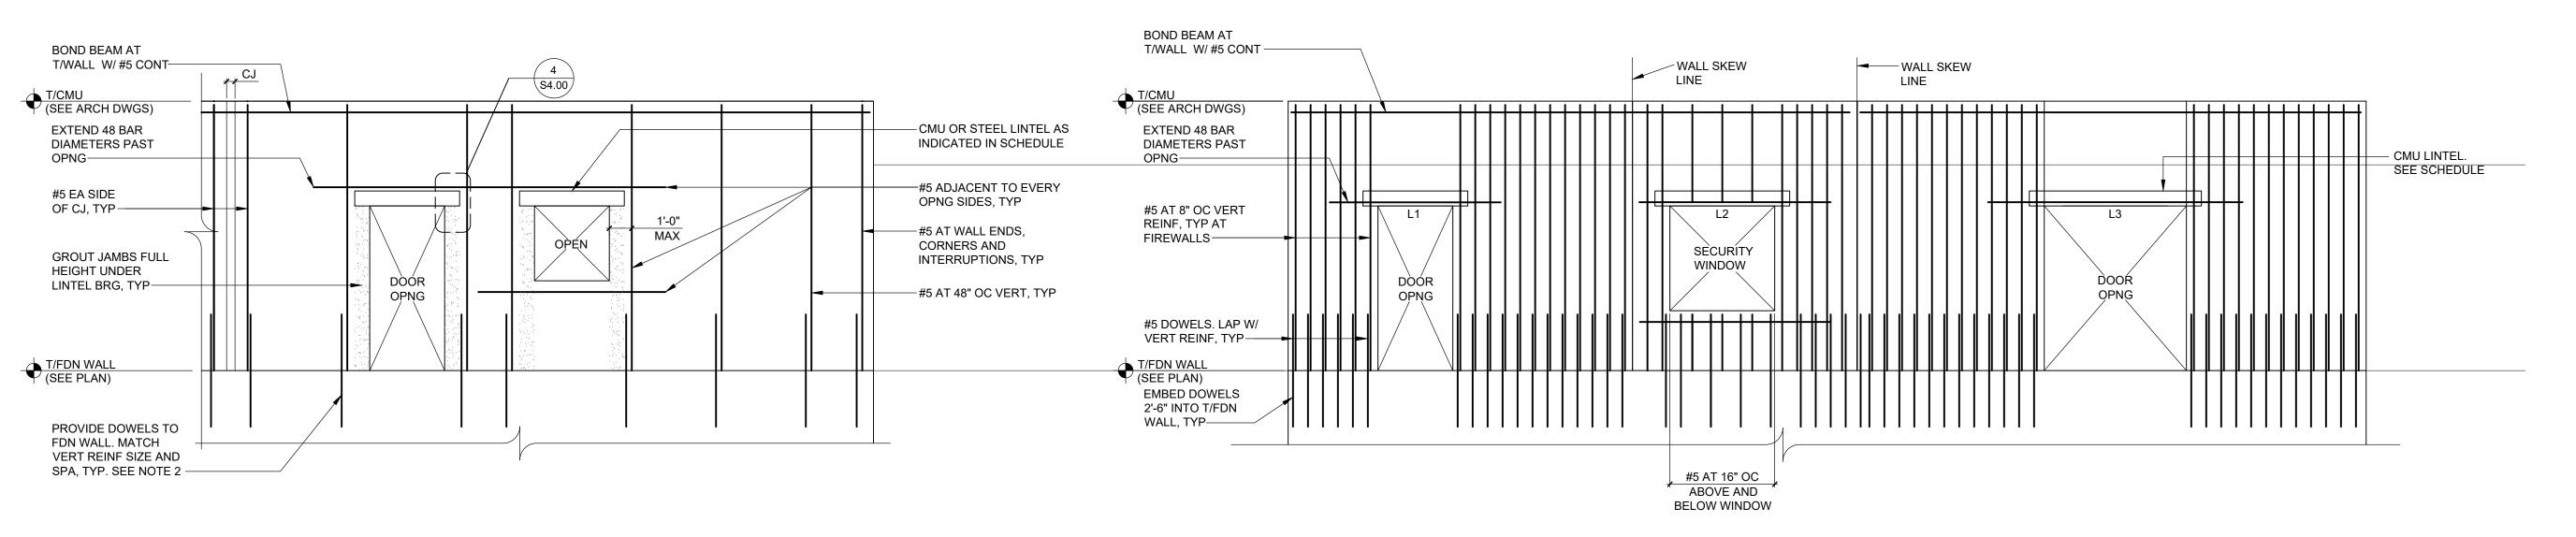

TYPICAL MASONRY WALL 1 REINFORCING ELEVATION

S4.00 SCALE: 1/4" = 1'-0" REINFORCING SHOWN IS TYPICAL UNLESS NOTED. PROVIDE REBAR POSITIONERS AS INDICATED IN 10/S4.00.

AS SHOWN IN 11/S4.00 OR 12/S4.00 AS APPLICABLE.

LAP SPLICE SCHEDULE ON S0.02. 3. PROVIDE LADDER TYPE HORIZONTAL JOINT REINFORCING AT 16" ON CENTER AND AT TOP TWO COURSES UNLESS NOTED OTHERWISE.

2. LAP REINFORCING BARS AS INDICATED IN THE MASONRY REINFORCING

4. AT INTERIOR PARTITIONS, WHERE NO FOUNDATION WALL IS PRESENT, PROVIDE (1)#4 CONTINUOUS IN SLAB (TYPICAL). 5. AT INTERIOR, NON-LOAD BEARING PARTITIONS, TOP OF PARTITION SHALL BE 1" MINIMUM BELOW FRAMING MEMBERS OR DECK TO ALLOW FOR DEFLECTION OF STRUCTURE ABOVE. BRACE TOP OF PARTITION

MASONRY WALL REINFORCING **** ELEVATION AT FIREWALL SCALE: 1/4" = 1'-0"

1. SEE 1/S4.00 FOR ADDITIONAL INFORMATION.

LINTEL SCHEDULE MARK MATERIAL TYPE LENGTH REMARKS 8X8 CMU 3'-4" MO REINF W/ (1) #5 L1 8X16 CMU 4'-8" MO | REINF W/ (1) #5, TOP AND BOT L2 8X16 CMU 6'-0" MO REINF W/ (1) #5, TOP AND BOT L3

REINFORCED MASONRY LINTEL NOTES:


- 1. REINFORCED MASONRY LINTEL MATERIAL INCLUDE REINFORCED CMU, PRECAST CONCRETE, OR CAST STONE.
- 2. FOR OPENINGS NOT OTHERWISE DETAILED, INCLUDING MECHANICAL OPENINGS, USE REINFORCED MASONRY LINTEL 8 INCHES DEEP FOR SPANS UP TO 4 FEET AND 16 INCHES
- DEEP FOR SPANS UP TO 6 FEET. 3. USE THE FOLLOWING MINIMUM REINFORCING: ONE #5 TOP AND BOTTOM FOR EACH 4 INCHES OF MASONRY WIDTH, ONE #6 TOP AND BOTTOM FOR 6-INCH CMU WALLS, AND TWO
- #5 TOP AND BOTTOM FOR 10 INCH CMU WALLS. 4. LOCATE REINFORCING IN REINFORCED CMU LINTELS 3/4-INCH CLEAR FROM INSIDE FACE OF FACE SHELL IN LINTELS CONTAINING MULTIPLE BARS. CENTER BAR IN LINTELS CONTAINING ONLY ONE BAR.
- 5. REINFORCED CMU LINTELS SHALL BE MADE OF SAME MATERIAL WITH SAME COLOR AND TEXTURE AS SURROUNDING WALLS. EXTEND REINFORCING 48 BAR DIAMETERS BEYOND OPENINGS. HOOK BAR ENDS WHERE 48 BAR DIAMETERS CANNOT BE ACHIEVED.
- 6. BEAR LINTELS A MINIMUM OF 8 INCHES EACH END, UNLESS NOTED OTHERWISE. 7. SHORE REINFORCED MASONRY LINTELS UNTIL MASONRY WALL ABOVE LINTEL HAS CURED A MINIMUM OF 14 DAYS.


8. SEE SPECIFICATIONS AND GENERAL NOTES FOR ADDITIONAL REQUIREMENTS.

STEEL LINTEL NOTES:

- 1. FOR OPENINGS NOT OTHERWISE DETAILED OR SCHEDULED, INCLUDING DOORS, WINDOWS, AND MECHANICAL OPENINGS, MINIMUM LINTELS SHALL BE (FOR EACH 4 INCHES OF MASONRY WIDTH), ONE L3 1/2 X3 1/2 X 5/16 FOR SPANS UP TO 4 FEET, ONE L4X3 1/2 X5/16 LLV FOR SPANS UP TO 6 FEET; ONE L5X3 1/2X5/16 LLV FOR SPANS UP TO 8 FEET. FOR SPANS LESS THAN 2 FEET, PROVIDE A 5/16 INCH PLATE. COORDINATE OPENINGS WITH
- ARCHITECTURAL AND MECHANICAL DRAWINGS. 2. WELD TOGETHER BACK-TO-BACK LINTELS. MAXIMUM WELD SPACING SHALL NOT EXCEED 12 INCHES ON CENTER.
- 3. BEAR LINTELS A MINIMUM OF 8 INCHES EACH END UNLESS NOTED OTHERWISE. 4. HOT-DIP GALVANIZE LINTELS IN EXTERIOR WALLS.

 \bigcirc \bigcirc \bigcirc

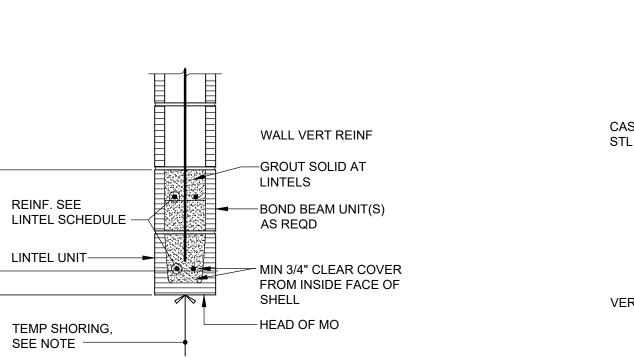

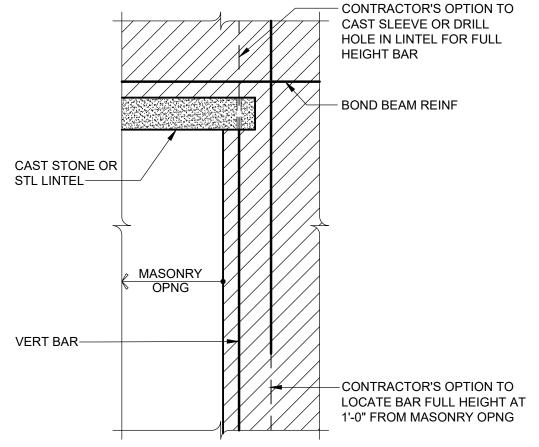

4 WALL REINFORCING AT MASONRY OPENING

2. USE FULL HEIGHT BAR THROUGH LINTEL BEARING AT

3. LAP LENGTH SHALL BE THE LAP LENGTH INDICATED IN THE

FULL HEIGHT. BARS MAY BE LAPPED.

REINFORCED CMU LINTEL.


OFFSET 8 INCHES.

1. TERM "FULL HEIGHT REFERS TO A SINGLE CORE REINFORCED

MASONRY NOTES ON S0.01 + 8 INCHES WHERE BARS ARE

4. SEE 5/S4.00 FOR ELEVATION OF OPENING AT CONTROL JOINT.

S4.00 | SCALE: 1" = 1'-0"

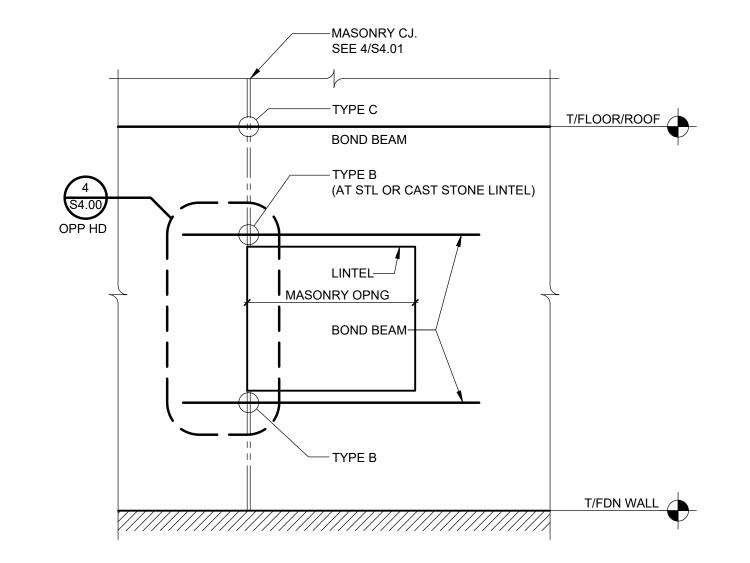

WALL ELEVATION

AT BOND BEAMS.

ADDITIONAL INFORMATION.

S4.00 SCALE: 1" = 1'-0"


5 OF CONTROL JOINT AT BOND BEAM


1. SEE 4/S4.01 FOR DETAILS OF TYPE A, B, AND C CONTROL JOINTS

PROVIDE LADDER TYPE HORIZONTAL JOINT REINFORCING AT 16"

2. SEE 1/S4.01 MASONRY WALL REINFORCING ELEVATION FOR

ON CENTER AND AT TOP TWO COURSES UNLESS NOTED

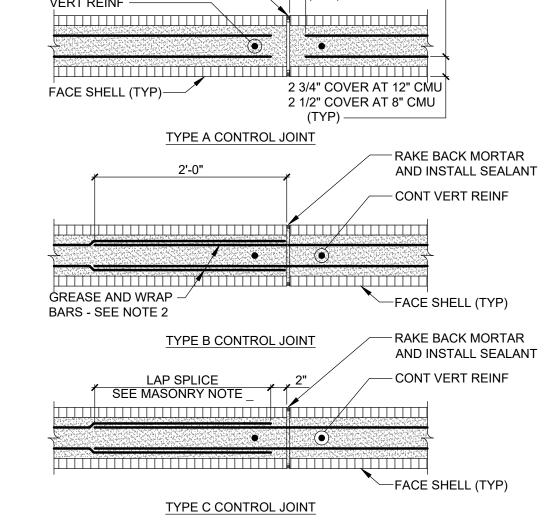

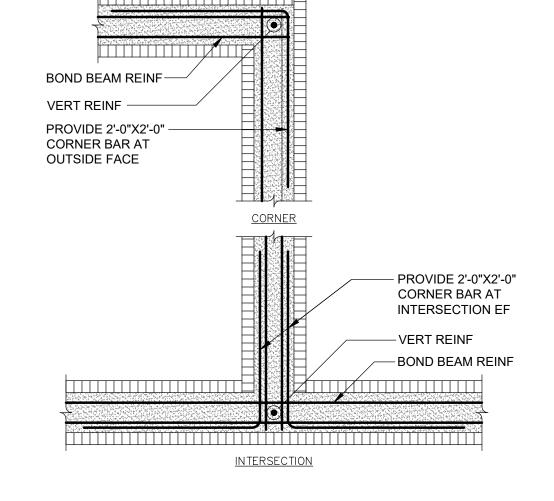


7 BOND BEAM PLAN DETAILS S4.00 SCALE: 1" = 1'-0"

6 CONTROL JOINTS AT BOND BEAM SCALE: 1" = 1'-0"

BACKER ROD AND SEALANT—


SEE 5/S4.00 FOR WALL ELEVATION OF CONTROL JOINT TYPES AT BOND BEAMS. 2. CONTRACTOR'S OPTION TO CAST PVC OR GALVANIZED STEEL

CONDUIT SLEEVES INTO WALL IN LIEU OF "GREASE AND WRAP"

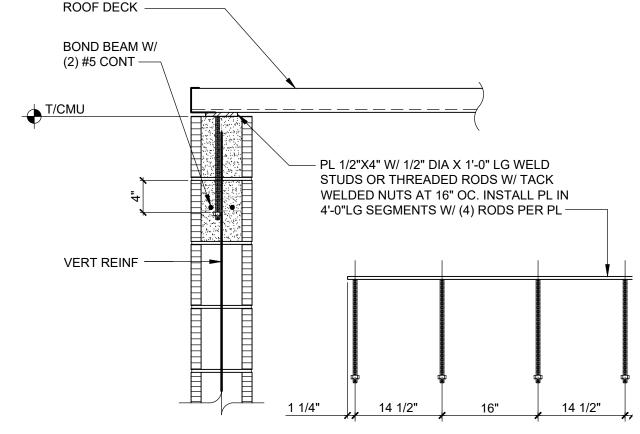


REINFORCED CMU LINTEL SECTION S4.00 SCALE: 1" = 1'-0"

NOTE: SHORE REINFORCED CMU LINTEL UNTIL MASONRY (INCLUDING GROUT) ABOVE LINTEL HAS CURED A MINIMUM OF 14 DAYS.

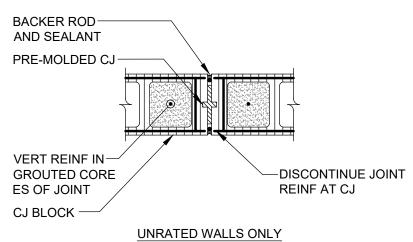


8 WALL CONTROL JOINT

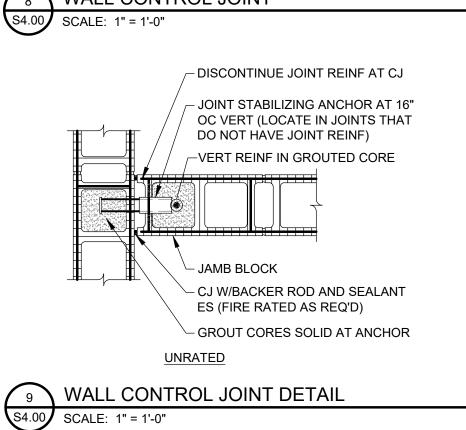


REBAR POSITIONER SPACING MAX VERTICAL SPACING BAR SIZE 56 INCHES 64 INCHES SECURE POSITION OF 80 INCHES REINF(INCLUDING LAP SPLICE) USING WIRE REBAR POSITIONERS AT MIN SPA INDICATED IN TABLE — -2 3/4" COVER AT 12" CMU 2 1/2" COVER AT 8" CMU VERT BAR CENTERED -


PLAN DETAIL -10 REINFORCING IN CMU CORES S4.00 NOT TO SCALE

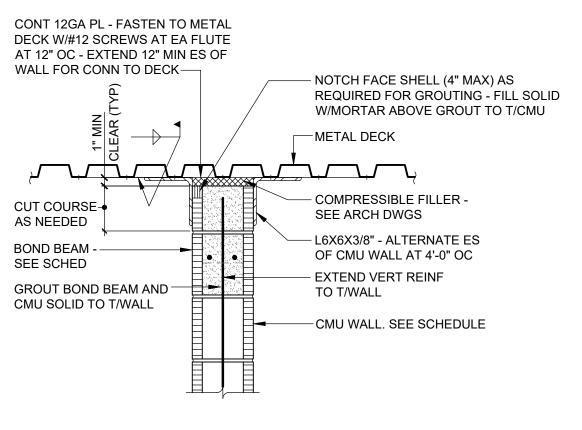

DETAIL AT TOP OF CMU WALL

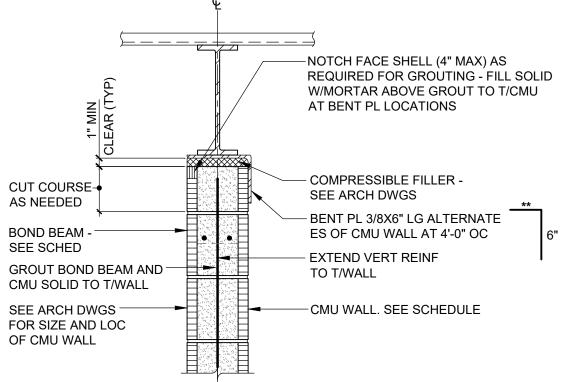

DETAIL AT TOP OF CMU WALL S4.00 SCALE: 1" = 1'-0" 1. ** INDICATES FLANGE WIDTH PLUS 2 INCHES OR WALL WIDTH + 1/2" (WHICHEVER IS GREATER).

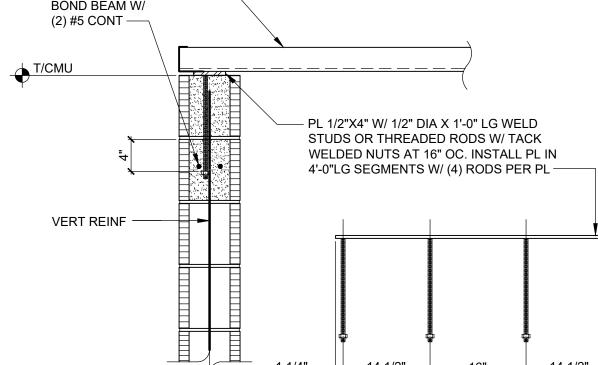

SECTION AT ROOF DECK BEARING S4.00 SCALE: 1" = 1'-0"

37 WOLF ROAD, STE. 2

NEW YORK 12205

66-01-02-06-0-007-013 BEDFORD CENTRAL SCHOOL DISTRICT PROJECT CAPITAL IMPROVEMENTS BOND PHASE 2 <u>DWG TITLE</u> MASONRY ELEVATIONS, SECTIONS AND DETAILS

DRAWING BY:

THIS DRAWING, PREPARED FOR THE SPECIFIC PROJECT INDICATED IS AN INSTRUMENT OF SERVICE AND THE PROPERTY OF BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PC INFRINGEMENT OR ANY USE OF THIS DRAWING FOR ANY OTHER

PROJECT IS PROHIBITED. ANY ALTERATION OR REPRODUCTION OF THIS DOCUMENT IS ALSO PROHIBITED WITHOUT THE WRITTE

LANDSCAPE ARCHITECTS

www.BBSARCHITECTURE.com

CONSENT OF THE ARCHITECT OR ENGINEER.

ARCHITECTS

ENGINEERS

44 EAST MAIN STREET

F. 631.475.0361

PATCHOGUE

NEW YORK 11772

CHECK BY:

REV. DATE

NOTICE

THESE DRAWINGS ARE BASED ON CONSTRUCTION DRAWINGS NO

PREPARED BY BBS ARCHITECTS, LANDSCAPE ARCHITECTS AN

CONDITIONS AS CONSTRUCTED AT THE TIME ALL EXIST

INFORMATION AS THEY MAY NOT HAVE BEEN BUILT AND DETAIL

Dalto Engineering
7 Maureen Court, Clifton Park, NY


www.daltopllc.com p.518.466.33

 \Box

APRIL 2024 BID PICK-UP: FEBRUARY 24, 2025 FILE No: 23-131b

SCALE: AS NOTED


S4.00

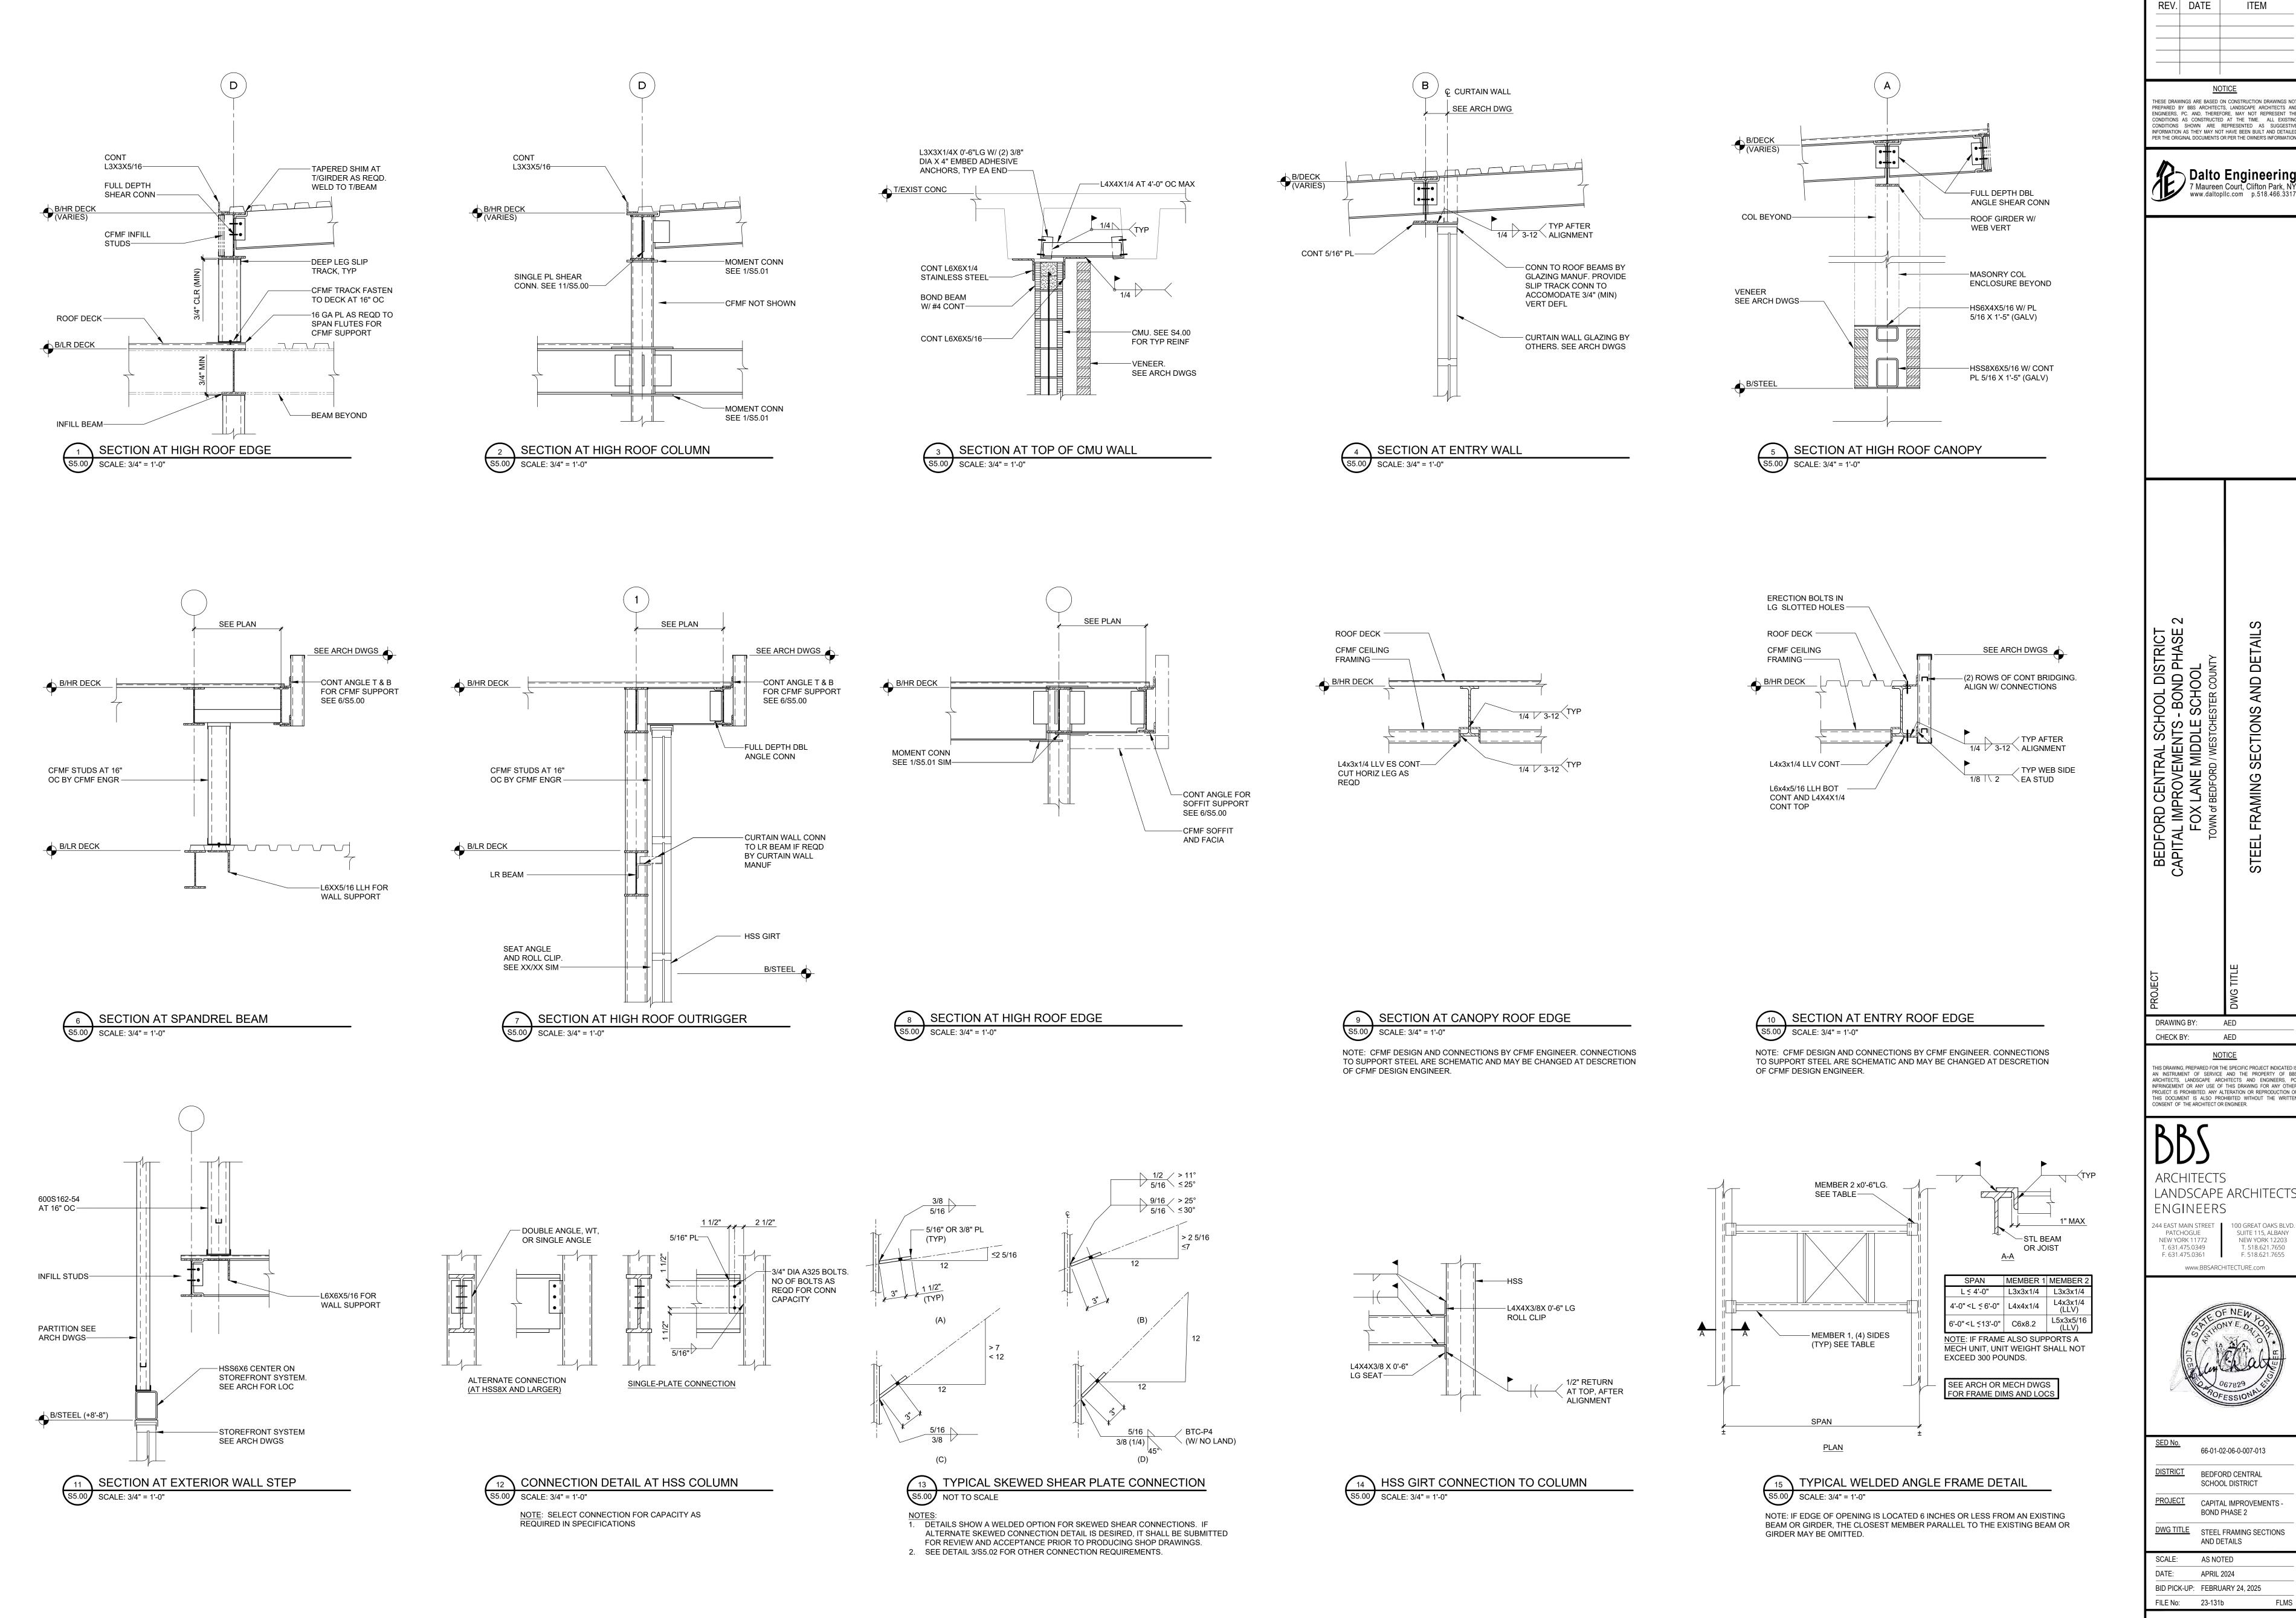

REV. DATE NOTICE THESE DRAWINGS ARE BASED ON CONSTRUCTION DRAWINGS NOT PREPARED BY BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PC. AND, THEREFORE, MAY NOT REPRESENT THE CONDITIONS AS CONSTRUCTED AT THE TIME. ALL EXISTIN CONDITIONS SHOWN ARE REPRESENTED AS SUGGESTIVE INFORMATION AS THEY MAY NOT HAVE BEEN BUILT AND DETAILED Dalto Engineering
7 Maureen Court, Clifton Park, NY
www.daltoplic.com p.518.466.3317

SECTIONS, DRAWING BY: AED

PROJECT IS PROHIBITED. ANY ALTERATION OR REPRODUCTION OF THIS DOCUMENT IS ALSO PROHIBITED WITHOUT THE WRITTEN CONSENT OF THE ARCHITECT OR ENGINEER. ARCHITECTS LANDSCAPE ARCHITECTS ENGINEERS 44 EAST MAIN STREET 100 GREAT OAKS BLVD PATCHOGUE SUITE 115, ALBANY NEW YORK 11772 NEW YORK 12203 F. 631.475.0361 www.BBSARCHITECTURE.com




SED No.	66-01-02-06-0-007-013
<u>DISTRICT</u>	BEDFORD CENTRAL SCHOOL DISTRICT
PROJECT	CAPITAL IMPROVEMENTS - BOND PHASE 2
DWG TITLE	STEEL FRAMING SECTIONS AND DETAILS
	· · · · · · · · · · · · · · · · · · ·

AS NOTED

APRIL 2024

S5.00

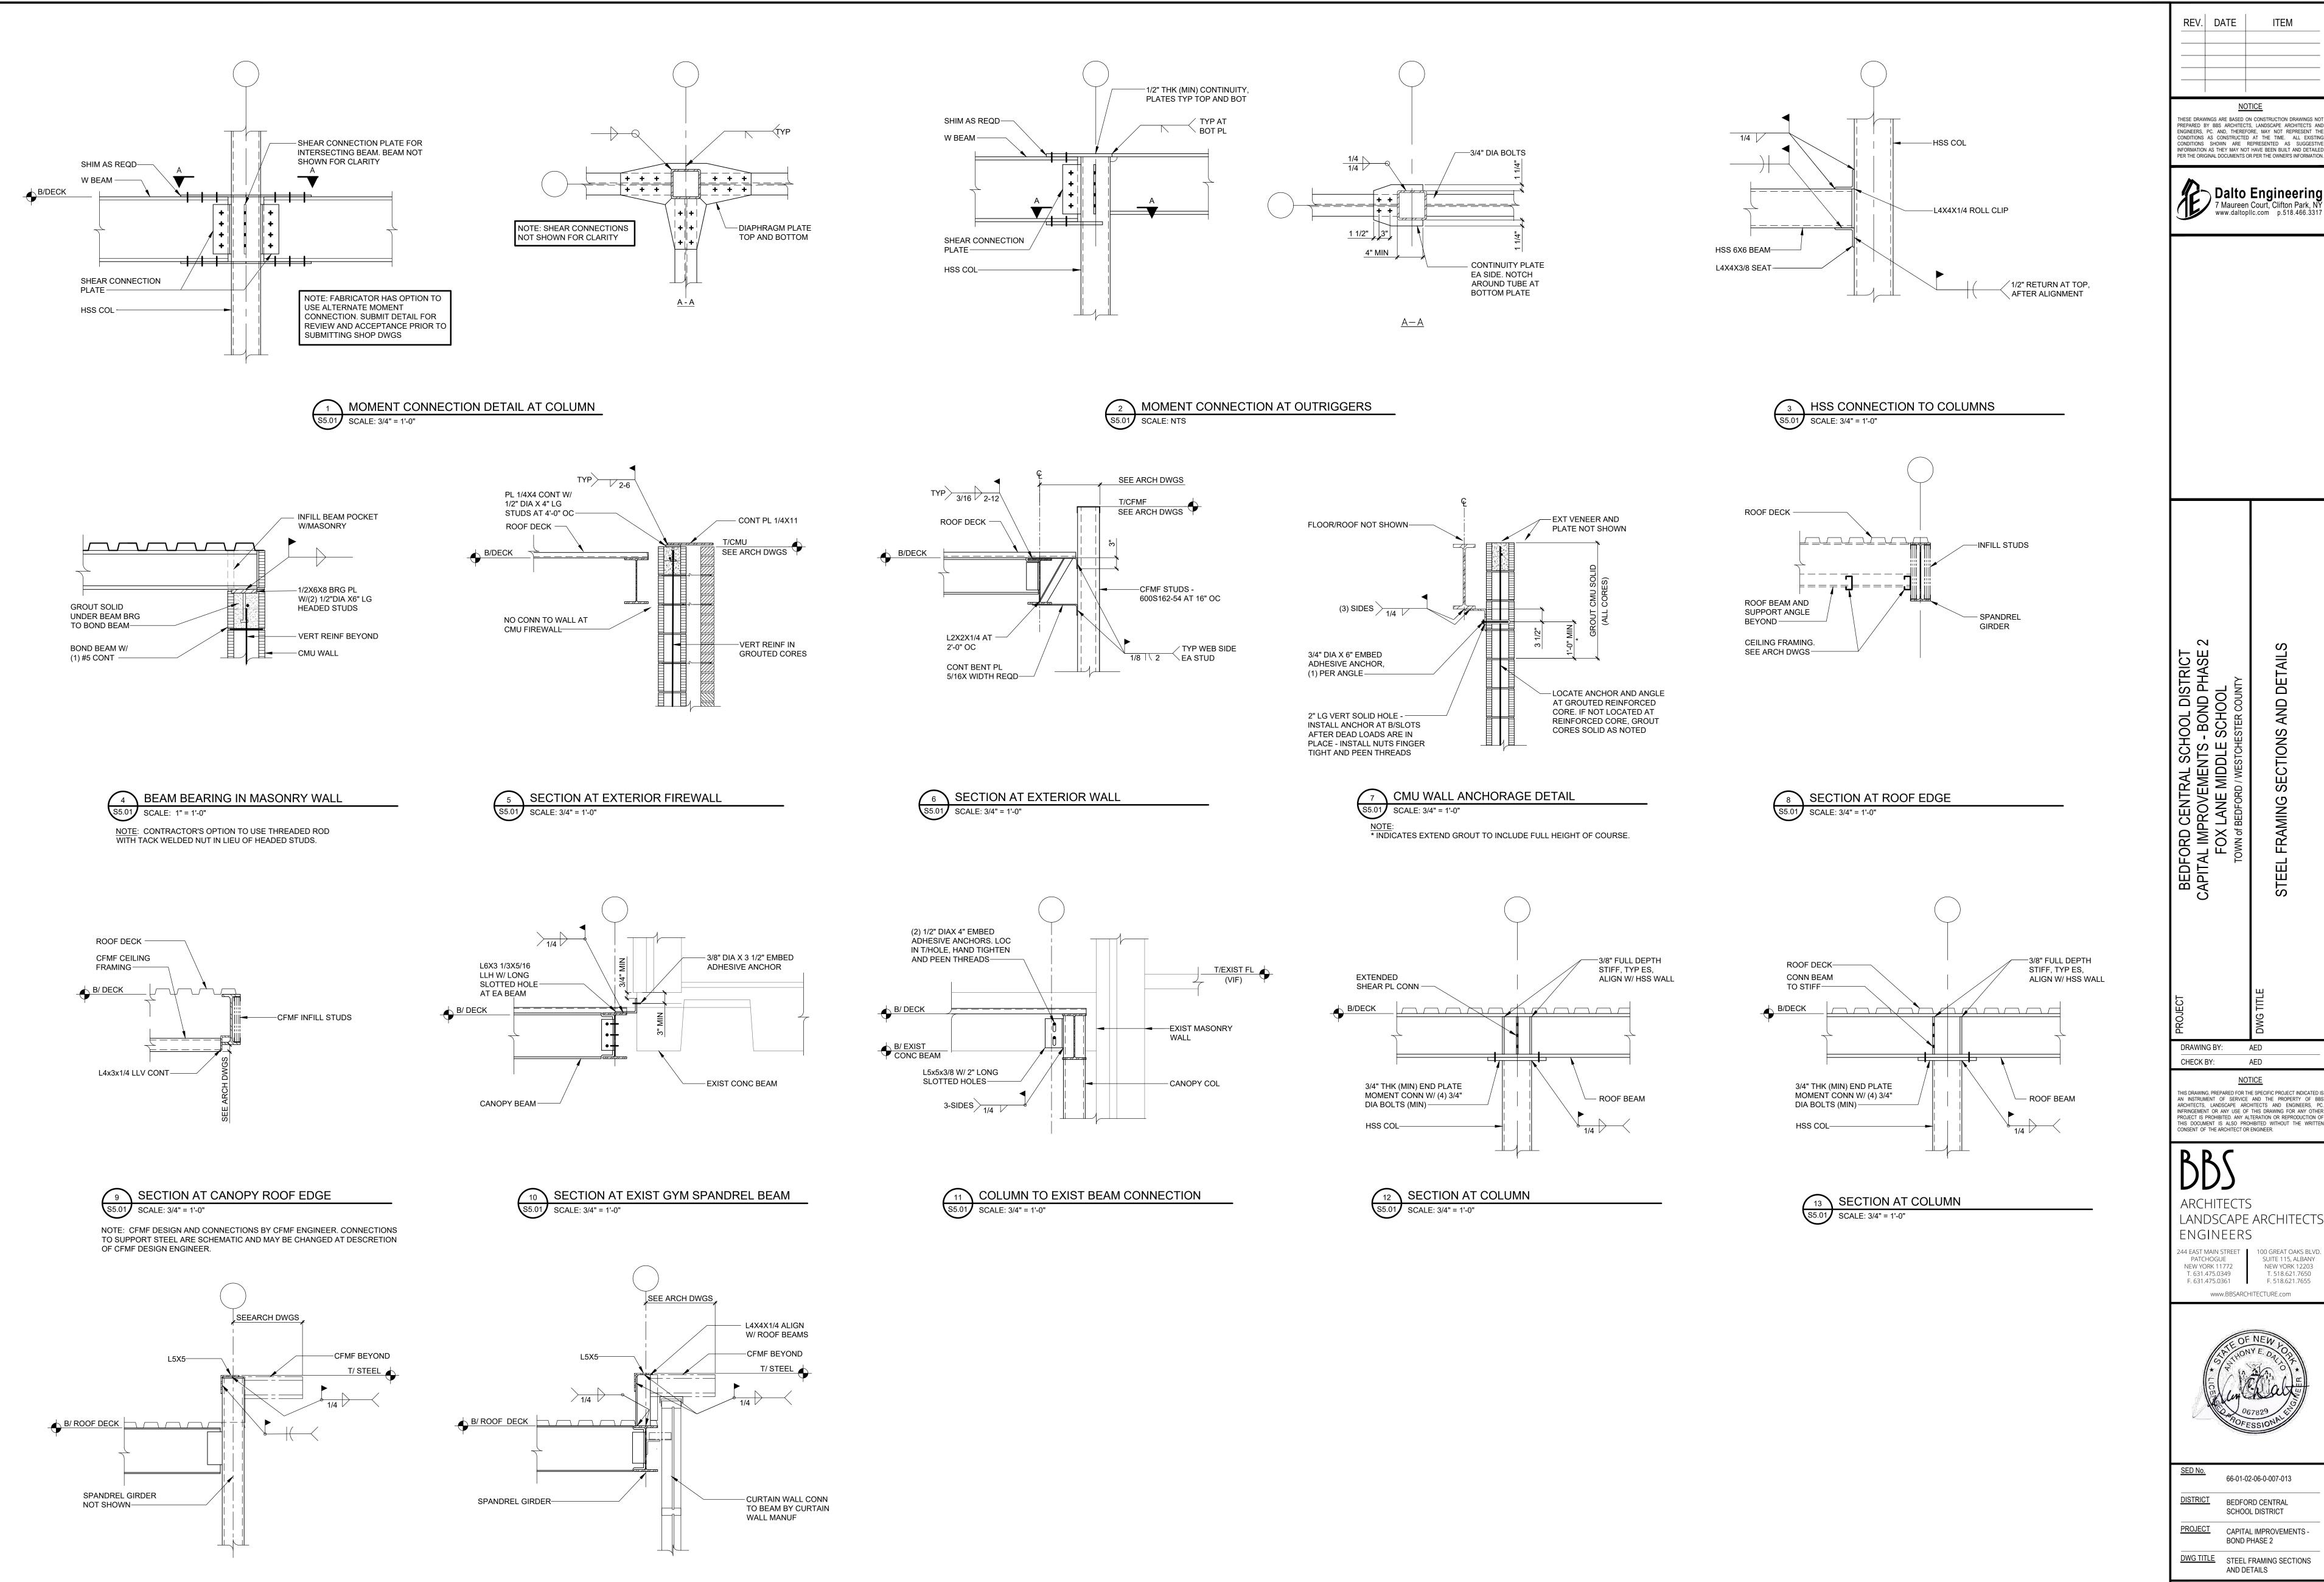

14 SECTION AT COLUMN S5.01 SCALE: 3/4" = 1'-0"

SECTION AT ROOF EDGE

S5.01 SCALE: 3/4" = 1'-0"

THESE DRAWINGS ARE BASED ON CONSTRUCTION DRAWINGS NOT PREPARED BY BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PC. AND, THEREFORE, MAY NOT REPRESENT THE CONDITIONS AS CONSTRUCTED AT THE TIME. ALL EXISTIN CONDITIONS SHOWN ARE REPRESENTED AS SUGGESTIVE INFORMATION AS THEY MAY NOT HAVE BEEN BUILT AND DETAILED






BEDFORD CENTRAL SCHOOL DISTRICT CAPITAL IMPROVEMENTS - BOND PHASE 2	FOX LANE MIDDLE SCHOOL TOWN of BEDFORD / WESTCHESTER COUNTY		STEEL FRAMING SECTIONS AND DETAILS
PROJECT		DWG TITLE	
DRAWING 		AED AED	

CONSENT OF THE ANOTHEOT ON ENGINEER.	
BBS	
ARCHITECTS LANDSCAPE ARCHITEC ENGINEERS	Τ:
244 FAST MAIN STREET 100 GREAT OAKS BI	VΓ

<u>NOTICE</u>





SED No.	66-01-02-06-0-007-013
<u>DISTRICT</u>	BEDFORD CENTRAL SCHOOL DISTRICT
PROJECT	CAPITAL IMPROVEMENTS - BOND PHASE 2
DWG TITLE	STEEL FRAMING SECTIONS AND DETAILS
SCALE:	AS NOTED
DATE:	APRIL 2024
BID PICK-UP:	FEBRUARY 24, 2025

FILE No: 23-131b

FIRE STOP NOTES

- ALL PIPING PENETRATIONS THROUGH FIRE RATED WALLS, FLOORS OR OTHER STRUCTURES SHALL BE FIRE STOPPED BY PLUMBING CONTRACTOR.
- THE FIRE STOP MATERIALS SHALL BE HILTI TYPE FS-657 FIRE BLOCK, FS-ONE SEALANT, CP-672 JOINT SPRAY, CP-601S ELASTOMERIC SEALANT, 6P-606 FLEXIBLE SEALANT, CP-643 OR CP-642 COLLAR, CP-618 PUTTY STICK, OR FS-635 TROWEL ABLE COMPOUND, AS SUITABLE.
- CONTRACTOR SHALL SUBMIT SHOP DRAWINGS OF PRODUCTS TO BE USED.
- FIRESTOP MATERIALS OTHER THAN HILTI SHALL INCLUDE FULL TECHNICAL DATA WITH SHOP DRAWINGS TO DEMONSTRATE EQUALITY WITH THE SPECIFIED FIRE STOPS.

NEW WORK SCOPE NOTES

- PLUMBING CONTRACTOR SHALL PROVIDE AND INSTALL NEW FIXTURES AS SHOWN IN PLUMBING FIXTURE SCHEDULE ON DRAWING #P0.02.
- INSTALL NEW PIPING WITH CONNECTIONS TO EXISTING MAIN PIPING TO EACH NEW
- CONNECT VENT PIPING TO EXISTING VENTS.
- SEE GENERAL NOTES AND PLUMBING SPECIFICATIONS DIVISION 22 FOR MORE DETAIL. DEMOLITION AND RECONSTRUCTION OF PLUMBING WALLS BY GENERAL CONTRACTOR.

PLUMBING CONTRACTOR TO COORDINATE WITH GENERAL CONTRACTOR.

IN ALL INSTANCES WHERE NEW FIXTURES ARE PROPOSED THE PLUMBING CONTRACTOR SHALL PERFORM ALL DEMOLITION REQUIRED FOR REMOVAL OF EXISTING FIXTURE CARRIERS AND INSTALL NEW FIXTURE CARRIERS. GENERAL CONTRACTOR. SHALL THEN BUILD/PATCH MASONRY WALLS AS REQUIRED INCLUDING NEW TILE FINISHES. UPON COMPLETION OF MASONRY/TILE THE PLUMBING CONTRACTOR SHALL INSTALL NEW FIXTURES PER SPECIFICATIONS

UTILITY NOTES

- PIPING LOCATIONS ARE SCHEMATIC AND EACH TRADE SHALL RUN PIPING IN ORDER TO USE THE LEAST AMOUNT OF MATERIAL.
- PLUMBING CONTRACTOR SHALL PROVIDE VENT PIPING FOR ALL PLUMBING FIXTURES AS PER CODE.
- PLUMBING NOTE: PIPING SIZES SEE SCHEDULE THIS SHEET.
- P.C. TO VERIFY SIZE OF SERVICE REQUIRED, SIZE AND EXACT LOCATION OF CONNECTIONS TO EACH PIECE OF FIXTURE AND/OR APPLIANCE.

EPA 67.4 NOTE

- THE PLUMBING CONTRACTOR SHALL PROVIDE AND INSTALL NEW AND/OR REPLACEMENT PLUMBING FIXTURES. THE RESPECTIVE FIXTURES MUST ADHERE TO THE "LEAD-FREE" DIVISION 22 SPECIFICATIONS OUTLINING THE INSTALLATION MEANS AND METHODS AS WELL AS THE FIXTURE ITSELF BEING "LEAD FREE." THE CONTRACTOR SHALL PROVIDE THE REQUIRED SUBMITTALS FOR ALL FIXTURES AND BUILDING MATERIALS PRIOR TO THE FIXTURE INSTALLATION, AND CONFIRM ON THE JOBSITE THAT THE FIXTURE ADHERES TO "LEAD-FREE" REGULATIONS. a. FOLLOWING THE POTABLE FIXTURE INSTALLATION; THE P.C. SHALL REMOVE ALL
- FILTERS AND STRAINERS AND FLUSH THE FIXTURE OF DEBRIS FROM THE SYSTEM.
- FOLLOWING THE COMPLETION OF THE P.C. WORK SCOPE, THE OWNER SHALL HAVE THE WATER CONDITIONS TESTED FOR LEAD CONTAMINANTS BY A THIRD-PARTY TESTING FIRM TO REGULATION 67.4 OF THE DEPARTMENT OF HEALTH REGULATIONS AS PART OF SECTION 1417 OF THE FEDERAL SAFE WATER ACT TO DETERMINE THEM AS "LEAD-FREE" COMPLIANT.
- IF A FIXTURE DOES NOT COMPLY WITH SUB-PART REGULATION 67.4 OF THE DOH SECTION 1417 OF THE FEDERAL SAFE WATER ACT, THE P.C. SHALL PROVIDE A REPLACEMENT FIXTURE AT NO ADDITIONAL COST, TO THEN REPEAT THE INSTALLATION AND TESTING REQUIREMENTS. THE P.C. SHALL ABSORB THE FEE FOR THE FIRST LEAD TESTING PROCEDURE AS WELL AS THE FOLLOWING CONFIRMATION PROCEDURES AT NO ADDITIONAL COST TO THE OWNER.

SYMBOL	DESCRIPTION
	EXISTING DOMESTIC COLD WATER PIPING
	EXISTING DOMESTIC HOT WATER PIPING
	EXISTING DOMESTIC HOT WATER RETURN PIPING
SW	EXISTING SANITARY WASTE PIPING
·	NEW DOMESTIC COLD WATER PIPING
··	NEW DOMESTIC HOT WATER PIPING
<u> </u>	NEW DOMESTIC HOT WATER RETURN PIPING
SW	NEW SANITARY WASTE PPIPING
	NEW VENT PIPING
	EXISTING VENT PIPING
OCODP	DENOTES CLEAN OUT DECK PLATE
E.CODP	DENOTES EXISTING OUT DECK PLATE
—	NEW BALL VALVE IN PIPING
P	NEW HAMMER ARRESTOR IN PIPING
—	CONNECTION POINT OF NEW WORK TO BE DONE.
— x — x —	DEMOLITION WORK TO BE DONE
W.	WASTE PIPING
V.	VENT PIPING
HWS	HOT WATER SUPPLY PIPING
HWR	HOT WATER RE-CIRCULATION PIPING
CWS	COLD WATER SUPPLY PIPING
RECIRC.	RECIRCULATION

GENERAL CONSTRUCTION NOTES

- PLUMBING CONTRACTOR SHALL VISIT THE SITE PRIOR TO SUBMITTING HIS BID AND PERFORM ALL INVESTIGATION WORK BEFORE SUBMITTING A BID ON THE PLUMBING
- CONNECT ALL HOT WATER, COLD WATER, VENT, AND WASTE PIPING AS REQUIRED INCLUDING PIPING, VALVES, TAPS, ESCUTCHEONS, SLEEVES, ACCESS DOORS, CLEANOUTS, PIPE HANGERS, INSULATION, ETC.
- PROVIDE AND INSTALL PLUMBING FIXTURES INCLUDING ALL CUTTING AND PATCHING AS REQUIRED INCLUDING WASTE, VENT, AND WATER SUPPLY CONNECTIONS AND FITTINGS (ALL TRAPS TO HAVE CLEANOUTS).
- ALL WORK SHALL BE IN ACCORDANCE WITH STATE AND LOCAL BUILDING CODES. CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND PAYING RELATED FEES.
- PLUMBING CONTRACTOR SHALL COORDINATE HIS WORK WITH ALL OTHER TRADES PRIOR TO CONSTRUCTION.
- INTERIOR DOMESTIC WATER PIPING SHALL BE TYPE "L" COPPER. UNDERGROUND SPIGOT UNDERGROUND, AND NO HUB INSIDE BUILDING. STORM DRAIN PIPING SHALL BE NO HUB CAST IRON SOIL PIPE INSIDE BUILDING. VENT PIPING SHALL BE NO HUB
- ALL WORK SHALL BE PROPERLY TESTED AND CLEANED. PROVIDE ONE YEAR WARRANTY FROM DATE OF ACCEPTED COMPLETION ON ALL PARTS AND LABOR.
- ALL EXPOSED METALWORK ON PLUMBING FIXTURES SHALL BE CHROME PLATED.
- PROVIDE SHUTOFF VALVE ON WATER SUPPLY BRANCH TO EACH INDIVIDUAL FIXTURE IN
- . ALL WORK SHALL BE IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS.
- NON-GALVANIC ISOLATOR, DIELECTRIC UNION OR FLANGES.
- . PROVIDE CLEANOUTS (FULL SIZE UP TO 4-INCHES AND AT LEAST HALF-SIZE FOR LARGER PIPES WITH 4-INCH MINIMUM), WHERE INDICATED, APPROXIMATELY EVERY 50 FEET ON HORIZONTAL DRAINAGE PIPING, AT CHANGES IN DIRECTION, AT BASE OF
- . PLUMBING CONTRACTOR SHALL BE RESPONSIBLE FOR ALL CORE DRILLING THRU WALLS, FLOORS AND CUTTING AND PATCHING AS REQUIRED TO FACILITATE INSTALLATION OF PIPES AND PLUMBING FIXTURES.
- . ALL FLOOR TRAPS SHALL BE INSTALLED WITH PRIMER TAPPING FOR WATER CONNECTION TO TRAP.
- 9. P.C. SHALL PROVIDE AND INSTALL PIPE INSULATION ON ALL DOMESTIC COLD WATER SUPPLY, HOT WATER SUPPLY, HOT WATER SUPPLY (RE-CIRCULATION LINE) AND ROOF DRAIN PIPING THAT IS EXPOSED ABOVE CEILINGS OR IN CRAWL SPACE AND PIF

EXISTING PIPING FIELD VERIFICATION NOTES

PLUMBING CONTRACTOR SHALL BE RESPONSIBLE TO INCLUDE IN THEIR PROPOSAL, EXISTING FIELD VERIFICATION OF ALL EXISTING PLUMBING INCLUDING, BUT NOT LIMITED TO THE FOLLOWING:

4. SANITARY WASTE LINES VENT LINES

SYMBOL	DESCRIPTION
	EXISTING DOMESTIC COLD WATER PIPING
	EXISTING DOMESTIC HOT WATER PIPING
	EXISTING DOMESTIC HOT WATER RETURN PIPING
— SW ——	EXISTING SANITARY WASTE PIPING
	NEW DOMESTIC COLD WATER PIPING
	NEW DOMESTIC HOT WATER PIPING
	NEW DOMESTIC HOT WATER RETURN PIPING
— SW ——	NEW SANITARY WASTE PPIPING
	NEW VENT PIPING
	EXISTING VENT PIPING
OCODP	DENOTES CLEAN OUT DECK PLATE
E.CODP	DENOTES EXISTING OUT DECK PLATE
<u> </u>	NEW BALL VALVE IN PIPING
P	NEW HAMMER ARRESTOR IN PIPING
→	CONNECTION POINT OF NEW WORK TO BE DONE.
- x — x —	DEMOLITION WORK TO BE DONE
W.	WASTE PIPING
V.	VENT PIPING
HWS	HOT WATER SUPPLY PIPING
HWR	HOT WATER RE-CIRCULATION PIPING


- DOMESTIC WATER PIPING SHALL BE TYPE "K" COPPER FOR UP TO 2" AND DUCTILE IRON OVER 2". WASTE PIPING SHALL BE SERVICE WEIGHT CAST IRON SOIL PIPE, HUB AND

- AN ACCESSIBLE LOCATION. WHERE DISSIMILAR METALS ARE CONNECTED, PROVIDE AN APPROVED MAKE OF
- 2. PROVIDE AND INSTALL BOLT CAPS ON ALL TOILETS.
- . RUN LOCAL HORIZONTAL DRAINAGE PIPING AT A GRADE OF 1/4-INCH PER FOOT WHEREVER POSSIBLE, BUT NO LESS THAN 1/8-INCH PER FOOT; HOUSE DRAINS AT 1/8-INCH PER FOOT UNLESS OTHERWISE NOTED AND OUTSIDE UNDERGROUND DRAINAGE PIPING AS INDICATED OR REQUIRED BY CODE.
- . RUN VENT PIPING WITH LONG TURN ELBOWS AT CHANGES IN DIRECTION, GRADE TO DRAIN OUT CONDENSATION, AND CONNECT AT BASE TO PREVENT ACCUMULATION OF
- LEADERS, SOIL, AND WASTE STACKS, AND AS REQUIRED BY CODE.
- PLUMBING CONTRACTOR TO PROVIDE AND INSTALL NEW VENTS FROM FIXTURES UP TO

- COLD WATER LINES 2. HOT WATER SUPPLY LINES 3. HOT WATER RE-CIRCULATION LINES

REV. DATE NOTICE

THESE DRAWINGS ARE BASED ON CONSTRUCTION DRAWINGS NO PREPARED BY BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PC. AND, THEREFORE, MAY NOT REPRESENT THE CONDITIONS AS CONSTRUCTED AT THE TIME. ALL EXISTIN CONDITIONS SHOWN ARE REPRESENTED AS SUGGESTIVE INFORMATION AS THEY MAY NOT HAVE BEEN BUILT AND DETAILED

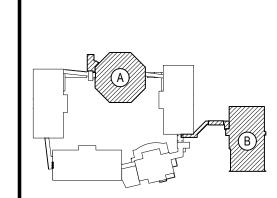

KEY PLAN

NOT TO SCALE


10 7 J

DRAWING BY: JH CHECK BY: CW

THIS DRAWING, PREPARED FOR THE SPECIFIC PROJECT INDICATED IS AN INSTRUMENT OF SERVICE AND THE PROPERTY OF BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PC. INFRINGEMENT OR ANY USE OF THIS DRAWING FOR ANY OTHER PROJECT IS PROHIBITED. ANY ALTERATION OR REPRODUCTION OF THIS DOCUMENT IS ALSO PROHIBITED WITHOUT THE WRITTEN CONSENT OF THE ARCHITECT OR ENGINEER.

> ARCHITECTS LANDSCAPE ARCHITECTS ENGINEERS


100 GREAT OAKS BLVD. PATCHOGUE SUITE 115, ALBANY NEW YORK 11772 NEW YORK 12203 T. 631.475.0349 F. 631.475.0361 F. 518.621.7655 www.BBSARCHITECTURE.com



SCHOOL DISTRICT PROJECT PHASE 2 -BOND IMPROVEMENTS <u>DWG TITLE</u> GENERAL NOTES, LEGENDS,

SCALE: AS NOTED DATE: APRIL 2024 BID PICK-UP: FEBRUARY 24, 2025 FILE No: 23-131b


P0.01

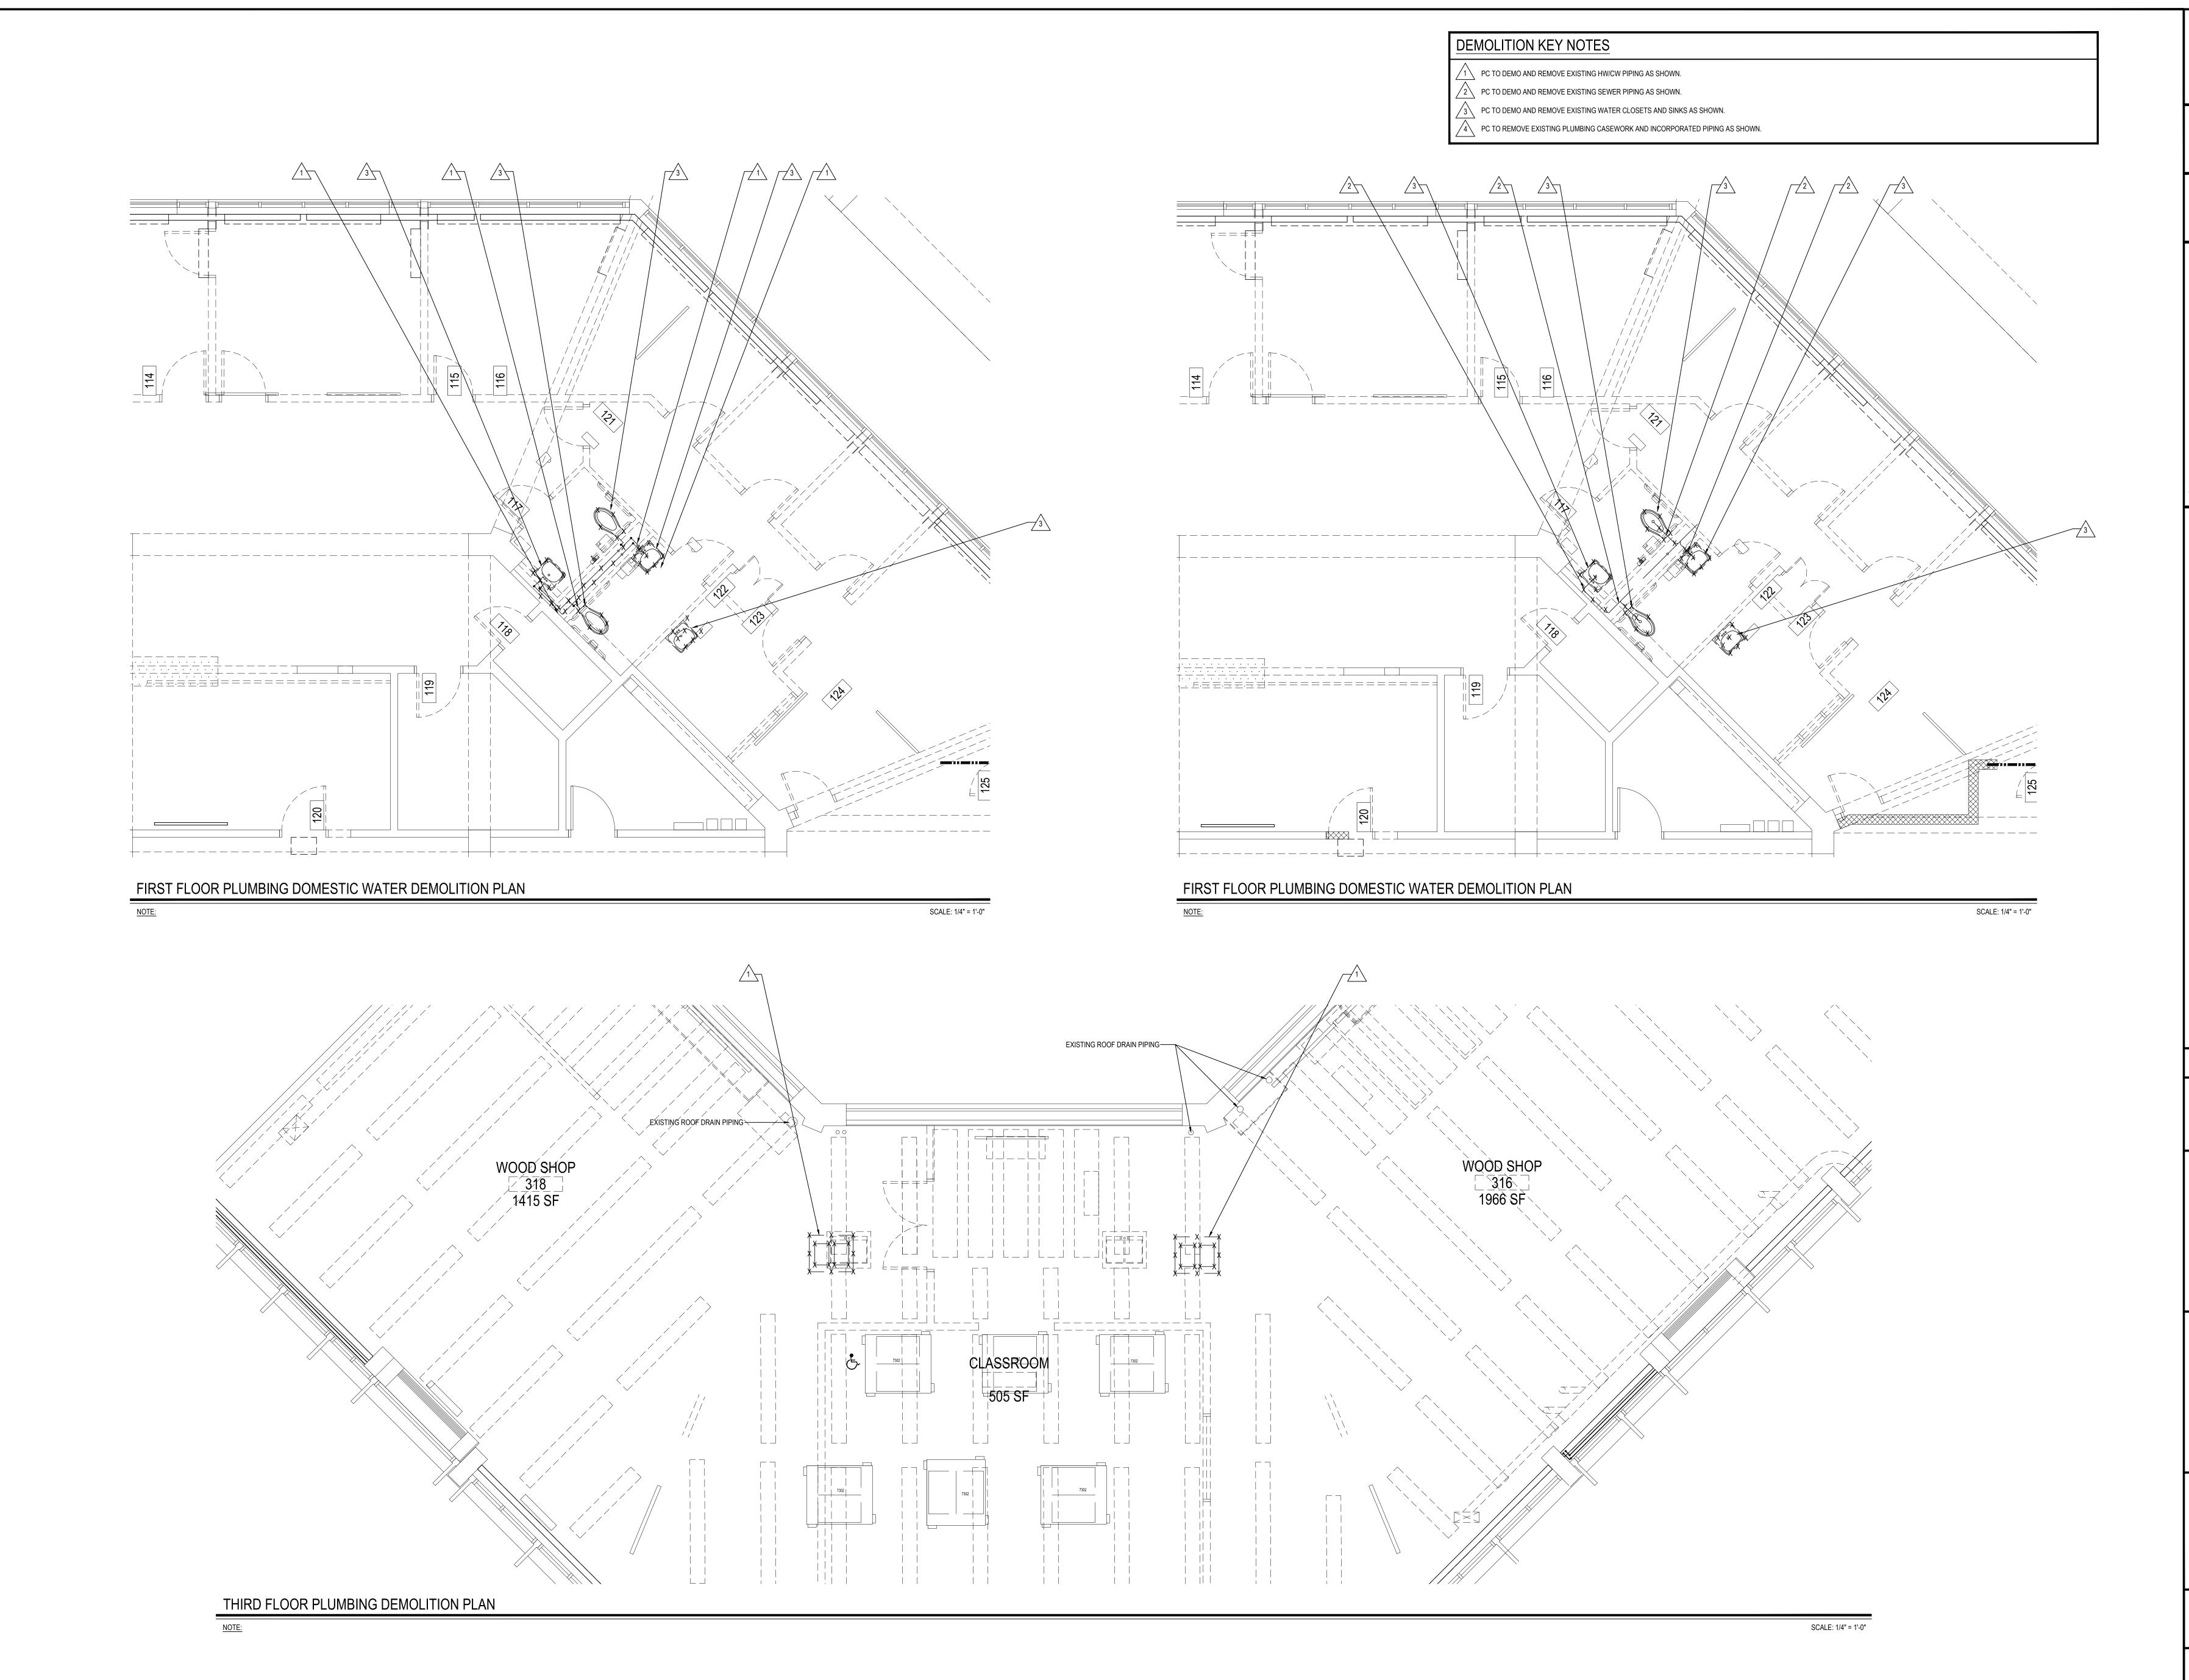


REV. DATE <u>NOTICE</u> THESE DRAWINGS ARE BASED ON CONSTRUCTION DRAWINGS NOT PREPARED BY BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PC. AND, THEREFORE, MAY NOT REPRESENT THE CONDITIONS AS CONSTRUCTED AT THE TIME. ALL EXISTING CONDITIONS SHOWN ARE REPRESENTED AS SUGGESTIVE INFORMATION AS THEY MAY NOT HAVE BEEN BUILT AND DETAILED PER THE ORIGINAL DOCUMENTS OR PER THE OWNER'S INFORMATION. KEY PLAN NOT TO SCALE CHECK BY: CW ARCHITECTS LANDSCAPE ARCHITECTS ENGINEERS 244 EAST MAIN STREET | 100 GREAT OAKS BLVD.
PATCHOGUE | SUITE 115, ALBANY
NEW YORK 11772 | NEW YORK 12203 NEW YORK 12203 T. 518.621.7650 www.BBSARCHITECTURE.com 66-01-02-06-0-007-013 DISTRICT BEDFORD CENTRAL SCHOOL DISTRICT PROJECT PHASE 2 -BOND IMPROVEMENTS DWG TITLE DEMOLITION PLANS SCALE: AS NOTED


DATE: APRIL 2024 BID PICK-UP: FEBRUARY 24, 2025 FILE No: 23-131b

P1.01

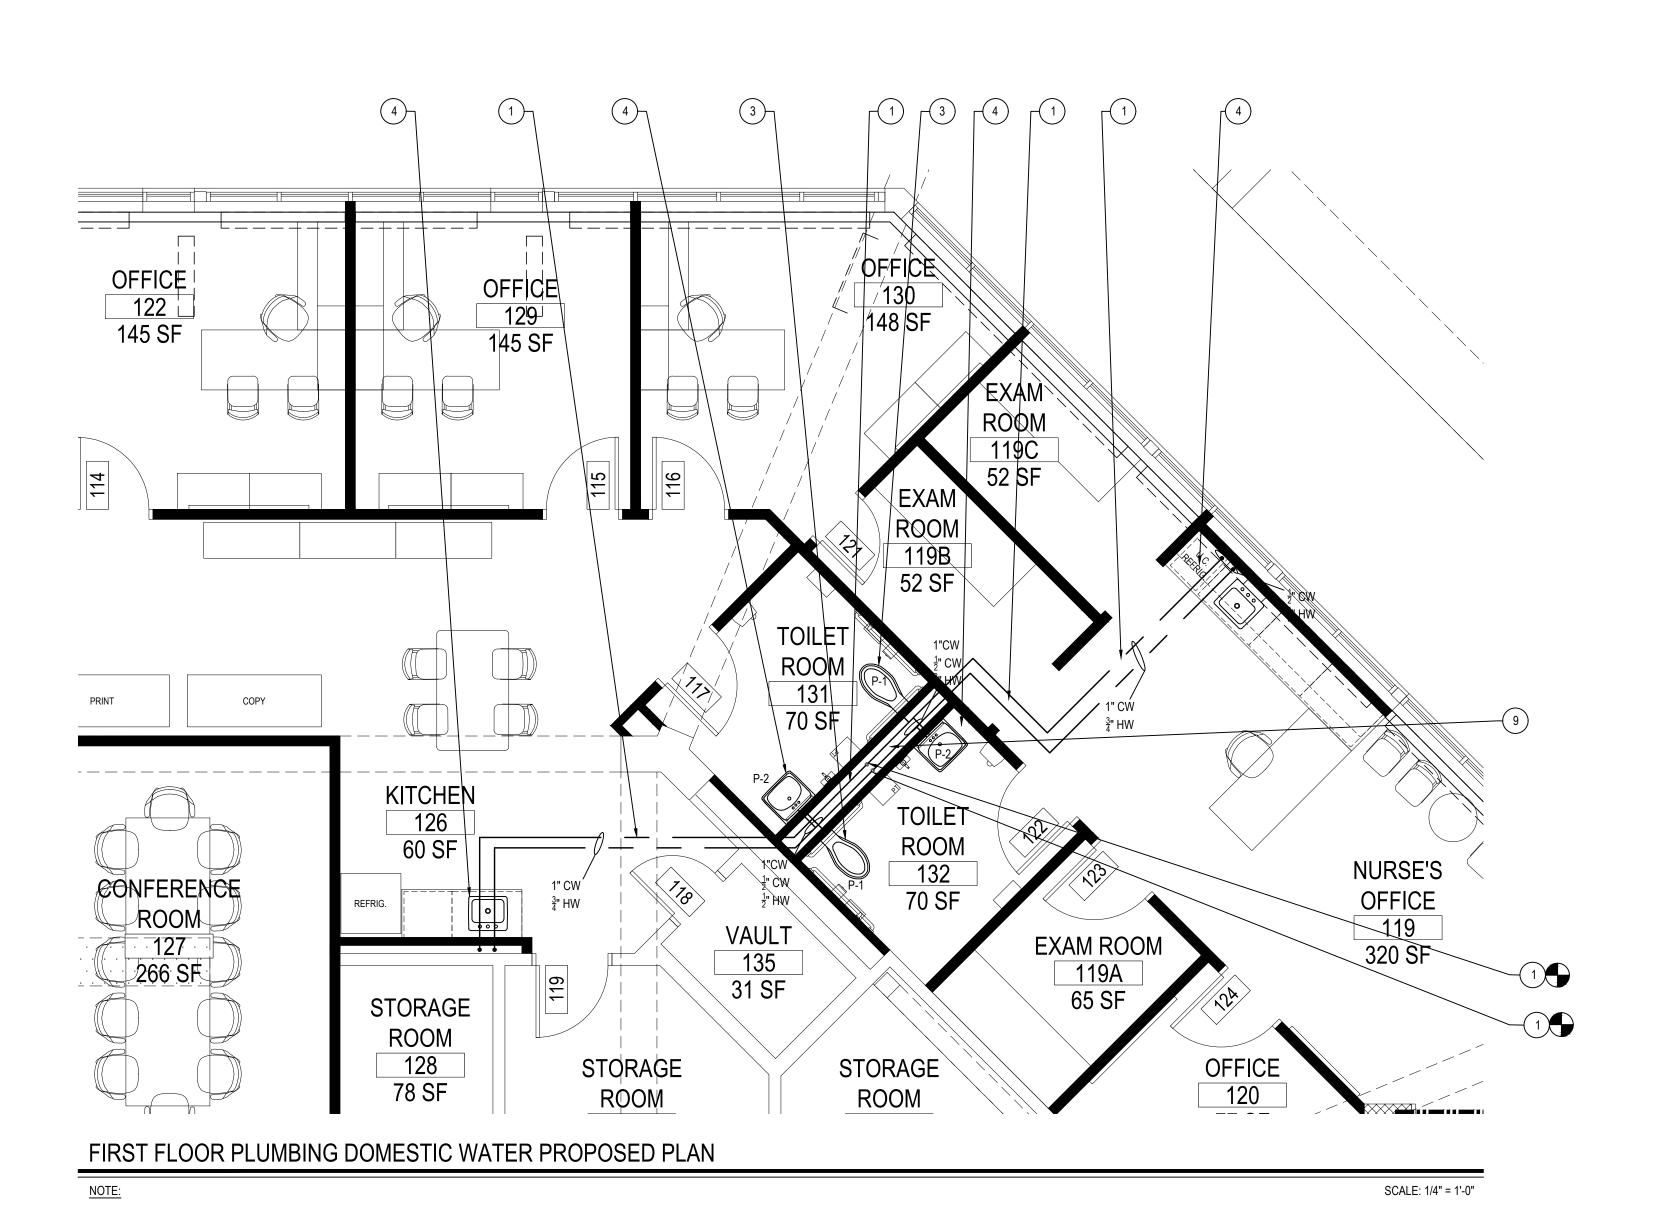

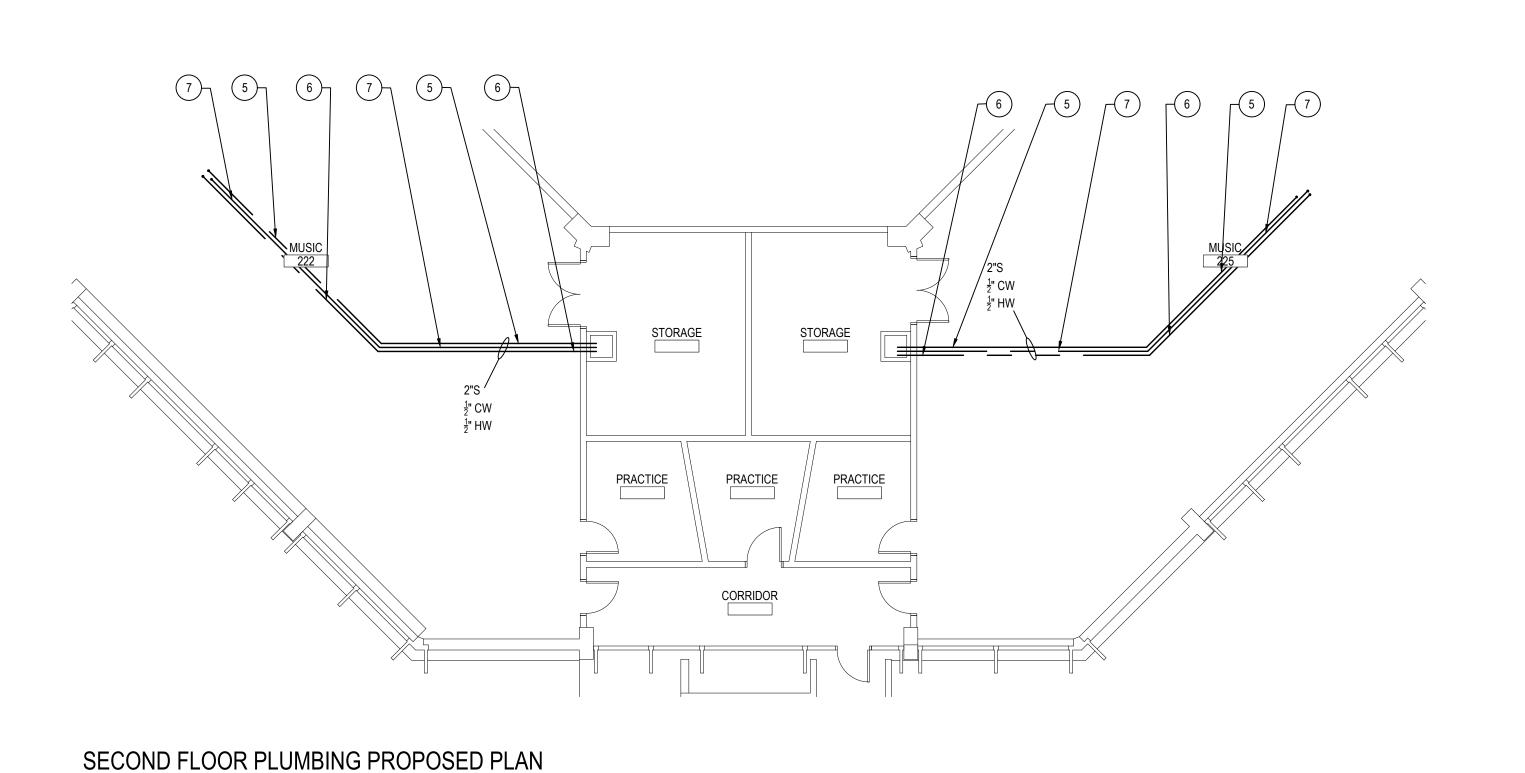

SCALE: 1/8" = 1'-0"

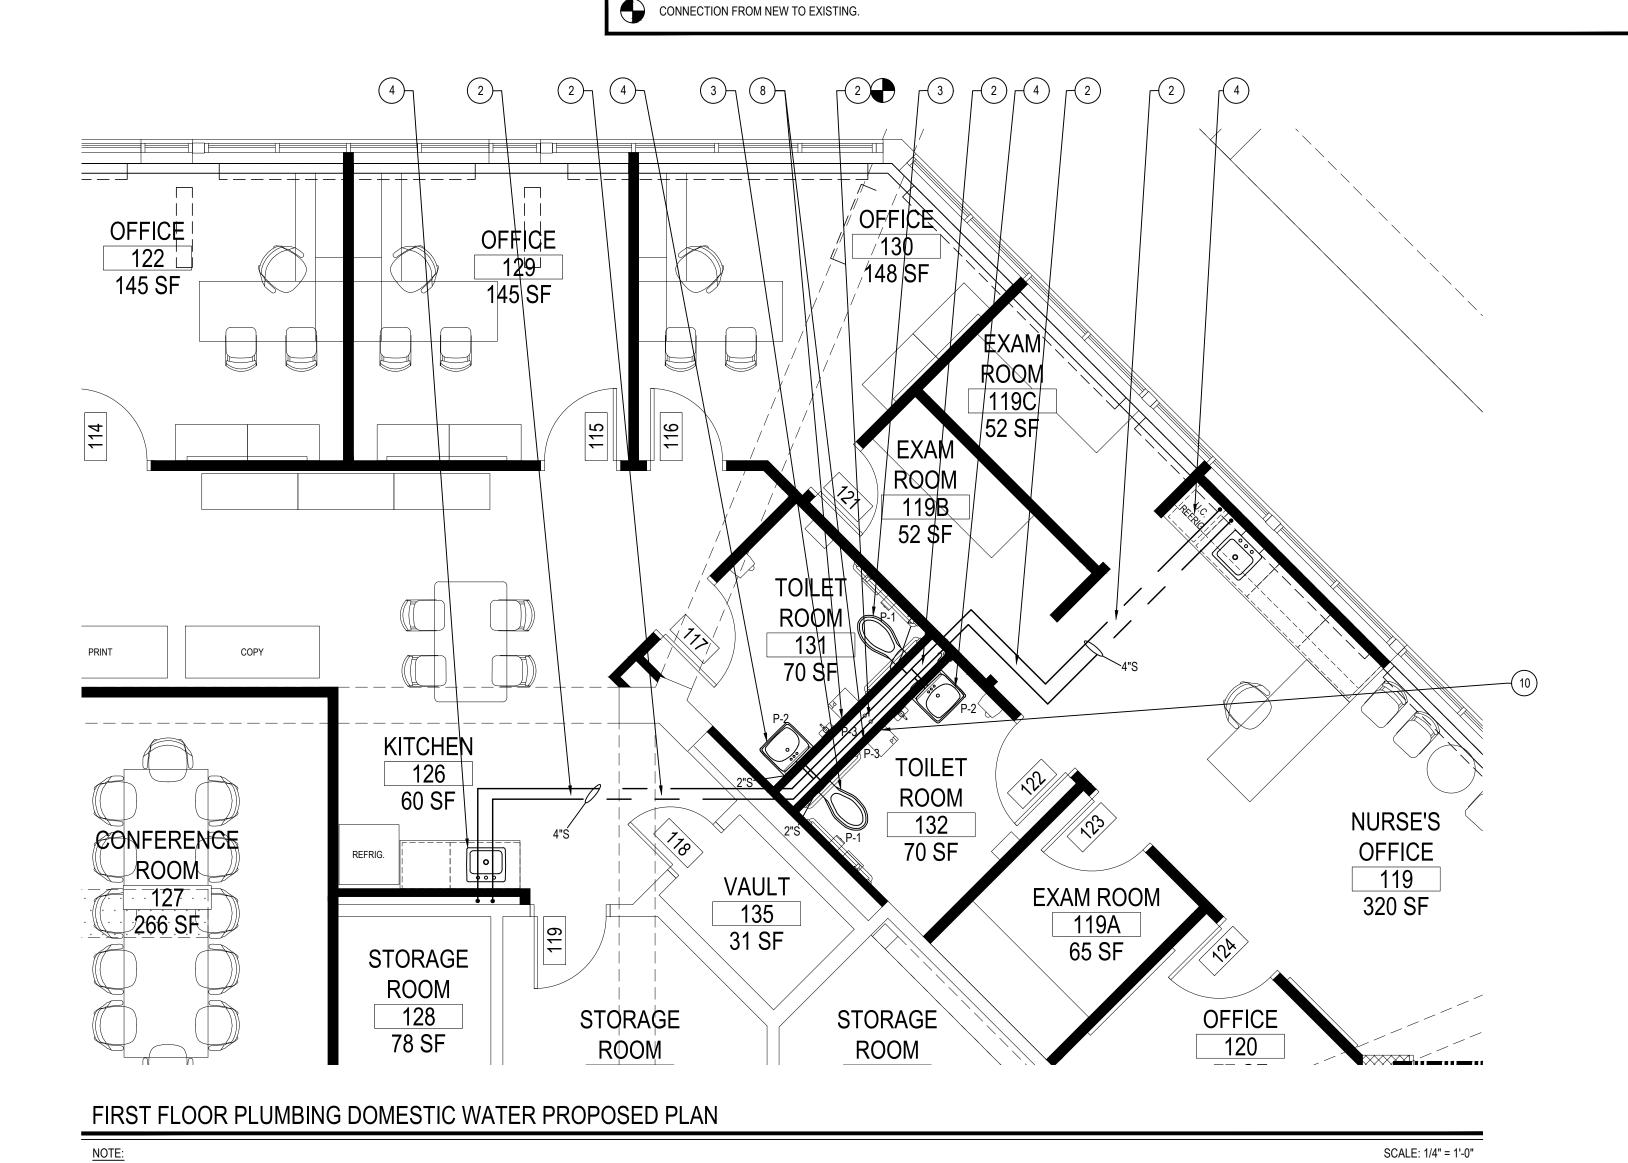

PROPOSED KEY NOTES

3) PC TO INSTALL NEW WATER CLOSET. SEE DWG P6.01 FOR MORE INFORMATION.

8) PC TO RUN NEW CW LINE TO NEW WALL HYDRANT AS SHOWN. SEE DWG P6.01 FOR MORE INFORMATION.

9) PC TO INSTALL WATER HAMMER ARRESTORS WHERE APPLICABLE. SEE DWG P6.01 FOR MORE INFORMATION.

4) PC TO INSTALL NEW LAVATORY. SEE DWG P6.01 FOR MORE INFORMATION.

(10) GC TO REPLACE ACCESS DOOR IN ITS CURRENT LOCATION.


PC TO TAP OFF EXISTING HW/CW LINES IN THE WET WALL AND INSTALL NEW HW/CW LINES AS SHOWN. PC TO WRAP PIPING WITH 2" INSULATION. SEE DWG P6.01 FOR MORE INFORMATION.

2) PC TO INSTALL NEW SEWER LINE AS SHOWN. RUN EACH LINE TO FIXTURES AS SHOWN AND TIE INTO EXISTING SEWER LINE.GC TO REPAIR FLOOR AFTER PIPING IS INSTALLED.

5) PC TO TAP OFF EXISTING CW LINE AND RUN PIPE IN THE CEILING ON THE SECOND FLOOR THEN UP TO NEW LAVATORIES IN ROOMS 316 AND 318 AS SHOWN.

PC TO TAP OFF EXISTING HW LINE AND RUN PIPE IN THE CEILING ON THE SECOND FLOOR THEN UP TO NEW LAVATORIES IN ROOMS 316 AND 318 AS SHOWN.

PC TO TAP OFF EXISTING SEWER LINE AND RUN PIPE IN THE CEILING ON THE SECOND FLOOR THEN UP TO NEW LAVATORIES IN ROOMS 316 AND 318 AS SHOWN.

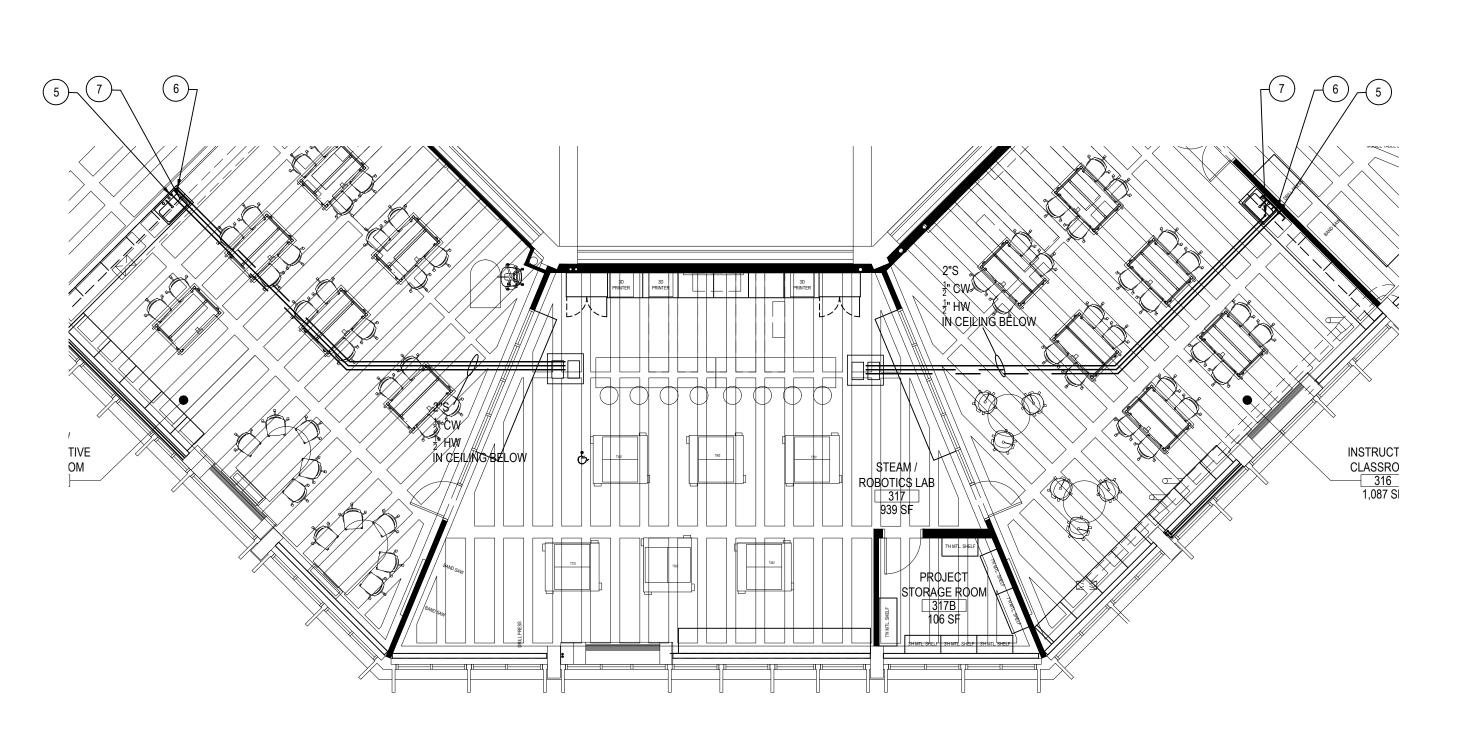


SECOND FLOOR PLUMBING PROPOSED PLAN


NOTE:

SCALE: 1/8" = 1'-0"

REV.	DATE	ITEM	
NOTICE THESE DRAWINGS ARE BASED ON CONSTRUCTION DRAWINGS NOT PREPARED BY BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PC. AND, THEREFORE, MAY NOT REPRESENT THE CONDITIONS AS CONSTRUCTED AT THE TIME. ALL EXISTING CONDITIONS SHOWN ARE REPRESENTED AS SUGGESTIVE INFORMATION AS THEY MAY NOT HAVE BEEN BUILT AND DETAILED PER THE ORIGINAL DOCUMENTS OR PER THE OWNER'S INFORMATION.			

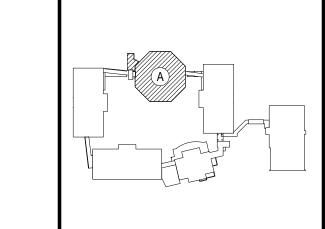


KEY PLAN	
NOT TO SCALE	<i>y</i>

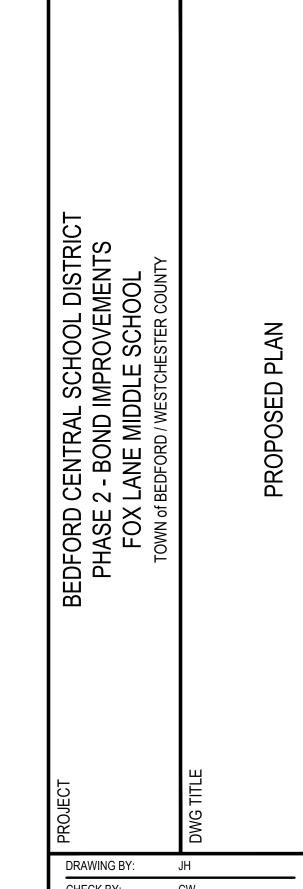

CHECK BY:	CW	
	NOTICE	
THIS DRAWING, PREPAI AN INSTRUMENT OF ARCHITECTS, LANDSO INFRINGEMENT OR AN PROJECT IS PROHIBITE THIS DOCUMENT IS A CONSENT OF THE ARC	SERVICE AND TO CAPE ARCHITECTS Y USE OF THIS DI ED. ANY ALTERATION ALSO PROHIBITED	THE PROPERTY OF AND ENGINEERS, RAWING FOR ANY O'DN OR REPRODUCTION WITHOUT THE WRI



244 EAST MAIN STREET	100 GREAT OAKS BL
PATCHOGUE	SUITE 115, ALBAN
NEW YORK 11772	NEW YORK 12203
T. 631.475.0349	T. 518.621.7650
F. 631.475.0361	F. 518.621.7655
225125	LUTECTURE
	LITECTI IDE com

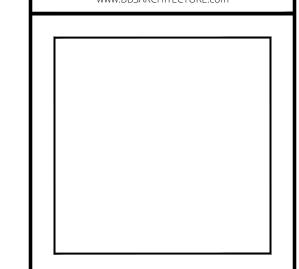

SED No.	66-01-02-06-0-007-013
DISTRICT	BEDFORD CENTRAL SCHOOL DISTRICT
PROJECT	PHASE 2 - BOND IMPROVEMENTS
DWG TITLE	
	PROPOSED PLANS
SCALE:	AS NOTED

DATE: APRIL 2024

FILE No: 23-131b

BID PICK-UP: FEBRUARY 24, 2025

PLUMBIN	PLUMBING FIXTURE TYPES						
FIXTURE TYPE	TAG No.	FIXTURE	TRAP SIZE	VENT SIZE	COLD WATER	HOT WATER	DESCRIPTION
WATER CLOSET	P-1	WALL MOUNTED WATER CLOSET	4"	2"	1"		ZURN Z5615-BWL-AM ECOVANTAGE HIGH EFFICIENCY TOILET SYSTEM VITREOUS CHINA, 1.1 GPF [4.2 LPF] OR GREATER HIGH EFFICIENCY WALL HUNG TOILET WITH SIPHON JET FLUSHING ACTION, ZURNSHIELDTM CERAMIC GLAZE AND ELONGATED FRONT RIM WITH 1-1/2" TOP SPUD. UNIVERSAL HIGH, 1.1 GALLONS PER FLUSH. ZURN ZTR6200 EXPOSED, QUIET PISTON-TYPE, CHROME PLATED FLUSHOMETER VALVE WITH A POLISHED EXTERIOR. COMPLETE WITH CHLORAMINE RESISTANT, FILTERED PISTON KIT. THE VALVE INCORPORATES A BATTERY POWERED SOLENOID ACTUATOR, AUTOMATIC SENSOR WITH MANUAL OVERRIDE PUSH BUTTON, AND ROBUST VANDAL RESISTANT METAL COVER WITH 10 DEGREE ANGLED SENSOR. ZURN Z5956SS-AM, 1" HIGH, IS AN ELONGATED, EXTRA HEAVY DUTY, PREMIUM WHITE, OPEN FRONT TOILET SEAT WITH LESS COVER AND STAINLESS STEEL CHECK HINGE.REFER TO ARCHITECTURAL DRAWINGS FOR MOUNTING HEIGHT.
LAVATORY	P-2	ADA ACCESSIBLE LAVATORY	1½"	1½"	1/2"	1/2"	ZURN Z5341 WALL-MOUNTED CONCEALED CARRIER ARM LAVATORY – SINGLE HOLE 20" X 18" VITREOUS CHINA WALL-MOUNTED LAVATORY WITH SINGLE FAUCET HOLE. PROVIDED WITH HANGER PLATE AND HOLES FOR CONCEALED ARM CARRIER SYSTEMS, FRONT OVERFLOW. ZURN Z6950-XL-S-F ZURN HYDRO-X POWER SENSOR FAUCETS. CHROME-PLATED CAST BRASS SENSOR FAUCET WITH INFRARED PROXIMITY SENSOR. A STANDARD 0.5 GPM FLOW CONTROL AND MOUNTING HARDWARE. ZURN P6900-TMV-1-XL THERMOSTATIC LEAD FREE VALVE MEETS ASSE 1070. ZURN Z8746-PC, CHROME PLATED CAST BRASS OPEN GRID DRAIN STRAINER, AND CHROME PLATED CAST BRASS ELBOW. FURNISHED WITH 1-1/4 17 GAUGE CHROME PLATED TUBULAR BRASS OFFSET TAILPIECE FOR SINK DEPTH TO 2-1/2. ZURN Z8700-PC TO Z8708-PC. CHROME-PLATED CAST BRASS (COPPER ALLOY) BODY P-TRAP WITH CLEANOUT, TUBULAR BRASS WALL BEND AS SPECIFIED, DIE-CAST NUTS, AND SHALLOW ESCUTCHEON WITH COMPRESSION INLET. ZURN Z8800-XL-LR-PC TO Z8809-XL-LRLK-PC TWO ZURN CHROME PLATED, SOLID BRASS ANGLE STOPS WITH ROUND WHEEL HANDLES OR LOOSE KEY AS SPECIFIED, TWO 12" FLEXIBLE CHROME PLATED COPPER LAVATORY RISERS COMPLETE WITH TWO CHROME PLATED STEEL FLANGES. Z8808-XL-LR-PC TO Z8809-XL-LRLK-PC INCLUDE 5"[127MM] CHROME PLATED COPPER EXTENSION TUBES AND DEEP BELL STEEL FLANGES. TRUEBRO MODEL 2018-AS-L LAV SHIELD ENCLOSURE. ZURN Z1231 LAVATORY SUPPORT SYSTEM WITH CONCEALED ARMS. COMPLETE WITH DURA-COATED RECTANGULAR STEEL UPRIGHTS WITH WELDED FEET, CAST IRON ADJUSTABLE HEADERS, CONCEALED ARMS, STEEL SLEEVES, ALIGNMENT TRUSS, AND MOUNTING FASTENERS. REFER TO ARCHITECTURAL DRAWINGS FOR MOUNTING HEIGHT.
WALL HYDRANT	P-3	WALL HYDRANT (INTERIOR)			³ ⁄ ₄ "		ZURN Z1321XL EXPOSED, ECOLOTROL, LEAD-FREE, NON-FREEZE AUTOMATIC DRAINING WALL HYDRANT FOR FLUSH INSTALLATION. HYDRANT FEATURES INTEGRAL BACKFLOW PREVENTER WITH ANTI-SIPHON TECHNOLOGY, COPPER CASING, ALL-BRONZE INTERIOR COMPONENTS WITH 1/2 TURN LONG-LIFE CERAMIC DISC CARTRIDGE, COMBINATION 3/4" FEMALE SOLDER AND 3/4" MALE PIPE THREAD INLET CONNECTION, AND 3/4" MALE HOSE CONNECTION. HYDRANT FURNISHED WITH TYPE 304 STAINLESS STEEL FACEPLATE AND INCLUDES OPERATING KEY.
ARRESTOR	P-4	WATER HAMMER ARRESTOR			3/4"		OATEY QUIET PIPES HAMMER ARRESTORS SIZE A-F. ARRESTOR CHAMBERS SHAL BE SPECIFICALLY SIZED TO ACCOMMODATE AND DISSIPATE ENERGY GENERATED BY SUCH VALVES AND FAUCETS. ARRESTORS SHALL BE EFFECTIVE WHEN INSTALLED ANY ANGLE. ARRESTOR SHALL BE LEAD-FREE, MADE OF COPPER AND INCLUDE POLYPROPYLENE PISTON WITH TWO NBR O-RINGS. ARRESTORS SHALL BE ANSI/ASSE1010-200 CERTIFIED AND APPROVED FOR INSTALLATION WITH NO ACCESS PANEL REQUIRED. ARRESTOR BODY:COPPER(TYPE K). PISTION:POLYPROPYLENE WITH TWO NBR O-RINGS.PISTON LUBRICATION: DOW CORNING MOLYKOTE 111. FITTINGS AVAILABLE: MALES SWEAT/PRESS,FEMALE CPVC.MIP,F1807 PEX & F1960 PEX(NO LEAD BRASS C46400). TEMPERATURE RANGE:33°F-180°F.MAX WORKING PRESSURE: 0-400 Psi. ANSI/ASSE1010-2004cUPC.PDI WH-201-2017.

REV. DATE <u>NOTICE</u> THESE DRAWINGS ARE BASED ON CONSTRUCTION DRAWINGS NOT PREPARED BY BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PC. AND, THEREFORE, MAY NOT REPRESENT THE CONDITIONS AS CONSTRUCTED AT THE TIME. ALL EXISTING CONDITIONS SHOWN ARE REPRESENTED AS SUGGESTIVE INFORMATION AS THEY MAY NOT HAVE BEEN BUILT AND DETAILED PER THE ORIGINAL DOCUMENTS OR PER THE OWNER'S INFORMATION. KEY PLAN NOT TO SCALE

DRAWING BY: JH

CHECK BY: CW NOTICE THIS DRAWING, PREPARED FOR THE SPECIFIC PROJECT INDICATED IS AN INSTRUMENT OF SERVICE AND THE PROPERTY OF BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PC. INFRINGEMENT OR ANY USE OF THIS DRAWING FOR ANY OTHER PROJECT IS PROHIBITED. ANY ALTERATION OR REPRODUCTION OF THIS DOCUMENT IS ALSO PROHIBITED WITHOUT THE WRITTEN CONSENT OF THE ARCHITECT OR ENGINEER. BBS

ARCHITECTS
LANDSCAPE ARCHITECTS
ENGINEERS 244 EAST MAIN STREET | 100 GREAT OAKS BLVD.
PATCHOGUE | SUITE 115, ALBANY
NEW YORK 11772 | NEW YORK 12203
T. 631.475.0349 | T. 518.621.7650
F. 631.475.0361 | F. 518.621.7655 www.BBSARCHITECTURE.com 66-01-02-06-0-007-013 DISTRICT BEDFORD CENTRAL SCHOOL DISTRICT PROJECT PHASE 2 - BOND IMPROVEMENTS DWG TITLE SCHEDULES AND DETAILS

SCALE: AS NOTED

DATE: APRIL 2024

BID PICK-UP: FEBRUARY 24, 2025

P6.01

FILE No: 23-131b

ELECTRICAL CONSTRUCTION NOTES

- ALL WORK SHALL BE DONE IN ACCORDANCE WITH THE LATEST EDITIONS OF THE N.E.C., APPLICABLE LOCAL CODES, STATE CODES, OWNER'S WORKING RULES AND SCHEDULE DIRECTIVES, AND THE ENGINEER'S SPECIFICATIONS.
- THE VOLTAGE CHARACTERISTIC OF BUILDING IS 480Y/277V, 3-PHASE, 4-WIRE, GROUNDED NEUTRAL, WYE. ALL EQUIPMENT SHALL BE COMPATIBLE WITH THESE CHARACTERISTICS. VERIFY AND MAINTAIN ALL PHASE ROTATIONS
- THE DRAWINGS SCHEMATICALLY SHOW THE APPROXIMATE LOCATION OF ALL EQUIPMENT, CONDUITS, DEVICES, ETC. THE EXACT LOCATION OF WHICH SHALL BE SUBJECT TO APPROVAL BY THE ARCHITECT AND / OR OWNER WHO RESERVES THE RIGHT TO MAKE PRIOR TO INSTALLATION, ANY REASONABLE CHANGES IN LOCATION INDICATED WITHOUT EXTRA COST TO THE OWNER. CONTRACTOR SHALL VERIFY ALL INDICATED OR APPROXIMATED DIMENSIONS DRAWN OR DENOTED.
- CONTRACTOR SHALL EXAMINE THE SITE TO VERIFY WORK TO BE PERFORMED AS SHOWN ON DRAWINGS AND SPECIFICATIONS BEFORE SUBMITTING HIS BID. ANY DISCREPANCY BETWEEN DRAWINGS AND SPECIFICATIONS AND ACTUAL FIELD CONDITIONS SHALL BE BROUGHT TO ARCHITECT / ENGINEERS ATTENTION BEFORE BID SUBMITTAL ANY FIELD CONDITION FOUND AFTER BID APPROVAL WHICH HAMPERS AND/OR PREVENTS ANY WORK TO BE PERFORMED AS SHOWN ON DRAWINGS AND SPECIFICATIONS SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR. THE CONTRACTOR SHALL BID THE HIGHER SPECIFICATION FOR ANY DISCREPANCY BETWEEN DRAWINGS AND SPECIFICATIONS.
- CONTRACTOR SHALL PROVIDE ALL LABOR SERVICE MATERIALS, EQUIPMENT, AND RELATED ITEMS TO COMPLETE THE WORK OF THIS DIVISION, AS REQUIRED BY THE NATIONAL ELECTRIC CODE, AND ALL STATE AND LOCAL AUTHORITIES
- CONTRACTOR SHALL PROVIDE ALL ELECTRICAL HARDWARE SHOWN ON THESE DRAWINGS, RELATED DETAIL AND IS NECESSARY TO COMPLETE THE INSTALLATION.
- CONTRACTOR SHALL PAY ANY FEES APPLICABLE TO ELECTRICAL WORK, SUCH AS, BUT NOT LIMITED TO, THE POWER COMPANY, TELEPHONE COMPANY, CAT-V, AN APPROVED ELECTRICAL INSPECTION AGENCY, ALARM AND FIRE PROTECTION COMPANIES.
- CONTRACTOR SHALL REFER TO ALL OTHER DRAWINGS IN BID PACKAGE AND PERFORM THE WORK (INCLUDE IN HIS BID) INDICATED AS ELECTRICAL CONTRACTOR (E.C.) WORK.
- ALL WORK SHALL BE IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS AND DIRECTIVES OF THE OWNER. ALL WORK SHALL BE PERFORMED BY A LICENSED ELECTRICAL CONTRACTOR WHO SHALL OBTAIN AN INSPECTION

CERTIFICATE AND PAY ASSOCIATED FEE. SUBMIT A PHOTOCOPY OF THIS CERTIFICATE TO THE ENGINEER WITH FINAL

- CONTRACTOR SHALL GUARANTEE ALL MATERIALS AND THEIR INSTALLATION TO BE FREE OF DEFECTS FOR A PERIOD AS DEFINED IN SPECIFICATION SECTION 01700 OF THE PROJECT MANUAL.

A COMPLETE SYSTEM OF WIRING, WITH ALL FEEDERS, MAINS, BRANCHES AND CONDUITS AS SHOWN ON THE

DRAWINGS, SHALL BE FURNISHED AND INSTALLED FROM THE MAIN DISTRIBUTION BOARD TO THE PANELS OUTLETS.

- PROVIDE IDENTIFICATION FOR ALL PANEL AND MOTOR FEEDER CABLES IN PULL BOXES AND AT TERMINATIONS. ANY CONDUCTOR VOLTAGES HIGHER THAN 240 VOLTS SHALL BE MARKED ON DEVICES AND JUNCTION BOXES.
- FURNISH AND INSTALL ALL WIRING OF ANY VOLTAGE OR PURPOSE AS SHOWN ON THE DRAWINGS.

PAYMENT APPLICATION.

MOTORS, AND APPURTENANCES.

- THE INDICATED SOURCE OF EXISTING CIRCUITS MAY NOT BE KNOWN OR HAS NOT BEEN VERIFIED. IT IS THE DIVISION 16 CONTRACTOR'S RESPONSIBILITY TO TRACE OUT, LOCATE AND VERIFY THE DISCONNECTING MEANS OF EXISTING CIRCUIT(S) TO BE IMPACTED BY THE WORK. SAFE OFF THE CIRCUIT (SO AS REQUIRED TO SAFELY PERFORM THE WORK, AND RE-ENERGIZE UPON COMPLETION. UPDATE PANEL DIRECTORIES UPON COMPLETION.
- ALL BRANCH CIRCUITS SHALL HAVE INDIVIDUAL NEUTRALS. SHARING COMMON NEUTRALS AMONG BUNDLED CIRCUITS IS SPECIFICALLY DISALLOWED UNLESS OTHERWISE NOTED.
- PULL / JUNCTION BOXES SHALL BE PROVIDED WHERE INDICATED OR AS OTHERWISE REQUIRED TO FACILITATE THE PROPER INSTALLATION OF WIRES AND CABLES. CONDUITS MAY BE INCREASED IN SIZE FOR CONSTRUCTION
- FURNISH AND INSTALL ALL DISCONNECT DEVICES AND SAFETY SWITCHES AS SHOWN ON THE DRAWINGS AND / OR AS REQUIRED TO CONFORM WITH CODE REQUIREMENTS.
- FURNISH AND INSTALL ALL INDICATED LIGHTING FIXTURES COMPLETE WITH MOUNTING HARDWARE AS REQUIRED FOR A COMPLETE INSTALLATION, NOTE ALL LIGHT FIXTURES SHALL BE SUPPORTED FROM BUILDING STRUCTURE. UTILIZING CEILING FRAMING ALONE IS NOT ACCEPTABLE. NEW LIGHTING FIXTURES (OTHER THAN THEATRICAL EQUIPMENT) SHALL NOT BE DAISY CHAINED. RE-USE OF AN EXISTING LIGHTING CIRCUIT INCLUDES HOME RUN WIRING OR WIRING UP TO THE SWITCH. ANY WIRING DOWNSTREAM OF THE SWITCH IS SUBJECT T REMOVAL/REARRANGEMENT. ELECTRICAL CONTRACTOR SHALL ALLOW FOR THIS IN THE BID PRICE.
- NEW CIRCUIT BREAKERS INSTALLED IN EXISTING PANELBOARD(S) SHALL BE LISTED/LABELED FOR USE WITH THE EXISTING PANELBOARD(S) AND SHALL MEET OR EXCEED THE INTERRUPTING RATING OF THE PANEL.
- CONTRACTOR SHALL REFER TO ALL FURNITURE DRAWINGS BEFORE INSTALLING RECEPTACLES. THE MOUNTING HEIGHT OF THE RECEPTACLES IS 18" ABOVE FINISHED FLOOR UNLESS INDICATED ON THE DRAWING. COLOR, TYPE & FINISH OF ALL RECEPTACLES, DEVICES & FACE PLATES SHALL BE AS APPROVED BY ENGINEER AND ARCHITECT. CONTRACTOR SHALL PROVIDE & WIRE WEATHERPROOF GFCI RECEPTACLES ON ALL APPLICABLE ROOFTOP UNITS AS

PART OF HIS BID. SEE MECHANICAL EQUIPMENT SCHEDULES FOR UNITS WITH SERVICE RECEPTACLES FACTORY

- . ALL WIRING TO BE 1 #12 + 1 #12(N) + 1 #12(G) 3/4"C, OR STEEL JACKETED MC CABLE (WHERE CODE PERMITTED). ALUMINUM JACKETED MC CABLE IS NOT ACCEPTABLE.
- UNLESS OTHERWISE SPECIFIED ON DRAWINGS, RUN BRANCH CIRCUITS IN DROPPED CEILINGS, VOIDS, CHASES, FLOOR BELOW AND BEHIND WALLS. ALL DEVICES & CONDUITS ON NEW CONSTRUCTION MUST BE RECESSED. CONDUITS MAY BE SURFACE MOUNTED IN MECHANICAL SPACES UNLESS OTHERWISE NOTED. CONDUITS IN PUBLIC AREAS SHALL BE CONCEALED IN HUNG CEILINGS, EMBEDDED IN SLAB OR MASONRY WALLS, EXCEPT WHERE SURFACE MOUNTED RACEWAY IS SPECIFIED. ALL WIRING THAT CANNOT BE CONCEALED IN MUST BE RUN IN FINISHED SURFACE RACEWAY SUCH AS WIREMOLD, COLOR PER ARCHITECT.
- ALL CONNECTIONS AND / OR SPLICES SHALL BE MADE ONLY IN ACCESSIBLE JUNCTION BOXES.
- ALL COUPLINGS AND CONNECTORS FOR USE WITH EMT SHALL BE COMPRESSION TYPE. SET SCREW TYPE OR INDENT TYPE FITTINGS WILL NOT BE ACCEPTED.
- ALL PENETRATIONS TO BUILDING EXTERIOR SHALL BE SEALED WATERTIGHT. ROOF PENETRATIONS SHALL BE MADE VIA APPROVED PITCH POCKETS OR PIPE PORTALS AND IN ACCORDANCE WITH EXISTING ROOF WARRANTIES.
- WIRING INSTALLED IN CEILINGS SHALL BE HUNG INDEPENDENT OF CEILING SYSTEM AND SECURELY TIED TO
- . ALL LOW VOLTAGE (FIRE ALARM, PA INTERCOM, PHONE, DATA, ETC.) WIRING INSTALLED IN OPEN AREAS SHALL BE IN METALLIC RACEWAY IN MECHANICAL AREAS, GYMNASIUMS, ART ROOMS, STOREROOMS, ETC., AND IN SURFACE MOUNTED RACEWAY IN PUBLIC AREAS. LOW VOLTAGE WIRE INSTALLED IN DROPPED CEILINGS SHALL BE BUNDLED TOGETHER AND SUPPORTED BY BUILDING STEEL. LOW VOLTAGE WIRE SHALL NOT BE SUPPORTED WITH BRANCH CIRCUITS OR FEEDER CIRCUITS AND SHALL NOT BE SUPPORTED BY CONDUIT, PIPES, ETC.. LOW VOLTAGE WIRING NOT INSTALLED IN CONDUITS, SHALL BE PLENUM RATED.
- FURNISH AND INSTALL ALL HARDWARE TO PROPERLY SUPPORT ALL CONDUITS NOT INSTALLED IN CONCRETE SLABS
- ALL CONDUITS OR MC CABLE SHALL BE EQUIPPED WITH AN INSULATING/CHAFE GUARD GROMMET AT WIRE EXIT/ENTRANCE. MC CABLE SHALL USE MC STYLE BUSHINGS. BX OR OTHER BUSHINGS ARE SPECIFICALLY
- WHERE AN EXISTING CONDUIT OR CABLE IS REQUIRED TO BE REMOVED BUT SERVES AND EXISTING PIECE OF EQUIPMENT WHICH IS TO REMAIN OPERABLE, THE ELECTRICAL CONTRACTOR SHALL REROUTE SAID CONDUIT OR CABLE OR PROVIDE A NEW SOURCE OF POWER (APPROVED BY ENGINEERING) TO THIS EQUIPMENT AS A PART OF
- ALL PANELS, SWITCHES, DISCONNECT STARTERS, OR OTHER ELECTRIC SYSTEM CONTROLS SHALL BE STENCILED WITH THEIR APPROPRIATE DESIGNATION/FUNCTION. ALL CIRCUIT BREAKERS SHALL BE IDENTIFIED BY A PANEL SCHEDULE OR STENCIL ADJACENT TO THE CIRCUIT BREAKER. PROVIDE PRINT PANEL SCHEDULE. HAND WRITING
- ALL CIRCUIT BREAKERS POSITIONS IN ALL PANELS ARE SHOWN FOR GROUPING PURPOSES ONLY. ELECTRICAL
- . ALL DEVICES SHALL BE FASTENED IN PLACE SECURELY.

NO LONGER REQUIRED.

CONTRACTOR IS RESPONSIBLE FOR LOAD BALANCING.

- WORK WHICH MUST BE DONE IN OCCUPIED AREAS SHALL BE DONE AT SUCH TIMES AS INDICATED IN THE PHASING OF CONSTRUCTION AND AS APPROVED BY THE OWNER. OUTAGES ARE ONLY PERMITTED OUTSIDE OF NORMAL BUSINESS HOURS. COORDINATE WITH OWNER. INCLUDE ALL PREMIUM TIME IN BID.
- WHERE THE CONTRACTOR IS INSTRUCTED TO PROVIDE, INSTALL AND WIRE CIRCUIT BREAKER(S) TO AN EXISTING PANEL AND THAT PANEL DOES NOT HAVE THE ROOM TO INSTALL REQUIRED CIRCUIT BREAKERS. THE CONTRACTOR SHALL REMOVE (3) ADJACENT 1P CIRCUIT BREAKERS AND PROVIDE A 3P. 60A CIRCUIT BREAKER IN THEIR PLACE FOR SUB FEED TO A SURFACE MOUNTED 100A, 3P, 4W, 24 POLE SUB PANEL AND ESTABLISH OVERFLOW CIRCUITS IN NEW SUB PANEL, EACH WITH REQUIRED CIRCUIT BREAKERS. PROVIDE (3) 1P, AMPERAGE AS BEFORE CIRCUIT BREAKERS FOR DISCONNECTED CIRCUITS IN MAIN PANEL AND RECONNECT THEM IN SUB PANEL. SUB PANEL FEED TO BE 3 #6 + #6(N) + 1 #10(G) - 1"C.
- ALL DEVICES ADDRESSED BY ADA REGULATIONS SHALL BE INSTALLED AT ADA COMPLIANT HEIGHTS AND LOCATIONS.
- REMOVAL OF ELECTRICAL ITEMS INCLUDES THEIR DISPOSAL. THE EXCEPTION WILL BE TO TURN OVER TO THE OWNER ITEMS. IF ANY, THEY SPECIFY TO BE RETAINED IN THEIR INVENTORY, PCB OR ASBESTOS BEARING MATERIAL SHALL BE DISPOSED OF IN ACCORDANCE WITH LAWS AND REGULATIONS.
- UNLESS OTHERWISE NOTED. STARTERS AND DISCONNECTS FOR MECHANICAL EQUIPMENT SHALL BE FURNISHED BY THE MECHANICAL CONTRACTOR. COORDINATE WITH THE MECHANICAL CONTRACTOR FOR ALL POWERED MECHANICAL EQUIPMENT. THE ELECTRICAL CONTRACTOR IS RESPONSIBLE TO INSTALL ALL MOTOR STARTERS AND ASSOCIATED POWER WIRING FROM SOURCE TO UNIT VIA STARTERS AND DISCONNECTS. THE LOCATIONS OF MOTOR STARTERS SHALL BE DETERMINED BY THE MECHANICAL CONTRACTOR IN THE FIELD AND SUBMITTED TO THE ENGINEER FOR APPROVAL UNLESS IT IS SPECIFIED ON THE DRAWINGS. THE ELECTRICAL CONTRACTOR SHALL REFER TO THE MECHANICAL DRAWINGS, EQUIPMENT SCHEDULES AND NOTES AND INCLUDE IN HIS BID PRICE ALL ELECTRICAL WORK ASSOCIATED WITH THEIR INSTALLATION, AND THE REMOVAL OF ANY STARTERS / DISCONNECTS
- PROVIDE PROTECTIVE DUST COVERS ON SMOKE DETECTORS IN CONSTRUCTION AREAS. REMOVE COVERS UPON COMPLETION OF WORK.
- ANY LIGHT FIXTURES INSTALLED IN GYMNASIUMS OR OTHER AREAS SUBJECT TO IMPACT OR PHYSICAL DAMAGE SHALL BE MOUNTED WITH SAFETY CHAINS AND SECURED TO STRUCTURE. INCLUDE PROTECTIVE WIRE GUARD OVER
- PROVIDE ALL WIRING, PANEL BOARDS, SWITCHES, FUSES, EQUIPMENT, AND ALL INCIDENTAL MATERIALS REQUIRED TO SUPPLY TEMPORARY AND PERMANENT ELECTRICAL NEEDS FOR THE WORK INVOLVED, ALL IN ACCORDANCE WITH OSHA, LOCAL, STATE AND UNDERWRITERS REQUIREMENTS.

FIRE STOP NOTES

- ALL CONDUIT AND CABLE PENETRATIONS THROUGH FIRE RATED WALLS, FLOORS OR OTHER STRUCTURES SHALL BE FIRE STOPPED.
- THE FIRE STOP MATERIALS SHALL BE HILTI TYPE FS-657 FIRE BLOCK, FS-ONE SEALANT, CP-672 JOINT SPRAY. CP-601S ELASTOMERIC SEALANT, 6P-606 FLEXIBLE SEALANT, CP-643 OR CP-642 COLLAR, CP-618 PUTTY STICK, OR FS-635 TROWEL ABLE COMPOUND, AS SUITABLE.
- CONTRACTOR SHALL SUBMIT SHOP DRAWINGS OF PRODUCTS SPECIFIED OR EQUAL.
- FIRE STOP MATERIALS OTHER THAN HILTI SHALL INCLUDE FULL TECHNICAL DATA WITH SHOP DRAWINGS TO DEMONSTRATE EQUALITY WITH THE SPECIFIED FIRE STOPS AND STATEMENT FROM MANUFACTURER THAT THEY MEET OR EXCEED THE PRODUCTS SPECIFIED HERE.
- ALL SYSTEMS SHALL HAVE THEIR OWN SLEEVE THROUGH FIRE RATED WALLS. IE FIRE ALARM, PUBLIC ADDRESS, TELEPHONE, DATA, POWER AND LIGHTING.

DEMOLITION NOTES

- THE ITEMS SPECIFICALLY SHOWN ON THE DEMOLITION DRAWINGS ARE TO BE ADDRESSED BY THE ELECTRICAL CONTRACTOR. THE ITEMS ARE TO BE TREATED AS NOTED AND RANGE FROM DIRECT REMOVAL AND DISPOSAL TO REMOVAL, STORAGE AND REINSTALLATION
- MANY OTHER ELECTRIC ITEMS EXIST THAT ARE NOT SHOWN INCLUDING, BUT ARE NOT LIMITED TO SWITCHES, RECEPTACLES, FLOOR OUTLETS, LOW VOLTAGE JACKS, LOW VOLTAGE DEVICES AND WIRING, TELEPHONE PUNCH DOWN BLOCKS, AND OUT OF SERVICE ITEMS. ALL SUCH ITEMS SHALL BE PERMANENTLY DE-ENERGIZED, DISCONNECTED, AND OTHERWISE MADE SAFE FOR DEMOLITION BY NON-ELECTRICAL CONTRACTORS. THE ELECTRICAL CONTRACTOR IS RESPONSIBLE FOR ASSURING THAT ALL ELECTRIC DEVICES SCHEDULED FOR DEMOLITION, OF ANY VOLTAGE OR FUNCTION, ARE SAFE AND ADVISE THE OTHER CONTRACTORS.
- AFTER THE ELECTRICAL CONTRACTOR HAS DISCONNECTED ELECTRIC SUPPLIES TO ITEMS TO BE DEMOLISHED, HE SHALL ADVISE THE GENERAL CONTRACTOR OF ANY ELECTRIC ITEMS TO BE RETAINED FOR FUTURE USE AND THEREFORE NOT TO BE DEMOLISHED. THE GENERAL CONTRACTOR SHALL THEN PERFORM ALL WORK ZONE DEMOLITION. THIS MATTER APPLIES TO ALL ELECTRIC ITEMS, OF ANY VOLTAGE OR PURPOSE.
- THE SPECIAL/SPECIFIC ITEMS SHOWN ON THE DRAWING FOR ELECTRICAL CONTRACTOR TO ACT ON WERE FOUND BY SURVEY. NUMEROUS LOCATIONS WERE BLOCKED BY FURNITURE, ETC. AND ADDITIONAL EQUAL TYPE ITEMS MAY BE PRESENT. THE ELECTRICAL CONTRACTOR SHALL ALLOW FOR THIS IN HIS BID PRICE AND ATTEND TO THOSE EQUAL OR SIMILAR DEVICES AS MAY BE DISCOVERED.
- REMOVAL ITEMS THAT ARE LISTED AS TO BE TURNED OVER TO OWNER'S INVENTORY SHALL BE DISCUSSED WITH THE OWNERS BUILDINGS AND GROUNDS MANAGER. THOSE ITEMS THAT THE OWNER DECLINES SHALL THEN BE DISPOSED OF BY THE CONTRACTOR IN THE MANNER OF OTHER PERMANENT REMOVALS. ANY PCB BEARING FLUORESCENT FIXTURES SHALL BE DISPOSED OF PER REGULATIONS.
- RETAIN EXISTING RECEPTACLES IN WALLS THAT WILL NOT BE IN CONFLICT WITH NEW CONSTRUCTION. RETAIN LIGHT SWITCH LOCATIONS THAT WILL NOT BE IN CONFLICT WITH NEW CONSTRUCTION. INSTALL BLANKING PLATE COVERS OVER THE UNUSED PORTION OF GANG BOXES HAVING MORE GANG POSITIONS THAN NEEDED FOR NEW SWITCHES.
- LIGHT FIXTURES ARE TO BE REMOVED AS GENERAL, NON ELECTRIC, CONTRACTOR DEMOLITION U.O.N. ELECTRICAL CONTRACTOR IS RESPONSIBLE TO SAFE OFF LIGHTING CIRCUITS FOR REMOVAL BY OTHERS. NO SPECIFIC QUANTITIES OR LOCATIONS ARE SHOWN. RETURN WHATEVER QUANTITY, IF ANY, OF THESE TO OWNER'S INVENTORY IF HE SO SPECIFIES OR THEY ARE OTHERWISE TO BE DISPOSED OF. ELECTRICAL CONTRACTOR SHALL EXAMINE FIXTURES FOR PRESENCE OF PCB'S AND SPECIAL DISPOSAL.
- THE ELECTRICAL CONTRACTOR SHALL COVER ALL BACK BOXES IN THE WALL THAT BECOME EXPOSED DUE TO DEVICE REMOVALS. THIS INSTRUCTION ALSO APPLIES TO EXPOSED ELECTRICAL BACK BOXES AS MAY EXIST AT THE SITE PRIOR TO THIS PROJECT. THE COVER SHALL BE BRUSHED ALUMINUM WITH CHAMFERED EDGES AND COVER THE HOLE COMPLETELY WITH AT LEAST 3/4" EXTRA MARGIN ON ALL SIDES. MOUNT THE COVER WITH SCREWS TO MATCH THE ORIGINAL PATTERN.
- IT IS EXPECTED THAT STRUCTURAL DEMOLITION BY THE GENERAL CONTRACTOR WILL CAUSE VARIOUS ELECTRIC SUPPLIES. OF VARIOUS VOLTAGES AND PURPOSES. TO BE CUT AND RENDER SOME DEVICES TEMPORARILY INACTIVE. IT IS THE ELECTRICAL CONTRACTOR'S RESPONSIBILITY TO RECONSTRUCT AND RECONNECT SUCH ELECTRIC SOURCES WHEN THE NEW STRUCTURE IS BUILT. NOTE THAT MOST REINSTALLED ITEMS WILL BE IN DIFFERENT LOCATIONS FROM THE REMOVAL LOCATION. THE ELECTRICAL CONTRACTOR SHALL MAKE ALL REQUIRED CIRCUIT EXTENSIONS OR MODIFICATIONS TO PROVIDE SERVICE TO A REINSTALLED ITEM AS RELOCATED. PROVIDE ALL REQUIRED CIRCUIT EXTENSIONS AS REQUIRED TO RESTORE SERVICE TO DEVICES. NOTE THAT THIS REQUIREMENT ALSO APPLIES TO THE ROOMS AND ELECTRICAL ITEMS WITHIN THAT ARE NOMINALLY NOT IN CONTRACT. SUCH RESTORATION OF SERVICE, IF NEEDED, IS SPECIFICALLY IN THE ELECTRICAL CONTRACTOR'S CONTRACT.
- IT SHALL BE THE ELECTRICAL CONTRACTOR'S RESPONSIBILITY TO PROTECT ALL ELECTRICAL DEVICES FROM DAMAGES DURING CONSTRUCTION, WHICH ARE EITHER INDICATED TO REMAIN, AND/OR TO BE REMOVED AND REINSTALLED THROUGHOUT ALL CONSTRUCTION AREAS. DEVICES SHALL INCLUDE BUT WILL NOT BE LIMITED TO: SMOKE DETECTORS, EMERGENCY LIGHTS, EXIT SIGNS, OCCUPANCY SENSORS, SPEAKERS, LIGHT FIXTURES, SWITCHES, RECEPTACLE, ETC. IN THE EVENT OF DAMAGES INCURRED DUE TO CONSTRUCTION ACTIVITIES, THE ELECTRICAL CONTRACTOR SHALL BE RESPONSIBLE TO REPLACE ANY DAMAGED DEVICES AT NO ADDITIONAL COST TO THE OWNER.
- ALL SYSTEMS ASSOCIATED WITH THE DEVICES SCHEDULED TO BE REMOVED, STORED AND PROTECTED SHALL BE TESTED BY THE MANUFACTURER'S CERTIFIED TESTING VENDOR PRIOR TO ANY DEMOLITION ACTIVITY. ANY DEVICE WHICH FAILS THE TEST SHALL BE REPLACED WITH A FORM, FIT AND FUNCTION COMPONENT PER UNIT PRICES, AND SUCH DEVICES ARE NOT INCLUDED IN THIS RESPONSIBILITY STATEMENT, BUT ALSO SUCH INSTALLATION SHALL BE IN THE ELECTRICAL CONTRACTOR'S BASE BID. THE ELECTRICAL CONTRACTOR SHALL RE-TEST ALL SUCH SYSTEM COMPONENTS BY A MANUFACTURER CERTIFIED TESTING VENDOR OF SUCH SYSTEM OF ALL PREVIOUSLY TESTED SYSTEM COMPONENTS AFTER ALL WORK BY ALL TRADES HAS BEEN COMPLETED, AND ALL SYSTEM COMPONENTS HAVE BEEN INSTALLED. ANY COMPONENT WHICH FAILS SHALL BE REPLACED, AND PROGRAMMED IF NECESSARY BY THE ELECTRICAL CONTRACTOR. ALL SUCH REPLACEMENT AND PROGRAMMING COSTS SHALL BE ELECTRICAL CONTRACTOR'S RESPONSIBILITY. ALL COSTS ASSOCIATED WITH THE TESTING OF AFFECTED SYSTEM SUCH AS BUT NOT LIMITED TO FIRE ALARM, PUBLIC ADDRESS, INTERCOM, TELEPHONE, AND SECURITY SYSTEMS SHALL BE THE RESPONSIBILITY OF THE ELECTRICAL CONTRACTOR. ALL EQUIPMENT, DEVICES, WIRING AND THEIR ASSOCIATED MATERIAL SPECIFIED TO REMAIN, WHICH IS NOT STORED AND PROTECTED, SHALL BE PROTECTED DURING THE DEMOLITION ACTIVITIES, AND ALL TRADES SHALL BE INFORMED OF SUCH COMPONENTS. ANY OF SUCH COMPONENTS WHICH BECOME DAMAGED DURING DEMOLITION SHALL BE REPLACED FORM, FIT AND FUNCTION BY THE ELECTRICAL CONTRACTOR AT HIS EXPENSE.

TEMPORARY POWER CONSTRUCTION NOTES

- THE ELECTRICAL CONTRACTOR SHALL PROVIDE TEMPORARY POWER AND LIGHT IN THE CONSTRUCTION
- ALL TEMPORARY POWER PANELS AND FUSED SWITCHES OUTSIDE SHALL BE NEMA 3R CONSTRUCTION AND LOCKABLE. ALL OUTSIDE RECEPTACLES SHALL BE WATERPROOF AND HAVE A COVER THAT ENCLOSES THE PLUGGED IN CORDS WHILE IN SERVICE AS INTERMATIC WP120C. NON-WATERPROOF GEAR IN A HOUSING IS
- ALL RECEPTACLES SHALL BE GFCI PROTECTED AND MOUNTED 3'-0" ABOVE FINISHED FLOOR. PROVIDE WORK BLOCKING AS REQUIRED. ALL RECEPTACLES OUTLETS SHALL BE 2 GANG DOUBLE DUPLEX.
- TEMPORARY LIGHTING SHALL BE CONSTRUCTED OF SINGLE AND DOUBLE 100 WATT CLEAR INCANDESCENT LAMPS, OR EQUIVALENT, AND WATERPROOF RUBBER SOCKETS, SPLICED WITH WATERPROOF CONNECTORS ON FESTOONED ROMEX-TYPE WIRE. ADEQUACY OF ALL TEMPORARY LIGHTING CONFIGURATIONS SHALL BE AS DETERMINED BY THE CONSTRUCTION MANAGER. PRE ASSEMBLED TEMPORARY LIGHTING IS DISALLOWED. TAPS AND SPLICES SHALL BE MADE WITH SCOTCH LOCK CONNECTORS, RUBBER TAPE, AND THEM PVC COATED. THE CONNECTORS SHALL BE FILLED WITH PENETROX. A PLASTIC SHAPE ON CAGE/GUARD SHALL PROTECT EACH SOCKET AND LAMP. NOMINAL SPACING BETWEEN LAMP CLUSTER IS 16 FEET. MOUNT LIGHTS EIGHT FEET ABOVE FINISHED FLOOR IN TYPICAL LOCATIONS AND 10 FEET ABOVE FINISHED FLOOR IN CORRIDOR. PROVIDE NIGHT LIGHTING CIRCUIT, WHICH SHALL OPERATE CONTINUOUSLY. ALL LAMPS SHALL BE 130 VOLT, ROUGH SERVICE RATED. TEMPORARY LIGHTS SHALL BE TO OSHA STANDARDS. ALTERNATE FIXTURES SHALL BE 400W CONSTRUCTION SITE STYLE
- WIRING SHALL BE 1#12+1#12(N)+1#12(G) ROMEX STYLE. CIRCUITS SHALL BE OPERATED A MAXIMUM OF 15 AMPS OR 1800 WATTS (18 100 WATT LAMPS), SWITCHING SHALL BE DONE VIA THE SWITCH RATED 20A, 10 CIRCUIT BREAKERS. SEGREGATE THE NIGHT LIGHTS AND RECEPTACLES IN THE LOWER PART OF THE POWER PANELS AND LABEL THESE "DO NOT TURN OFF" . CIRCUIT HOME RUNS CONDUCTORS SHALL INCREASE ONE WIRE SIZE EVERY 100 FEET I.E. #10 CONDUCTORS. WIRING WITHIN THE ROOM AREA SHALL BE MADE WITH #12 CONDUCTORS.
- THE ELECTRICAL CONTRACTOR SHALL PREPARE EACH PANEL SCHEDULE.

REMOVAL WITHIN CLOSE OUT DOCUMENTS, REQUIRED FOR FINAL PAYMENT.

- A LENGTH OF GREENFIELD FLEX CONDUIT AT PINCH POINTS SHALL PROTECT ALL WIRE. SUCH AS WHERE WIRING PASSED THROUGH A DOORWAY. WIRING SHALL BE SUPPORTED FROM ANCHORS INSTALLED BY THE ELECTRICAL CONTRACTOR FOR THE PURPOSE OF ATTACHMENT TO PROJECT. ALL ELECTRICAL HARDWARE SHALL BE NEW FOR THIS PROJECT.
- ALL WIRING SHALL BE INSTALLED SO AS NOT TO CAUSE TRIPPING HAZARD OR SIMILAR OBSTRUCTION.
- POWER PANELS SHALL BE EQUIPPED WITH 42 1P, 20A CIRCUIT BREAKERS AND ALL CIRCUIT BREAKERS NOT IN SERVICE SHALL BE LABELED SPARE. AT THE OWNERS OPTION PANEL AND CIRCUIT BREAKERS SHALL BE TURNED OVER TO OWNERS INVENTORY AT CONCLUSION OF THE PROJECT, ALL ELECTRICAL HARDWARE SHALL BE NEW FOR THIS PROJECT.
- THE ELECTRICAL CONTRACTOR SHALL BE RESPONSIBLE FOR ALL MAINTENANCE OF TEMPORARY LIGHTING AND POWER SYSTEMS DURING, AND AFTER INSTALLATION, UP TO THE TIME OF BENEFICIAL OCCUPANCY, AND TIME OF REMOVAL. REPAIRS SHALL BE MADE WITHIN 24 HOURS OF THE REPORTED OUTAGE, OR AS DIRECTED BY THE CONSTRUCTION MANAGER. ELECTRICAL CONTRACTOR SHALL COMMENCE WORK ON
- THIS PROJECT WITH A GROSS OF SPARE CONSTRUCTION BULBS AT HIS IMMEDIATE DISPOSAL. REMOVAL OF THE TEMPORARY POWER AND LIGHTING SHALL BE THE RESPONSIBILITY OF THE ELECTRICAL CONTRACTOR WHEN THE PROJECT IS COMPLETE, ALL EQUIPMENT, WIRING SUPPORTS, CONNECTORS, ETC SHALL BE REMOVED FROM OWNER'S PROPERTY AFTER PROJECT IS COMPLETE. INCLUDE STATEMENT OF

EXISTING FIRE ALARM SYSTEM NOTES

- ELECTRICAL CONTRACTOR SHALL EXTEND THE EXISTING 'SIEMENS' SYSTEM TO PROVIDE COVERAGE FOR THE NEW AREAS AND/OR DEVICES AND INTEGRATE THEM INTO THE SYSTEM. PROVIDE NEW UPDATED AND LEGIBLE GRAPHIC MAPS AT EACH LOCATION. THE MAPS SHALL BE PROTECTED FROM DAMAGE: FRAMED AND SHIELDED WITH TRANSPARENT SHATTERPROOF COVERS. NEW DEVICES SHALL BE COMPATIBLE WITH THE EXISTING FIRE ALARM PANEL WHICH IS TO REMAIN. ALL NEW DEVICES SHALL BE INSTALLED PER ADA REQUIREMENTS AND FULLY INTEGRATED INTO THE SYSTEM. THE CONTRACTOR SHALL PROVIDE THE ITEMS ON THE DRAWING AND ALL RELATED EXPANSION, ADAPTIVE, AND CONNECTING WIRING, REPROGRAMMING AND DEVICES FOR A FULLY FUNCTIONING SYSTEM.
- PRIOR TO PERFORMING ANY WORK ON THE SYSTEM. THE ELECTRICAL CONTRACTOR SHALL PERFORM A COMPLETE TEST OF THE SYSTEM IN THE PRESENCE THE OWNER'S REPRESENTATIVE TO ASCERTAIN AND NOTE ANY PRE-EXISTING DEFICIENCIES. ANY CORRECTIVE ACTION WILL BE AS DIRECTED BY THE OWNER WILL BE ON CHANGE ORDER BASIS. ELECTRICIAN WILL MARK-UP THE RESULTS OF THEIR PRE-CONSTRUCTION SURVEY ON FLOOR PLANS AND SUBMIT TO THE CM BEFORE WORK STARTS
- ALL FIRE ALARM WORK SHALL BE PERFORMED BY MANUFACTURER CERTIFIED TECHNICIANS.
- ELECTRICAL CONTRACTOR SHALL OBTAIN ALL REQUIRED PERMITS AND APPROVALS FOR THIS PROJECT AND PAY RELATED FEES. HE SHALL SUBMIT SHOP DRAWINGS ON ALL HARDWARE. THE SHOP DRAWINGS SHALL CONTAIN A SYSTEM RISER DIAGRAM.
- ELECTRICAL CONTRACTOR TO PROTECT OR TEMPORARILY DISCONNECT / RECONNECT EXISTING FIRE ALARM DEVICES TO ACCOMMODATE NEW CONSTRUCTION AS REQUIRED. COORDINATE WITH GENERAL CONTRACTOR. WHERE PLANS CALL FOR EXISTING DEVICE TO BE RELOCATED, EXTEND WIRING AS REQUIRED.
- ALL NEW FIRE ALARM DEVICES SHALL BE OF THE SAME MANUFACTURER AND COMPATIBLE WITH THE FIRE ALARM PANEL.
- PROVIDE ADAPTIVE HARDWARE TO POWER THE SPEAKER STROBES, STROBES AND MAGNETIC DOOR HOLDERS.
- ALL WORK SHALL BE IN ACCORDANCE WITH SYSTEM MANUFACTURER SPECIFICATIONS, LATEST EDITION OF NEC, NFPA 72, ANY LOCAL, STATE CODES, AND ENGINEERING SPECIFICATIONS.

ALL WIRING SHALL BE AS SPECIFIED BY SYSTEM MANUFACTURER AND PLENUM RATED

- ELECTRICAL CONTRACTOR SHALL PROVIDE ANY ADDITIONAL EQUIPMENT, SYSTEM MODULES, POWER SUPPLIES ETC. NEEDED TO HAVE A COMPLETE AND OPERATIONAL SYSTEM. PROVIDE NEW REMOTE ANNUNCIATOR PANEL(S) WHERE INDICATED INCLUDING UPDATED GRAPHIC MAPS. UPDATED MAPS SHALL ALSO INDICATE THE LOCATIONS OF ALL AREA OF RESCUE ASSISTANCE (REFUGE) CALL STATIONS. SUBMIT PROPOSED MAPS FOR APPROVAL.
- THE ELECTRICAL CONTRACTOR SHALL FIELD SELECT THE PROPER OUTPUT SETTINGS OF FIRE ALARM HORNS AND STROBES TO MEET THE MINIMUM CODE PERFORMANCE REQUIREMENTS TO SUIT THE AREAS BEING SERVED.
- PROVIDE AS-BUILT DRAWINGS AND COPY OF UPDATED SITE SPECIFIC SYSTEM SOFTWARE INCLUDING PASSWORDS TO THE OWNER AT NO ADDITIONAL CHARGE.
- ALL NEW MAGNETIC DOOR HOLDERS ARE TO BE WIRED AT 24V. WHEN REPLACING AN EXISTING MAGNETIC DOOR HOLDER, THE CONTRACTOR SHALL MATCH EXISTING
- CONTRACTOR TO ENSURE ALL POINTS ARE PROPERLY ENROLLED IN THE SYSTEM AND OLD POINTS NOT LONGER IN USE ARE REMOVED. PROVIDE CERTIFICATION AS PART OF CLOSEOUT DOCUMENTS.
- WHERE NOT EXISTING, PROVIDE SYSTEM RECORD DOCUMENT CABINET ADJACENT TO FACP TO HOUSE SYSTEM RECORD DOCUMENTS AND ELECTRONIC MEDIA AS PER NFPA 72 AND PROJECT SPECIFICATIONS. PROVIDE LOCKING CABINET BY SPACE AGE ELECTRONICS #SU00691 W/ LOCK OR EQUAL.
- THE ELECTRICAL CONTRACTOR SHALL SUBMIT COMPLETED NFPA 72 "SYSTEM RECORD OF COMPLETION" FORMS PLUS ANY APPLICABLE SUPPLEMENT DOCUMENTS WITH REGARD TO SYSTEM MODIFICATIONS AS PART OF PROJECT CLOSEOUT DOCUMENTS PRIOR TO APPLICATION FOR FINAL PAYMENT. REFER TO SPECIFICATIONS FOR ADDITIONAL REQUIREMENTS.

EXISTING PUBLIC ADDRESS SYSTEM NOTES

- ELECTRICAL CONTRACTOR SHALL EXTEND THE EXISTING PUBLIC ADDRESS COMMUNICATIONS SYSTEM ('TELECENTER') LOCATED IN MAIN OFFICE TO PROVIDE COVERAGE FOR THE NEW/RENOVATED AREAS AND INTEGRATE THEM INTO THE EXISTING SYSTEM. ALL DEVICES SHALL BE INSTALLED PER ADA AND MANUFACTURER REQUIREMENTS. THE CONTRACTOR SHALL PROVIDE THE ITEMS ON THE DRAWING AND ALL RELATED EXPANSION, ADAPTIVE, AND CONNECTING WIRING AND DEVICES FOR A FULLY FUNCTIONING SYSTEM.
- PRIOR TO PERFORMING ANY WORK ON THE SYSTEM, THE ELECTRICAL CONTRACTOR SHALL PERFORM A COMPLETE TEST OF THE SYSTEM IN THE PRESENCE THE OWNER'S REPRESENTATIVE TO ASCERTAIN AND NOTE ANY PRE-EXISTING DEFICIENCIES. ANY CORRECTIVE ACTION WILL BE AS DIRECTED BY THE OWNER WILL BE ON CHANGE ORDER BASIS. ELECTRICIAN WILL MARK-UP THE RESULTS OF THEIR PRE-CONSTRUCTION SURVEY ON FLOOR PLANS AND SUBMIT TO THE CM BEFORE WORK STARTS.
- ALL WORK SHALL BE IN ACCORDANCE EXISTING SYSTEM MANUFACTURER SPECIFICATIONS, LATEST EDITION OF NEC, ANY LOCAL, STATE CODES, AND ENGINEERING MANUFACTURER'S SPECIFICATIONS.
- ALL WIRES SHALL BE AS SPECIFIED BY SYSTEM MANUFACTURER AND PLENUM RATED. ELECTRICAL CONTRACTOR SHALL PROVIDE ANY ADDITIONAL EQUIPMENT NEEDED TO
- HAVE A COMPLETE AND OPERATIONAL SYSTEM. CONTRACTOR TO ENSURE ALL NEW POINTS ARE PROPERLY ENROLLED IN THE SYSTEM
- AND DEMOLISHED POINTS NO LONGER IN USE ARE REMOVED. PROVIDE NEW WIRING FOR ALL NEW AND RENOVATED AREAS. ALL NEW WIRING RUNS SHALL BE CONCEALED IN EITHER SURFACE MOUNTED WIREMOLD (V500 IVORY IN COLOR) OR RECESSED NEW CONDUIT TO RECESSED BACKBOXES OF SPEAKERS, PHONE JACKS, AND MICROPHONE JACKS. WIRING IN DROP CEILINGS SHALL BE SUPPORTED EVERY 5 FEET, AND FROM BUILDING STEEL. ANY WIRING EXPOSED IN UNFINISHED NON-PUBLIC SHALL BE IN EMT. REMOVE AND REPLACE CEILINGS AS REQUIRED TO PERFORM THE WORK. REPLACE ANY DAMAGE TO THE CEILING AS
- RESULT OF WORK. ELECTRICAL CONTRACTOR SHALL PROVIDE AND INSTALL ALL POWER REQUIREMENT FOR PUBLIC ADDRESS SYSTEM. WIRE ALL NEW PUBLIC ADDRESS SYSTEM RACKS AND AMPLIFIERS TO NEARBY 120/208V AC PANEL 20 AMP, 1 POLE CIRCUIT BREAKERS, PROVIDE NEW AS REQUIRED
- ELECTRICAL CONTRACTOR SHALL BE RESPONSIBLE FOR ALL REQUIRED TESTS AND INSPECTIONS FOR INSTALLATION OF THIS SYSTEM, AND SHALL PAY ANY FEES REQUIRED FOR SAME.
- ELECTRICAL CONTRACTOR SHALL FIELD VERIFY THE LOCATIONS OF WALL MOUNT PHONES AND DESK TOP PHONES, AND CONSULT WITH OWNER FOR FINAL LOCATIONS. THE EXISTING PUBLIC ADDRESS SYSTEM SHALL REMAIN IN SERVICE DURING
- ELECTRICAL CONTRACTOR TO FIELD ADJUST VOLUME TAPS ON EACH NEW SPEAKER TO SUIT THE SPACE IN WHICH IT IS INSTALLED.

ENERGY REBATES:

CONSTRUCTION.

- THE CONTRACTOR SHALL SHALL COORDINATE AND PROVIDE ALL ASSISTANCE TO THE OWNER IN THE APPLICATION PROCESS FOR ENERGY EFFICIENCY REBATES FROM THE LOCAL UTILITY AND/OR APPLICABLE AGENCIES FOR CONTRACTOR FURNISHED EQUIPMENT. THIS SHALL INCLUDE, BUT NOT LIMITED TO: LIGHTING FIXTURES, LIGHTING CONTROLS, PHOTOVOLTAIC SYSTEMS, ELECTRIC VEHICLE CHARGING SYSTEMS, ETC BEGIN THIS PROCESS EARLY WITH THE OWNER - PRIOR TO START OF CONSTRUCTION AS REQUIRED BY REBATE AGENCY.
- PROVIDE TO OWNER ALL REQUIRED DOCUMENTATION AS REQUIRED BY THE ISSUING AGENCY TO OBTAIN REBATE.
- ALTERATIONS AND RENOVATIONS OF EXISTING AREAS MAY REQUIRE PRE-INSPECTION BY THE REBATE ISSUING AGENCY TO VERIFY EXISTING CONDITIONS. OBTAIN AND COORDINATE ANY PRE-INSPECTIONS PRIOR TO START OF DEMOLITION.
- OBTAIN AND COORDINATE ANY POST INSTALLATION INSPECTIONS AS REQUIRED.

ALL REBATE PROCEEDS ARE THE PROPERTY OF THE OWNER.

SITE WORK NOTES

- THE ELECTRICAL CONTRACTOR SHALL FIELD VERIFY AND TONE OUT THE LOCATION OF ALL UTILITIES IN THE EXCAVATION AREA OF CONSTRUCTION PRIOR TO COMMENCING WORK. CARE SHALL BE TAKEN NOT TO DISTURB EXISTING UTILITIES AND SERVICE CONNECTIONS (OR PORTIONS THEREOF) TO REMAIN. THE CONTRACTOR IS RESPONSIBLE FOR THE REMOVAL OF ABANDONED UTILITY SERVICE CONNECTIONS AND INSTALLATION OF NEW SERVICE CONNECTIONS AND SHALL COORDINATE WORK WITH THE APPROPRIATE UTILITY COMPANY WHERE APPLICABLE. MAINTAIN ALL MARK OUTS FOR THE DURATION AS REQUIRED.
- ADDITIONAL EXISTING UTILITIES MAY EXIST IN THE WORK AREA. (REFER TO CIVIL / SITE DRAWINGS FOR ADDITIONAL INFORMATION. THESE MAY INCLUDE BUT ARE NOT LIMITED O ELECTRIC, WATER, GAS, IRRIGATION SYSTEM, IRRIGATION MAIN, AND SANITARY. $\,$ I 7 IS THE RESPONSIBILITY OF THE CONTRACTOR TO HAVE THE RESPECTIVE UTILITY COMPANIES AND SURVEYORS MARK ALL LOCATIONS OF UNDERGROUND UTILITIES IN THE FIELD PRIOR TO THE COMMENCEMENT OF WORK. CONTRACTOR SHALL HAND DIG TRENCH WHEN WITHIN 5' OR CROSSING EXISTING THE UTILITIES LINES. ELECTRICAL CONTRACTOR IS RESPONSIBLE FOR ANY REPAIR OR REPLACEMENT OF ANY SYSTEM DAMAGED DURING CONSTRUCTION AT NO ADDITIONAL COST.
- THE ELECTRICAL CONTRACTOR SHALL BE RESPONSIBLE TO SAWCUT AND TRENCH ALI PAVED AREAS AS REQUIRED TO FACILITATE INSTALLATION OF WIRES AND CONDUITS THE ELECTRICAL CONTRACTOR SHALL BE RESPONSIBLE TO BACKFILL EXCAVATION AND COMPACT TO 95% DENSITY UP TO GRADE. PATCH PAVEMENT WITH FULL DEPTH ASPHALT AND RCA BASE TO RESTORE AREAS NOT OTHERWISE BEING PAVED BY GENERAL CONTRACTOR. ALL DISTURBED AREAS TO BE TOPSOILED, FINE GRADED AND SEEDED PER SITE PLAN AND SPECS. RESTORE ANY DISTURBED PAVEMENT/ TRAFFIC
- WHERE FINISH PAVING IS TO BE PERFORMED BY OTHER TRADES, THE ELECTRICAL CONTRACTOR SHALL COORDINATE WORK SO THAT ALL CONDUITS TO BE RUN UNDER AREAS TO BE PAVED SHALL BE INSTALLED AFTER DEMOLITION OF ANY EXISTING PAVING AND PRIOR TO NEW PAVING.
- TRANSITION OUTDOOR PVC CONDUITS TO EMT UPON ENTERING BUILDING.
- ALL UNDERGROUND CONDUITS SHALL BE SCHEDULE 80 PVC UNLESS OTHERWISE NOTED. SIZE AS INDICATED ON PLANS. All 90-DEGREE BENDS SHALL BE ENCASED IN 3" CONCRETE ALL AROUND OR RIGID GALV. STEEL CONDUIT.
- THE CONTRACTOR SHALL NOTIFY APPROPRIATE UTILITIES 48 HOURS BEFORE EXCAVATING, CUTTING, REMOVING OR TAPPING INTO ANY EXISTING UTILITY SERVICE. OWNER SHALL BE NOTIFIED 48 HOURS BEFORE ANY SITE WORK IS BEGUN. VACANT CONDUIT DUCTBANKS SHALL BE EXTENDED 2' MIN. PAST CURBING/PAVING AND
- CAPPED OFF. TYPICAL EACH END. PROVIDE PULLSTRINGS IN ALL SPARE CONDUITS INSTALLED AND CAP OFF.

FIRE ALARM SYMBOL LEGEND

REMOTE COMMAND CENTER.

SMOKE DETECTOR WITH BASE.

WALL MOUNT STROBE NOTIFICATION DEVICE.

WALL MOUNT HORN / STROBE NOTIFICATION DEVICE.

CEILING MOUNT HORN / STROBE NOTIFICATION DEVICE.

ELECTROMAGNETIC HOLD OPEN DEVICE. VOLTAGE TO MATCH

PC = PLUMBING CONTRACTOR

CC = CASEWORK CONTRACTOR

CEILING MOUNT STROBE NOTIFICATION DEVICE.

THE STROBE CANDELA IS 15 cd UNLESS OTHERWISE INDICATED ON DRAWING.

ALARM (OR SIMILAR).

FIRE ALARM RELAY.

CONTRACTOR ABBREVIATIONS

WG = WIRF GUARD

WM = WALL MOUNT

WP = WEATHER PROOF

GC = GENERAL CONTRACTOR

MC = MECHANICAL CONTRACTOR

EC = ELECTRICAL CONTRACTOR

BUILDING NOTES

THE BUILDING HAS EXISTING GENERATOR.

ALL UNDERGROUND CONDUITS, EXCLUDING PRIMARY CONDUCTORS (3'), SHALL BE AT 2' BELOW SURFACE. INSTALL DETECTABLE YELLOW FIBERGLASS WARNING MARKER TAPE 6" BELOW GRADE.

FIRE ALARM CONTROL PANEL. PROVIDE BUILDING SHATTERPROOF

REMOTE ANNUNCIATOR PANEL. PROVIDE BUILDING SHATTERPROOF

MANUAL PULL STATION WITH STI STOPPER PROTECTIVE SHIELD WITHOUT

ASSOCIATED UNIT WITH SOUNDER BASE FOR SIMULTANEOUS LOCAL ALARM

CARBON MONOXIDE DETECTOR WITH SOUNDER BASE. CONNECT TO

FRAMED SCHOOL GRAPHIC PAPER MAP WITHIN SIGHT OF PANEL.

FRAMED SCHOOL GRAPHIC PAPER MAP WITHIN SIGHT OF PANEL.

PRIOR TO THE COMMENCEMENT OF WORK, THE CONTRACTOR SHALL OBTAIN ALL PERMITS NECESSARY AND PAY ALL FEE'S FOR INSTALLATION OF THE WORK. ALL WORK SHALL BE PERFORMED IN ACCORDANCE WITH THE LATEST EDITION OF THE NEC, APPLICABLE LOCAL CODES, UTILITY SPECIFICATIONS, AND THE ENGINEER'S SPECIFICATIONS.

LIGHTING LEGEND DESCRIPTION X 4' RECESSED LIGHTING FIXTURE. L' X 2' RECESSED LIGHTING FIXTURE. X 2' RECESSED EMERGENCY LIGHTING FIXTURE. WITH 90 MINUTES EMERGENCY BATTERY PACK. ?' X 2' SURFACE MOUNT LIGHTING FIXTURE. 1' X 4' SURFACE MOUNT LIGHTING FIXTURE. 1' X 4' PENDANT LIGHTING FIXTURE RECESSED DOWN LIGHTING FIXTURE. EXTERIOR WALL MOUNT LIGHTING FIXTURE. EMERGENCY WALL PACK LIGHTING FIXTURE. EXIT SIGN/EMERGENCY COMBO WALL PACK LIGHTING FIXTURE.

CLOCK SYMBOL LEGEND SYMBOL WIRELESS ANALOG SERIES CLOCK. 12.5" DIAMETER UNLESS OTHERWISE NOTED.

##	THREE POLE CIRCUIT 4-#12, 1-#12G, ¾"C UNLESS OTHERWISE NOTED
Φ	SINGLE RECEPTACLE, NEMA 5-20R W/ STAINLESS STEEL FACEPLATE
Ф	DUPLEX RECEPTACLE, NEMA 5-20R W/ STAINLESS STEEL FACEPLATE
P WF	GROUND FAULT CIRCUIT INTERRUPTER DUPLEX RECEPTACLE, 5-20R W/ STAINLESS STEEL FACEPLATE FOR MECHANICAL SPACES, OUTDOORS, ETC. 'WP' ANNOTATION - IN RAINPROOF & IN-USE COVER.
$\overline{\Phi}$	DUPLEX RECEPTACLE W/ (1) USB TYPE 'A' & (1) TYPE 'C', 20A W/ STAINLESS STEEL FACEPLATE
	DUPLEX CEILING MOUNTED RECEPTACLE , NEMA 5-20R W/ STAINLESS STEEL FACEPLATE.
#	QUADRUPLEX RECEPTACLE - (2)-GANG DUPLEX RECEPTACLES PER ABOVE W/ STAINLESS STEEL FACEPLATE
$\overline{\Phi}$	QUADRUPLEX RECEPTACLE - (2)-GANG DUPLEX RECEPTACLES W/ (1) USB TYPE 'A' & (1) TYPE 'C' PER RECEPTACLE, W/ STAINLESS STEEL FACEPLATE
	RECEPTACLE, VOLTAGE & PHASE PER LABEL
RWB	POWER/DATA WALL BOX. REFER TO TECHNOLOGY DRAWINGS FOR FINAL CONFIGURATION AND LOCATION.
FB	POWER/DATA FLOOR BOX. REFER TO TECHNOLOGY DRAWINGS FOR FINAL CONFIGURATION AND LOCATION. SUBSCRIPT 'P' POWER ONLY. CONFIGURATION PER PLAN.
PT	POWER/DATA FIRE-RATED POKE-THROUGHS. REFER TO TECHNOLOGY DRAWINGS FOR FINAL CONFIGURATION AND LOCATION. SUBSCRIPT 'P' POWER ONLY. CONFIGURATION PER PLAN.
	RETRACTABLE WHITE INDUSTRIAL CORD REEL, 20A, 125V, 25' CORD LENGTH, (2) DUPLEX RECEPTACLE END W/ GFCI.
	UNFUSED DISCONNECT SWITCH, SIZE PER PLAN
\$1P	MOTOR SWITCH FURNISHED AND INSTALLED BY THE E.C. WIRE SIZE AND POLE PER PLAN.
J	JUNCTION BOX. MOUNT/ INSTALL IN FIELD AS REQUIRED.
(HP)	MOTOR, NO. INDICATES HORSEPOWER
HD	HAND DRYER, SUPPLIED BY G.C., INSTALLED AND WIRED BY E.C. U.O.N
	PANEL BOARD/LOAD CENTER, MOUNTING AND CHARACTERISTICS PER PLAN
	TRANSFORMER, VOLTAGE, PHASE, KVA PER PLAN
	EMERGENCY SHUT-OFF MUSHROOM TYPE PUSH BUTTON
	WALL SWITCH: LOWER CASE LETTER (TOP) INDICATES SWITCHING DESIGNATION UPPER CASE LETTER(S) OR NUMBER SUBSCRIPTS (BOTTOM): K = KEY SWITCH 3 = THREE WAY SWITCH

ELECTRICAL SYMBOL LEGEND

DESCRIPTION

TWO POLE CIRCUIT 3-#12,1-#12G, 3/4"C UNLESS OTHERWISE NOTED

PUBLIC /	PUBLIC ADDRESS / SPEAKER SYSTEM LEGEND					
SYMBOL	DESCRIPTION					
S	SURFACE MOUNTED PUBLIC ADDRESS SPEAKER.					
Θ	RECESSED CEILING MOUNTED PUBLIC ADDRESS SPEAKER					
	RECESSED LAY-IN 2X2 SPEAKER FOR SUSPENDED CEILINGS PUBLIC ADDRESS SPEAKER.					
VC	VOLUME CONTROL FOR PUBLIC ADDRESS SPEAKER(S)					
PA RACK	PUBLIC ADDRESS SYSTEM HEAD-END RACK					

4 = FOUR WAY SWITCH

M = MOMENTARY CONTACT SWITCH

3RL = 3 BUTTON CONTROLS - MODEL

VS = VACANCY PIR SENSOR DIMMER

VC = VACANCY PIR SENSOR SWITCH

CEILING MOUNTED OCCUPANCY/ VACANCY/ DAYLIGHT SENSOR, LOW

VOLTAGE, DUAL TECHNOLOGY, COMPLETE W/ POWER PACK(S) AS REQ'D.

ROOM CONTROLLER. MOUNT ABOVE CEILING UNLESS OTHERWISE NOTED.

SECURITY SYSTEM LEGEND					
SYMBOL	DESCRIPTION				
P	BLUE LIGHT PANIC BUTTON AND STROBE				
	VIDEO DOOR STATION				
	CARD READER				
\bowtie	INTERIOR SECURITY CAMERA				

ABBREV	<u>ABBREVIATIONS</u>			
ACT	ABOVE COUNTER TOP			
AFF	ABOVE FINISHED FLOOR			
ETR	EXISTING DEVICE TO REMAIN. PROTECT DURING CONSTRUCTION.			
EX	EXISTING DEVICE.			
RR	EXISTING DEVICE TO BE DISCONNECTED, STORED, AND REINSTALLED AFTER RENOVATION. E.C. TO SAFE OFF WIRING FOR RE-USE. SEE PROPOSED PLAN FOR NEW DEVICE LOCATIONS AND TEST FOR PROPER OPERATION. ADDITIONAL WIRING MAY BE REQUIRED, EXTEND WIRING AS NEEDED.			
WP	WEATHERPROOF DEVICE			

NOTE: SYMBOLS AND ABBREVIATIONS ON HIS DRAWING ARE FOR REFERENCE ONLY, AND MAY NOT BE USED IN THE FOLLOWING DOCUMENTS.

REV. DATE SINGLE POLE CIRCUIT 2-#12, 1-#12G, 3/4"C UNLESS OTHERWISE NOTED <u>NOTICE</u> ESE DRAWINGS ARE BASED ON CONSTRUCTION DRAWINGS NO EPARED BY BBS ARCHITECTS, LANDSCAPE ARCHITECTS AN ONDITIONS AS CONSTRUCTED AT THE TIME. ALL EXIST INFORMATION AS THEY MAY NOT HAVE BEEN BUILT AND DETAILE KEY PLAN NOT TO SCALE

> C C 1 DRAWING BY:

> > CHECK BY: ١W IS DRAWING, PREPARED FOR THE SPECIFIC PROJECT INDICATED N INSTRUMENT OF SERVICE AND THE PROPERTY OF B FRINGEMENT OR ANY USE OF THIS DRAWING FOR ANY OTH IS DOCUMENT IS ALSO PROHIBITED WITHOUT THE WRITT NSENT OF THE ARCHITECT OR ENGINEER.

LANDSCAPE ARCHITECTS ENGINEERS SUITE 115, ALBANY NEW YORK 11772 NEW YORK 12203 T. 631.475.0349 F. 631.475.0361 F. 518.621.7655


www.BBSARCHITECTURE.com

66-01-02-06-0-007-013 DISTRICT BEDFORD CENTRAL SCHOOL DISTRICT PROJECT PHASE 2 -BOND IMPROVEMENTS


and ABBREVIATIONS SCALE: AS NOTED APRIL 2024 DATE: BID PICK-UP: FEBRUARY 24, 2025 FILE No: 23-131b


DWG TITLE GENERAL NOTES, LEGENDS

E0.01

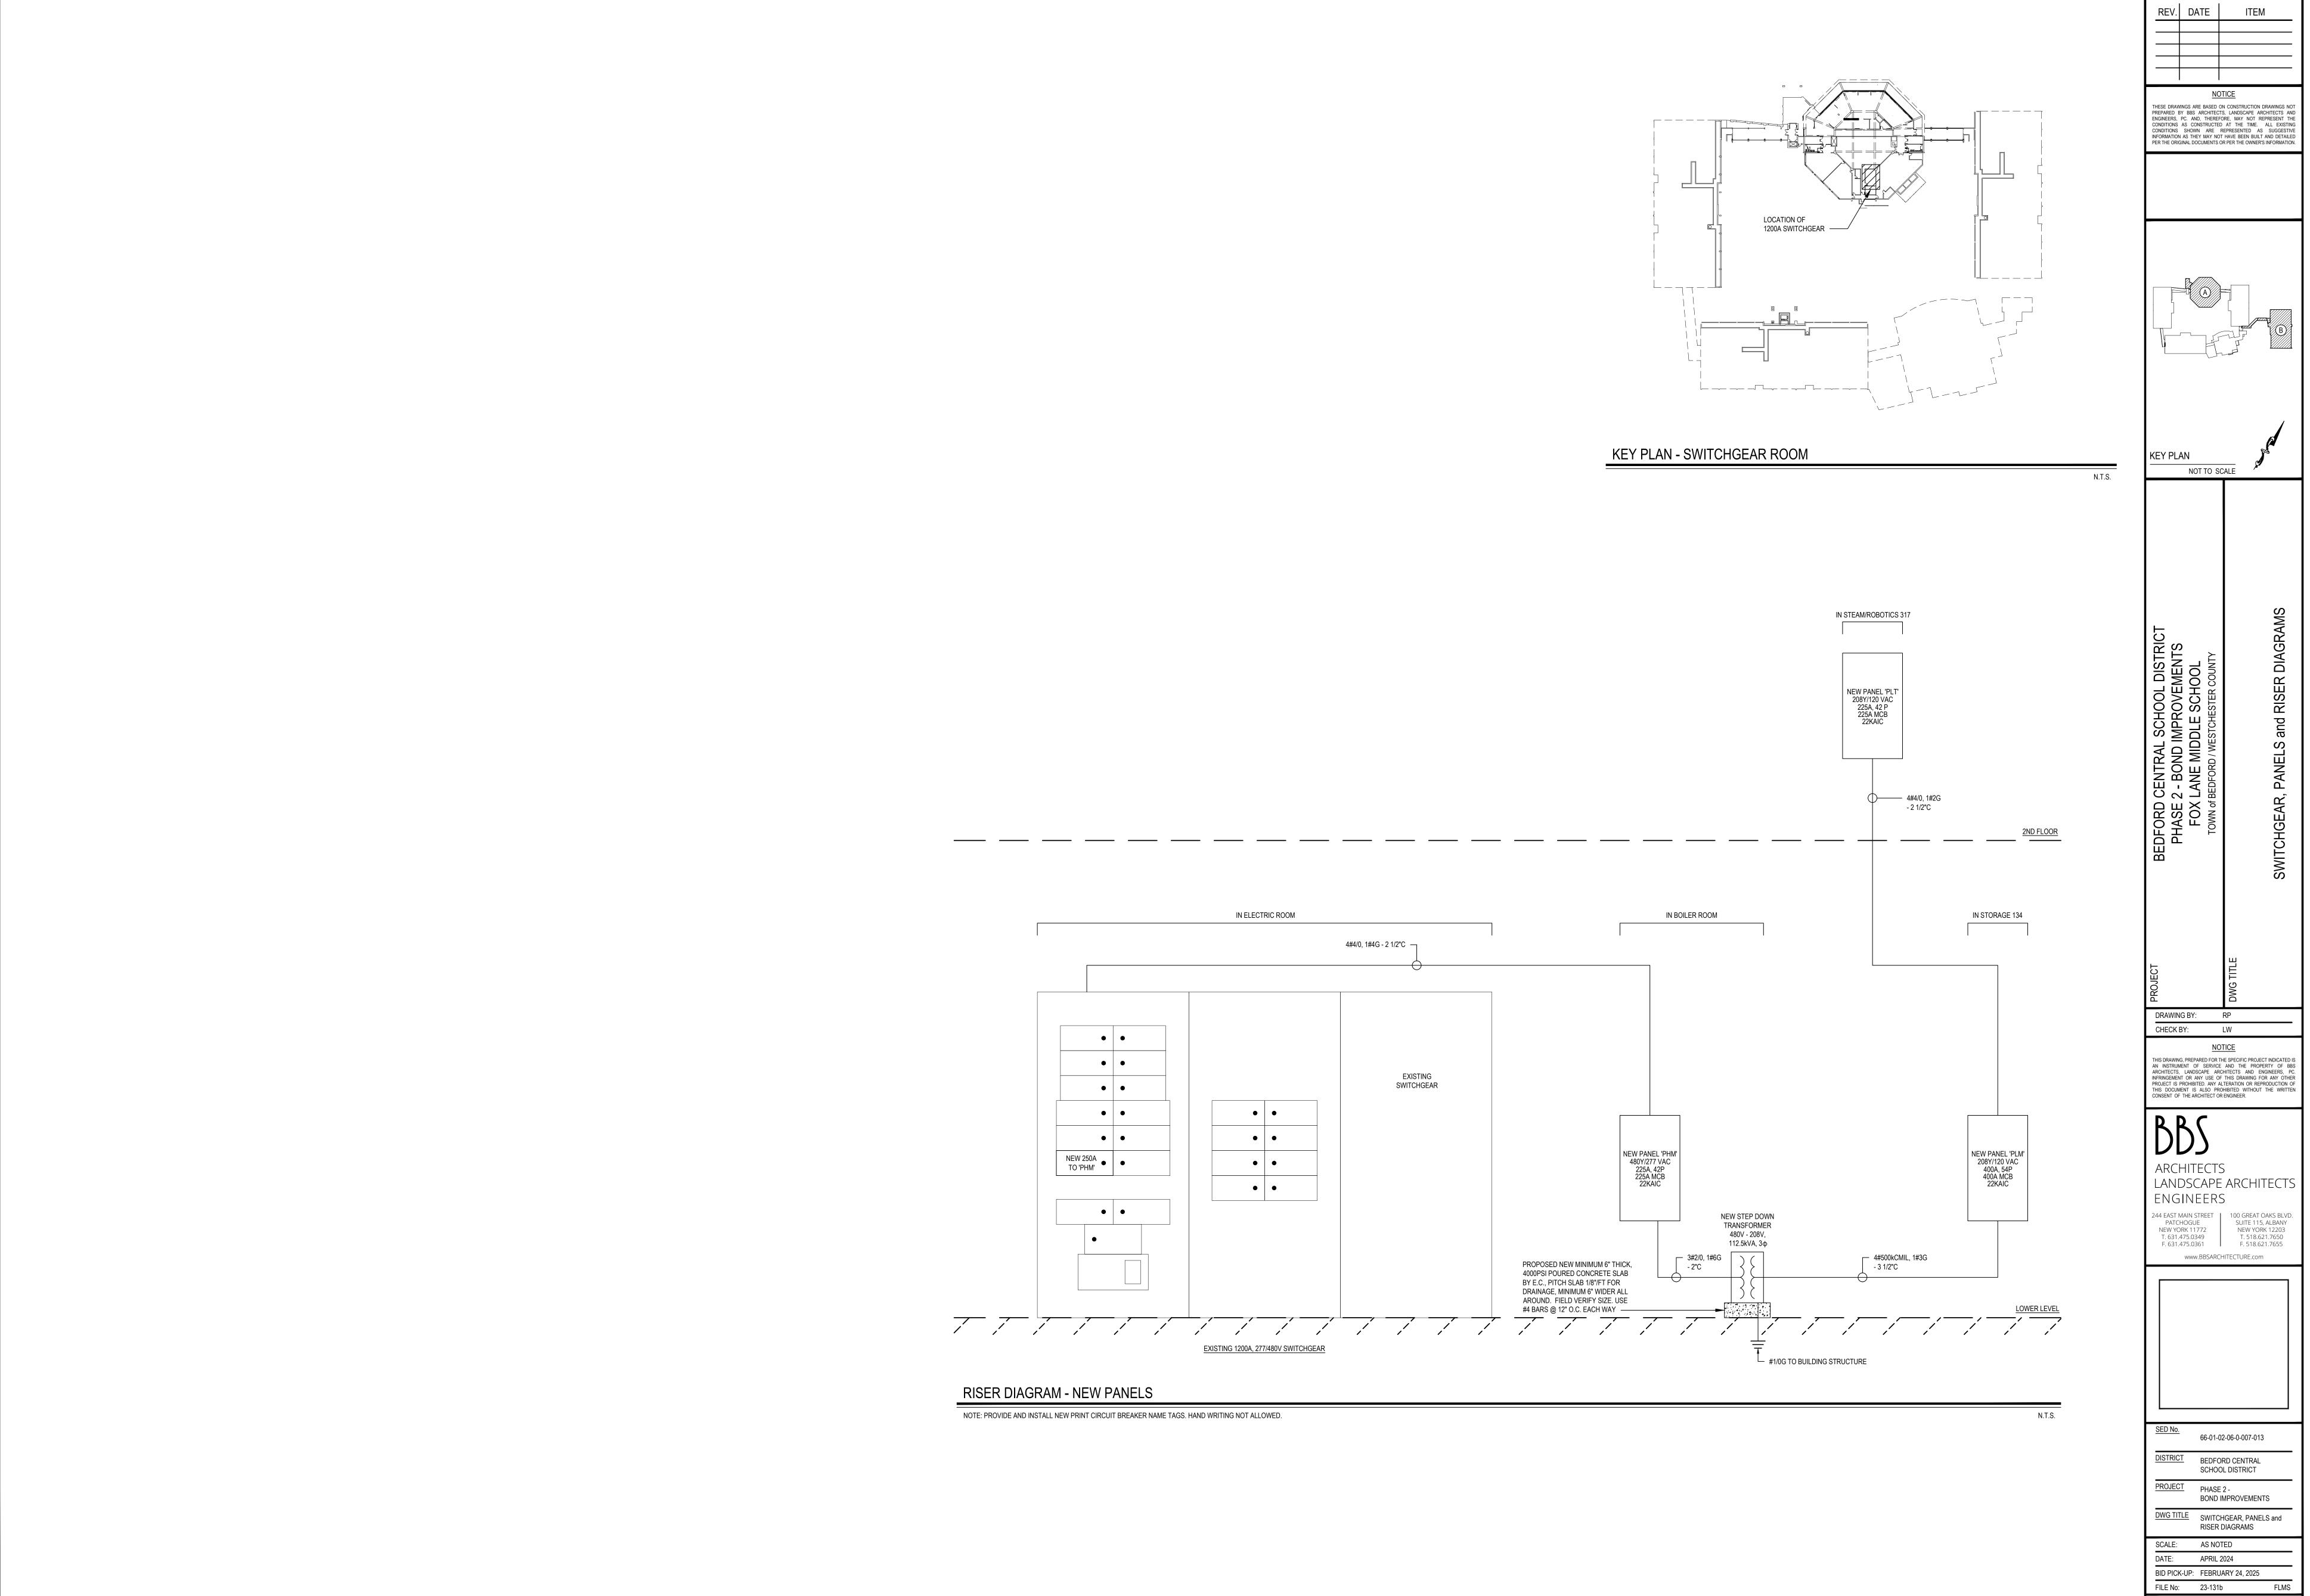

E0.02

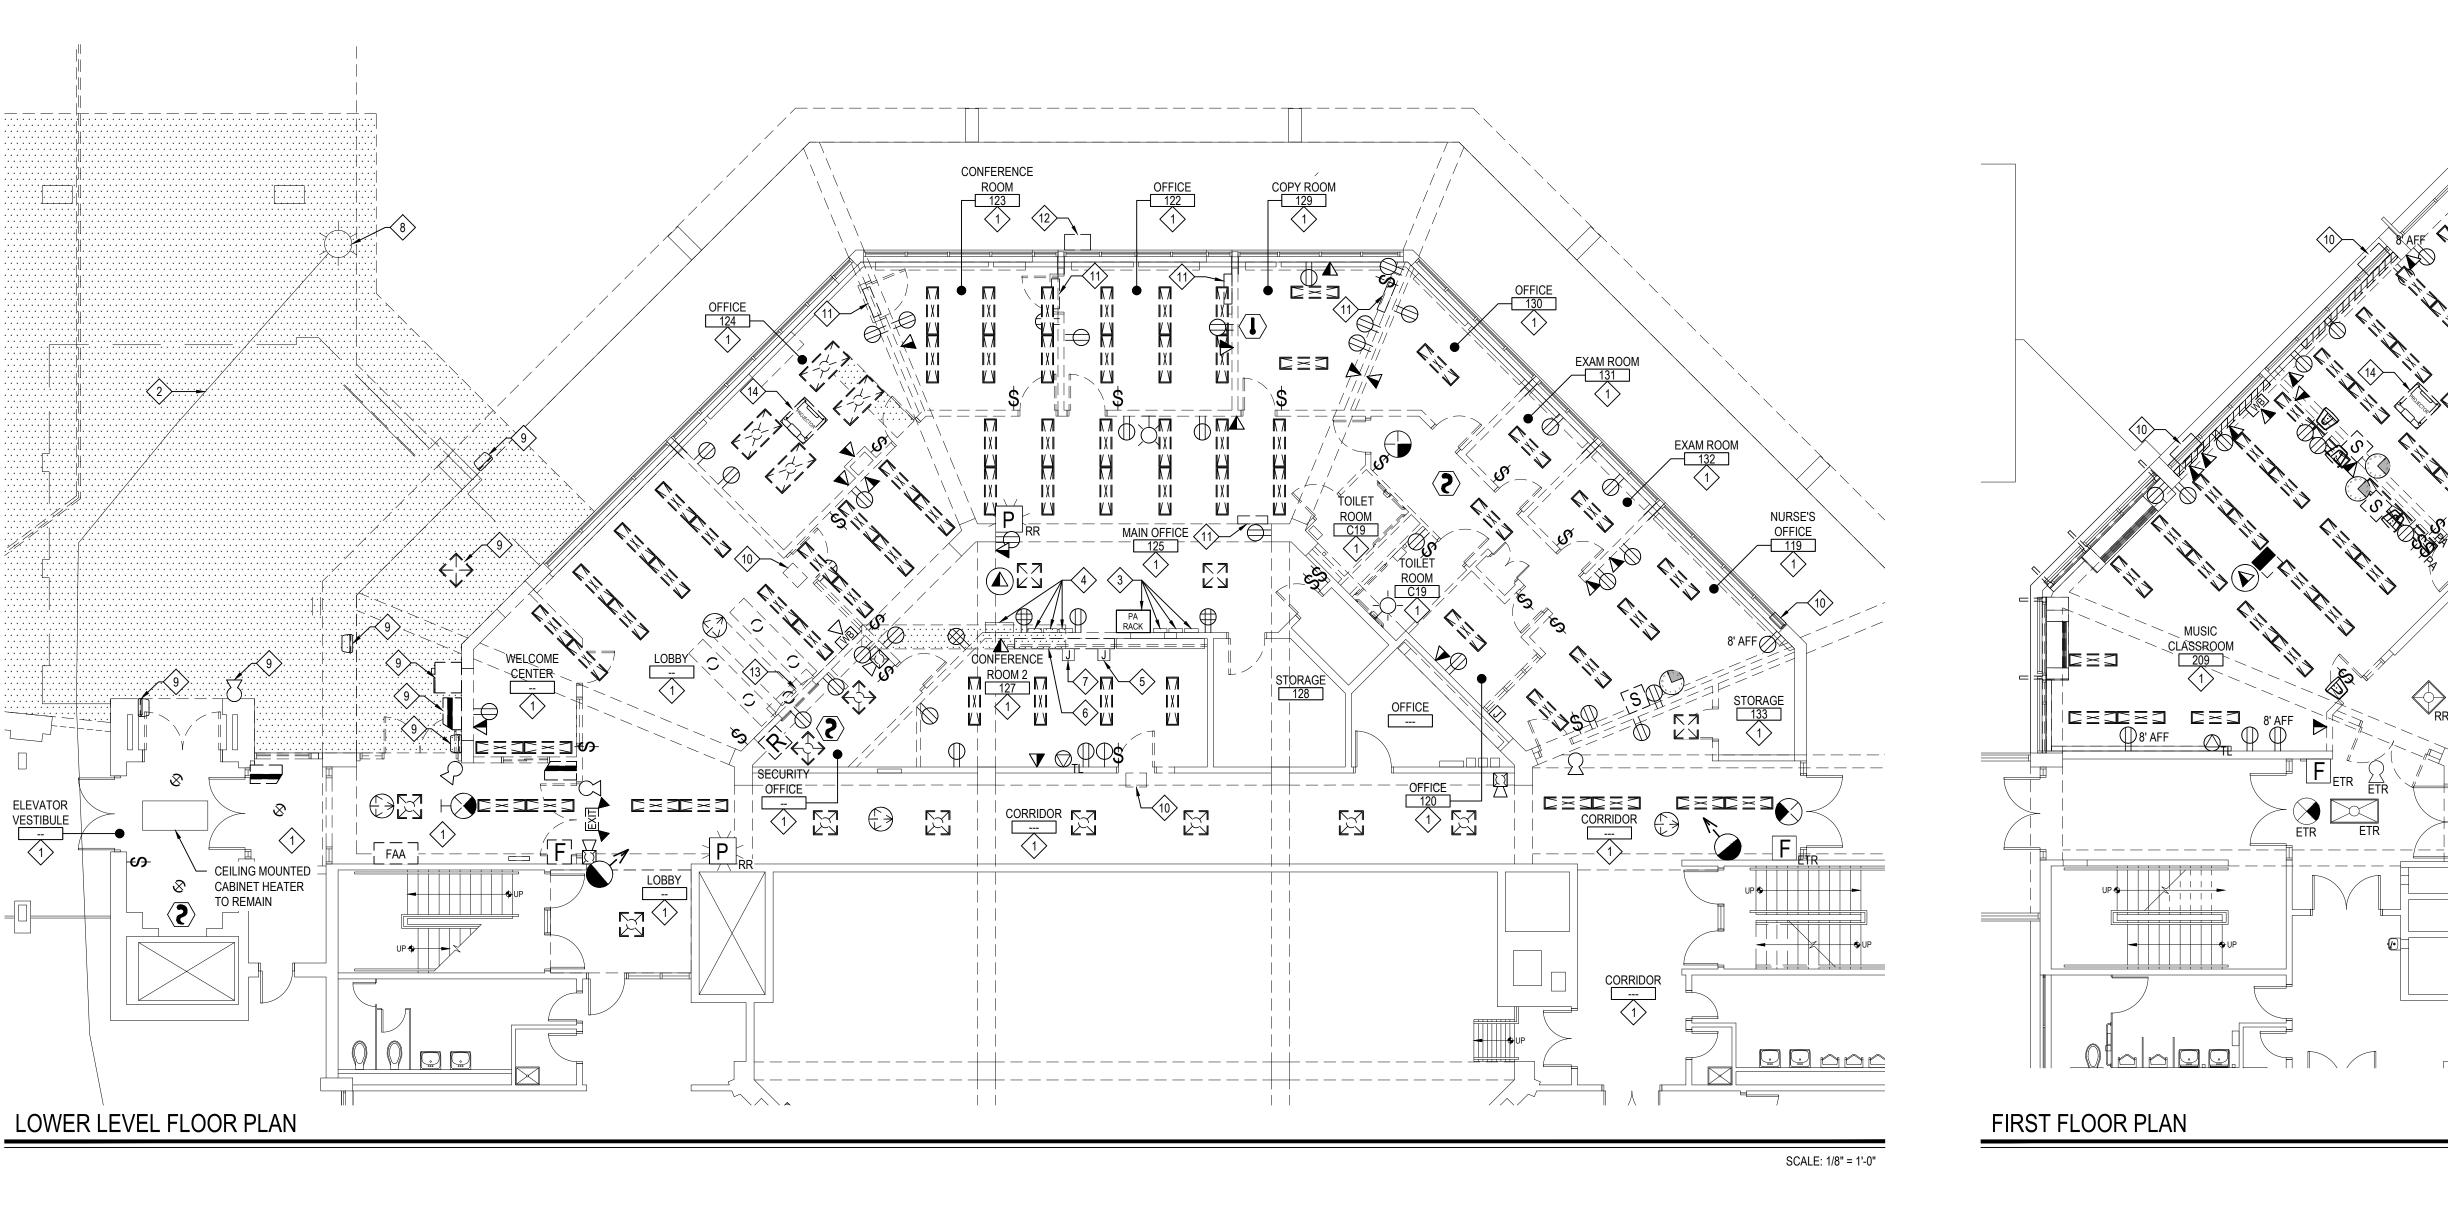

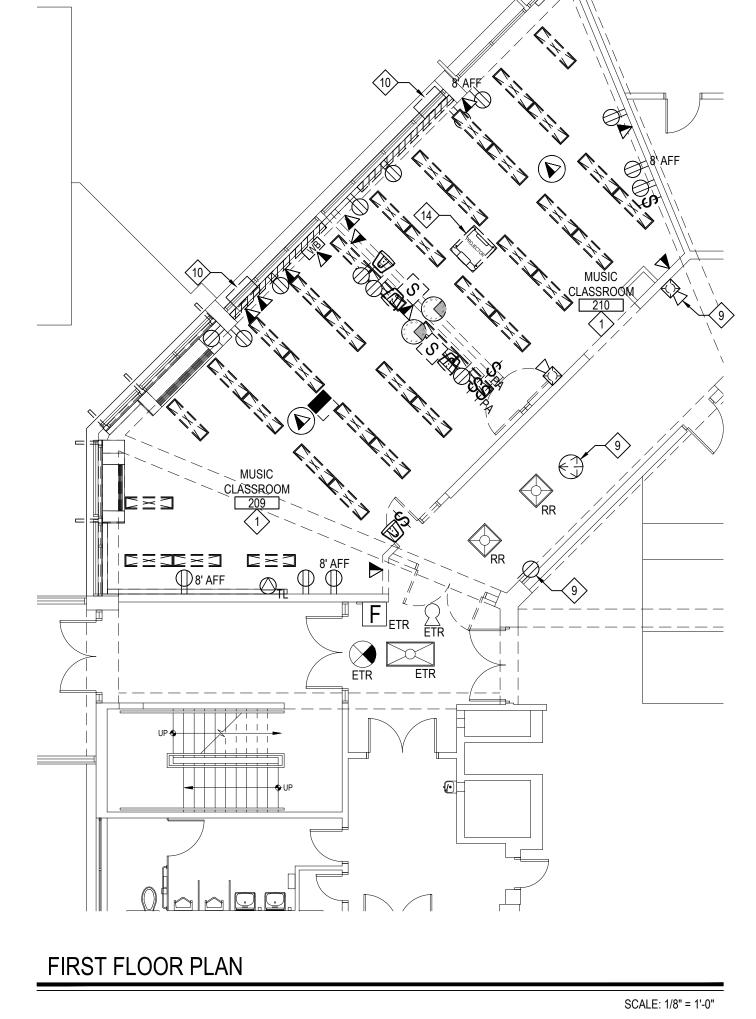

E.C. TO SAFE-OFF AND DISCONNECT EXISTING EXHAUST FAN TO BE REMOVED BY THE M.C. REMOVE CIRCUIT BACK TO SOURCE. —

> EXHAUST FAN TO BE REMOVED BY THE M.C. REMOVE CIRCUIT BACK TO SOURCE.

ELECTRICAL DEMOLITION KEY NOTES:

- \langle 1angle all existing interior electrical devices including but not limited to BATTERY PACKS, WALL MOUNTED AND CEILING MOUNT OCCUPANCY SENSORS, SWITCHES, RECEPTACLES, DATA DROPS, PHONE DROPS, RACEWAY, CLOCKS, PHONES, EMERGENCY CALL BUTTON SYSTEM, FIRE ALARM DEVICES, PUBLIC ADDRESS DEVICES. SECURITY SYSTEM DEVICES TO BE DE-ENERGIZED AND REMOVED BY THE E.C. ALL EXISTING INTERIOR RECESSED, SURFACE, WALL, AND PENDANT MOUNTED LIGHTING FIXTURES TO BE DE-ENERGIZED AND REMOVED BY THE E.C. REMOVE ALL CONDUIT AND WIRES BACK TO SOURCE. ALL DEMOLISHED MECHANICAL AND PLUMBING EQUIPMENT SHALL BE DE-ENERGIZED AND HAVE THEIR EXISTING POWER CIRCUITS REMOVED BACK TO THEIR SOURCES. SEE MECHANICAL AND PLUMBING DRAWINGS FOR MORE
- $\langle 2
 angle$ APPROXIMATE UNDERGROUND ELECTRIC LINE FEEDING OUTDOOR LIGHT POLE E.C. TO DISCONNECT CIRCUIT TO BE EXTENDED AND REROUTED AROUND NEW VESTIBULE ADDITION.
- (3) E.C. TO DISCONNECT TIME CARD READER, EMERGENCY GENERATOR ANNUNCIATOR, AND PA/CLOCK SYSTEM CONTROLS TO BE RELOCATED INTO NEW STORAGE CLOSET/KITCHEN AREA.
- E.C. TO DISCONNECT FIRE ALARM PANEL, FIRE ALARM BOX, DATABASE, AND ALARM PANEL TO BE RELOCATED INTO NEW STORAGE CLOSET.
- $\langle 5
 angle$ E.C. TO REROUTE EXISTING FA SPLICE BOX CIRCUITS TO A NEW SPLICE BOX IN STORAGE ROOM 128. E.C. TO SAWCUT FLOOR TO STORAGE ROOM 128 TO ALLOW FOR THE REROUTING OF EXISTING CIRCUITS. SEE DETAIL 2 ON A1.01 FOR MORE INFO.
- $\langle 6
 angle$ E.C. TO REROUTE ALL EXISTING CONDUITS/WIRES ON WALL SECTION THAT IS TO BE REMOVED. REROUTED CIRCUITS SHALL BE RAN INSIDE NEW WALLS/ABOVE NEW CEILINGS. MAINTAIN CONTINUITY FOR ALL CONNECTIONS AND VERIFY FUNCTIONALITY AFTER REROUTING. REMOVE ANY CONDUITS/WIRES THAT ARE OBSOLETE. EXTEND/SHORTEN WIRING AS NEEDED.
- SAWCUT FLOOR TO STORAGE ROOM 128 FOR THE REROUTING OF THESE WIRES INSIDE NEW WALLS/ABOVE NEW CEILINGS. MAINTAIN CONTINUITY FOR ALL CONNECTIONS AND VERIFY FUNCTIONALITY AFTER REROUTING. EXTEND/SHORTEN WIRING AS NEEDED.
- 8 E.C. TO DISCONNECT AND REMOVE LIGHT POLE TO BE REINSTALLED IN NEW LOCATION. SEE ALSO E3.01.
- 9 EXISTING DEVICE TO BE DISCONNECTED AND REMOVED. PULL BACK WIRING/CABLE TO SOURCE.
- $\stackrel{\textstyle <}{\scriptstyle (10)}$ EXISTING WALL-MOUNTED AIR CONDITIONER TO BE DE-ENERGIZED BY THE E.C. AND REMOVED BY THE M.C. E.C. TO REMOVE ALL RELATED ELECTRICAL COMPONENTS AND PULL BACK CIRCUIT TO SOURCE.
- (11) INDOOR AC UNIT TO BE DE-ENERGIZED BY THE E.C. AND REMOVED BY THE M.C. (12) OUTDOOR CONDENSING UNIT TO BE DE-ENERGIZED BY THE E.C. AND REMOVED
- BY THE M.C. E.C. TO DE-ENERGIZE AND REMOVE EXISTING MOTORIZED ROLL UP SHUTTER.
- (14) E.C. TO DISCONNECT AND REMOVE PROJECTOR. HAND OVER TO DISTRICT.
- (15) TRENCH BY E.C. E.C. TO RUN NEW CIRCUITS FROM INSIDE NEARBY WALL/COLUMN TO NEW FLOOR BOXES IN TRENCH. SEE ALSO PROPOSED PLANS AND E7.01 FOR TRENCH DETAIL.
- (16) E.C. TO DE-ENERGIZE DUST COLLECTION SYSTEM TO BE REMOVED BY THE M.C. PULL BACK CIRCUIT TO SOURCE.

ELECTRICAL GENERAL DEMOLITION NOTES:

- NOT ALL DEVICES COULD BE FOUND DURING SURVEY, ADDITIONAL SIMILAR DEVICES MAY EXIST IN THE WORK ZONE AND SHALL BE ACTED UPON AS PER THE DEMO KEY NOTES UNLESS OTHERWISE INDICATED TO REMAIN.
- LIGHT FIXTURE CIRCUITS PULLED BACK TO PANELS 'LHD' AND 'LHDE' SHALL HAVE THEIR POSITIONS RESERVED TO PROVIDE POWER TO NEW LIGHT FIXTURES IN SIMILAR AREAS. RETAIN CONTINUITY OF LIGHT FIXTURES OUTSIDE THE WORK

 E.C. TO SAFE-OFF AND DISCONNECT EXISTING EXHAUST FAN TO BE REMOVED BY THE M.C. REMOVE CIRCUIT BACK TO SOURCE.

REV. DATE HESE DRAWINGS ARE BASED ON CONSTRUCTION DRAWINGS NOT REPARED BY BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND NGINEERS, PC. AND, THEREFORE, MAY NOT REPRESENT THE CONDITIONS AS CONSTRUCTED AT THE TIME. ALL EXISTING CONDITIONS SHOWN ARE REPRESENTED AS SUGGESTIVE INFORMATION AS THEY MAY NOT HAVE BEEN BUILT AND DETAILED

KEY PLAN NOT TO SCALE

DRAWING BY:

CHECK BY: <u>NOTICE</u> THIS DRAWING, PREPARED FOR THE SPECIFIC PROJECT INDICATED IS AN INSTRUMENT OF SERVICE AND THE PROPERTY OF BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PC. INFRINGEMENT OR ANY USE OF THIS DRAWING FOR ANY OTHER PROJECT IS PROHIBITED. ANY ALTERATION OR REPRODUCTION OF THIS DOCUMENT IS ALSO PROHIBITED WITHOUT THE WRITTEN CONSENT OF THE ARCHITECT OR ENGINEER.

ARCHITECTS

LANDSCAPE ARCHITECTS ENGINEERS 244 EAST MAIN STREET PATCHOGUE SUITE 115, ALBANY NEW YORK 11772 NEW YORK 12203


T. 631.475.0349 F. 631.475.0361 F. 518.621.7655 www.BBSARCHITECTURE.com

SED No.	66-01-02-06-0-007-013
DISTRICT	BEDFORD CENTRAL SCHOOL DISTRICT
PROJECT	PHASE 2 - BOND IMPROVEMENTS
DWG TITLE	DEMOLITION PLANS

SCALE: 1/8" = 1'-0"


BID PICK-UP: FEBRUARY 24, 2025 FILE No: 23-131b

E1.01

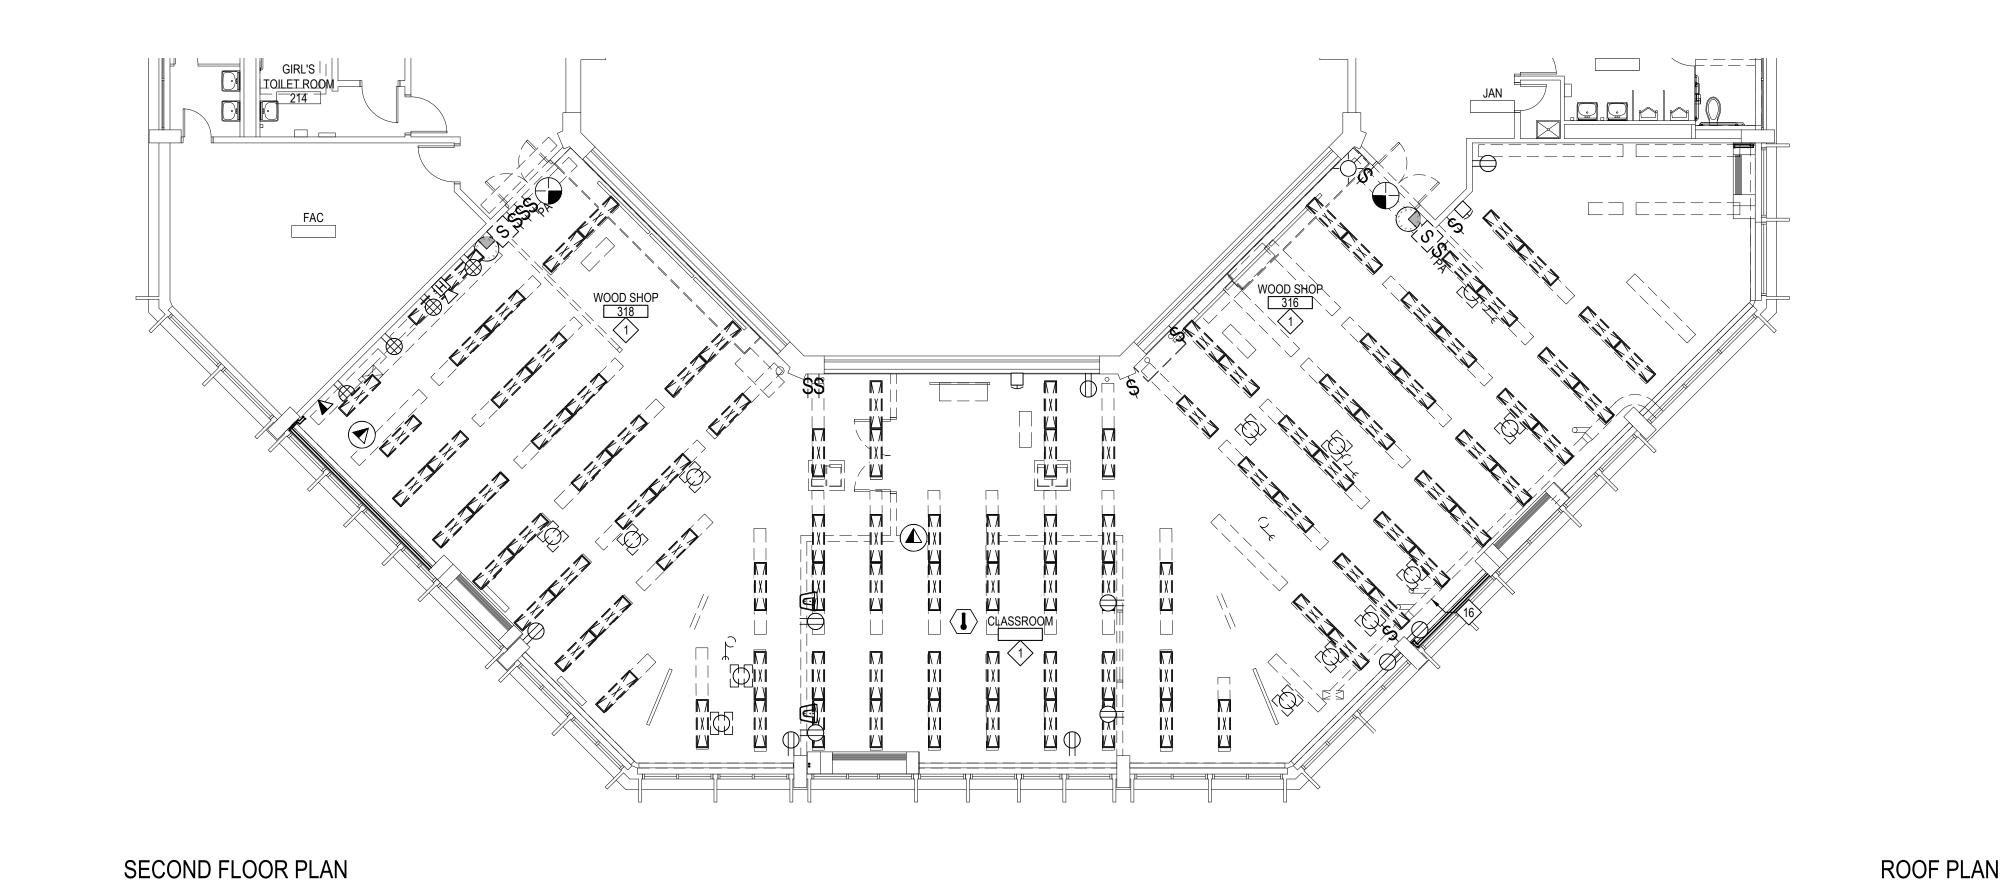

SCALE: 1/8" = 1'-0"

E.C. TO SAFE-OFF AND DISCONNECT EXISTING

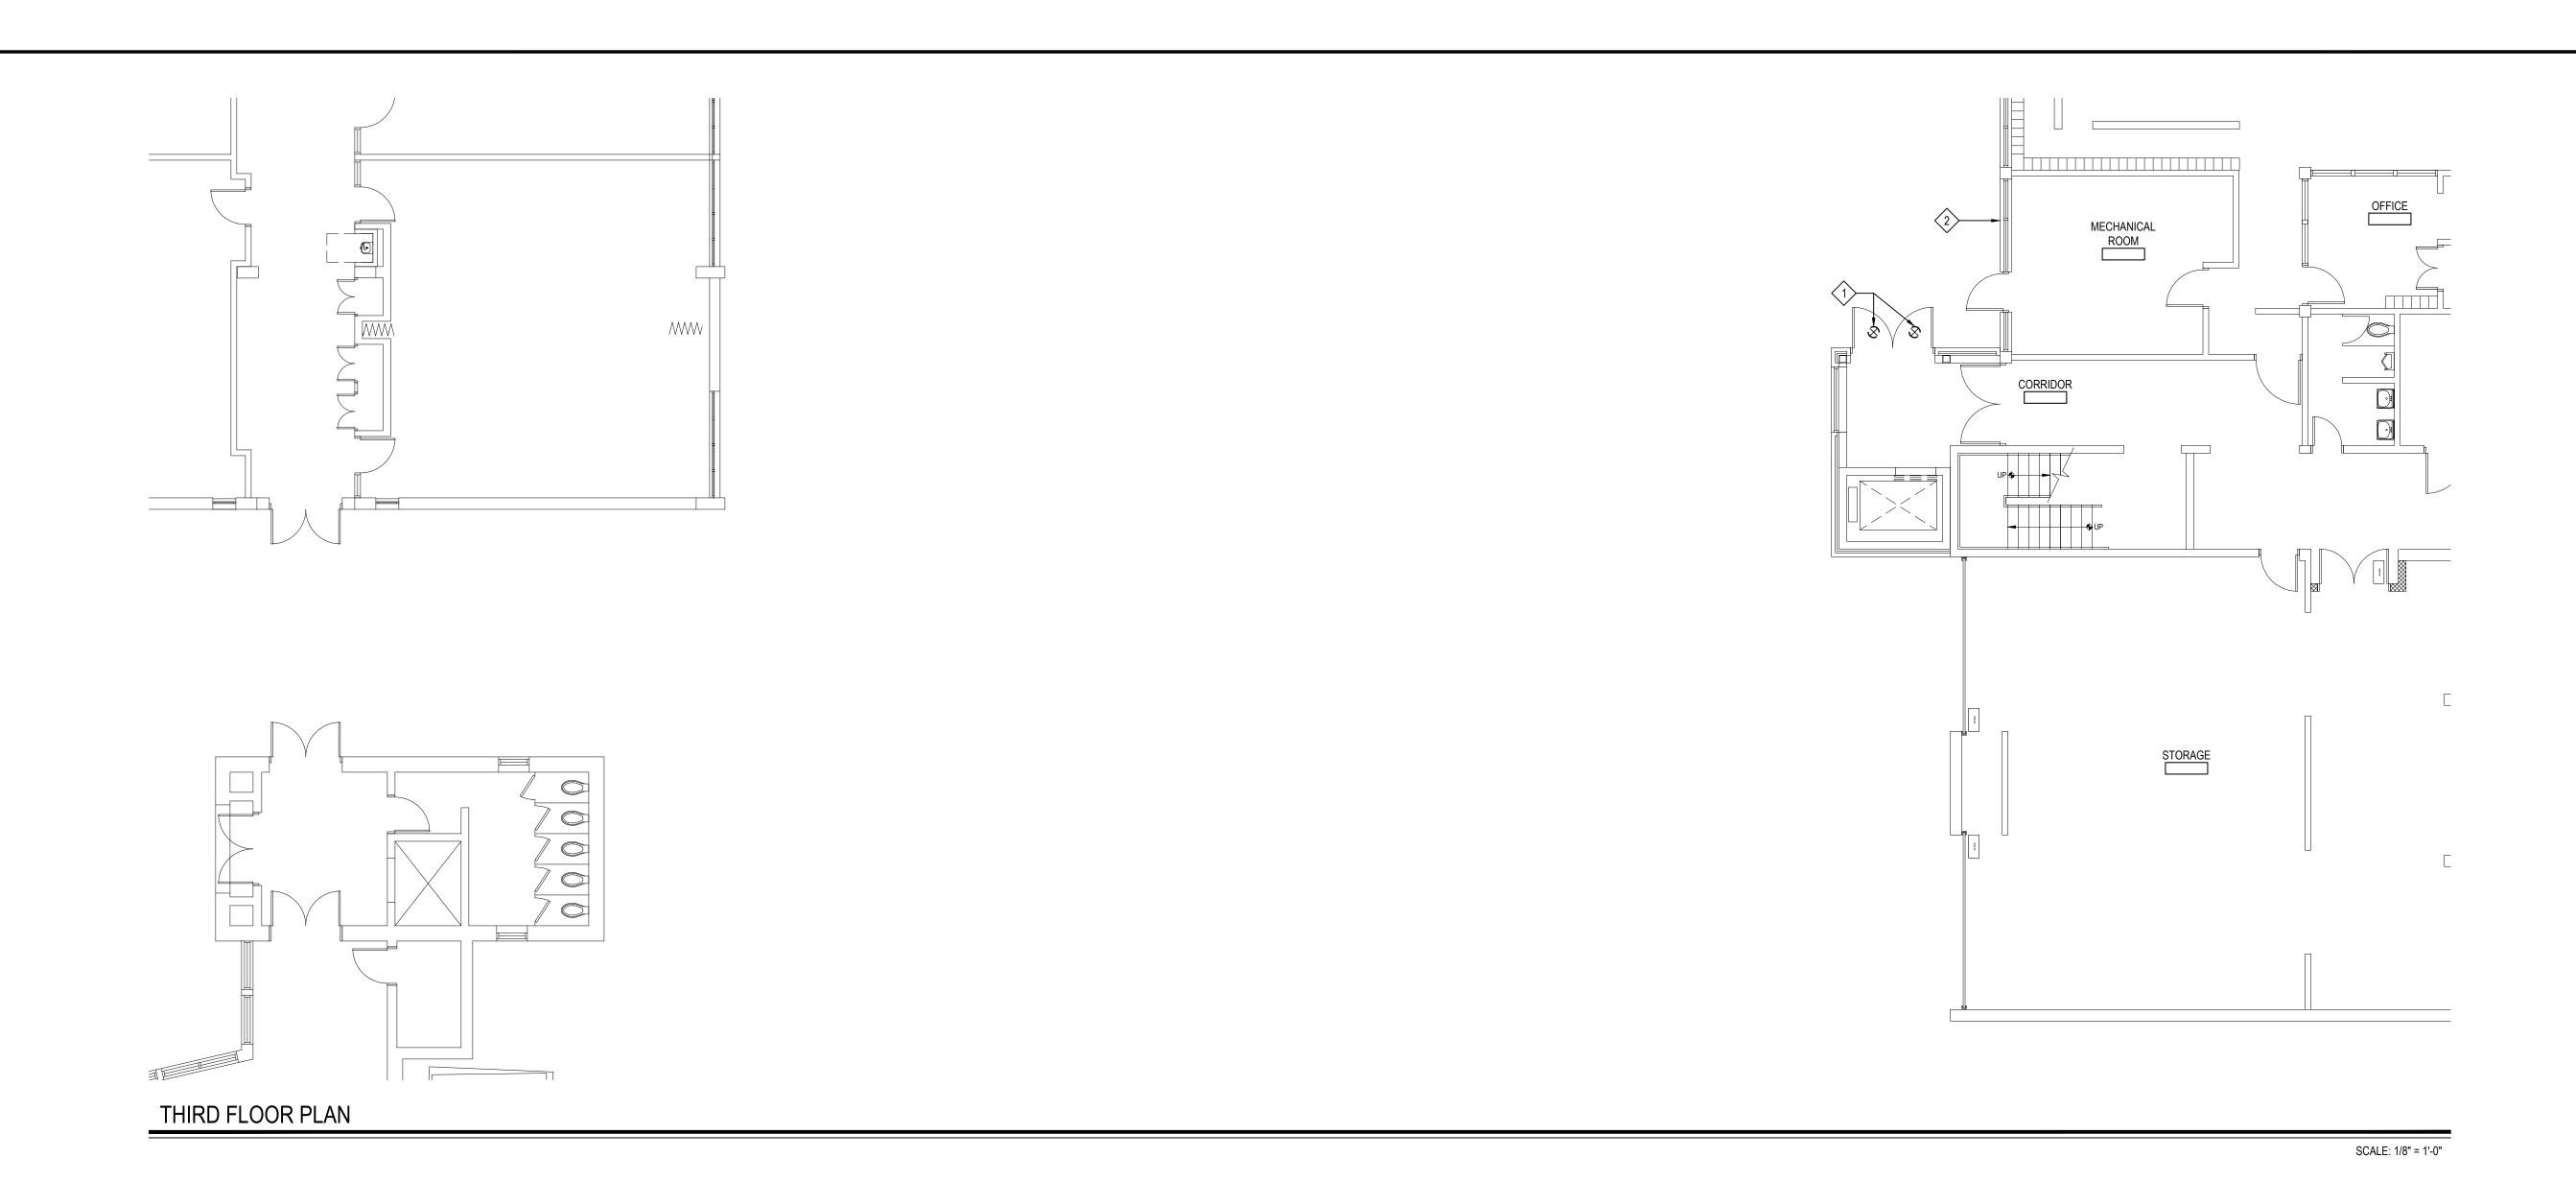

ELECTRICAL DEMOLITION KEY NOTES:


E.C. TO DISCONNECT AND SAFE OFF EXISTING LIGHT FIXTURE. IF CIRCUIT SERVES ANOTHER DEVICE, MAINTAIN CIRCUIT CONTINUITY. IF CIRCUIT IS UNUSED, PULL BACK WIRING AND LABEL BREAKER AS SPARE.

E.C. TO REROUTE ALL ELECTRICAL CONDUITS CLEAR OF NEW COVERED WALKWAY CONSTRUCTION. EXTEND/SHORTED WIRING AS NEEDED.

NOTICE

THESE DRAWINGS ARE BASED ON CONSTRUCTION DRAWINGS NOT PREPARED BY BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PC. AND, THEREFORE, MAY NOT REPRESENT THE CONDITIONS AS CONSTRUCTED AT THE TIME. ALL EXISTING CONDITIONS SHOWN ARE REPRESENTED AS SUGGESTIVE INFORMATION AS THEY MAY NOT HAVE BEEN BUILT AND DETAILED PER THE ORIGINAL DOCUMENTS OR PER THE OWNER'S INFORMATION.

REV. DATE

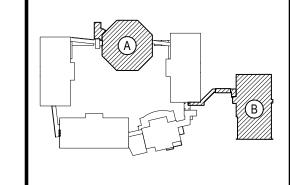

KEY PLAN

NOT TO SCALE

PHASE 2 - BOND IMPROVEMENTS
FOX LANE MIDDLE SCHOOL
TOWN of BEDFORD / WESTCHESTER COUNTY

DEMOLITION PLAN - WALKWAY CANOPY


CHECK BY: LW

NOTICE

THIS DRAWING, PREPARED FOR THE SPECIFIC PROJECT INDICATED IS AN INSTRUMENT OF SERVICE AND THE PROPERTY OF BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PC. INFRINGEMENT OR ANY USE OF THIS DRAWING FOR ANY OTHER PROJECT IS PROHIBITED. ANY ALTERATION OR REPRODUCTION OF THIS DOCUMENT IS ALSO PROHIBITED WITHOUT THE WRITTEN CONSENT OF THE ARCHITECT OR ENGINEER.

DRAWING BY: RP




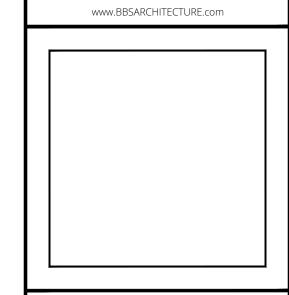


SED No.	66-01-02-06-0-007-013
DISTRICT	BEDFORD CENTRAL SCHOOL DISTRICT
PROJECT	PHASE 2 - BOND IMPROVEMENTS
DWG TITLE	DEMOLITION PLAN - WALKWAY CANOPY
SCALE:	AS NOTED

DATE:	APRIL 2024	
BID PICK-UP:	FEBRUARY 24, 2025	
FILE No:	23-131b	FLMS

E1.02

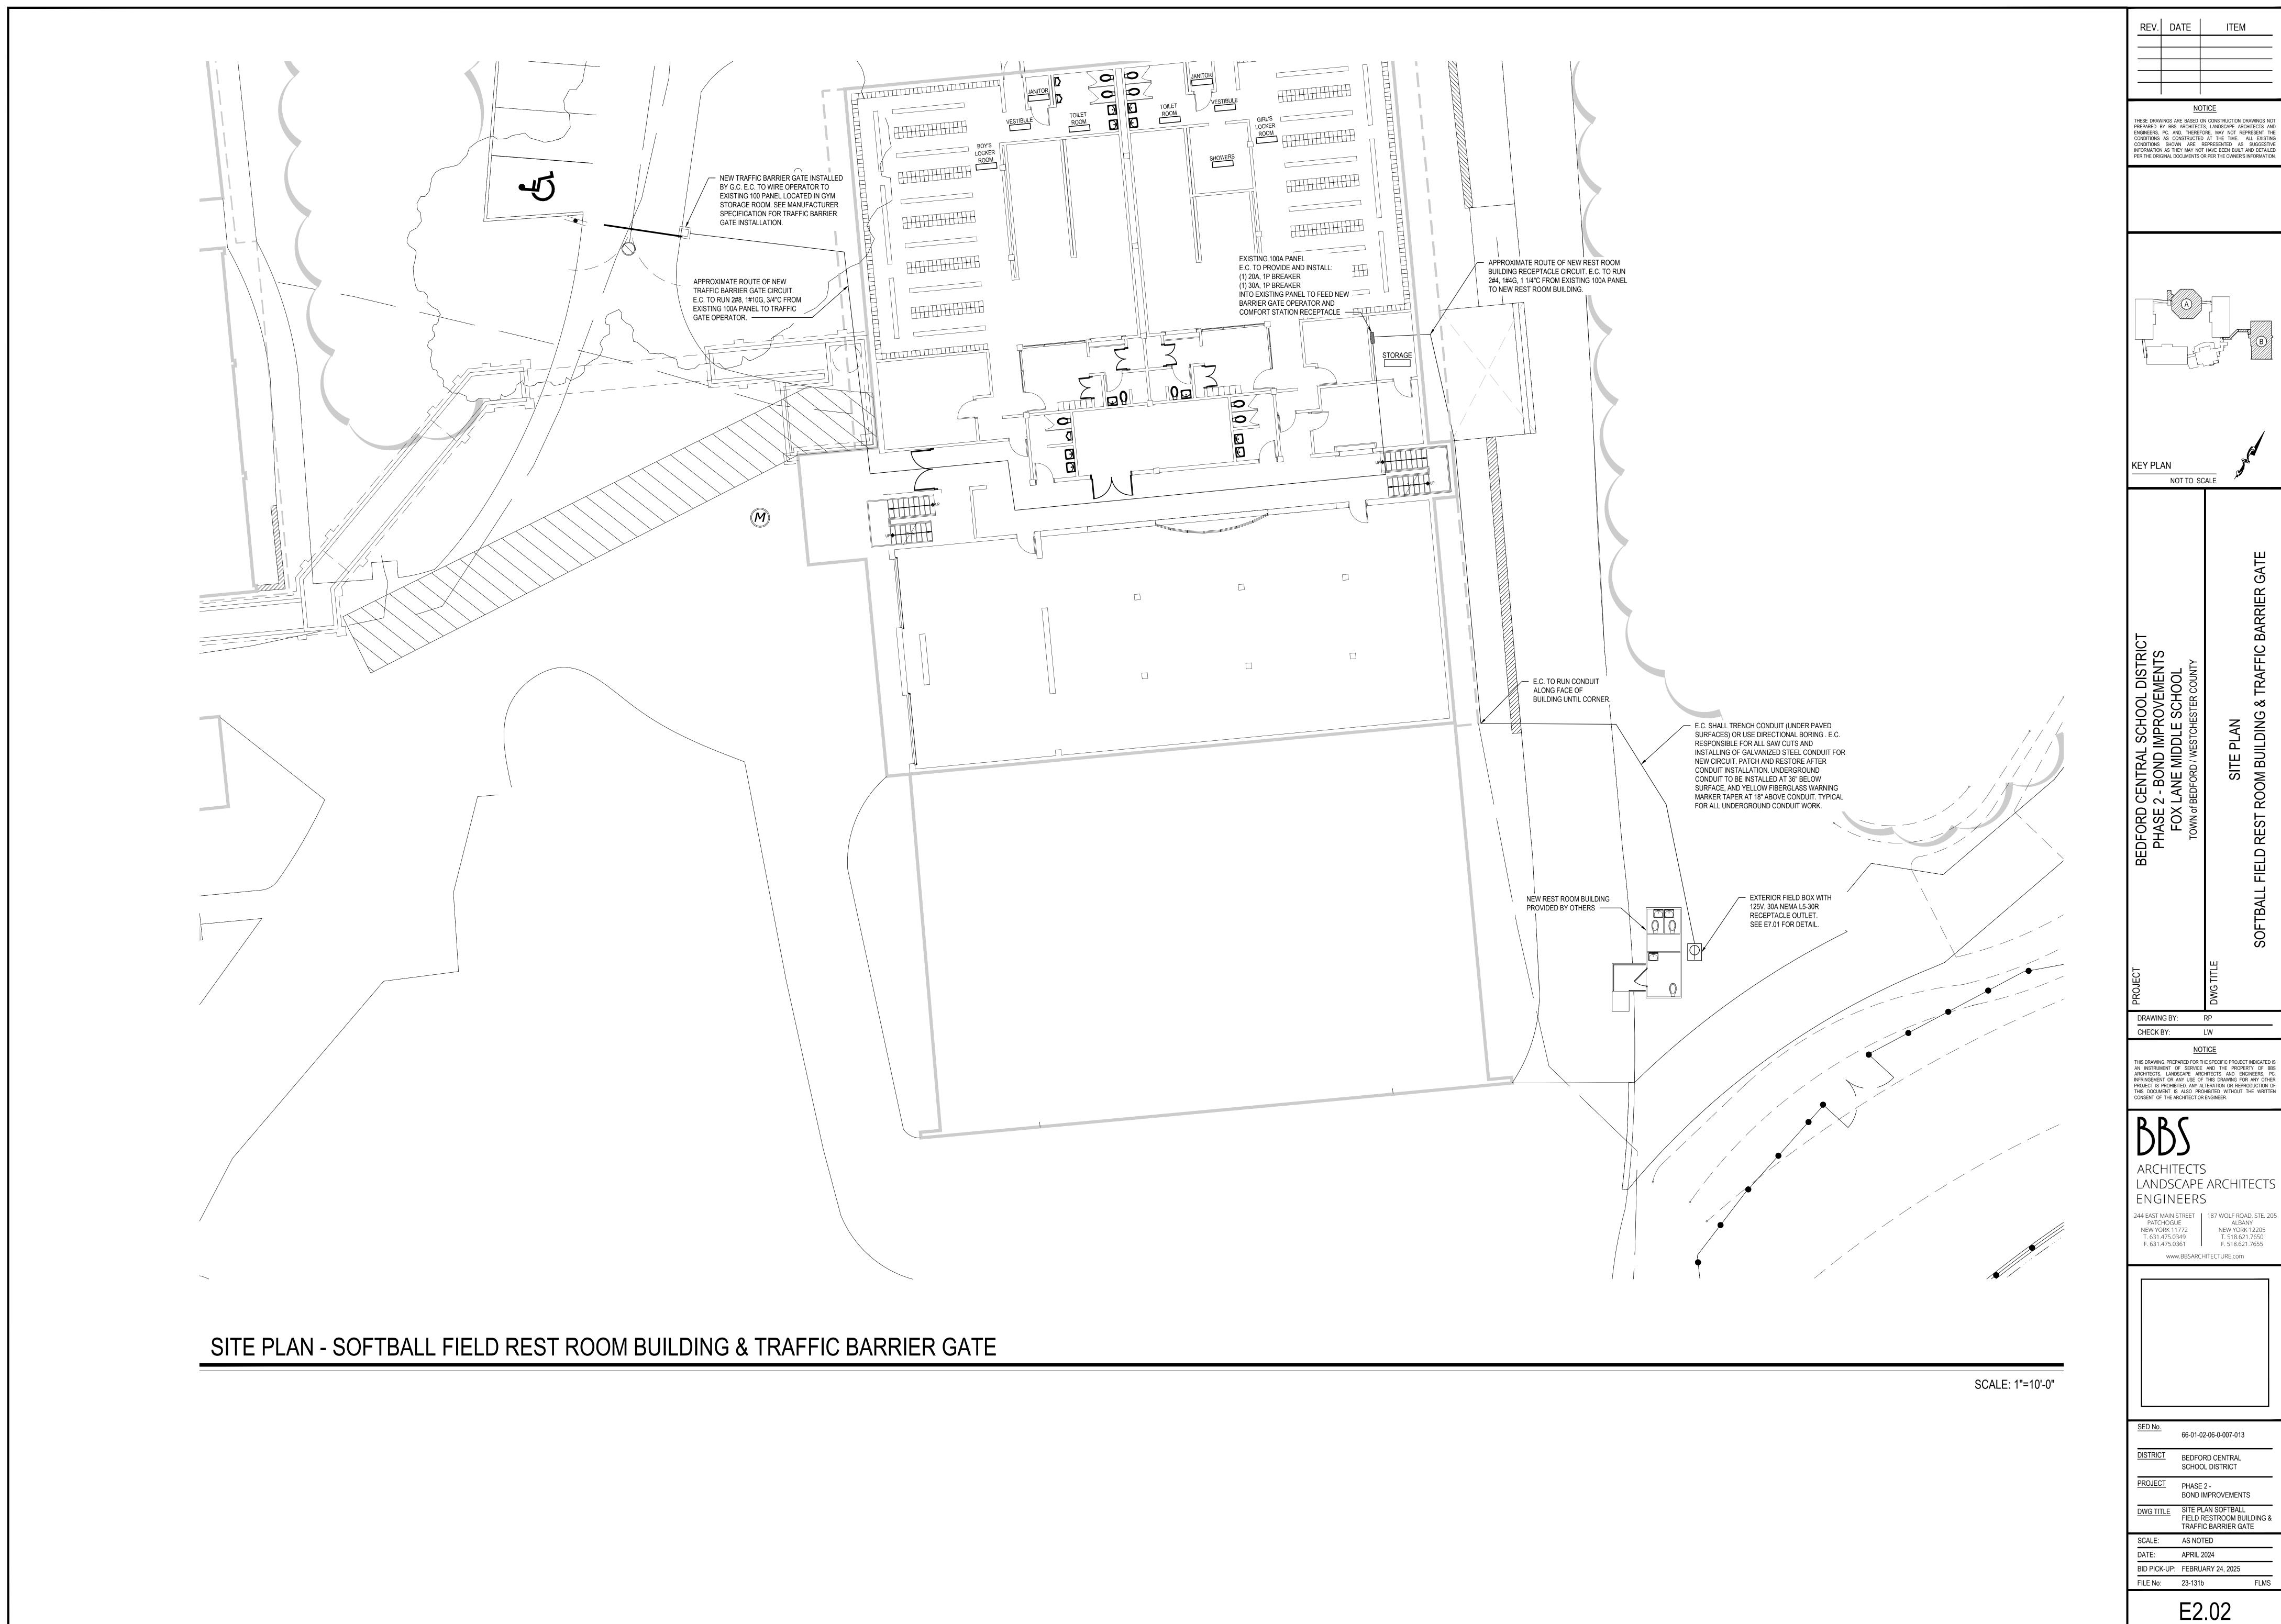

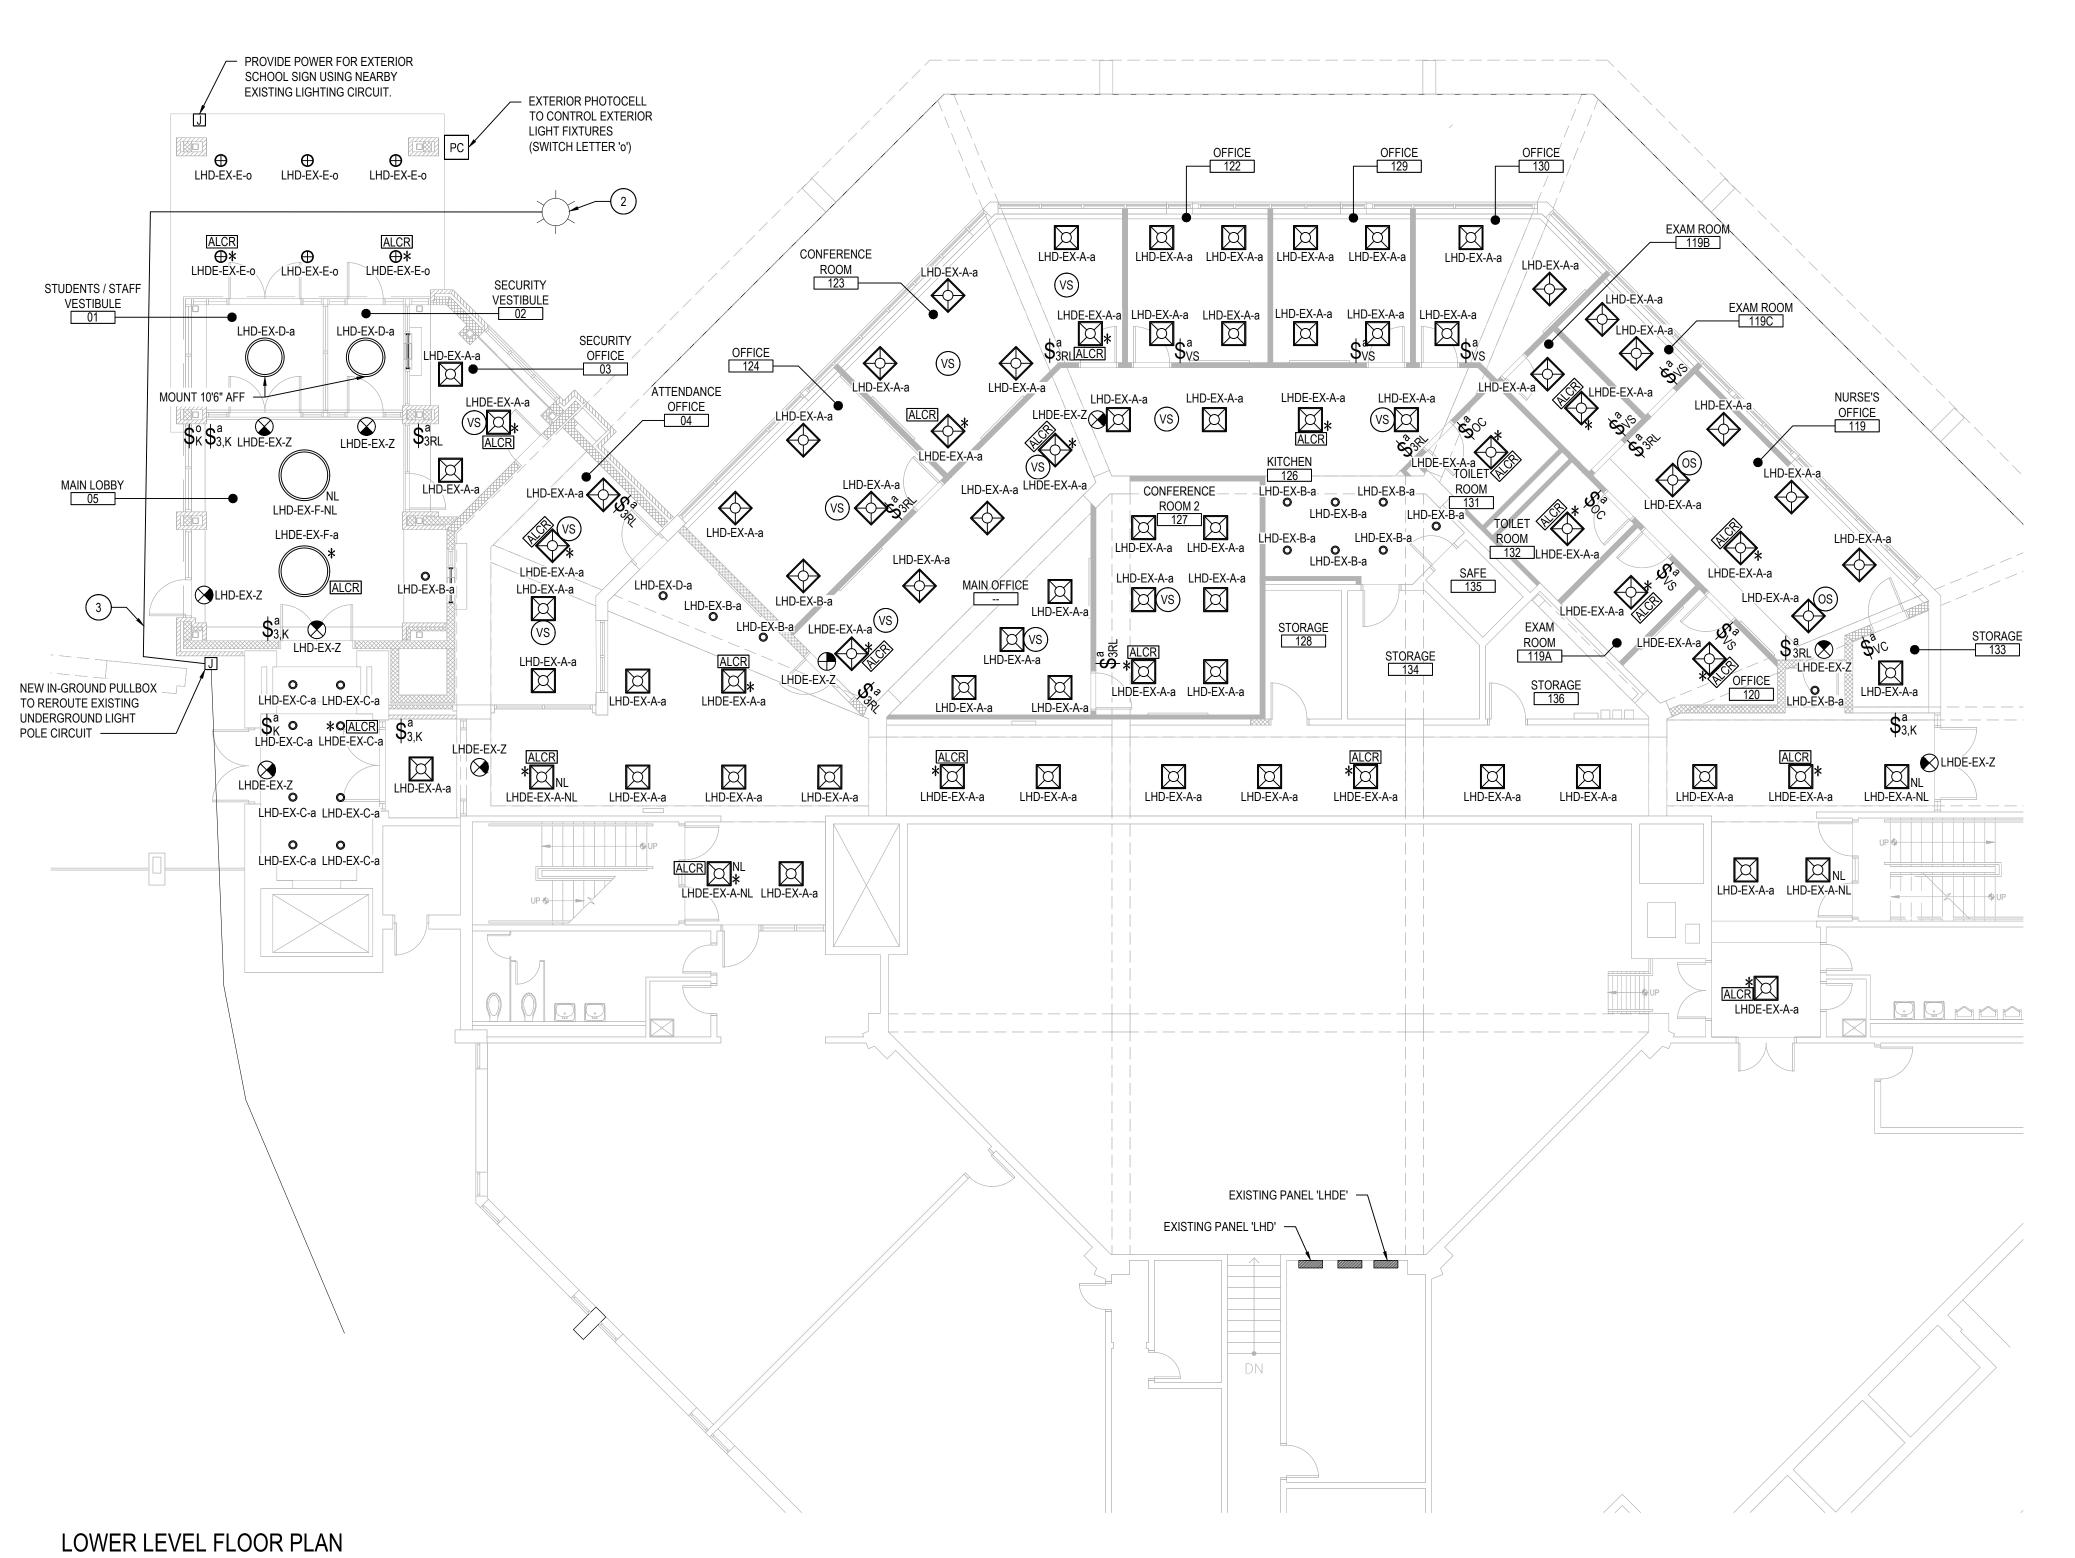

MUSIC CLASSROOM

LHD EX.Aa

LHD E

SCALE: 1/8" = 1'-0"

SCALE: 1/8" = 1'-0"

SCALE: 1/8" = 1'-0"

ELECTRICAL PROPOSED GENERAL NOTES:

1. ALL LIGHT FIXTURES DENOTED WITH AN ASTERISK * SHALL BE WIRED TO EMERGENCY GENERATOR PANEL SHOWN BY LIGHT FIXTURE WIRING FORMAT. THE EXISTING GENERATOR MET NFPA 110 REQUIREMENT (LESS THAN 10 SECONDS TO PROVIDE EMERGENCY LIGHTING).

2. NEW LIGHT FIXTURES BEING POWERED BY EXISTING CIRCUITS SHALL USE ALL NEW WIRING AND CONDUIT. RETAIN CONTINUITY OF LIGHT FIXTURES OUTSIDE THE WORK SCOPE. PROVIDE AND INSTALL NEW BREAKERS INTO EXISTING PANEL POSITIONS.

3. E.C. TO PROVIDE POWER PACKS FOR ALL NEW LIGHTING AS REQUIRED. SEE DRAWING E7.02 FOR LIGHTING CONTROL DETAILS.4. WHERE NECESSARY, E.C. SHALL RUN ALL EXPOSED CONDUITS AS CLOSE TO

5.CONTRACTOR SHALL CONNECT THE EXIT SIGNS DIRECTLY TO THE ASSOCIATED LIGHTING CIRCUITS AHEAD OF ANY LIGHTING SWITCHES, CONTACTORS, ETC.. THE EXIT SIGNS BATTERY SHOULD LAST MINIMUM 90 MINUTES.

EXPOSED BEAMS AS POSSIBLE TO MAINTAIN AESTHETICS OF THE RENOVATED

ELECTRICAL DEMOLITION KEY NOTES:

- THE LINEAR LIGHTS IN THIS ROOM SHALL BE MOUNTED SUCH THAT THE BOTTOM OF THE FIXTURE IS FLUSH WITH THE LOWER CEILING RIBS WITHIN.
- E.C. TO RELOCATE EXISTING LIGHT POLE CLEAR OF NEW VESTIBULE ADDITION.
 CONNECT TO REROUTED EXISTING CIRCUIT. COORDINATE WITH NEW SITE
 WORK. ALL EXCAVATION, BACKFILL, AND COMPACTION BY E.C.
- 3 E.C. TO REROUTE AND EXTEND EXISTING UNDERGROUND LIGHT POLE CIRCUIT AROUND NEW VESTIBULE FOUNDATION AND INTO RELOCATED LIGHT POLE. MATCH EXISTING CIRCUIT SIZE
- WHEN REINSTALLING EXISTING FIXTURE, REWIRE TO NEARBY GENERATOR PANEL CIRCUIT AND CONTROLS. EXTEND/SHORTEN WIRING AS NEEDED.
- 5 WIRE TO EXISTING CORRIDOR LIGHTING CIRCUIT AND CONTROLS.

<u>LIGHTING SCHEDULE</u>				
TYPE	SYMBOL	DESCRIPTION		
Α		2'x2' RECESSED LIGHTING TROFFER BY DAY-BRITE. 28 WATTS, 3500K, 3800 LUMENS. MODEL #2FGXG-38L-835-2'-RS-UNV-DIM		
AE		2'x2' RECESSED LIGHTING TROFFER W/90 MIN EMERGENCY BATTERY PACK BY DAY-BRITE. 28 WATTS, 3500K, 3800 LUMENS. MODEL #2FGXG-38L-835-2'-RS-UNV-DIM-BSL6LST		
В		LOW PROFILE DIRECT LUMINAIRE BY CORONET LED. 7 WATTS/FT, 0-10 DIMMING DRIVER, 677 LUMENS/FT. LENGTH OF FIXTURE VARIES BY SECTION. MODEL #LS1LP-X-35-MED-UNV-DB-W-AC-FL-NA-NA		
С	0	4-INCH LED DOWNLIGHT BY CSL LIGHTING. 12.3W, 0-10 DIMMING DRIVER, 1485 LUMENS. MODEL #NU4-RD-SW-15LM-35K-80-50D-CL-WH-WH-NC-UNV-DIM10		
D		3' RING LIGHTING FIXTURE BY CORONET LED. 130 WATTS, 3500K, 5350 DIRECT/INDIRECT LUMENS. RAL 3001 POWDER COAT MODEL #PRD-UPDN-3-35-MED-MED-UNV-DB-CC-AC.CENT-SD-SD		
E	8	DOWNLIGHT BY WE-EF 28 WATTS, 2542 LUMENS, 4000K, 0-10V DIMMING DRIVER MODEL #DOC120-FT-LED-134-6259		
F		4' RING LIGHTING FIXTURE BY CORONET LED. 138 WATTS, 3500K, 13007 LUMENS. RAL 3001 POWDER COAT MODEL #PRD-4-35-MED-UNV-DB-CC-SM-SD		
Z	\odot	LED EXIT SIGN W/ 90-MINUTE EMERGENCY BATTERY BY ATG LED LIGHTING. MODEL #EES01-R-1-WH		

	PANEL NAME/ EXISTING CIRCUIT	CKT BKR/ EXISTING CIRCUIT GROUPING	FIXTURE TYPE	SWITCH LETTER
P1-1-AE-b	"P1"	"1"	"AE"	"b"
	"EX"	"EX"	"AE"	"EX"


LIGHTING CONTROLS				
SYMBOL	DESCRIPTION			
a # ()	LOW VOLTAGE WALL SWITCH BY SENSORWORX: LOWER CASE LETTER (TOP) INDICATES SWITCHING DESIGNATION UPPER CASE LETTER(S) OR NUMBER SUBSCRIPTS (BOTTOM): 3 = THREE WAY SWITCH M = MOMENTARY CONTACT SWITCH K = KEY SWITCH - #SWX-KS-MOM 3RL = 3 BUTTON CONTROLS - MODEL #SWX-854-B-WH VS = VACANCY PIR SENSOR DIMMER - MODEL #SWX-103-D-WH VC = VACANCY PIR SENSOR SWITCH - MODEL #SWX-103-WH OC = OCCUPANCY PIR SENSOR SWITCH - MODEL #SWX-101-WH			
(5)	CEILING MOUNTED OCCUPANCY SENSOR BY SENSORWORX. WIRE AS AUTO ON/AUTO OFF UNLESS OTHERWISE NOTED. PROVIDE POWER PACKS AS REQUIRED. MODEL #SWX-201-B			
ALCR	EMERGENCY POWER CONTROL FOR DIMMABLE LOADS MODEL #SWX-EPC-A-2-D			
PC	EMERGENCY POWER CONTROL FOR DIMMABLE LOADS MODEL #SWX-LCS624D			

	•	
<u>NOTICE</u>		
THESE DRAWINGS ARE BASED ON CONSTRUCTION DRAWINGS NOT		

NOTICE

THESE DRAWINGS ARE BASED ON CONSTRUCTION DRAWINGS NOT PREPARED BY BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PC. AND, THEREFORE, MAY NOT REPRESENT THE CONDITIONS AS CONSTRUCTED AT THE TIME. ALL EXISTING CONDITIONS SHOWN ARE REPRESENTED AS SUGGESTIVE INFORMATION AS THEY MAY NOT HAVE BEEN BUILT AND DETAILED PER THE ORIGINAL DOCUMENTS OR PER THE OWNER'S INFORMATION.

REV. DATE

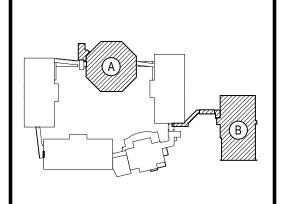

KEY PLAN

NOT TO SCALE

FOX LANE MIDDLE SCHOOL

TOWN of BEDFORD / WESTCHESTER COUNTY

PKOJECI DWG TITLE

CHECK BY: LW

NOTICE

THIS DRAWING, PREPARED FOR THE SPECIFIC PROJECT
AN INSTRUMENT OF SERVICE AND THE PROPER


THIS DRAWING, PREPARED FOR THE SPECIFIC PROJECT INDICATED IS AN INSTRUMENT OF SERVICE AND THE PROPERTY OF BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PC INFRINGEMENT OR ANY USE OF THIS DRAWING FOR ANY OTHER PROJECT IS PROHIBITED. ANY ALTERATION OR REPRODUCTION OF THIS DOCUMENT IS ALSO PROHIBITED WITHOUT THE WRITTEN CONSENT OF THE ARCHITECT OR ENGINEER.

BBS ARCHITECTS

LANDSCAPE ARCHITECTS
ENGINEERS

244 EAST MAIN STREET | 100 GREAT OAKS BLVD.
PATCHOGUE | SUITE 115, ALBANY

NEW YORK 11772 NEW YORK 12203 T. 631.475.0349 T. 518.621.7650 F. 631.475.0361 F. 518.621.7655 www.BBSARCHITECTURE.com

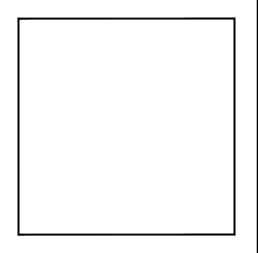

SED No.	66-01-02-06-0-007-013
DISTRICT	BEDFORD CENTRAL SCHOOL DISTRICT
PROJECT	PHASE 2 - BOND IMPROVEMENTS
DWG TITLE	
	PROPOSED LIGHTING PLANS

DATE: APRIL 2024


BID PICK-UP: FEBRUARY 24, 2025

FILE No: 23-131b FLM

SCALE: AS NOTED

E3.01

	SCALE: 1/0 = 1-0
BOY'S TOILET ROOM	
LHDE-EX-Z WOOD SHOP / PREP ROOM(OS) LHD-EX-B-a MOOD SHOP / SHOP SHOP SHOP SHOP SHOP SHOP SHOP SHOP	
INSTRUCTION CLASSROOM CLASSSROOM CLASSSROOM THE CLASSSROOM THE CLASSSROOM THE CLASS TH	
STEAM / ROBOTICS LAB ROBOTICS L	
*## ### ### ### ### ### ### ### #### #	
PROJECT STORAGE ROOM 317A	

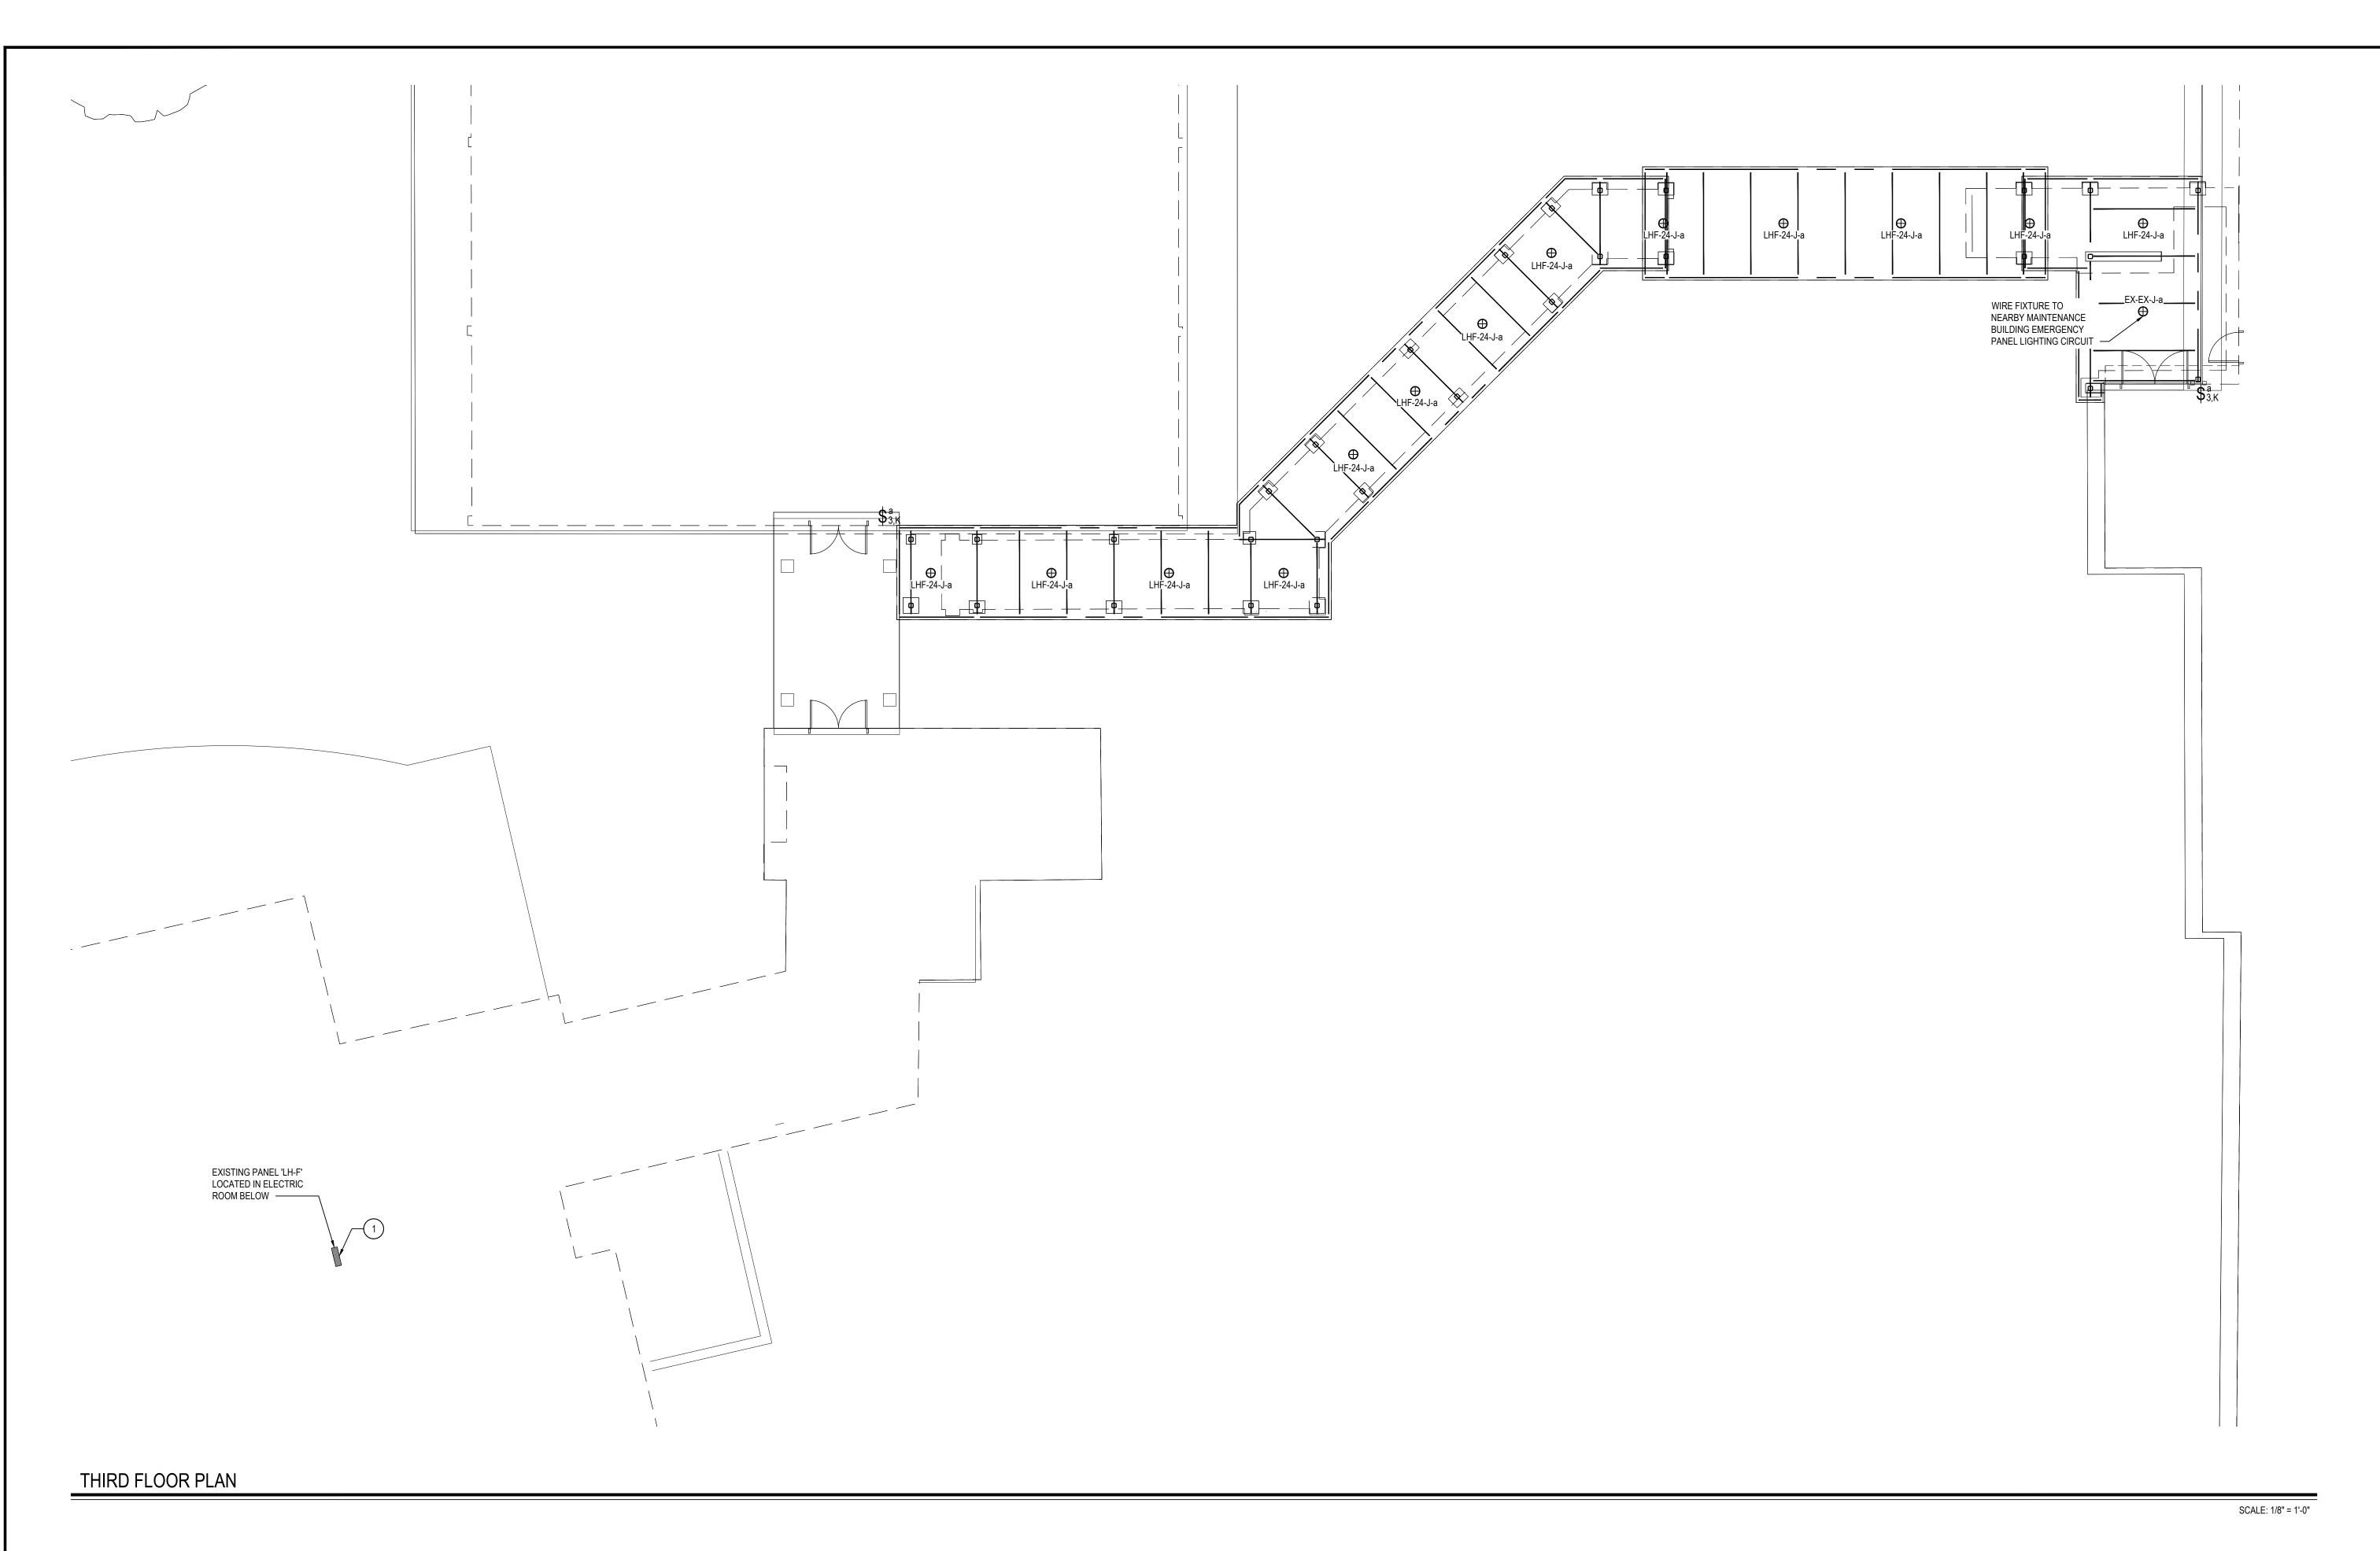

ELECTRICAL PROPOSED GENERAL NOTES:

1. SEE DRAWING E7.02 FOR LIGHTING CONTROL DETAILS.

2. REFER TO DRAWING E3.01 FOR FULL LIGHT FIXTURE AND LIGHTING CONTROL

ELECTRICAL DEMOLITION KEY NOTES:

1 E.C. TO PROVIDE AND INSTALL NEW 20A BREAKER INTO EXISTING PANEL 'LH-F' TO FEED NEW CANOPY LIGHTS. BREAKER SHALL BE COMPATIBLE WITH EXISTING

	LIGHT FIXTURE WIRING FORMAT				
		PANEL NAME/ EXISTING CIRCUIT	CKT BKR/ EXISTING CIRCUIT GROUPING	FIXTURE TYPE	SWITCH LETTER
P1-1- <i>A</i>	P1-1-AE-b	"P1"	"1"	"AE"	"b"
		"EX"	"1"	"AE"	"b"

	REV.	DATE	דו
l '			

<u>NOTICE</u>

THESE DRAWINGS ARE BASED ON CONSTRUCTION DRAWINGS NOT PREPARED BY BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PC. AND, THEREFORE, MAY NOT REPRESENT THE CONDITIONS AS CONSTRUCTED AT THE TIME. ALL EXISTING CONDITIONS SHOWN ARE REPRESENTED AS SUGGESTIVE INFORMATION AS THEY MAY NOT HAVE BEEN BUILT AND DETAILED PER THE ORIGINAL DOCUMENTS OR PER THE OWNER'S INFORMATION.

KEY PLAN NOT TO SCALE

DRAWING BY: RP


CHECK BY: LW NOTICE

THIS DRAWING, PREPARED FOR THE SPECIFIC PROJECT INDICATED IS AN INSTRUMENT OF SERVICE AND THE PROPERTY OF BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PC. INFRINGEMENT OR ANY USE OF THIS DRAWING FOR ANY OTHER PROJECT IS PROHIBITED. ANY ALTERATION OR REPRODUCTION OF THIS DOCUMENT IS ALSO PROHIBITED WITHOUT THE WRITTEN CONSENT OF THE ARCHITECT OR ENGINEER.

ARCHITECTS
LANDSCAPE ARCHITECTS


ENGINEERS 244 EAST MAIN STREET PATCHOGUE ALBANY
NEW YORK 11772 NEW YORK 12205
T. 631.475.0349 T. 518.621.7650
F. 631.475.0361 F. 518.621.7655


www.BBSARCHITECTURE.com

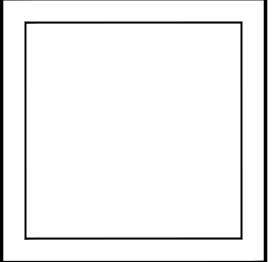

	SED No.	66-01-02-06-0-007-013
	DISTRICT	BEDFORD CENTRAL SCHOOL DISTRICT
	PROJECT	PHASE 2 - BOND IMPROVEMENTS
	DWG TITLE	PROPOSED LIGHTING PLAN - WALKWAY CANOPY

SCALE:	AS NOTED	
DATE:	APRIL 2024	
BID PICK-UP:	FEBRUARY 24, 2025	
FILE No:	23-131b	FLMS

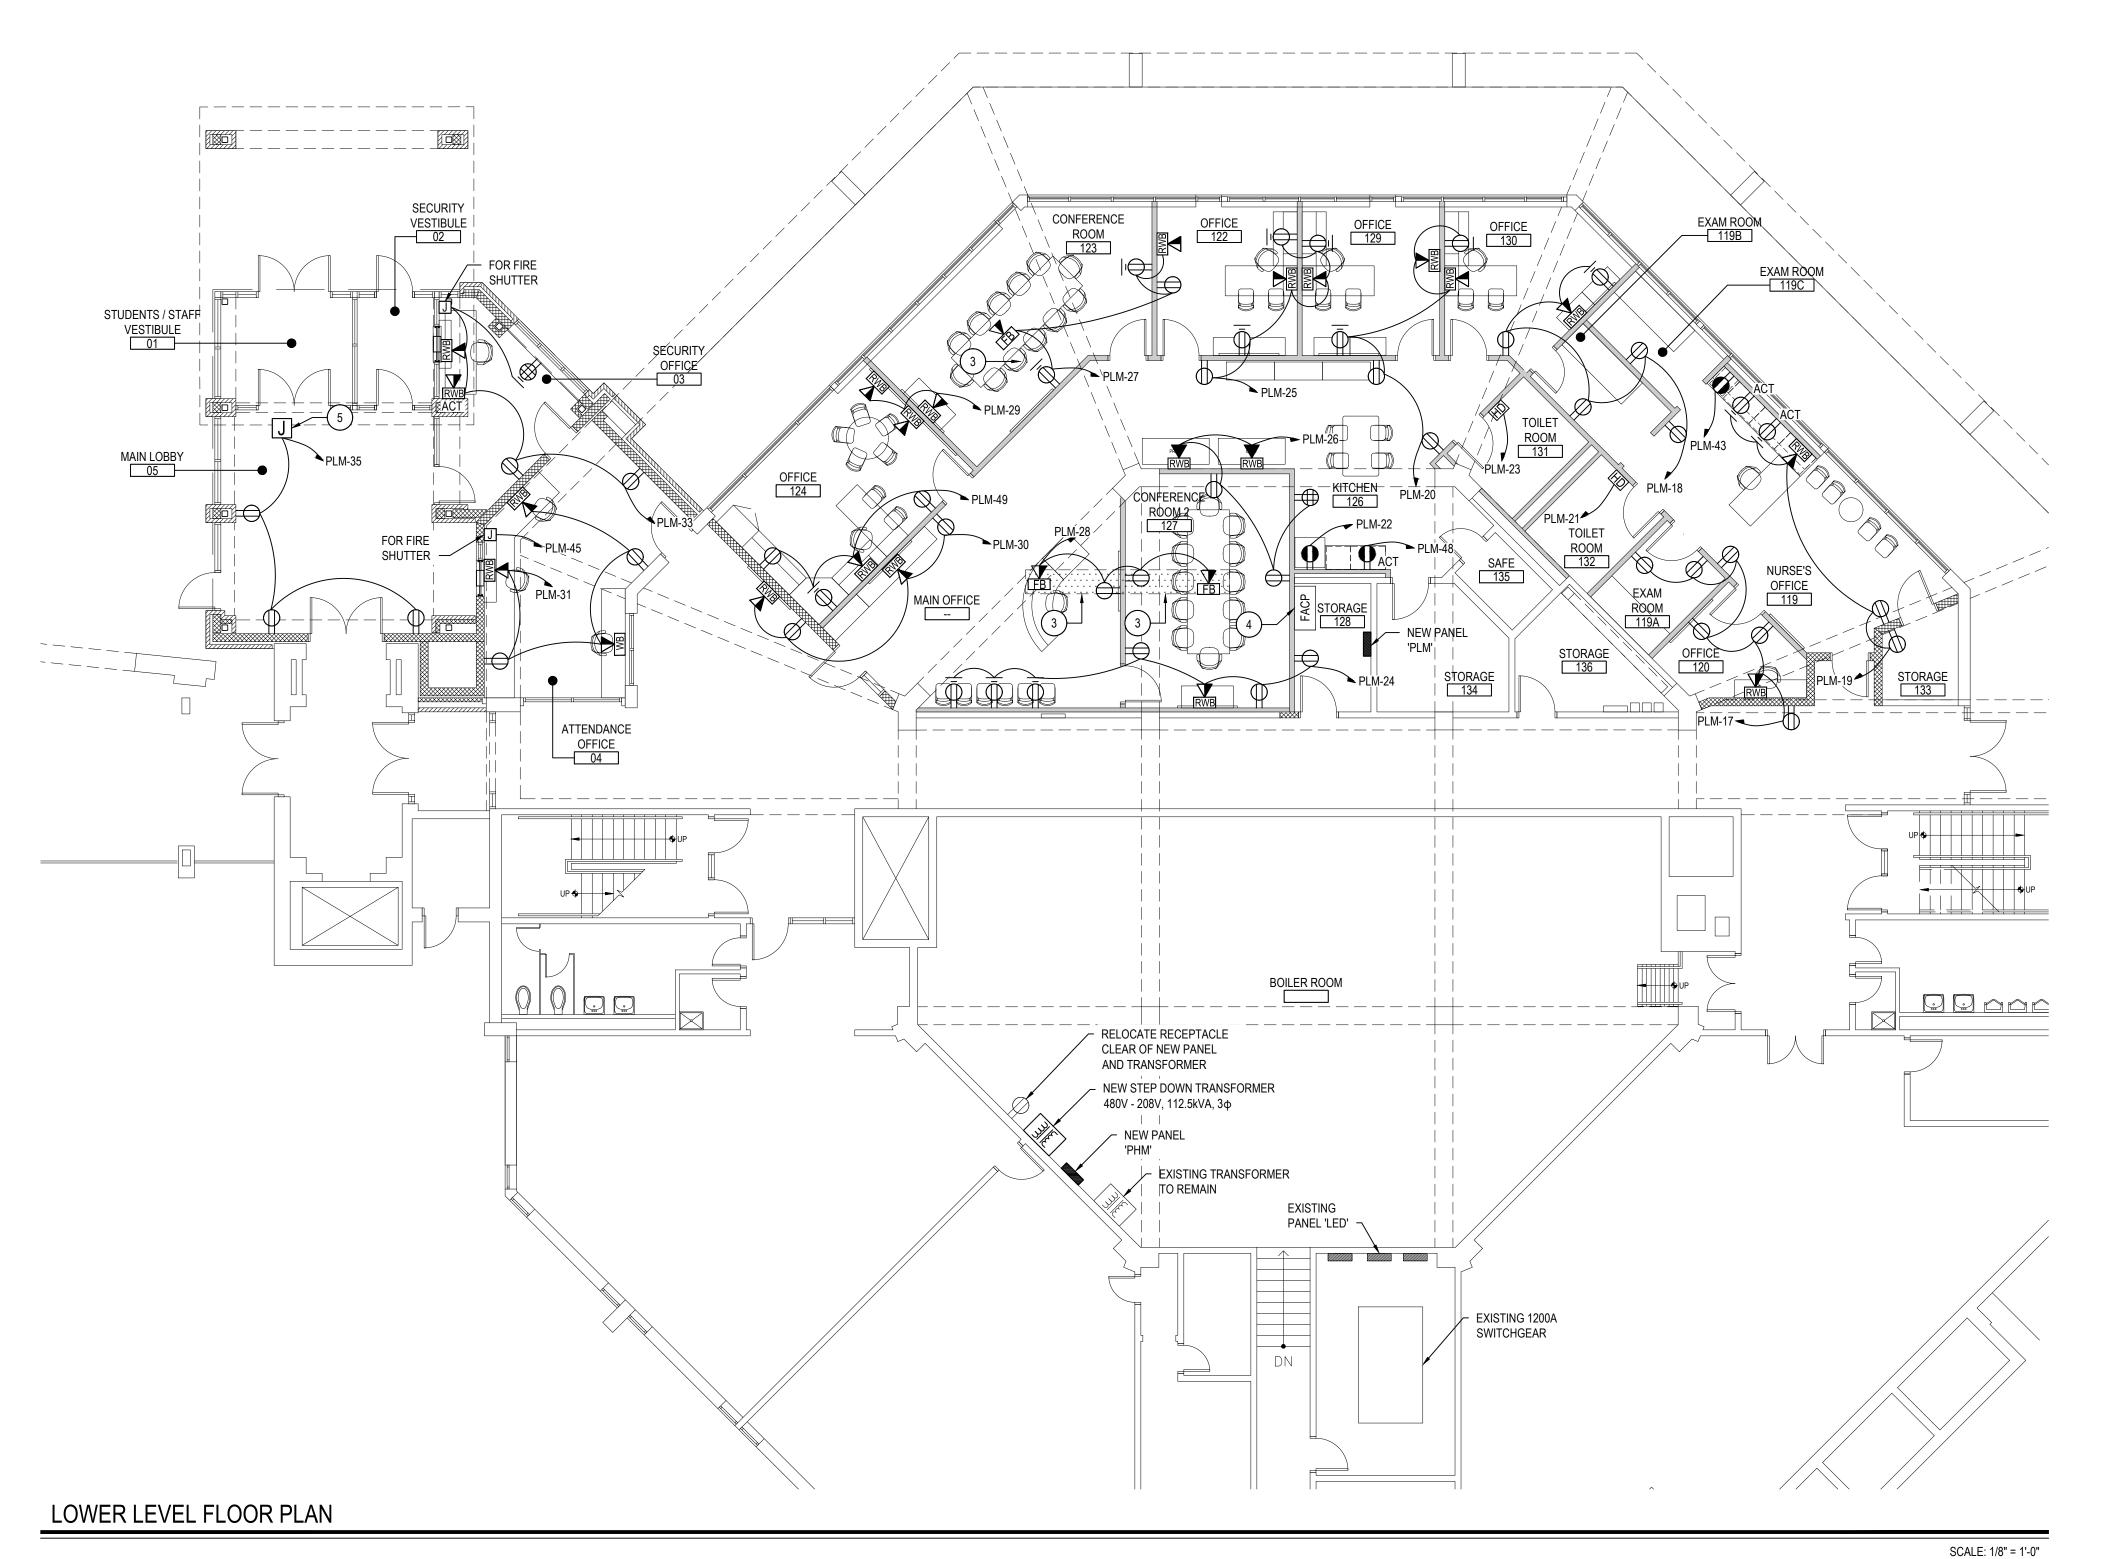

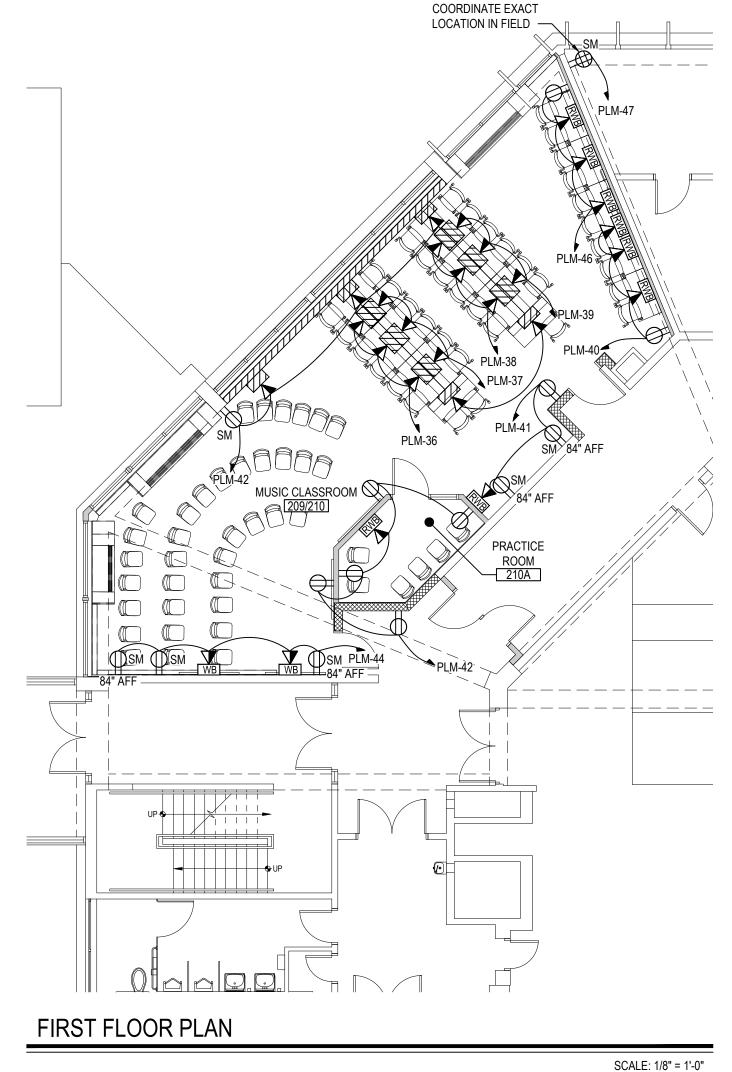

NEW QUAD FOR IDF.

ELECTRICAL PROPOSED GENERAL NOTES:

1. SEE DETAIL 5 ON E7.01 FOR CONTACTOR WIRING DIAGRAM

WHERE NECESSARY, E.C. SHALL RUN ALL EXPOSED CONDUITS AS CLOSE TO EXPOSED BEAMS AS POSSIBLE TO MAINTAIN AESTHETICS OF THE RENOVATED SPACES.

ELECTRICAL PROPOSED GENERAL NOTES:

. POWER AND DATA SERVICE WILL BE SUPPLIED TO FLOOR EQUIPMENT VIA FLOOR BOXES AND CONDUITS AS DESCRIBED AS FOLLOWS.

THE FLOOR BOXES ARE FOUR-COMPARTMENT CAST-IRON COMBINATION FLOOR BOX. THE BOX WILL CONTAIN VARIOUS WIRING SERVICES, SEE TECHNOLOGY DRAWING FOR MORE DETAILS, ALL IN QUANTITIES AS REQUIRED FOR THE SPECIFIC LOCATION/LOAD

EXPECTED TO BE 4 INCHES THICK, BUT THIS THICKNESS IS NOT CONFIRMED. THE SLOT FOR THE CONDUITS SHALL BE 12 INCHES WIDE. THE FLOOR BOX HOLE SHALL BE 18 NCHES BY 18 INCHES, MINIMUM, OR LARGER AS REQUIRED. PROVIDE A CONCRETI FOUNDATION BLOCK UNDER THE FLOOR BOX TO PROVIDE BEARING STRENGTH. PROVIDI BLOCKS UNDER THE CONDUITS AS REQUIRED TO STABILIZE AND POSITION THEM FOR FLOOR RESTORATION. PLACE CONDUITS IN THE SAND BELOW THE FLOOR POUR WITH 4 SAND OVER THE CONDUITS. USE SCHEDULE 40 PVC CONDUITS. UTILIZE THE FLOOR BOX ADJUSTING LEG SCREWS TO LEVEL THE BOX TO BE FLUSH WITH FLOOR WITH THE COVER INSTALLED, AS PER MANUFACTURER'S INSTRUCTIONS.

4. OBSERVE CAT-6 MINIMUM BENDING RADIUS IN DATA CONDUITS.

ELECTRICAL DEMOLITION KEY NOTES:

-) E.C. TO WIRE CORD REEL CIRCUITS SERVING THE ROOM THROUGH 60A CONTACTOR. WIRE CONTACTOR CIRCUIT THROUGH EMERGENCY PUSH BUTTON SO THAT IN THE EVENT THE BUTTON IS PRESSED, POWER IS CUT FROM ALL CORD REELS IN THE ROOM.
- SO THAT IN THE EVENT THE BUTTON IS PRESSED, POWER IS CUT FROM ALL MACHINES IN THE ROOM. 3) TRENCH BY E.C. E.C. TO RUN FROM INSIDE NEW WALL TO NEW FLOOR BOX IN
- (1) 1 1/2" CONDUIT FOR NEW POWER CIRCUIT (1) 1 1/2" CONDUIT FOR NEW DATA WIRING
- MOUNT ABOVE CEILING. SEE TECHNOLOGY PLANS FOR MORE INFORMATION.

FLOOR BOX CONSTRUCTION NOTES:

. POWER AND DATA SERVICE WILL BE SUPPLIED TO FLOOR EQUIPMENT VIA FLOOR BOXES AND CONDUITS AS DESCRIBED AS FOLLOWS.

3. THE EXISTING SITE CONCRETE FLOOR IS TO BE SAW CUT BY GENERAL CONTRACTOR $% \left(1\right) =\left(1\right) \left(1\right)$

- 4) RELOCATED FACP TO NEW LOCATION AND WIRE TO GENERATOR POWERED
- PROVIDE AND INSTALL JUNCTION BOX FOR CARD ACCESS CONTROLLERS AND

2. THE FLOOR BOXES ARE FOUR-COMPARTMENT CAST-IRON COMBINATION FLOOR BOX. THE BOX WILL CONTAIN VARIOUS WIRING SERVICES, SEE TECHNOLOGY DRAWING FOR MORE DETAILS, ALL IN QUANTITIES AS REQUIRED FOR THE SPECIFIC LOCATION/LOAD

FROM THE WALL TO BOX LOCATION AS REQUIRED. THE FLOOR IS EXPECTED TO BE 4 INCHES THICK, BUT THIS THICKNESS IS NOT CONFIRMED. THE SLOT FOR THE CONDUITS SHALL BE 12 INCHES WIDE. THE FLOOR BOX HOLE SHALL BE 18 INCHES BY 18 INCHES MINIMUM, OR LARGER AS REQUIRED. PROVIDE A CONCRETE FOUNDATION BLOCK UNDER THE FLOOR BOX TO PROVIDE BEARING STRENGTH. PROVIDE BLOCKS UNDER THE CONDUITS AS REQUIRED TO STABILIZE AND POSITION THEM FOR FLOOR RESTORATION. PLACE CONDUITS IN THE SAND BELOW THE FLOOR POUR WITH 4" SAND OVER THE CONDUITS. USE SCHEDULE 40 PVC CONDUITS. UTILIZE THE FLOOR BOX ADJUSTING LEG SCREWS TO LEVEL THE BOX TO BE FLUSH WITH FLOOR WITH THE COVER INSTALLED, AS PER MANUFACTURER'S INSTRUCTIONS.

4. OBSERVE CAT-6 MINIMUM BENDING RADIUS IN DATA CONDUITS.


<u>NOTICE</u> THESE DRAWINGS ARE BASED ON CONSTRUCTION DRAWINGS NOT PREPARED BY BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PC. AND, THEREFORE, MAY NOT REPRESENT THE CONDITIONS AS CONSTRUCTED AT THE TIME. ALL EXISTING CONDITIONS SHOWN ARE REPRESENTED AS SUGGESTIVE INFORMATION AS THEY MAY NOT HAVE BEEN BUILT AND DETAILED R THE ORIGINAL DOCUMENTS OR PER THE OWNER'S INFORMATION 3. THE EXISTING SITE CONCRETE FLOOR IS TO BE SAW CUT BY ELECTRICAL KEY PLAN NOT TO SCALE) E.C. TO WIRE DRILL PRESS, SAW, AND CORD REEL CIRCUITS THROUGH 100A CONTACTOR. WIRE CONTACTOR CIRCUIT THROUGH EMERGENCY PUSH BUTTON DRAWING BY: CHECK BY: LW

REV. DATE

NOTICE THIS DRAWING, PREPARED FOR THE SPECIFIC PROJECT INDICATED IS AN INSTRUMENT OF SERVICE AND THE PROPERTY OF BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PC. INFRINGEMENT OR ANY USE OF THIS DRAWING FOR ANY OTHER PROJECT IS PROHIBITED. ANY ALTERATION OR REPRODUCTION OF THIS DOCUMENT IS ALSO PROHIBITED WITHOUT THE WRITTEN CONSENT OF THE ARCHITECT OR ENGINEER.

ARCHITECTS LANDSCAPE ARCHITECTS ENGINEERS

244 EAST MAIN STREET | 100 GREAT OAKS BLVD. PATCHOGUE | SUITE 115, ALBANY NEW YORK 11772 NEW YORK 12203 T. 631.475.0349 F. 631.475.0361 F. 518.621.7655

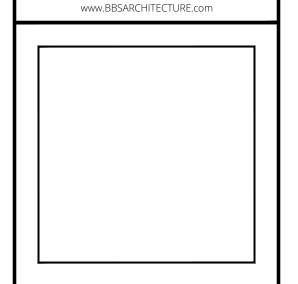


66-01-02-06-0-007-013 <u>DISTRICT</u> BEDFORD CENTRAL SCHOOL DISTRICT PROJECT PHASE 2 -BOND IMPROVEMENTS DWG TITLE


PROPOSED FLOOR PLANS SCALE: AS NOTED

BID PICK-UP: FEBRUARY 24, 2025

FILE No: 23-131b E4.01

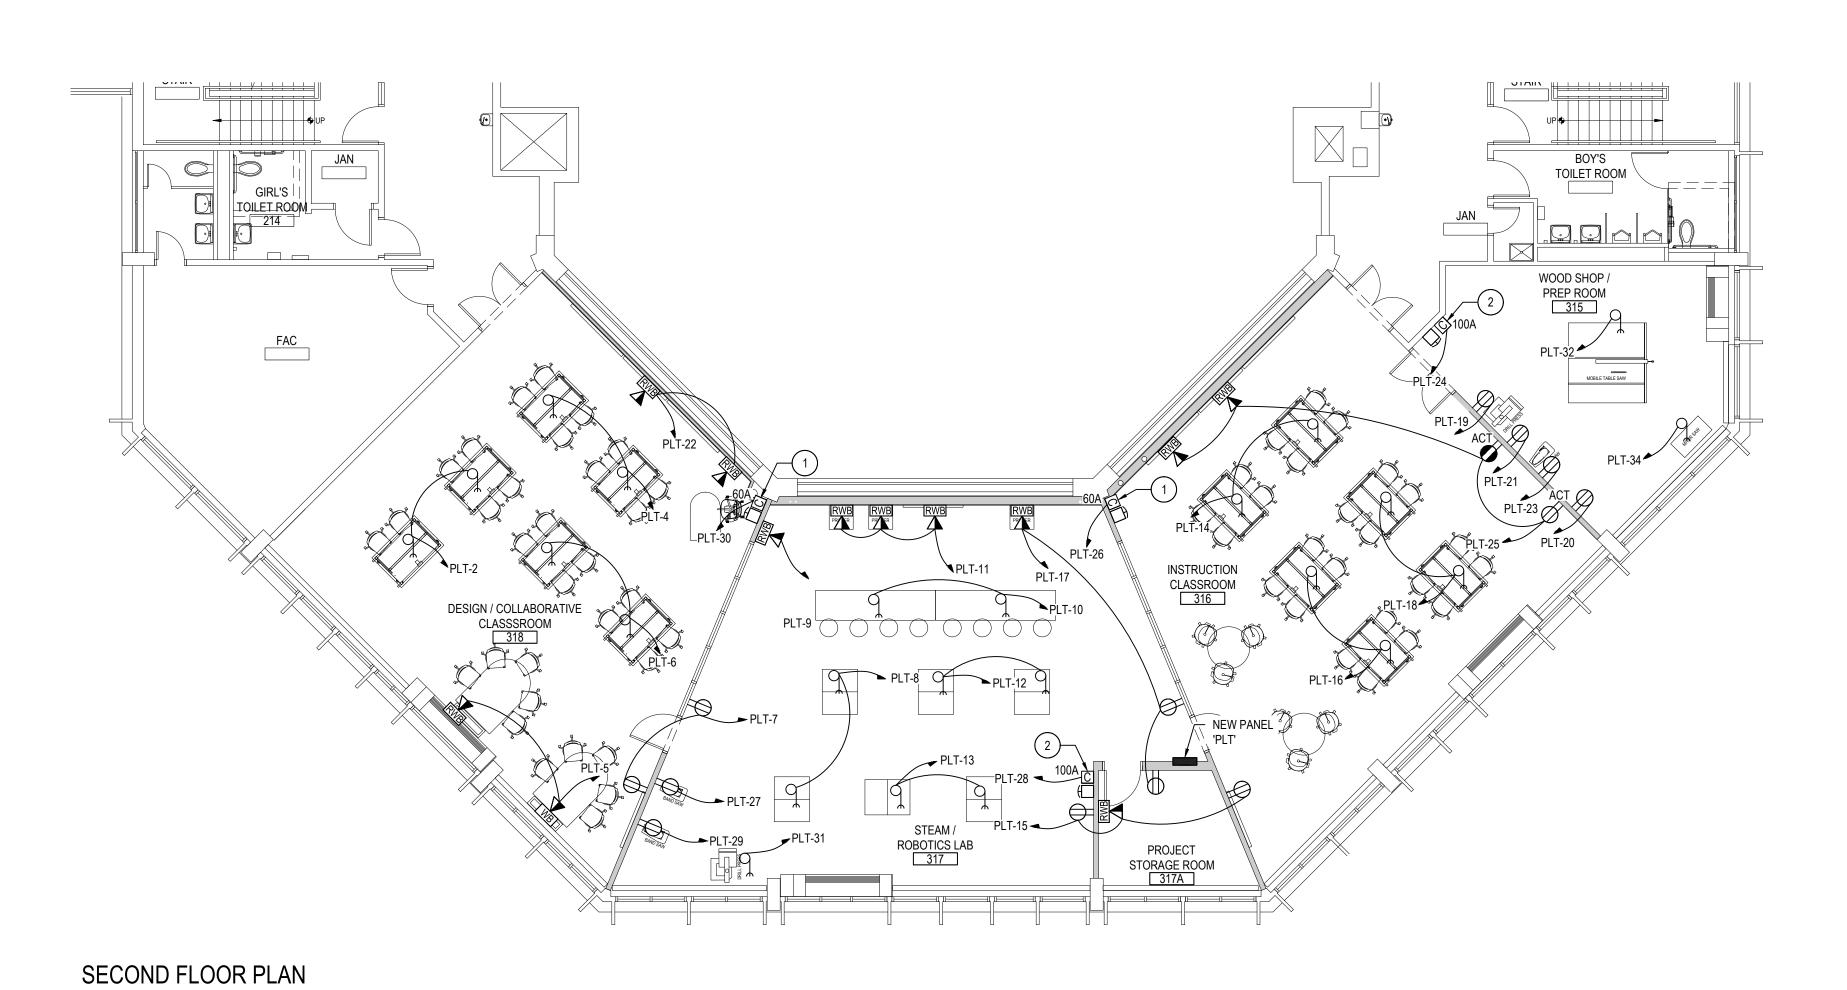

SCALE: 1/8" = 1'-0"

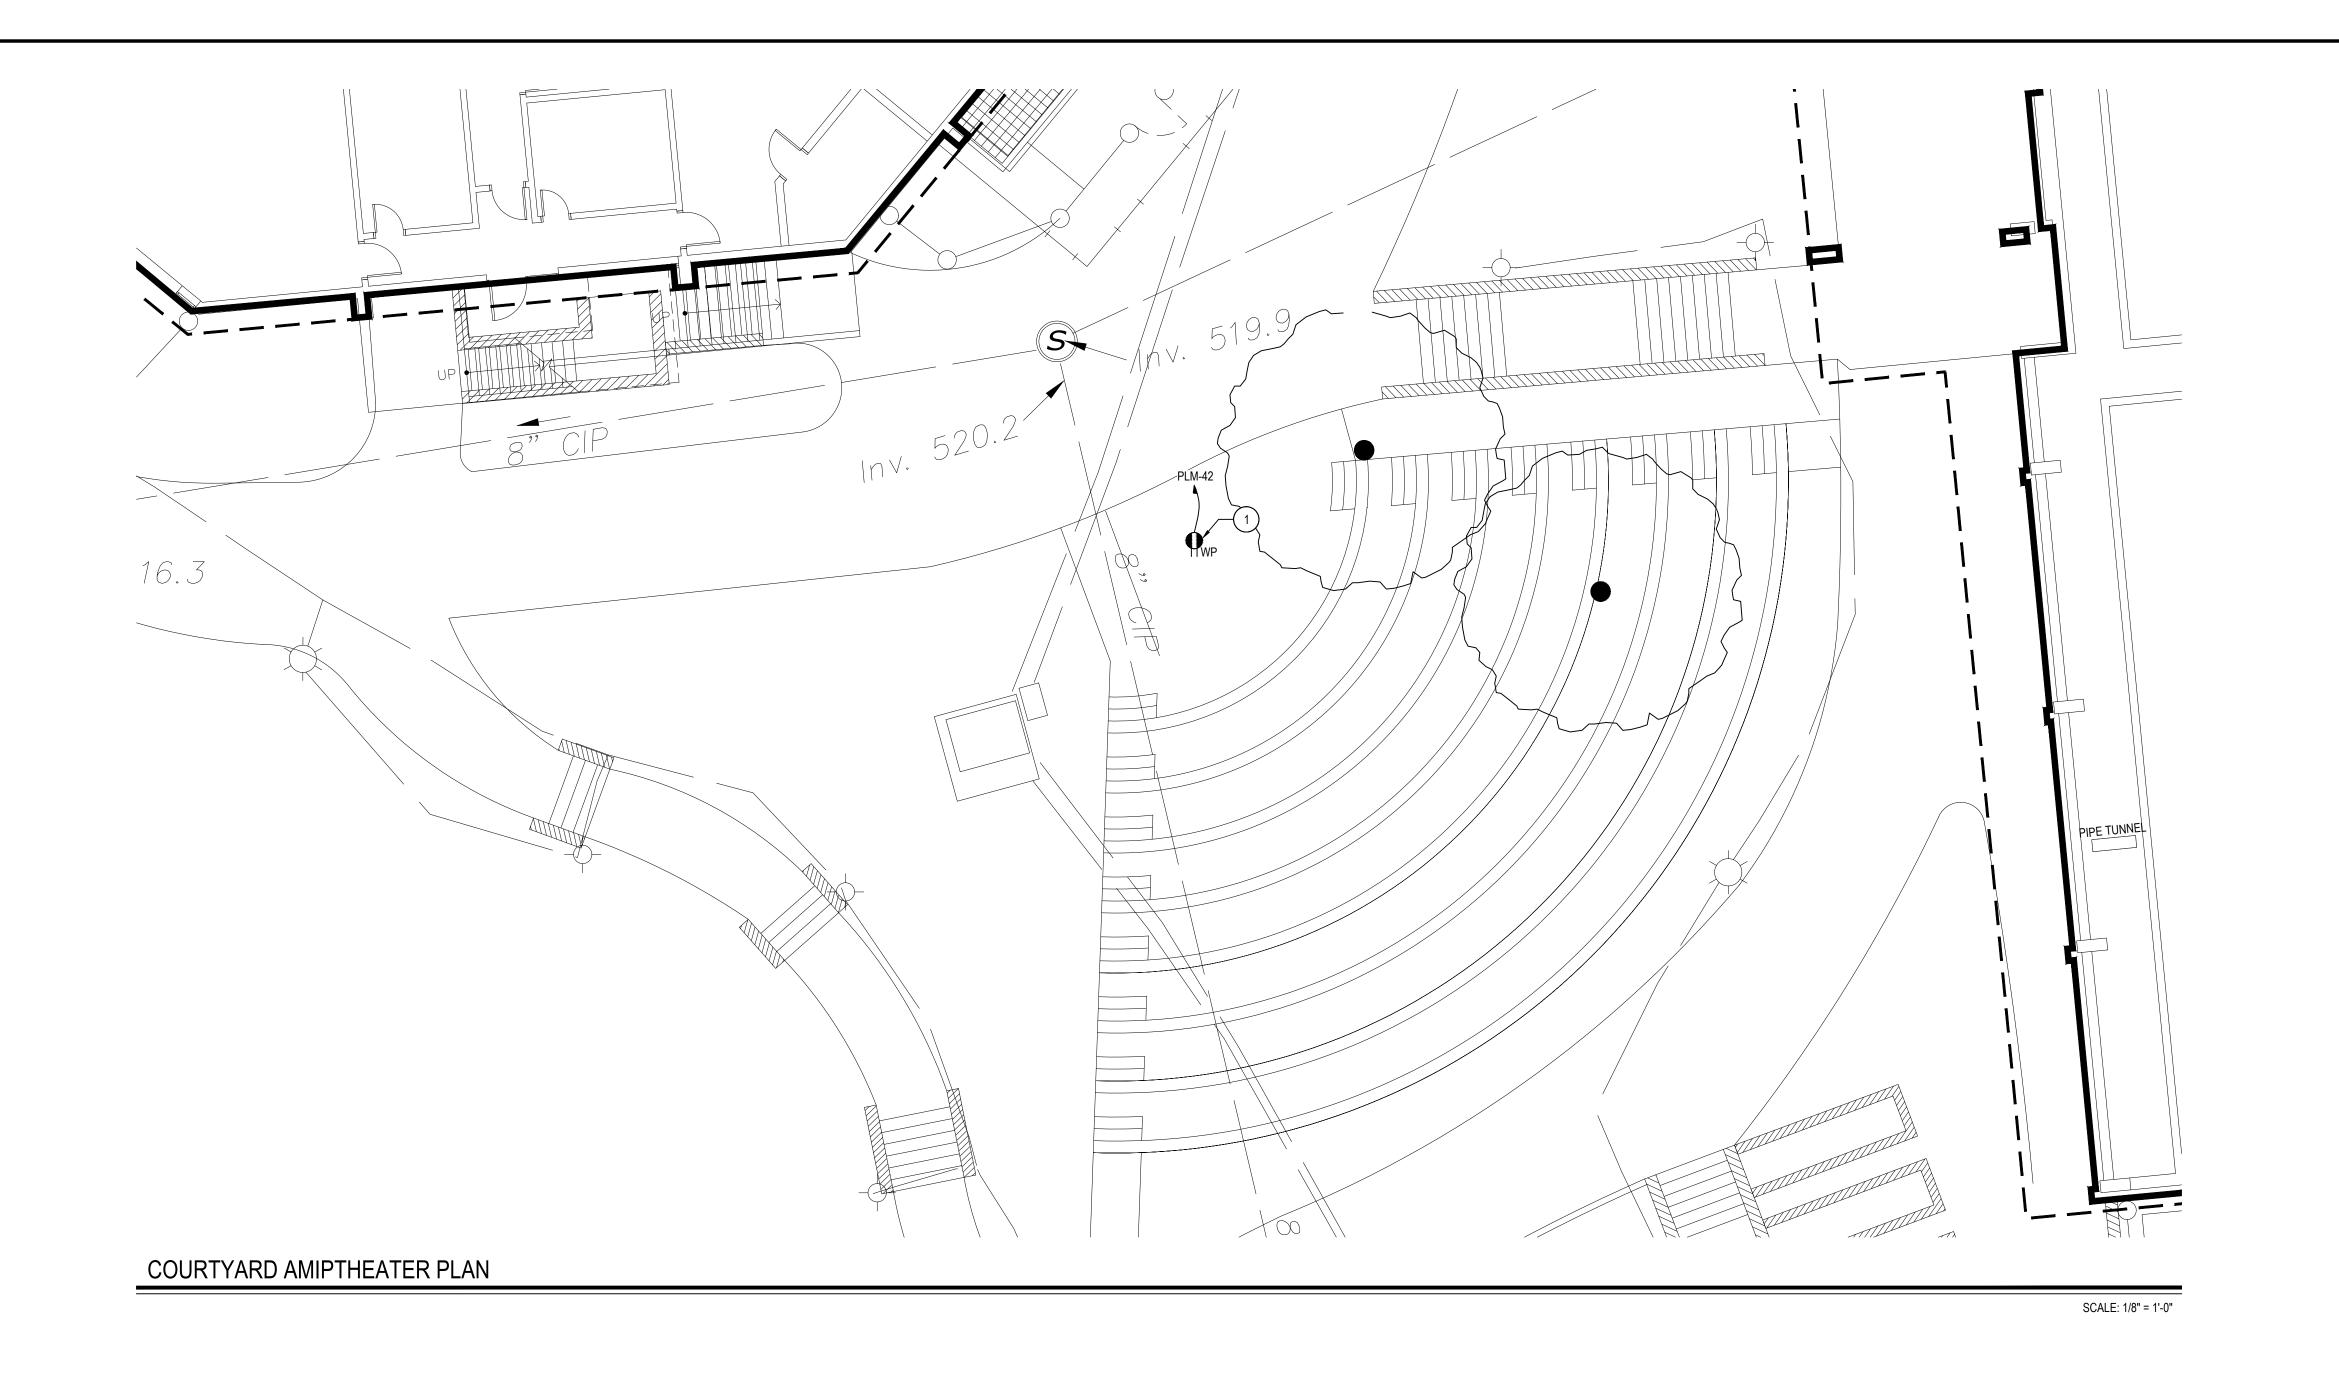

ELECTRICAL PROPOSED KEY NOTES:

1) INSTALL WEATHERPROOF GFCI RECEPTACLE TO SERVE OUTDOOR AMPHITHEATER AREA. ALL EXCAVATION, BACKFILL, COMPACTION, AND RESTORATION OF IMPACTED SURFACED (ASPHALT, GRASS, SIDEWALKS, ETC) IS BY E.C.

REV. DATE

NOTICE THESE DRAWINGS ARE BASED ON CONSTRUCTION DRAWINGS NOT PREPARED BY BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PC. AND, THEREFORE, MAY NOT REPRESENT THE CONDITIONS AS CONSTRUCTED AT THE TIME. ALL EXISTING CONDITIONS SHOWN ARE REPRESENTED AS SUGGESTIVE INFORMATION AS THEY MAY NOT HAVE BEEN BUILT AND DETAILED PER THE ORIGINAL DOCUMENTS OR PER THE OWNER'S INFORMATION.


NOT TO SCALE

DRAWING BY: RP

CHECK BY: LW NOTICE THIS DRAWING, PREPARED FOR THE SPECIFIC PROJECT INDICATED IS AN INSTRUMENT OF SERVICE AND THE PROPERTY OF BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PC. INFRINGEMENT OR ANY USE OF THIS DRAWING FOR ANY OTHER PROJECT IS PROHIBITED. ANY ALTERATION OR REPRODUCTION OF THIS DOCUMENT IS ALSO PROHIBITED WITHOUT THE WRITTEN CONSENT OF THE ARCHITECT OR ENGINEER.

ARCHITECTS LANDSCAPE ARCHITECTS ENGINEERS 244 EAST MAIN STREET PATCHOGUE SUITE 115, ALBANY
NEW YORK 11772 NEW YORK 12203
T. 631.475.0349 T. 518.621.7650
F. 631.475.0361 F. 518.621.7655

www.BBSARCHITECTURE.com

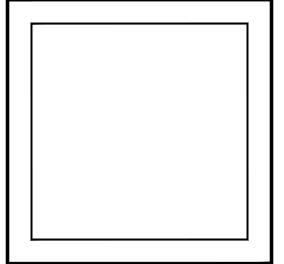

66-01-02-06-0-007-013 DISTRICT BEDFORD CENTRAL SCHOOL DISTRICT


PROJECT PHASE 2 - BOND IMPROVEMENTS

DWG TITLE PROPOSED POWER PLANS - COURTYARD AMPITHEATER SCALE: AS NOTED

DATE: APRIL 2024

BID PICK-UP: FEBRUARY 24, 2025 FILE No: 23-131b

E4.02

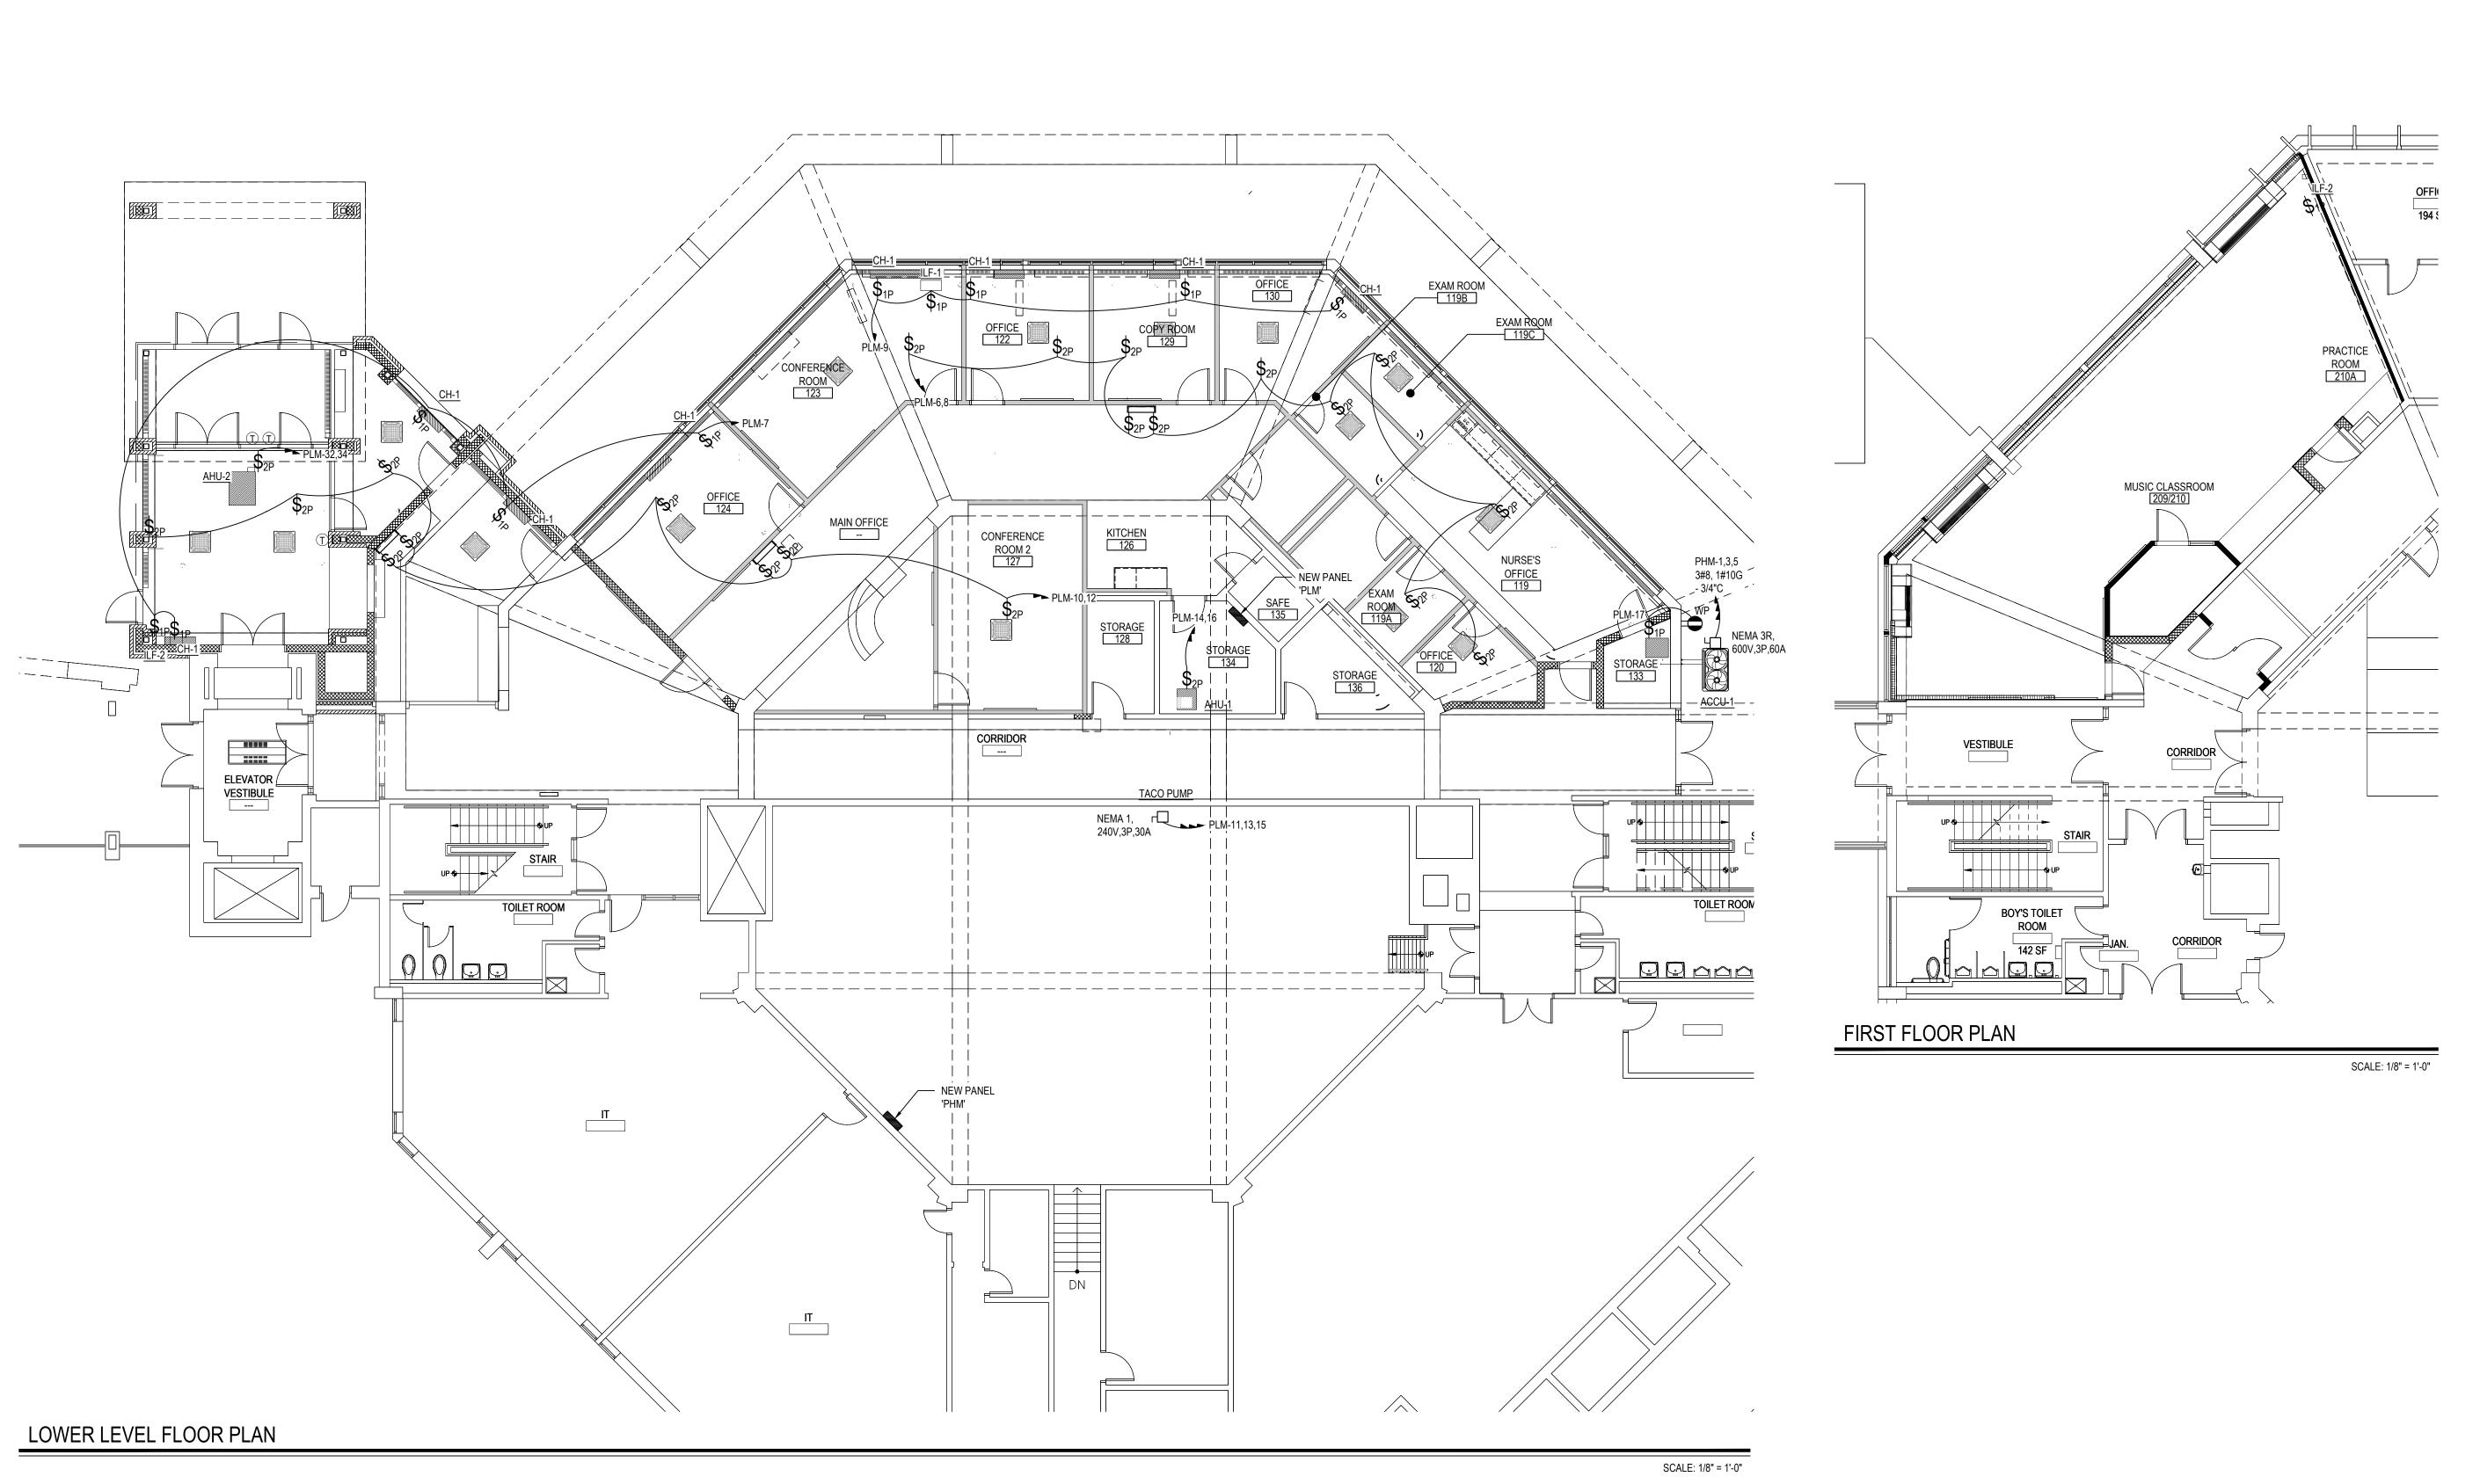

ELECTRICAL PROPOSED GENERAL NOTES:

1. WHERE NECESSARY, E.C. SHALL RUN ALL EXPOSED CONDUITS AS CLOSE TO EXPOSED BEAMS AS POSSIBLE TO MAINTAIN AESTHETICS OF THE RENOVATED SPACES.

REV. DATE ITEM

NOTICE

THESE DRAWINGS ARE BASED ON CONSTRUCTION DRAWINGS NOT PREPARED BY BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PC. AND, THEREFORE, MAY NOT REPRESENT THE CONDITIONS AS CONSTRUCTED AT THE TIME. ALL EXISTING CONDITIONS SHOWN ARE REPRESENTED AS SUGGESTIVE INFORMATION AS THEY MAY NOT HAVE BEEN BUILT AND DETAILED PER THE ORIGINAL DOCUMENTS OR PER THE OWNER'S INFORMATION.

A B

KEY PLAN

NOT TO SCALE

PHASE 2 - BOND IMPROVEMENTS
FOX LANE MIDDLE SCHOOL
TOWN of BEDFORD / WESTCHESTER COUNTY
PROPOSED MECHANICAL POWER PLANS

DRAWING BY: RP

CHECK BY: LW

NOTICE

THIS DRAWING, PREPARED FOR THE SPECIFIC PROJECT INDICATED IS AN INSTRUMENT OF SERVICE AND THE PROPERTY OF BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PC. INFRINGEMENT OR ANY USE OF THIS DRAWING FOR ANY OTHER PROJECT IS PROHIBITED. ANY ALTERATION OR REPRODUCTION OF THIS DOCUMENT IS ALSO PROHIBITED WITHOUT THE WRITTEN CONSENT OF THE ARCHITECT OR ENGINEER.

BBS ARCHITECTS LANDSCAPE ARC

ARCHITECTS
LANDSCAPE ARCHITECTS
ENGINEERS
244 EAST MAIN STREET | 100 GREAT OAKS BLVD.

244 EAST MAIN STREET | 100 GREAT OAKS BLVD.
PATCHOGUE | SUITE 115, ALBANY
NEW YORK 11772 | NEW YORK 12203
T. 631.475.0349 | T. 518.621.7650
F. 631.475.0361 | F. 518.621.7655

www.BBSARCHITECTURE.com

SED No.	66-01-02-06-0-007-013	
DISTRICT	BEDFORD CENTRAL SCHOOL DISTRICT	
PROJECT	PHASE 2 -	_

PHASE 2 BOND IMPROVEMENTS

DWG TITLE
PROPOSED MECHANICAL
POWER PLANS

SCALE: AS NOTED

DATE: APRIL 2024

BID PICK-UP: FEBRUARY 24, 2025

FILE No: 23-131b FLMS

E4.03

	WOOD SHOP / PREP ROOM 315
DESIGN / COLLABORATIVE CLASSSROOM 318 STEAM / ROBOTICS LAB	NSTRUCTION CLASSROOM 316
PROJECT STORAGE ROOM 317A	


SECOND FLOOR PLAN



SCALE: 1/8" = 1'-0"

ELECTRICAL GENERAL PROPOSED NOTES:

WIRE ALL MAINTENANCE RECEPTACLES TO NEAREST 120V CIRCUIT.

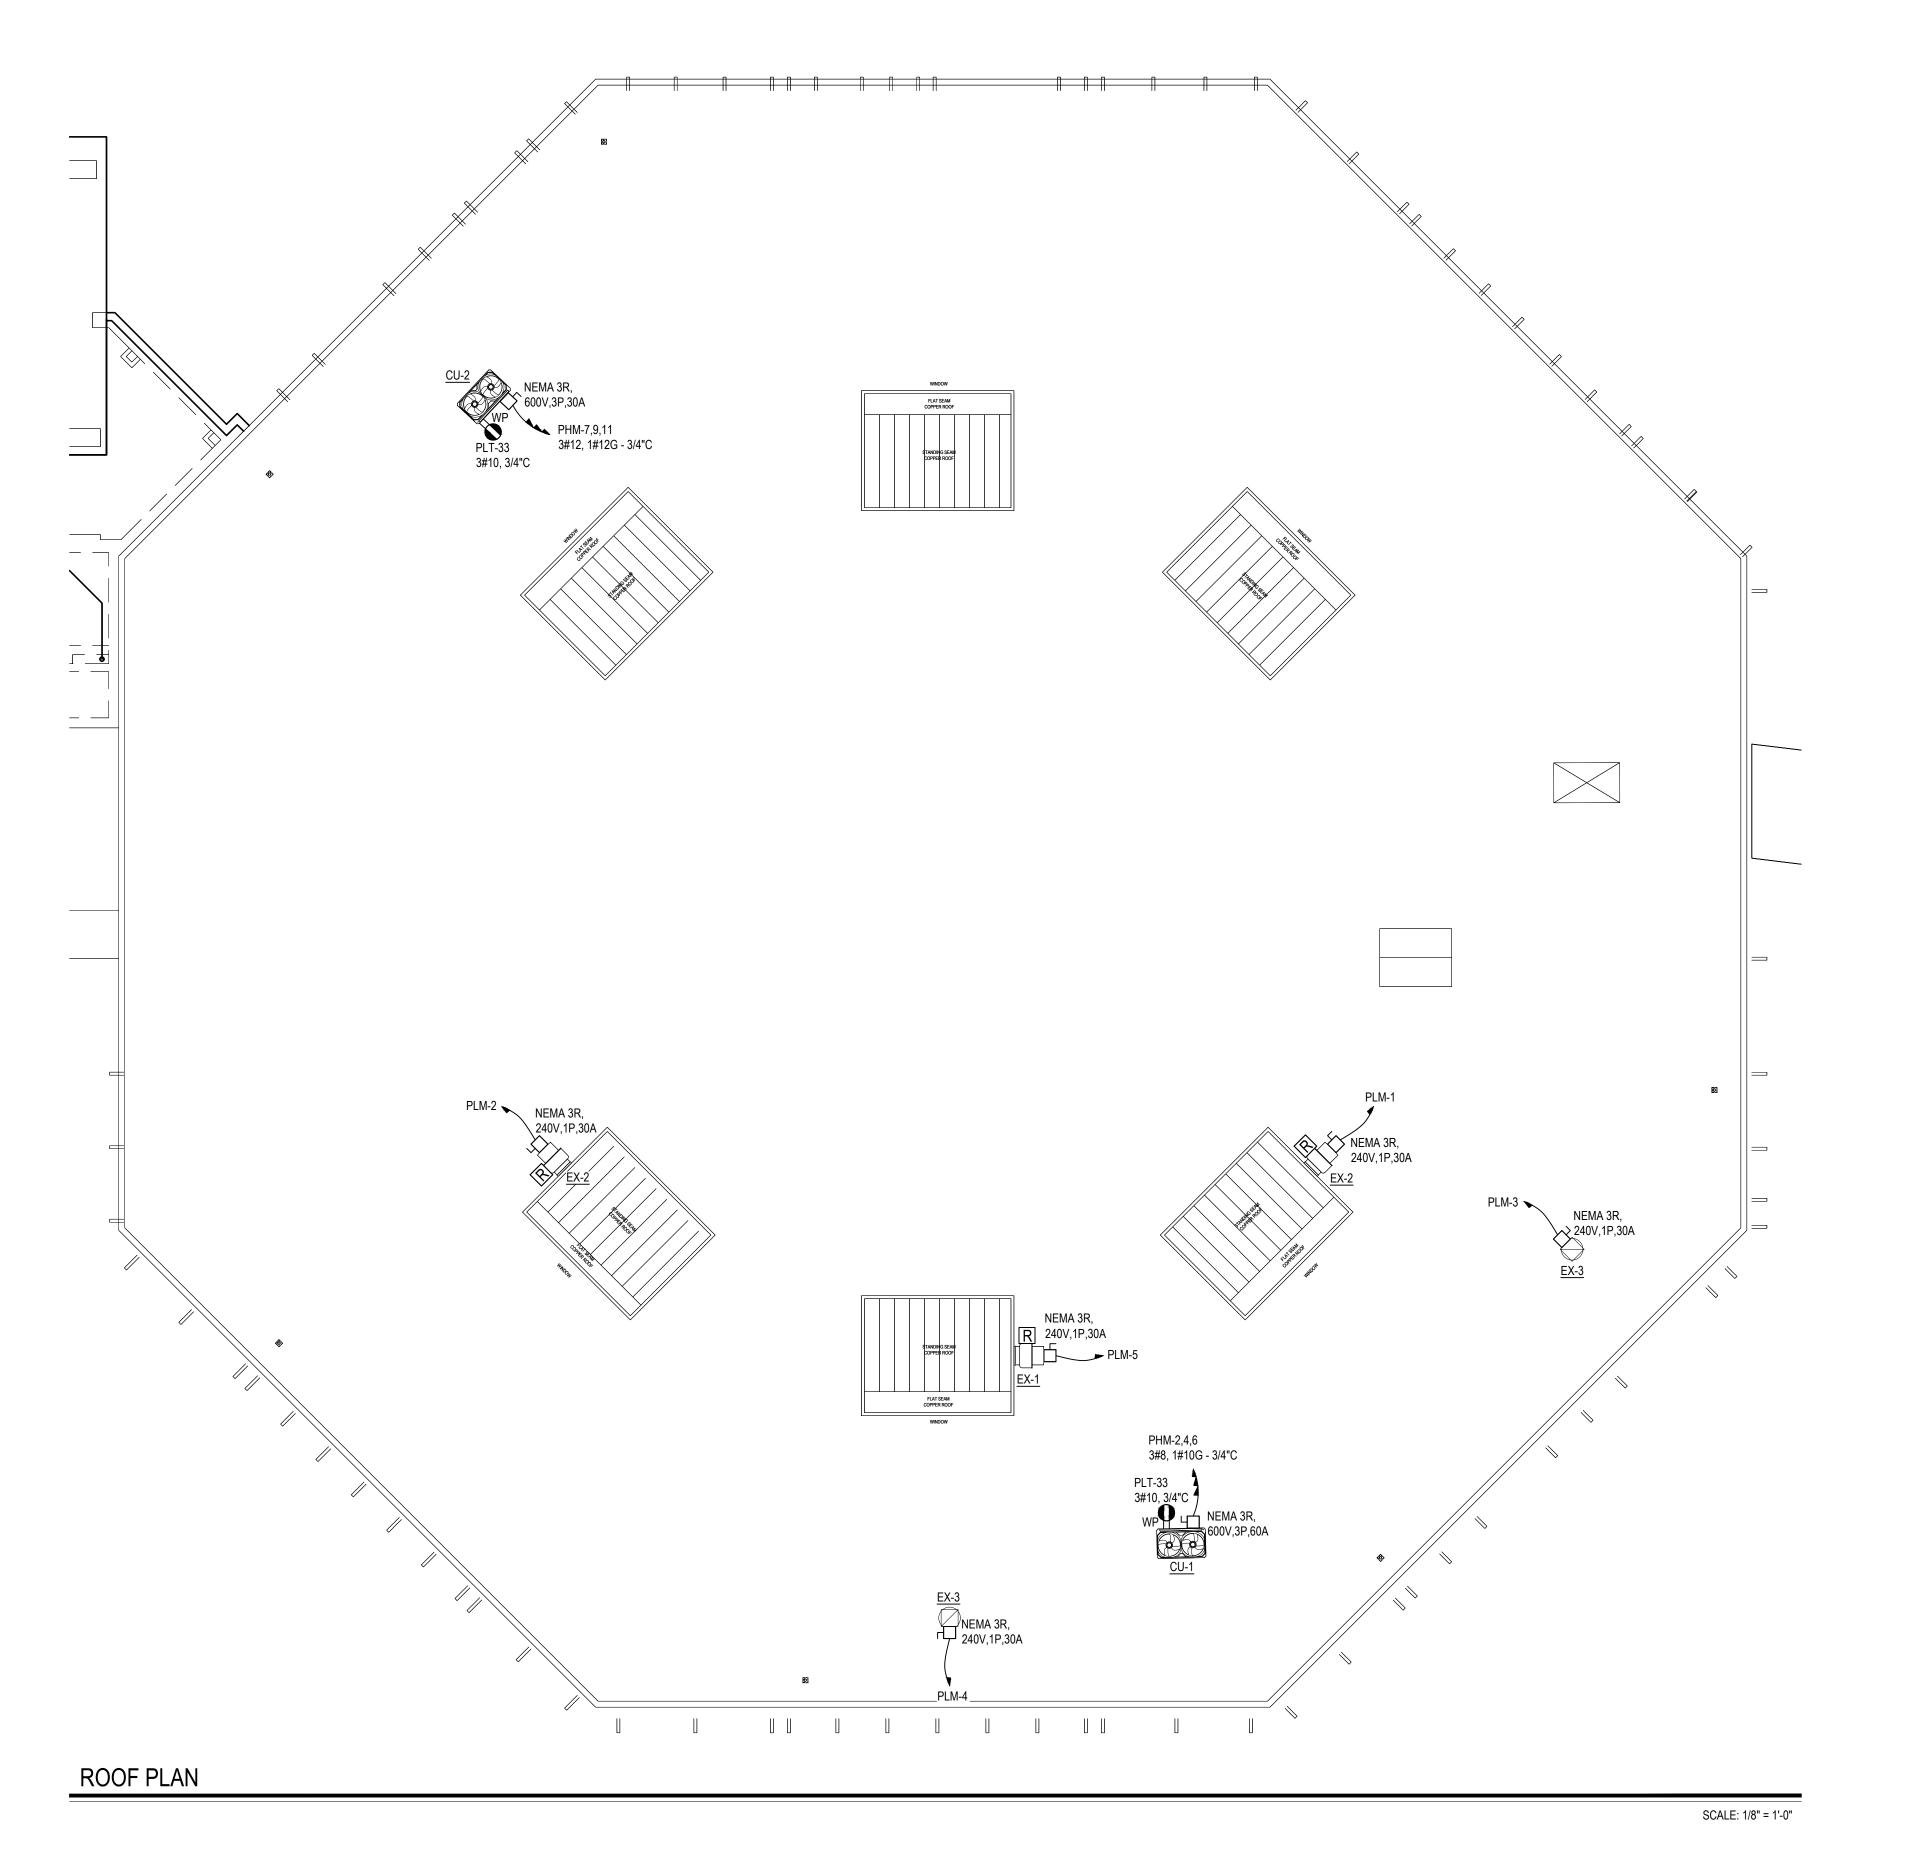

REV. DATE ITEM

NOTICE

THESE DRAWINGS ARE BASED ON CONSTRUCTION DRAWINGS NOT PREPARED BY BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PC. AND, THEREFORE, MAY NOT REPRESENT THE CONDITIONS AS CONSTRUCTED AT THE TIME. ALL EXISTING CONDITIONS SHOWN ARE REPRESENTED AS SUGGESTIVE INFORMATION AS THEY MAY NOT HAVE BEEN BUILT AND DETAILED PER THE ORIGINAL DOCUMENTS OR PER THE OWNER'S INFORMATION.

A B B

KEY PLAN

NOT TO SC

NOT TO SCALE

PROJECT
BEDFORD CENTRAL SCHOOL DISTRICT
PHASE 2 - BOND IMPROVEMENTS
FOX LANE MIDDLE SCHOOL
TOWN of BEDFORD / WESTCHESTER COUNTY

DECEMBER 1 ANS

NOTICE

THIS DRAWING, PREPARED FOR THE SPECIFIC PROJECT INDICATED IS AN INSTRUMENT OF SERVICE AND THE PROPERTY OF BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PC. INFRINGEMENT OR ANY USE OF THIS DRAWING FOR ANY OTHER PROJECT IS PROHIBITED. ANY ALTERATION OR REPRODUCTION OF THIS DOCUMENT IS ALSO PROHIBITED WITHOUT THE WRITTEN CONSENT OF THE ARCHITECT OR ENGINEER.

BBS

ARCHITECTS
LANDSCAPE ARCHITECTS
ENGINEERS

244 EAST MAIN STREET
PATCHOGUE
NEW YORK 11772
T. 631.475.0349
F. 631.475.0361
PARCHITECTS

100 GREAT OAKS BLVD.
SUITE 115, ALBANY
NEW YORK 12203
T. 518.621.7650
F. 518.621.7655

www.sbs/inclinizeronz.com

 SED No.
 66-01-02-06-0-007-013

 DISTRICT
 BEDFORD CENTRAL

DISTRICT

BEDFORD CENTRAL
SCHOOL DISTRICT

PROJECT

PHASE 2 BOND IMPROVEMENTS

DWG TITLE
PROPOSED ROOF PLANS


SCALE: AS NOTED


DATE: APRIL 2024

BID PICK-UP: FEBRUARY 24, 2025

FILE No: 23-131b FLMS

E4.04

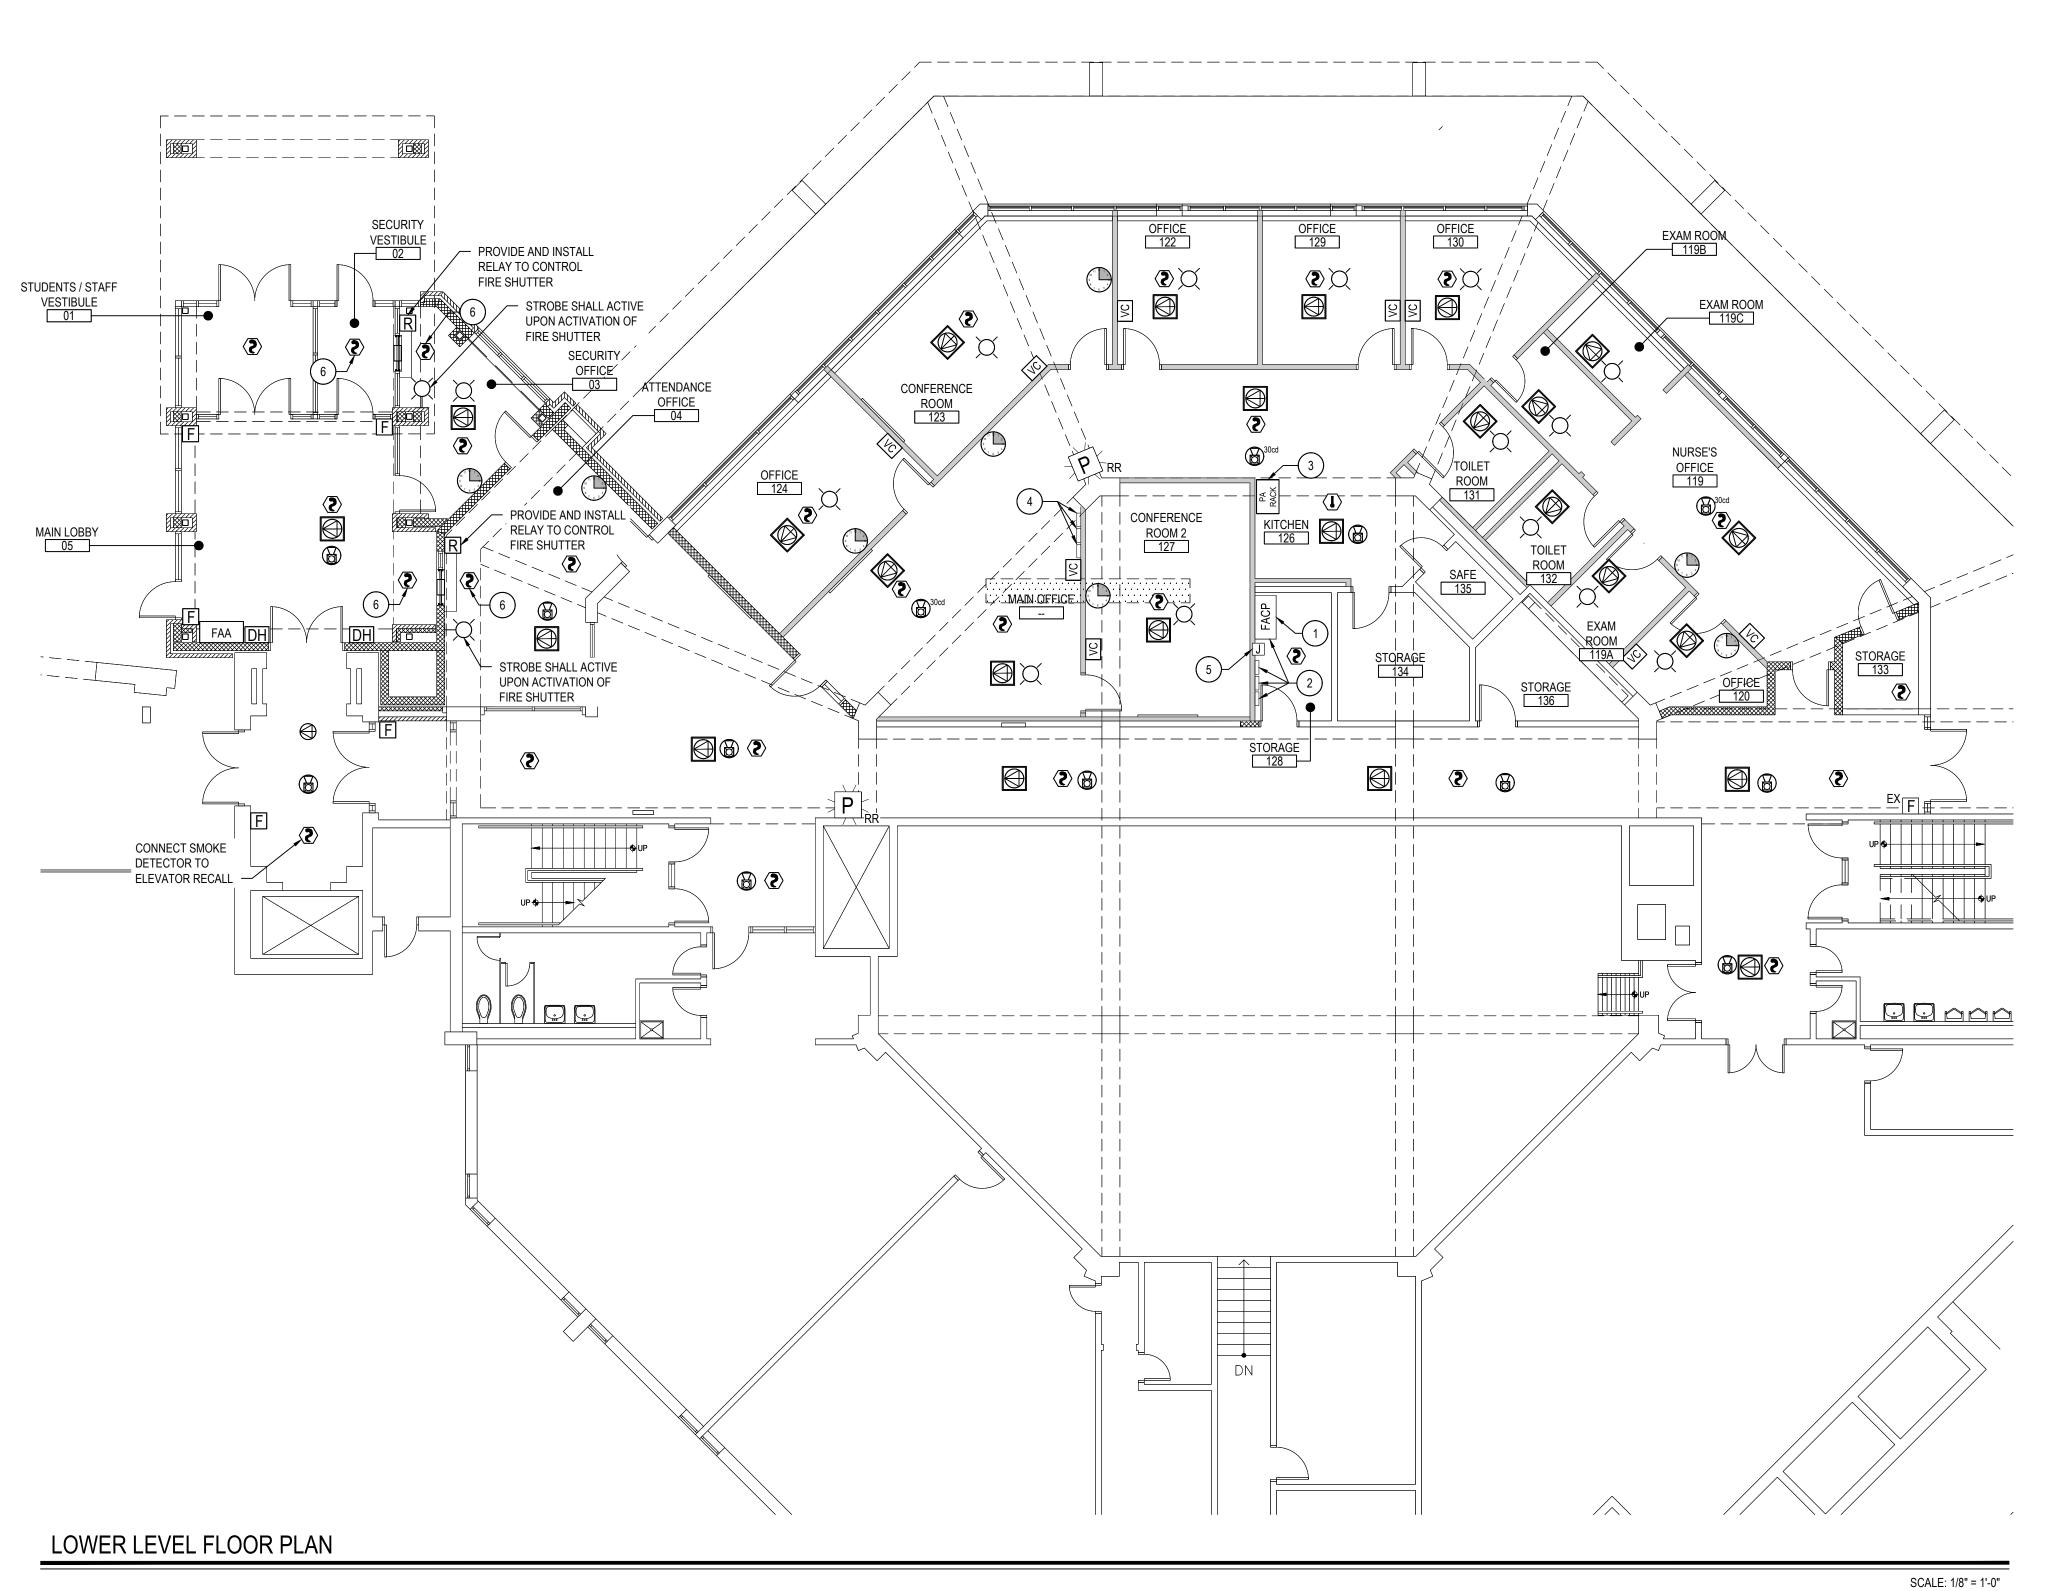

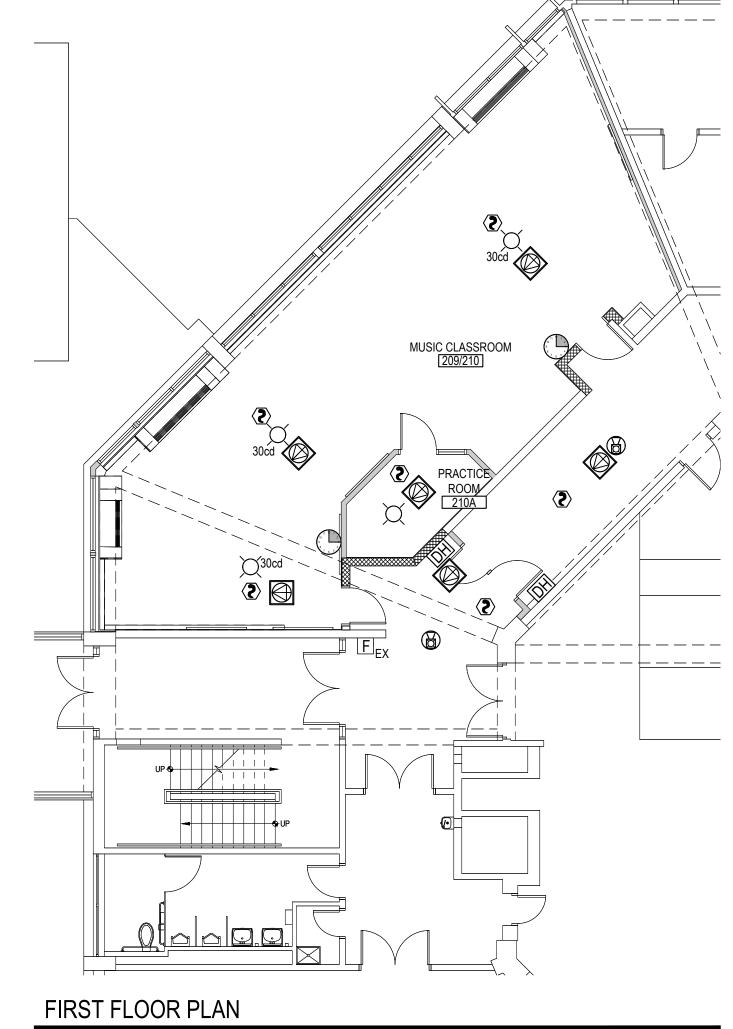

SCALE: 1/8" = 1'-0"

ELECTRICAL PROPOSED GENERAL NOTES:

WHERE NECESSARY, E.C. SHALL RUN ALL EXPOSED CONDUITS AS CLOSE TO EXPOSED BEAMS AS POSSIBLE TO MAINTAIN AESTHETICS OF THE RENOVATED SPACES.
 PROVIDE ADAPTIVE HARDWARE TO POWER OF THE STROBES AND HORNS. THE STROBE CANDELA IS 15 cd UNLESS OTHERWISE INDICATED ON DRAWING.

ELECTRICAL PROPOSED KEY NOTES:

- E.C. TO PROVIDE AND INSTALL NEW LOOP CONTROLLER INTO EXISTING FIRE ALARM CONTROL PANEL TO SERVE PROPOSED ADDITIONAL DEVICES.
- 2 E.C. TO REINSTALL FIRE ALARM PANEL, FIRE ALARM BOX, DATABASE, AND ALARM PANEL INTO NEW STORAGE CLOSET. TEST ALL DEVICES TO ENSURE FUNCTIONALITY AFTER REINSTALLATION. EXTEND/SHORTEN WIRING AS NEEDED. PROVIDE FA CERTIFICATION LETTER FROM FIRE ALARM VENDOR.
- 3 E.C. TO RECONNECT ALL PA CONNECTIONS TO EXISTING RACK IN NEW LOCATION. EXTEND/SHORTEN WIRING AS NEEDED.
- 4 E.C. TO REINSTALL TIME CARD READER, EMERGENCY GENERATOR ANNUNCIATOR, AND PA/CLOCK SYSTEM CONTROLS ONTO NEW MAIN OFFICE WALL. TEST ALL DEVICES TO ENSURE FUNCTIONALITY AFTER REINSTALLATION. EXTEND/SHORTEN WIRING AS NEEDED.
- SPLICE BOX LOCATION. INSTALL NEW SPLICE BOX RECESSED IN WALL UNDERNEATH THE FACP. EXTEND/SHOTEN WIRES AS NEEDED. VERIFY ALL CONNECTIONS AND ENSURE THAT ALL DEVICES TO REMAIN ARE FUNCTIONAL.

ig(5ig) E.C. TO REROUTE ALL FA WIRES FROM OLD SPLICE BOX LOCATION TO NEW


6 CONNECT SMOKE DETECTOR TO FIRE SHUTTER SUCH THAT IN THE ACTIVATION OF THIS DETECTOR THE SHUTTER SHALL CLOSE.

SPECIAL SYSTEMS SCHEDULE		
SYMBOL	DESCRIPTION	
(5)	SMOKE DETECTOR WITH BASE BY SIMPLEX. MODEL #FDO421	
F	MANUAL PULL STATION WITH STI STOPPER PROTECTIVE SHIELD WITHOUT ALARM (OR SIMILAR). MODEL #HMS-S	
X	CEILING MOUNT STROBE NOTIFICATION DEVICE. MODEL #SLSCW-F	
	CEILING MOUNT HORN / STROBE NOTIFICATION DEVICE. MODEL #SLHSCW-F	
DH	ELECTROMAGNETIC HOLD OPEN DEVICE. VOLTAGE TO MATCH SYSTEM.	
FIRE ALARM RELAY. MODEL #TRI-R		
\bigoplus	RECESSED CEILING MOUNTED PUBLIC ADDRESS SPEAKER COMPATIBLE WITH EXISTING SYSTEM.	
	RECESSED LAY-IN 2X2 PUBLIC ADDRESS DROP-IN CEILING SPEAKER. MODEL #CSD2X2	
VC	VOLUME CONTROL ATTENUATOR FOR PUBLIC ADDRESS SPEAKER(S) MODEL #AT10A OR AT35A	

	NO	OTICE_
		ON CONSTRUCTION DRAWINGS NOT TS, LANDSCAPE ARCHITECTS AND

REV. DATE

PREPARED BY BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PC. AND, THEREFORE, MAY NOT REPRESENT THE CONDITIONS AS CONSTRUCTED AT THE TIME. ALL EXISTING CONDITIONS SHOWN ARE REPRESENTED AS SUGGESTIVE INFORMATION AS THEY MAY NOT HAVE BEEN BUILT AND DETAILED PER THE ORIGINAL DOCUMENTS OR PER THE OWNER'S INFORMATION.

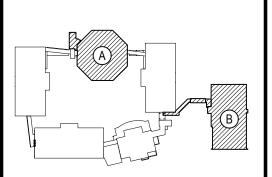

KEY PLAN

NOT TO SCALE

PHASE 2 - BOND IMPROVEMENTS
FOX LANE MIDDLE SCHOOL
TOWN of BEDFORD / WESTCHESTER COUNTY

DWG TITLE

PROPOSED SPECIAL SYSTEMS PLANS

THIS DRAWING, PREPARED FOR THE SPECIFIC PROJECT INDICATED IS AN INSTRUMENT OF SERVICE AND THE PROPERTY OF BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PC. INFRINGEMENT OR ANY USE OF THIS DRAWING FOR ANY OTHER PROJECT IS PROHIBITED. ANY ALTERATION OR REPRODUCTION OF THIS DOCUMENT IS ALSO PROHIBITED WITHOUT THE WRITTEN CONSENT OF THE ARCHITECT OR ENGINEER.


<u>NOTICE</u>

CHECK BY: LW

ARCHITECTS
LANDSCAPE ARCHITECTS
ENGINEERS

244 EAST MAIN STREET PATCHOGUE NEW YORK 11772 NEW YORK 12203 T. 518.621.7650

F. 631.475.0361 F. 518.621.7655 www.BBSARCHITECTURE.com

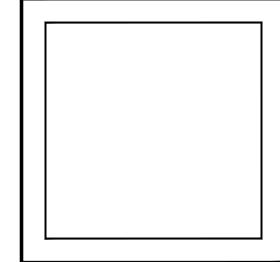

	SED No.	66-01-02-06-0-007-013
	DISTRICT	BEDFORD CENTRAL SCHOOL DISTRICT
	PROJECT	PHASE 2 - BOND IMPROVEMENTS
	DWG TITLE	PROPOSED SPECIAL SYSTEM


SCALE: AS NOTED

DATE: APRIL 2024


BID PICK-UP: FEBRUARY 24, 2025


FILE No: 23-131b FLMS


E5.01

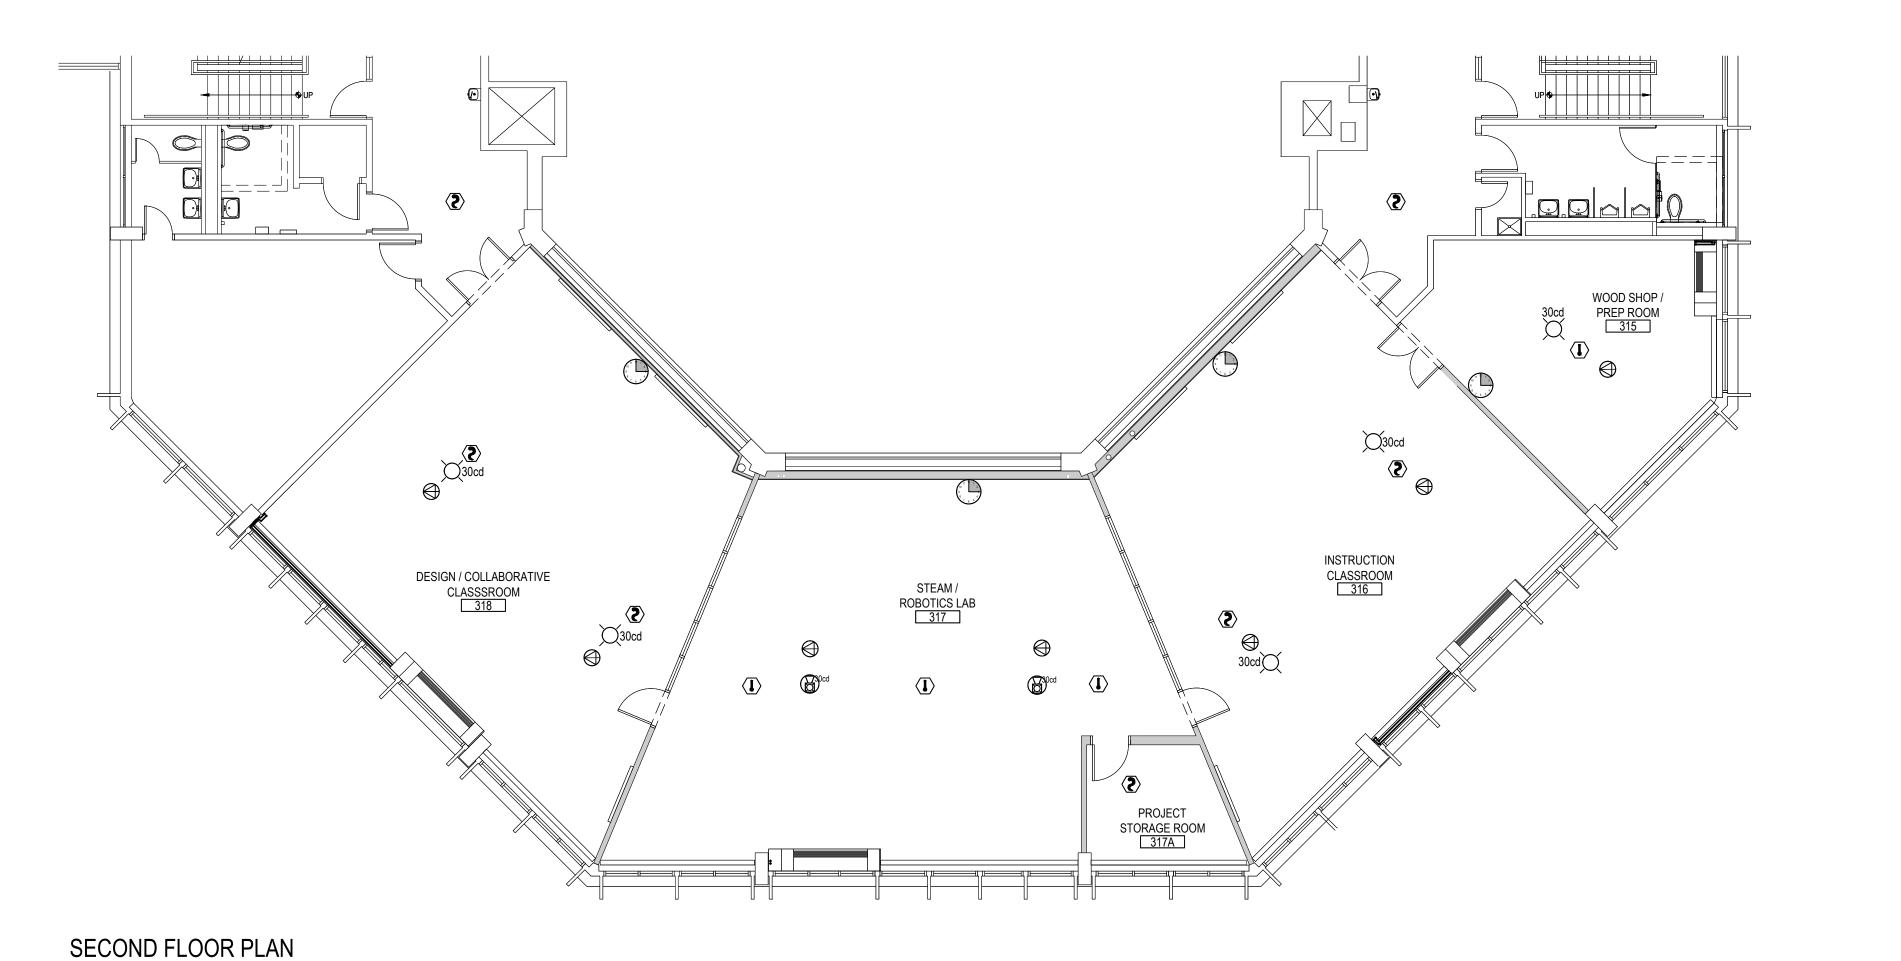



SCALE: 1/8" = 1'-0"

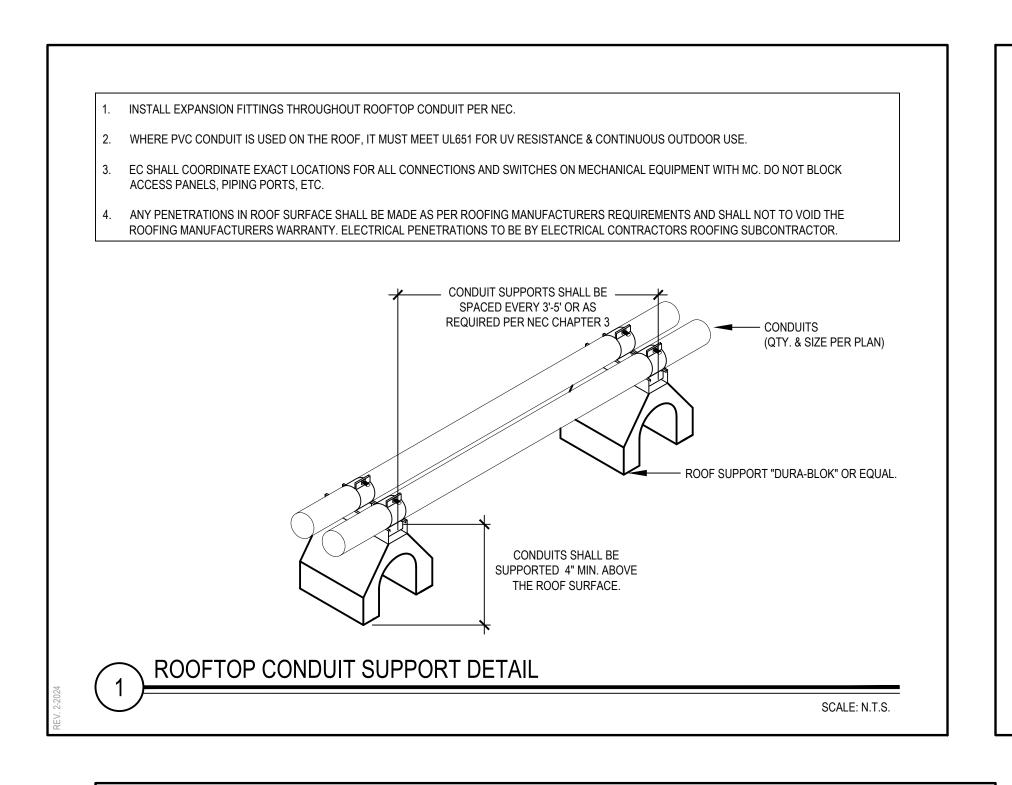


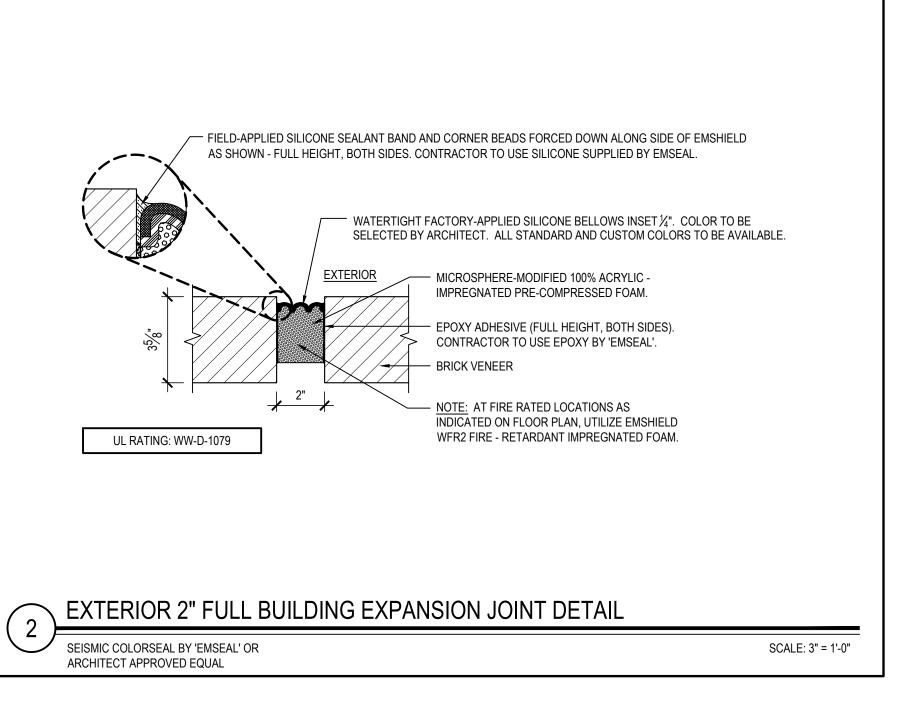


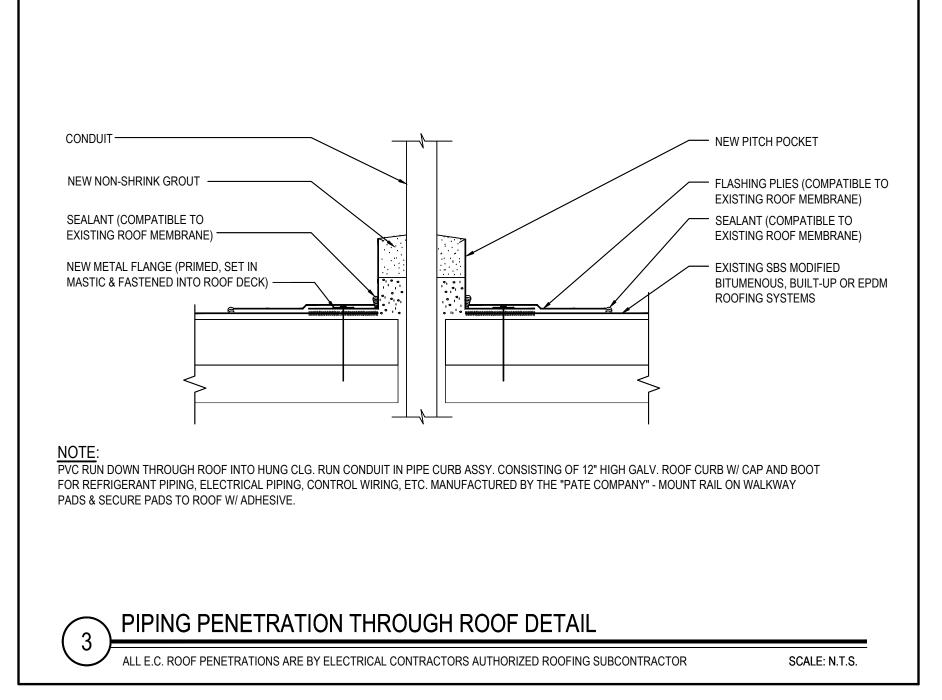


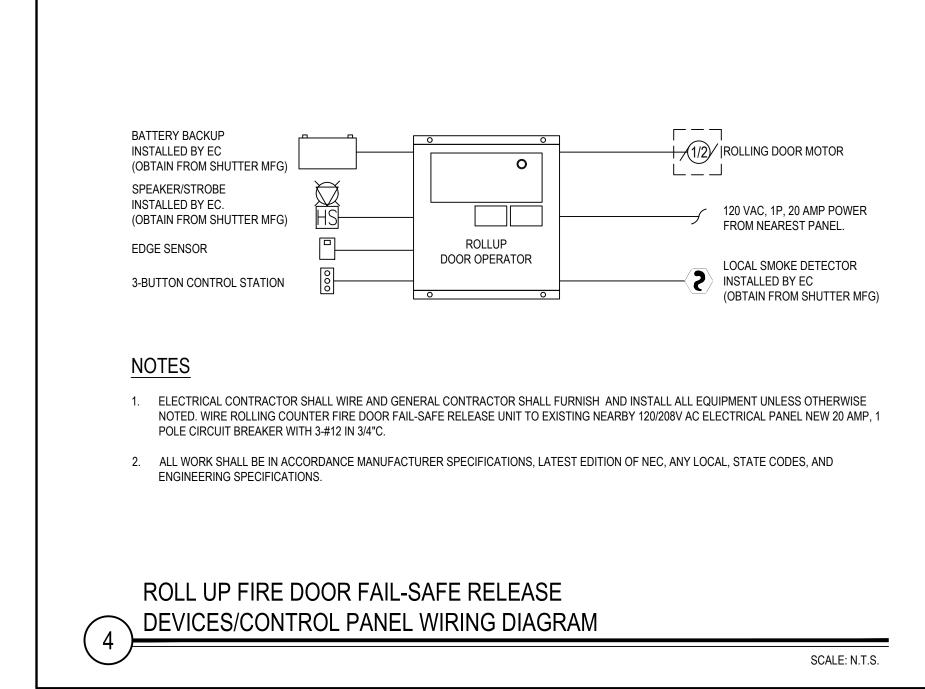


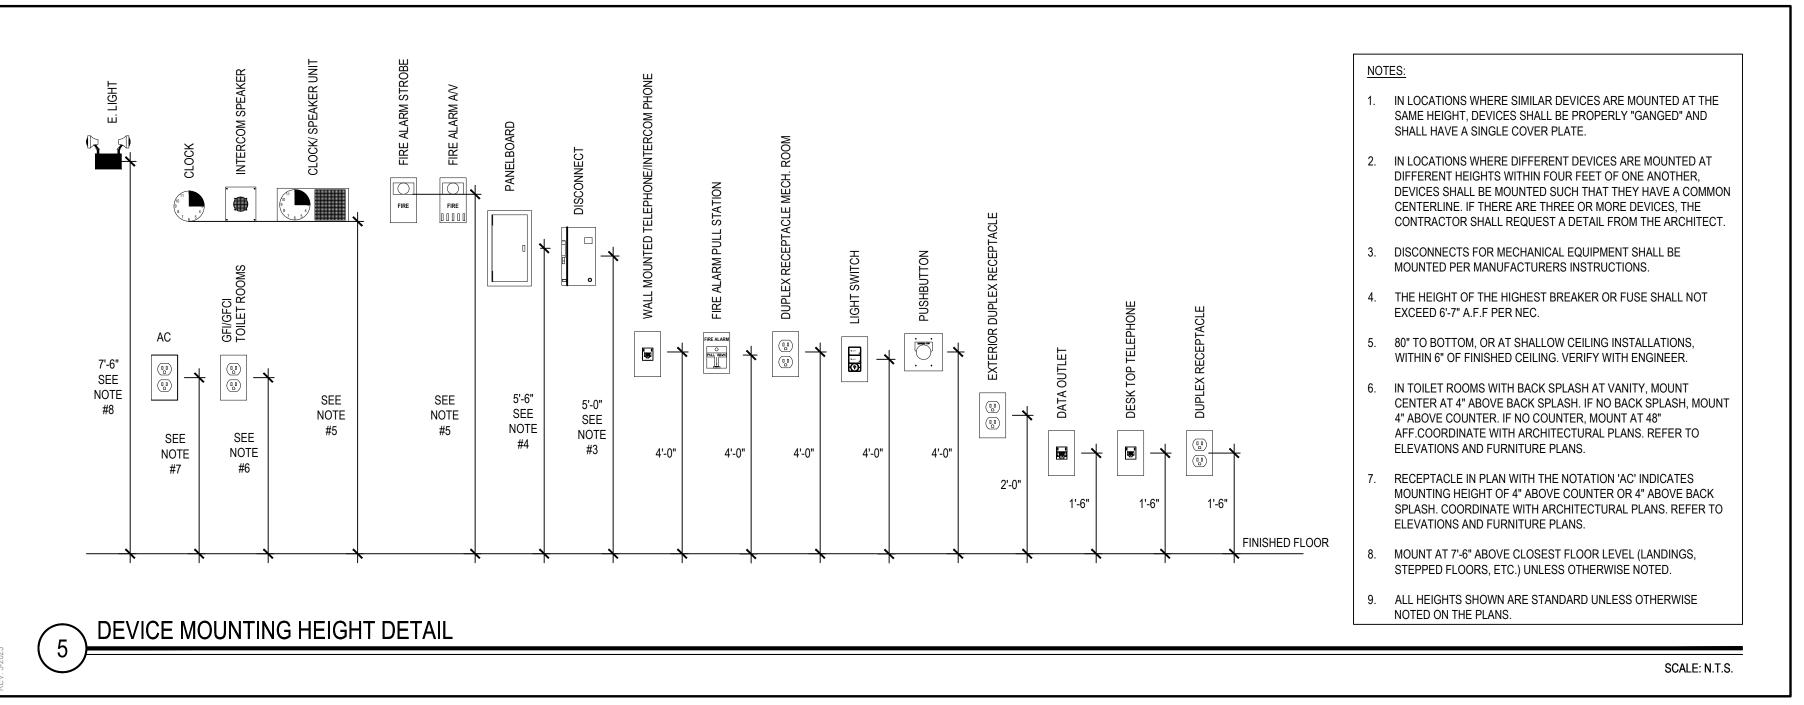


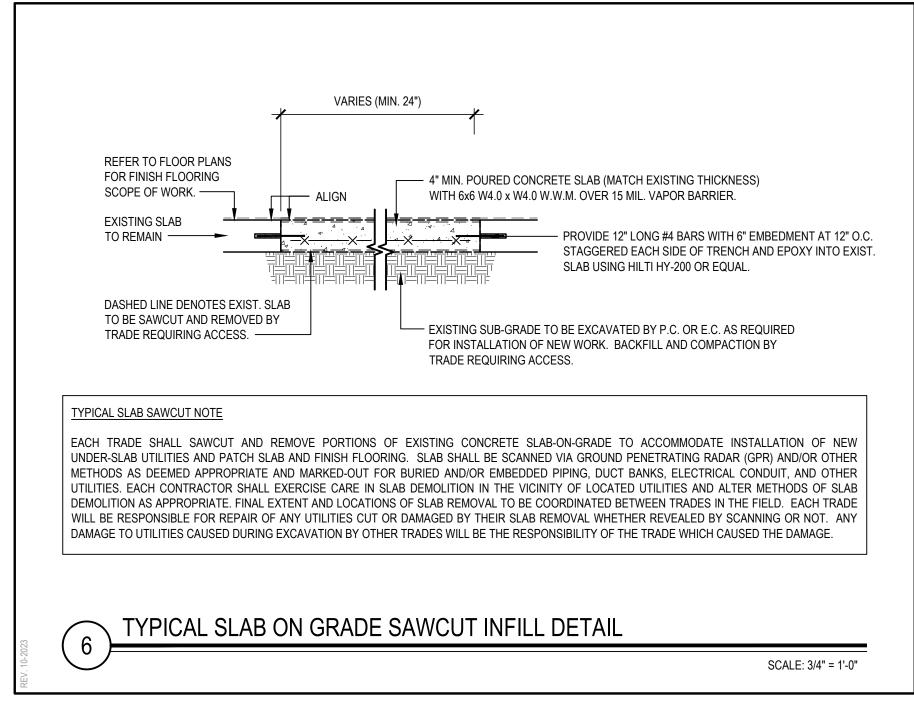

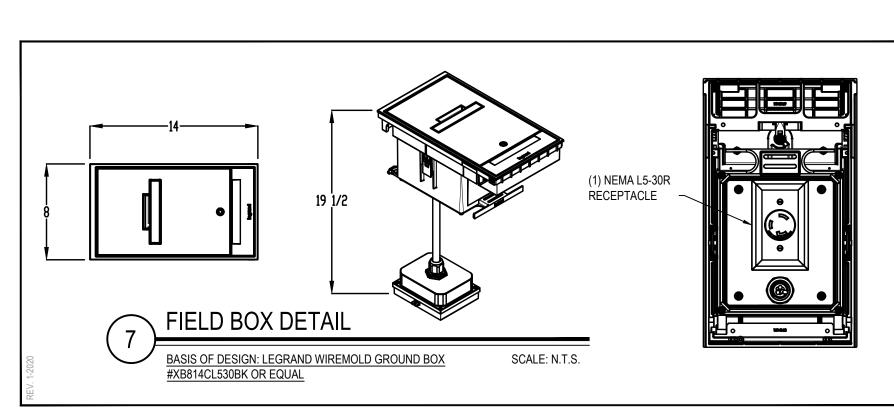

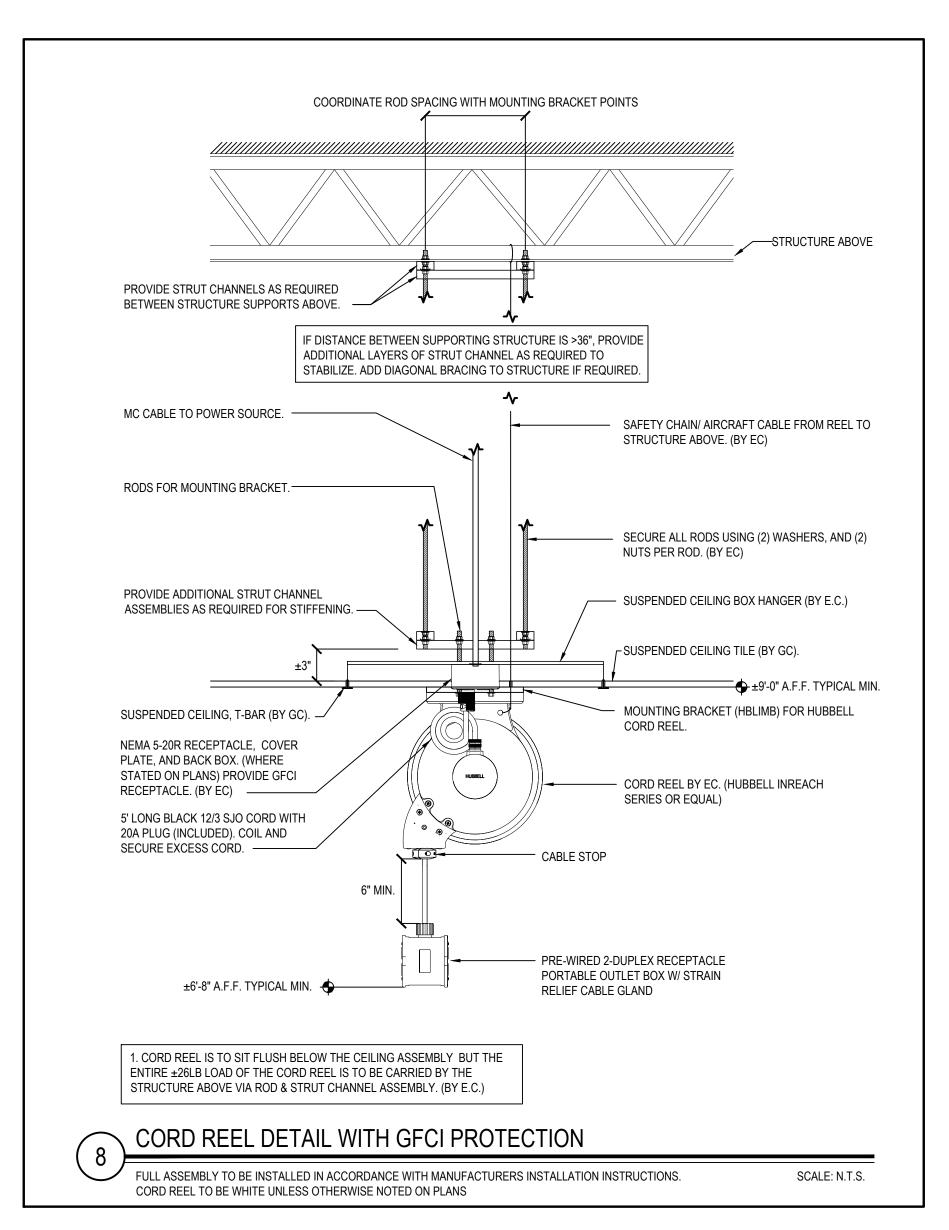

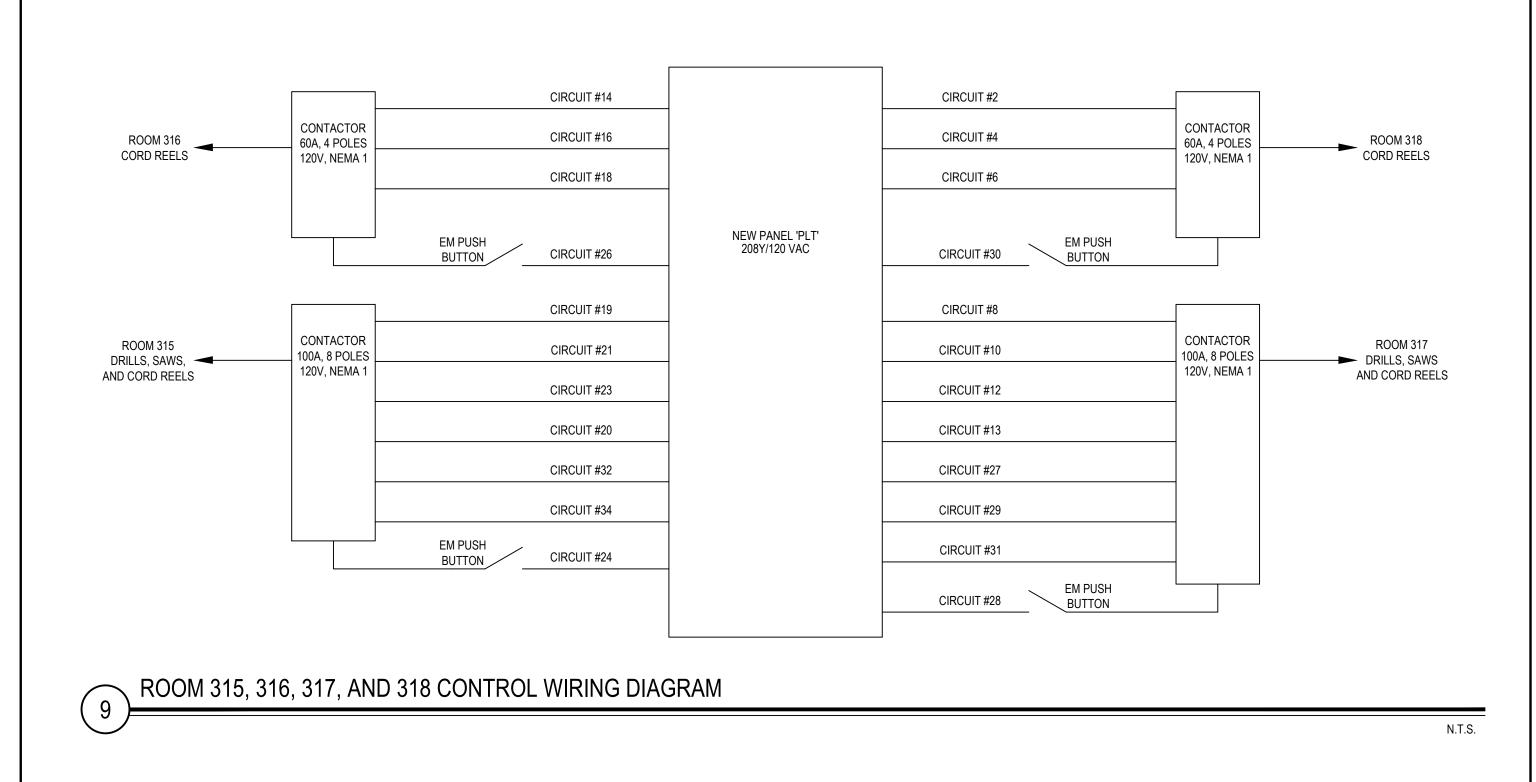

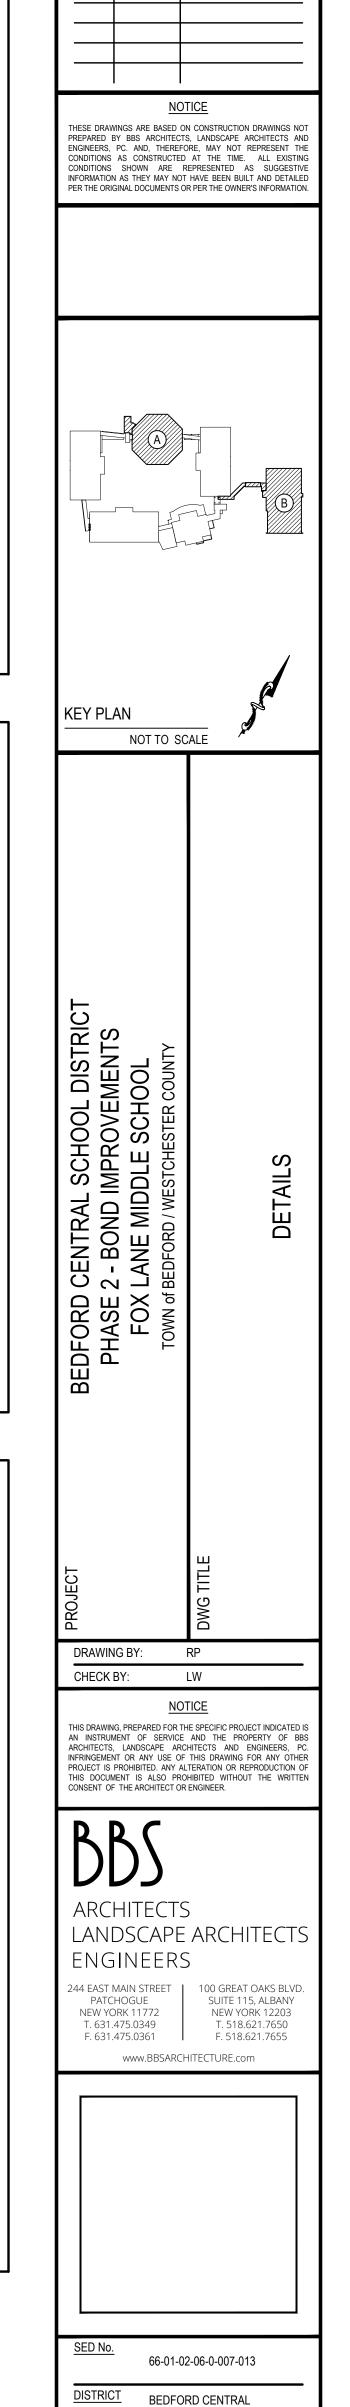

SCHOOL DISTRICT

DETAILS

BID PICK-UP: FEBRUARY 24, 2025

E7.01

BOND IMPROVEMENTS

PROJECT PHASE 2 -


SCALE: AS NOTED

DATE: APRIL 2024

FILE No: 23-131b

DWG TITLE

REV. DATE

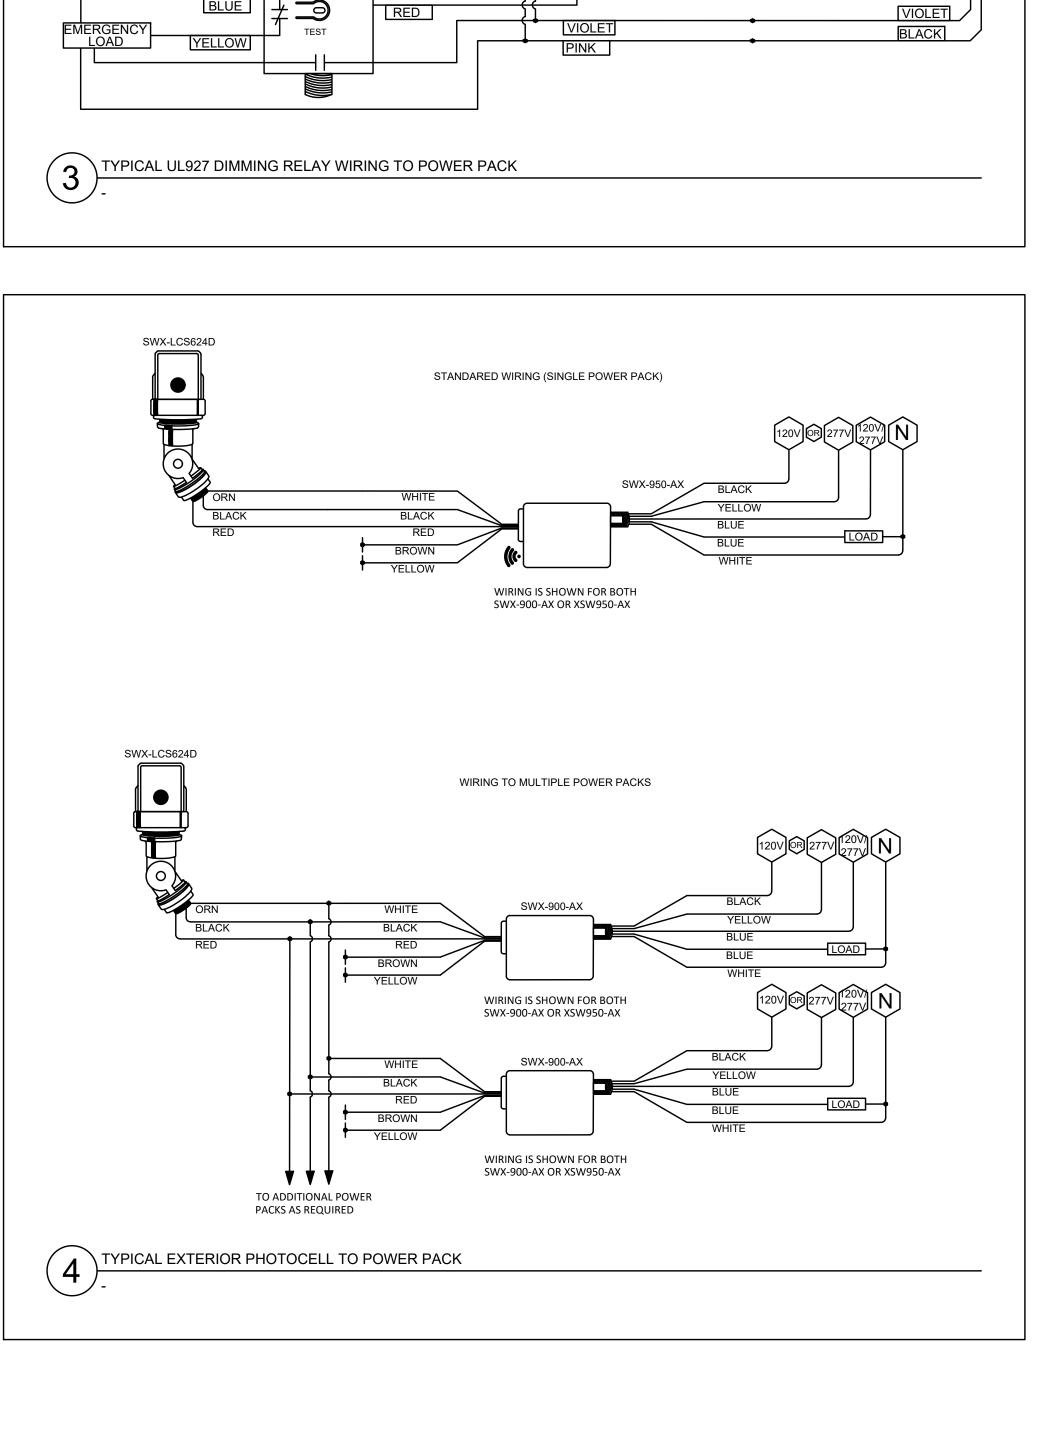

(N)(H)

SWX-103-D

VIOLET

BLACK OR YELLOW WIRE

WALL SWITCH SENSOR W/ 0-10V DIMMING
TYPICAL OFFICE, COPY, QUIET STUDY ROOM

SWX-950-D2

SWX-103


EMERGENCY


BLACK

WALL SWITCH SENSOR (ON/OFF)

TYPICAL STORAGE, VAULT, CLOSET, TOILET

SWX-EPC-A-2-D

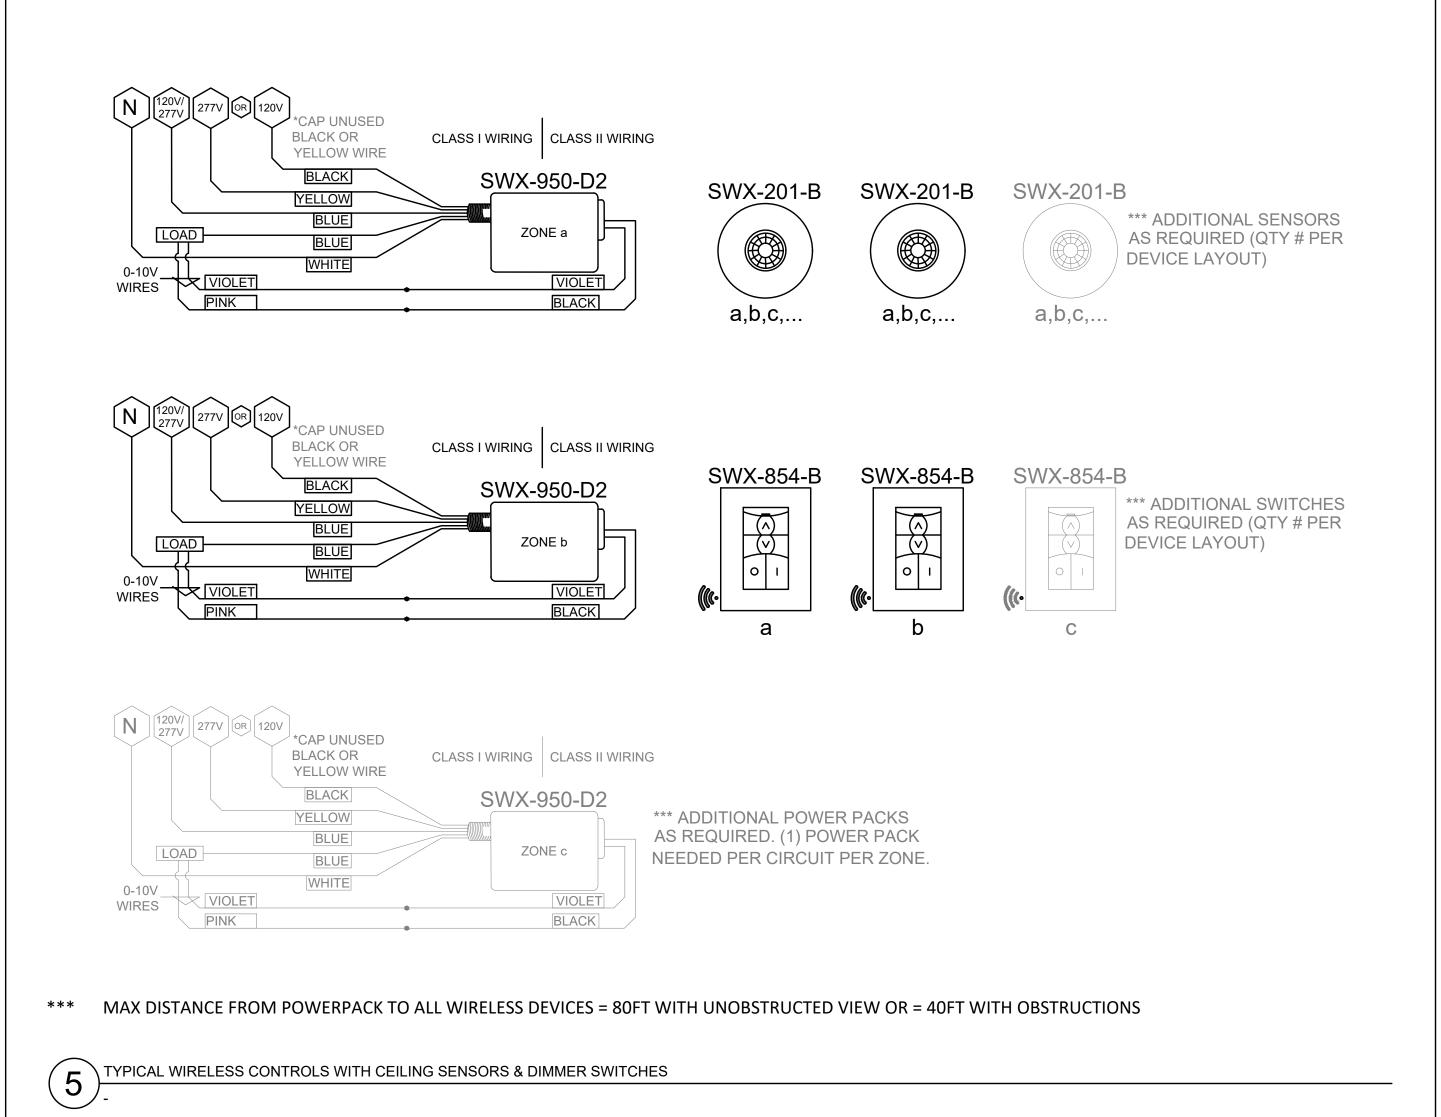

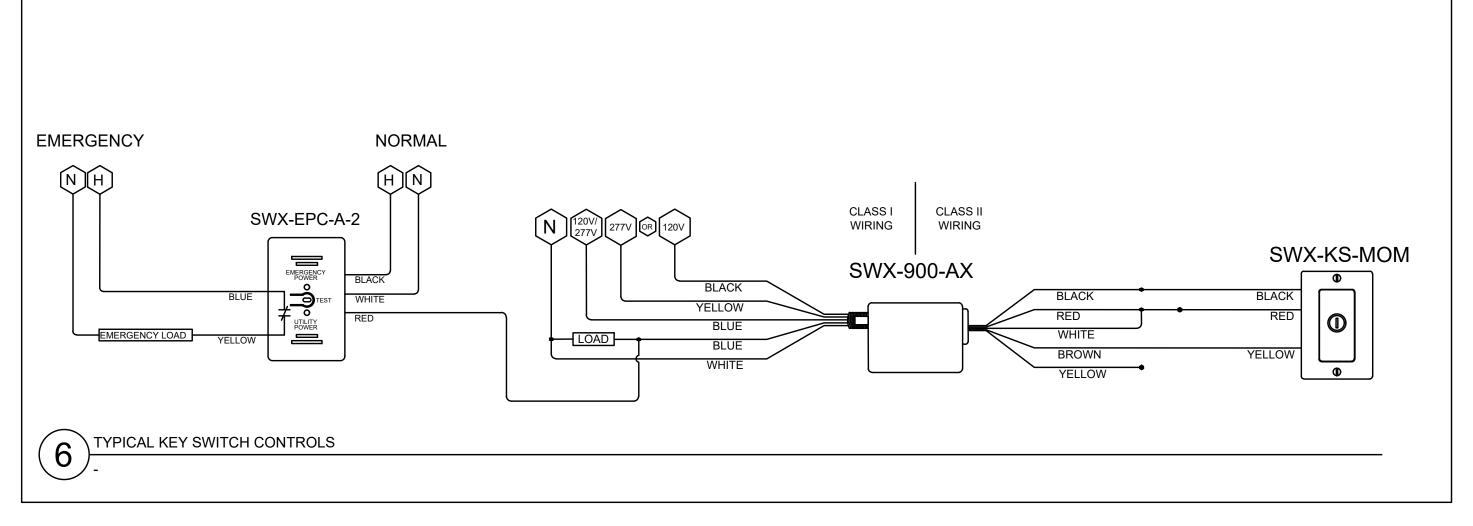


POWPAK DIMMING MODULE WITH 0-10 V CONTROL

CENTRAL EMERGENCY LIGHTING GENERATOR

TYPICAL GENERATOR WIRING DIAGRAM

EMERGENCY HOT

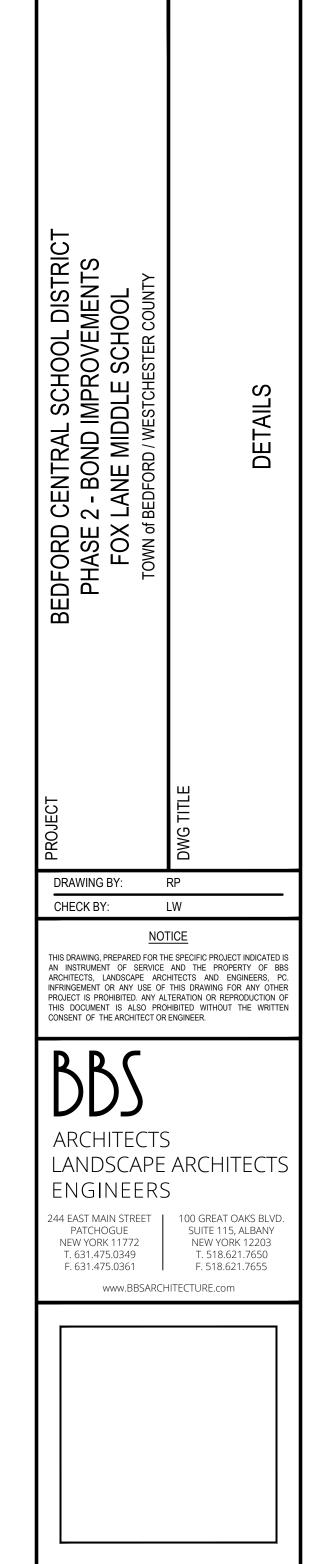

66-01-02-06-0-007-013

DISTRICT BEDFORD CENTRAL SCHOOL DISTRICT

DWG TITLE

SCALE: AS NOTED

FILE No: 23-131b

PROJECT PHASE 2 - BOND IMPROVEMENTS

BID PICK-UP: FEBRUARY 24, 2025

E7.02

REV. DATE

KEY PLAN

NOT TO SCALE

<u>NOTICE</u>


THESE DRAWINGS ARE BASED ON CONSTRUCTION DRAWINGS NOT PREPARED BY BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PC. AND, THEREFORE, MAY NOT REPRESENT THE

CONDITIONS AS CONSTRUCTED AT THE TIME. ALL EXISTING CONDITIONS SHOWN ARE REPRESENTED AS SUGGESTIVE INFORMATION AS THEY MAY NOT HAVE BEEN BUILT AND DETAILED PER THE ORIGINAL DOCUMENTS OR PER THE OWNER'S INFORMATION.

						NAM										OCATIO		BOILER ROOM	
TYPE						E: <u>B</u> (NO. OF PO				42			<u> 225A</u>
ſ	MIN AIC RAT	ING (KA)	: _	22K		N	IEUTRA	.L: .		225A		MAI	N CIRC	UITE	BREA	AKER: _	225 <i>A</i>	<u>4, 3P</u>	
MAI	IN LUGS:	_4/0	0					VOL	TS:	277/	480V	-	PH	IASE:	_	3	-	# WIRES:4	_
		N	MOUNT	ING: SU	RFACE	E MOUN	TED	Εl	NCL.	TYPE:		1			DO	OR REQ'D	:	DOOR-IN-DOOR	<u>L</u>
ACC	CESSORIES:	9	SURGE		TIVE DE	/ICE (SPD					N/A		S-FEED SO SWI	LUG	s: [FI	EED-THI	RU LUGS: D GROUND:	
CKT.			DESIG	NATION			WIRE SIZE			A	LOAD B	С	CKT. BRKR		RE ZE			DESIGNATION	C
• 1	ACCU-1						8	50A	\				50A	8	3	CU-1			
• 3																			
• 5							,								,		,		
• 7	CU-2						12	25 <i>A</i>	١				175A	2/	0	NEW 112	.5kVA TI	RANSFORMER	
9																			
1 1	•						•	.					•	ļ,			,		
13																			
15																			
17																			
19												1							
21																			
25																			
27																			
29																			
31																			
33																			
35																			
37																			
39																			
41																			

TYPE	BRANCH BREAKER TYPE:	BOLT O	N		1	NO. OF PC	DLES:		54	BUS SIZE (A): 400A	_
N				400A		MAI	N CIRCI	JIT BRE	AKER:	400A, 3P	
	N LUGS: 500kCMIL			: <u>120/</u> :					3	# WIRES:4	
IVIAI	OUDS				<u> </u>	4	1 1 17				
ACC	MOUNTING: <u>SURF</u> CESSORIES: SURGE PROTECTIVE DEVIC SHUNT TRIP MAIN:		_	L. TYPE: TING(KA):	 _N/A		-FEED L O SWIT	_UGS: [DOOR-IN-DOOR ED-THRU LUGS: DLATED GROUND:	
CKT.	DESIGNATION	WIRE SIZE	CKT. BRKR.	A	LOAD B	С	CKT. BRKR.	WIRE SIZE		DESIGNATION	С
1	EX-2	12	25A				25A	12	EX-2		
3	EX-3	12	25A				25A	12	EX-3		
5	EX-1	12	15A				20A	12	IDUs		
7	HYDRONIC CABINET HEATERS	12	20A				•		ļ		
9	HYDRONIC CABINET HEATERS	12	20A				20A	12	IDUs		
•11	TACO PUMP	12	20A]	 	ļ		
13							15A	12	AHU-1		
15	•						,	↓	,		
17	ERV, OUTSIDE GFI, EXAM ROOM, OFFICE RE	C. 12	20A				20A	12	OFFICE, EX	XAM ROOM RECEPTACLES	
19	119, 133 RECEPTACLES	12	20A				20A	12	OFFICE RE	ECEPTACLES	
21	HAND DRYER	12	20A				20A	12	KITCHEN F	REFRIGERATOR RECEPTACLE	
23	HAND DRYER	12	20A				20A	12	CONFERE	NCE & RECEPTION RECEPTACLES	
25	OFFICE RECEPTACLES	12	20A				20A	12	CONFERE	NCE, PRINT, COPY, RECEPTACLES	
27	OFFICE, CONFERENCE ROOM RECEPTACLES	12	20A				20A	12	RECEPTIO	N, CONFERENCE RECEPTACLES	
29	OFFICE, CONFERENCE ROOM RECEPTACLES	12	20A				20A	12	MAIN OFFI	CE AND LOBBY RECEPTACLES	
31	SECURITY RECEPTACLES	12	20A				15A	12	AHU-2		
33	SECURITY RECEPTACLES	12	20A				,	+	<u> </u>		
35	VESTIBULE RECEPTACLES	12	20A				20A	12	209/210 RE	ECEPTACLES	
37	209/210 RECEPTACLES	12	20A				20A	12	209/210 RE	ECEPTACLES	
39	209/210 RECEPTACLES	12	20A				20A	12	209/210 RE	ECEPTACLES	
41	209/210 RECEPTACLES	12	20A				20A	12	209/210 RE	ECEPTACLES	
43	NURSE'S OFFICE FRIDGE RECEPTACLE	12	20A				20A	12	209/210 RE	ECEPTACLES	
45	FIRE SHUTTER	12	20A				20A	12	209/210 RE	ECEPTACLES	
47	IDF QUAD	12	20A				20A	12	KITCHEN C	COUNTER RECEPTACLE	
49	124 RECEPTACLES AND WALLBOX	12	20A				225A	4/0	PANEL 'PL'	Τ'	
51											
53									L \		

TYPE	BRANCH BREAKER TYPE:	BOLT O	<u>N</u>		1	NO. OF PO	DLES:	_	42 BUS SIZE (A): <u>225A</u>	_
M	IIN AIC RATING (KA): 22K	NEUTRA	L:	225A		MAI	N CIRCL	JIT BRE	AKER: <u>225A, 3P</u>	
IIAM	NLUGS: <u>4/0</u>		VOLTS:	120/	208V		PHA	ASE:		
	MOUNTING: RECESSED)	ENCI	L. TYPE:		1		DC	OOR REQ'D: DOOR-IN-DOOR	
ACC	ESSORIES: SURGE PROTECTIVE DEVICE (SP SHUNT TRIP MAIN:	D):			N/A		-FEED L	.ugs: [_	
KT. #	DESIGNATION	WIRE SIZE	CKT. BRKR.	A	LOAD B	С	CKT. BRKR.	WIRE SIZE	DESIGNATION	CKT #
1	MAUV-2	12	15A				20A	12	318 CORD REELS	2
3	•	1	\				20A	12	318 CORD REELS	4
5	318 WINDOW WALLBOXES	12	20A				20A	12	318 CORD REELS	6
7	317A, 317, 318 RECEPTACLES	12	20A				20A	12	317 CORD REELS	8
9	317 LASER PRINTER WALLBOX	12	20A				20A	12	317 CORD REELS	10
11	317 WALLBOXES	12	20A				20A	12	317 CORD REELS	12
13	317 CORD REEL	12	20A				20A	12	316 CORD REELS	14
15	316, 317, 317B RECEPTACLES	12	20A				20A	12	316 CORD REELS	16
17	317 WALLBOXES	12	20A				20A	12	316 CORD REELS	18
19	315 RECEPTACLE	12	20A				20A	12	315 RECEPTACLE	20
21	315 RECEPTACLE	12	20A				20A	12	316, 318 SMARTBOARD WALLBOXES	22
23	315 RECEPTACLE	12	20A				20A	12	315 CONTACTOR POWER	24
25	316 RECEPTACLE AND WALLBOX	12	20A				20A	12	316 CONTACTOR POWER	26
27	317 RECEPTACLE	12	20A				20A	12	317 CONTACTOR POWER	28
29	317 RECEPTACLE	12	20A				20A	12	318 CONTACTOR POWER	30
31	317 RECEPTACLE	12	20A				20A	12	316 CORD REEL	32
33	MAINTENANCE RECEPTACLES	10	20A				20A	12	316 CORD REEL	34
35										36
37										38
39										40
41										42

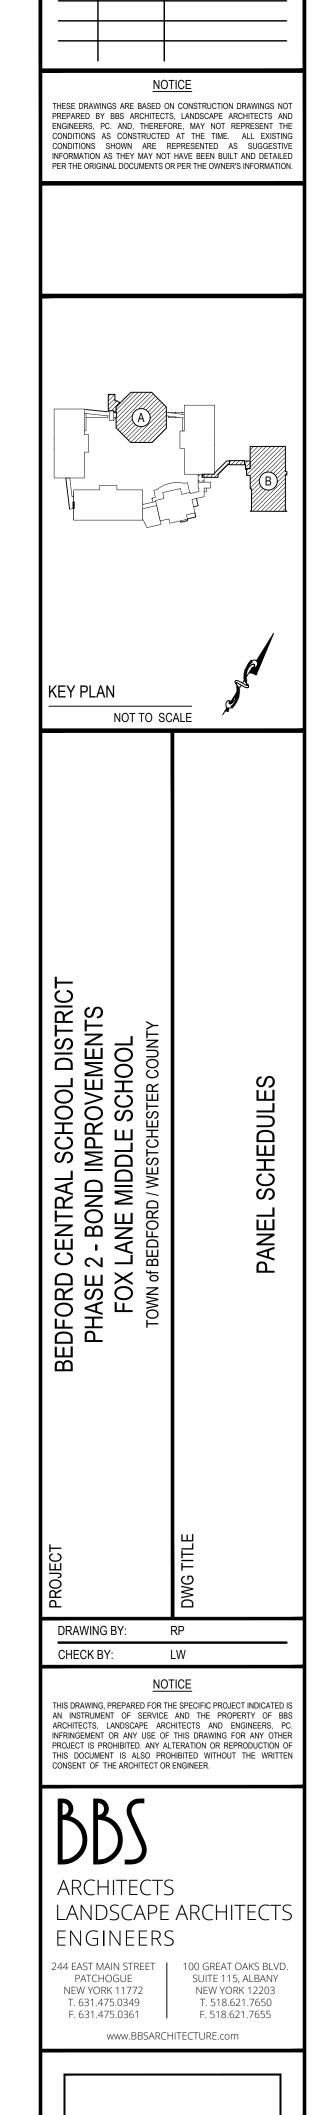

REV. DATE

SED No.	66-01-02-06-0-007-013
DISTRICT	BEDFORD CENTRAL SCHOOL DISTRICT
PROJECT	PHASE 2 - BOND IMPROVEMENTS

DWG TITLE

PANEL SCHEDULES

SCALE: AS NOTED

SCALE: AS NOTED

DATE: APRIL 2024

BID PICK-UP: FEBRUARY 24, 2025

FILE No: 23-131b F

E8.01

GENERAL NOTES

- IT IS STRONGLY RECOMMENDED BY THE ARCHITECT / ENGINEER THAT THE CONTRACTOR VISIT THE SITE AND VERIFY IN THE FIELD ALL EXISTING CONDITIONS PRIOR TO BIDDING. CONTRACTOR SHALL BE RESPONSIBLE FOR VERIFICATION OF ALL DIMENSIONS REQUIRED FOR ESTIMATING.
- IT SHALL BE THE SOLE RESPONSIBILITY OF THE CONTRACTOR NO MATTER WHAT TRADE, TO REVIEW THE ENTIRE BID PACKAGE CONSISTING OF (ALL CONSTRUCTION DRAWINGS AND THE PROJECT MANUAL) PRIOR TO SUBMITTING THEIR BID. THE CONTRACTOR(S) WILL BE HELD ACCOUNTABLE FOR ALL MATERIALS IN THE BID PACKAGE NO MATTER WHERE IT IS LOCATED IN THE DOCUMENTATION.
- IT SHALL BE THE SOLE RESPONSIBILITY OF THE CONTRACTOR TO REVIEW ALL EXISTING CONDITIONS, COMPONENTS, MEASUREMENTS, DISCREPANCIES AND ANY OTHER ITEMS THAT WILL IMPEDE THE PROGRESS OF OR INCREASE THE COSTS TO THE CURRENT WORK SCOPE. IF ANY OF THESE ITEMS EXIST THE CONTRACTOR SHALL REFER TO GENERAL NOTE No. 4.
- ALL QUESTIONS, DISCREPANCIES AND REQUESTS FOR INFORMATION MUST BE SUBMITTED IN WRITTEN FORM TO THE ATTENTION OF THE ARCHITECT OR ENGINEER. THE CONTRACTOR SHALL FOLLOW THE FORMAT OUTLINED IN THE PROJECT MANUAL, DIVISION 1, GENERAL REQUIREMENTS, SPECIFICATION SECTION - 012600, CONSTRUCTION PHASE CLARIFICATIONS, REQUESTS FOR INFORMATION FROM ARCHITECT'S OFFICE.
- IF NO QUESTIONS ARE RAISED ON A PARTICULAR ITEM IN QUESTION DURING THE BIDDING PROCESS, IT WILL BE THE UNDERSTANDING OF THE OWNER, CONSTRUCTION MANAGER, ARCHITECT, ENGINEER AND CONTRACTOR(S), THAT THE CONTRACTOR HAS VISITED THE SITE IN CONJUNCTION WITH REVIEWING THE CONTRACT DOCUMENTS (ALL CONSTRUCTION DRAWINGS AND THE PROJECT MANUAL) AND UNDERSTANDS THI ARCHITECTS/ENGINEERS INTENTIONS. IF A QUESTION IS RAISED AFTER THE BIDDING PHASE, THE CONTRACTOR WILL BE HELD TO THE ARCHITECT OR ENGINEERS INTERPRETATION OF ANY AND ALL COSTS ASSOCIATED WILL BARE SOLELY ON THE RESPONSIBILITY OF THE CONTRACTOR. NO ADDITIONAL COSTS WILL BE ACCEPTED OR PASSED ONTO THE OWNER.
- THE CONTRACTOR SHALL PROTECT THE AREA OF WORK FROM ANY INCLEMENT WEATHER THAT MAY OCCUR DURING THE WORK DAY AND AFTER DAILY OPERATIONS. THIS PROTECTION SHALL BE IN PLACE THROUGHOUT THE DURATION OF THE PROJECT. AS OUTLINED IN SPECIFICATION SECTION 013000.
- ALL WORK SHALL BE IN ACCORDANCE WITH STATE AND LOCAL CODES, THE REQUIRED EXITS IN THE EXISTING BUILDING MUST BE KEPT CLEAR, MAINTAINED, AND PROTECTED, AS OUTLINED IN SPECIFICATION SECTION 013500 - UNIFORMED SAFETY STANDARDS FOR SCHOOL CONSTRUCTION AND MAINTENANCE PROJECTS: COMMISSIONERS REGULATIONS, SECTION 155.5.
- ALL CONTRACTORS SHALL SUBMIT SAMPLES TO THE ARCHITECT/ENGINEER FOR REVIEW PRIOR TO THE COMMENCEMENT OF WORK. ALL SUBMITTALS SHALL BE IN ACCORDANCE WITH THE PROJECT MANUAL - DIVISION 1 - GENERAL REQUIREMENTS -SPECIFICATION SECTION 013300 - SUBMISSIONS.
- ALL DEMOLITION AND CONSTRUCTION WORK TO BE PERFORMED WITHOUT INTERRUPTION TO THE DISTRICT ADMINISTRATION OPERATIONS AND SHALL COMPLY WITH THE PROCEDURES OUTLINED IN THE PROJECT MANUAL - DIVISION 1 - GENERAL REQUIREMENTS - SECTION 013300 - SPECIAL PROCEDURES AND PROVISIONS, AND SECTION 013500 - COMMISSIONERS REGULATIONS, (PART 155.5) AND SAFETY
- ALL EXISTING VENTILATION DIFFUSERS AND GRILLS SHALL BE COVERED AND PROTECTED AGAINST ANY FOREIGN MATTER ENTERING THE SYSTEMS DURING CONSTRUCTION. THE CONTRACTOR MUST ALSO MAINTAIN ADEQUATE VENTILATION THROUGH OUT THE PROJECT AS STATED IN THE. 'REGULATIONS OF THE COMMISSIONER OF EDUCATION PART 155 (8NYCRR 155).' AS OUTLINED IN SPECIFICATION SECTION - 013500.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE CONTROL OF CHEMICAL FUMES, GASES. AND OTHER CONTAMINATES TO ENSURE THEY DO NOT ENTER OCCUPIED PORTIONS OF THE BUILDING OR AIR INTAKES, AS OUTLINED IN SPECIFICATION SECTION 013500 - UNIFORMED SAFETY STANDARDS FOR SCHOOL CONSTRUCTION AND MAINTENANCE PROJECTS: COMMISSIONERS REGULATIONS, SECTION 155.5.
- ALL WORK AND MATERIALS OF THIS PROJECT AND ADJACENT SURFACES SHALL BE PROTECTED FROM DAMAGE. IN THE EVENT OF DAMAGE, THE CONTRACTOR SHALL IMMEDIATELY MAKE REPAIRS AND REPLACEMENTS NECESSARY TO THE APPROVAL OF THE ARCHITECT/ENGINEER AND AT NO ADDITIONAL COST TO THE OWNER.
- THE CONTRACTOR SHALL ENFORCE UPON STRICT DISCIPLINE AND GOOD ORDER AMONG THE CONTRACTORS EMPLOYEES AND OTHER PERSONS CARRYING OUT THE CONTRACT. THE CONTRACTORS SHALL NOT PERMIT EMPLOYMENT OF UNFIT PERSONS OR PERSONS NOT SKILLED IN THE TASK ASSIGNED TO THEM. ALL IN ACCORDANCE WITH PROJECT MANUAL SECTION - CONDITIONS OF THE CONTRACT.
- ALL WORKERS WILL BE REQUIRED TO WEAR A PHOTO-IDENTIFICATION BADGE FOR WORKERS IDENTIFICATION AND SECURITY PURPOSES WHILE WORKING AT OCCUPIED SITES. ALL IN ACCORDANCE WITH PROJECT MANUAL SECTION - CONDITIONS OF THE
- ALL PROJECT WASTE MATERIAL AND RUBBISH SHALL BE DISPOSED IN CONTAINERS PROVIDED BY THE CONTRACTOR FOR SUBSEQUENT LEGAL OFF-SITE DISPOSAL. CONTAINER LOCATIONS ARE TO BE COORDINATED WITH SCHOOL DISTRICT OFFICIALS. OFF-SITE DISPOSAL SHALL BE PERFORMED ON A REGULAR BASIS. CONTRACTORS SHALL RESTORE ALL CONDITIONS TO THE STATE OF CLEANLINESS THAT EXISTED PRIOR TO COMMENCEMENT OF WORK.
- ALL INTERIOR SURFACES DISTURBED DURING CONSTRUCTION SHOULD BE REPAIRED AND/OR REPLACED TO MATCH EXISTING CONDITIONS TO THE APPROVAL OF THE ARCHITECT/ENGINEER AND OWNER.

GENERAL RACEWAY NOTES

SURFACE RACEWAY WITH APPROPRIATE CONNECTORS.

- QUANTITIES OF MATERIAL AS REQUIRED.
- ELECTRICAL CONTRACTOR SHALL ROUTE ALL SURFACE RACEWAY AROUND ALL OBSTRUCTIONS.
- ELECTRICAL CONTRACTOR WILL PROVIDE AND INSTALL ANY OTHER FITTINGS THAT WERE NOT MENTIONED IN ORDER TO PROVIDE A COMPLETE SYSTEM.
- ELECTRICAL CONTRACTOR MUST MECHANICALLY ANCHOR ALL SURFACE MOUNT RACEWAY WITH ADEQUATE ANCHORS.
- WHEREVER SPECIFIED SURFACE RACEWAY IS UNABLE TO BE INSTALLED DUE TO SIZE

ELECTRICAL CONTRACTOR MUST SECURE INCOMING MC CABLE TO END FITTING OF

- LIMITATION THE ELECTRICAL CONTRACTOR WILL BE RESPONSIBLE FOR SUPPLYING AND INSTALLING ARCHITECT/ENGINEER SPECIFIED ALTERNATE SURFACE RACEWAY.
- FINAL COLOR FOR ALL MATERIALS SHALL BE DETERMINED BY ARCHITECT/ENGINEER.
- ELECTRICAL CONTRACTOR WILL BE RESPONSIBLE FOR PROVIDING AND INSTALLING ALL CAT-6 CABLE WITHIN SURFACE RACEWAY.
- ELECTRICAL CONTRACTOR SHALL REFER TO "E" AND "E9.X" SERIES DRAWINGS FOR COORDINATION OF INSTALLATION.
- ELECTRICAL CONTRACTOR SHALL INSTALL DIVIDER WALL (WHERE APPLICABLE) CONTINUOUSLY THROUGHOUT SURFACE RACEWAY AND ACCORDING TO MANUFACTURERS SPECIFICATIONS FOR A POWER AND DATA INSTALLATION. THE ELECTRICAL CONTRACTOR SHALL CONFIRM RACEWAY HEIGHT BEFORE

INSTALLATION. THE FINAL HEIGHT SHALL BE DETERMINED BY CASEWORK, DESK. WORK

SURFACE HEIGHT AND OWNER. THE CONTRACTOR SHALL NOTIFY THE ARCHITECT OF

- ANY DISCREPANCIES BEFORE INSTALLATION OF SURFACE RACEWAY. MAINTAIN APPROPRIATE SEPARATION OF LINE VOLTAGE AND LOW VOLTAGE CABLE.
- QUANTITY OF DROPS AS PER FLOOR PLANS.
- . CABLES BACK FED OR RACEWAY FED AS REQUIRED.

CAT 6 / CAT 6A NOTES

- ALL 4-PAIR UTP HORIZONTAL STATION PLENUM RATED CABLES FOR VOICE / DATA SERVICES SHALL BE HOMERUN TO THE NEAREST COMMUNICATIONS ROOM, AS ILLUSTRATED ON THE TECHNOLOGY FLOOR PLANS.
- REFERENCING THE CABLE PATHS ILLUSTRATED ON THE TECHNOLOGY FLOOR PLANS. FOR WORKSTATIONS, ROUTE THE COMMUNICATIONS CABLES THROUGH THE GYPSUM WALLS, CONCRETE BLOCK AND RACEWAY UP TO THE CEILING CAVITY. COMMUNICATIONS CABLES MAIN PATHWAY WILL BE THE HALLWAYS TO THE NEAREST COMMUNICATIONS ROOM.
- REFER TO THE REFLECTED CEILING PLANS AND MECHANICAL PLANS TO COORDINATE PATHWAYS IN THE CEILINGS WITH LIGHT FIXTURES AND MECHANICAL DUCT WORK.
- . ALL 4-PAIR UTP HORIZONTAL STATION NETWORK DATA CABLES SHALL LAND SEQUENTIALLY, BY THEIR OUTLET ID, ON THE 48-PORT PATCH PANELS, IN THE RACKS AND CABINETS LOCATED IN THE COMMUNICATIONS ROOMS AS INDICATED ON THE TECHNOLOGY FLOOR PLANS.
- ELECTRICAL CONTRACTOR SHALL BE RESPONSIBLE FOR THE COORDINATION OF THE ROUTING OF CABLES ABOVE THE HUNG CEILING WITH THE ELECTRICAL, MECHANICAL AND GENERAL CONTRACTORS PRIOR TO INSTALLATION.
- ELECTRICAL CONTRACTOR TO VERIFY CEILING HEIGHTS FOR ALL AREAS PRIOR TO INSTALLING ANY CABLE. ELECTRICAL CONTRACTOR SHALL COORDINATE THE INSTALLATION OF ANY COMPONENTS IN THE CEILING WITH ALL OTHER TRADES, EQUIPMENT AND FIELD CONDITIONS. ANY CABLE TRANSITIONS ROUTED OVER HVAC DUCTS MUST NOT LAY ON TOP OF THE DUCTS AND MUST BE SUPPORTED OVER THE
- DO NOT LAY CABLES OVER LIGHTING FIXTURES OR ELECTRICAL MACHINERY IN THE HUNG CEILING. CABLES SHALL BE PLACED AT A MINIMUM OF 12 INCHES AWAY FROM MAGNETIC INDUCING EQUIPMENT AND ELECTRICAL WIRING.
- FURNISH AND INSTALL ADDITIONAL SLEEVES (WITH GROMMETED ENDS) AS REQUIRED FOR THE ENTRANCES INTO THE COMMUNICATIONS ROOMS AND ANY OTHER APPLICABLE AREAS. ALL SLEEVES SHALL BE FIRESTOPPED WHEN THE INSTALLATION IS COMPLETED.
- PROVIDE ALL PENETRATIONS AND RATED PARTITION FIRESTOPPING EVERY TIME A PARTITION IS TRAVERSED ABOVE THE HUNG CEILING. EXISTING FIREPROOFING MATERIAL WHICH IS DISTURBED OR DAMAGED BY THE WORK UNDER THIS CONTRACT SHALL BE REPLACED AND RESTORED TO THE SATISFACTION OF THE OWNER.
- 0. FURNISH AND INSTALL TRAPEZE, BRIDAL RINGS, CADDY HANGERS, J-HOOKS AND OTHER INDUSTRY ACCEPTED METHODS REQUIRED TO SUPPORT ALL INSTALLED CABLES. DO NOT SUPPORT CABLES ON CEILING BLACK IRON, DROP CEILING GRID OR ON ANY OTHER DEVICES THAT ARE NOT INTENDED FOR THE SUPPORTING OF CABLES. EXCEPT FOR GROUPS OF 10 OR FEWER CABLES, CABLE SUPPORTS SHALL BE ANCHORED TO THE UNDERSIDE OF THE SLAB AND CLAMPED TO BUILDING STEEL.

CABLES MUST BE SUPPORTED AT A MINIMUM EVERY FIVE (5) FEET OF CENTER AND

- BUNDLES MUST BE HOOK AND LOOPED TOGETHER AT A MINIMUM OF EVERY THREE (3)
- ALL CABLES SHALL BE INSPECTED AS THEY ARE PULLED OFF THE REEL FOR ANY OBVIOUS DEFECTS. REPORT ANY DEFECTS IMMEDIATELY TO THE ENGINEER AND HALT FURTHER USE OF THE CABLE FROM THAT REEL, PENDING A DETERMINATION OF THE QUALITY OF THE REEL BY THE MANUFACTURER.
- 3. ALL CABLES SHALL BE PULLED BY HAND AND CONTINUOUSLY MONITORED BY A TENSION METER SO AS NOT TO EXCEED THE PRESCRIBED MAXIMUM PULLING TENSION RECOMMENDED BY THE MANUFACTURER.
- ELECTRICAL CONTRACTOR SHALL NOT EXCEED THE CABLE PULLING FORCE AND MINIMUM CABLE BENDING RADIUS. CABLE TERMINATIONS AT DISTRIBUTION RACKS/CABINETS FOR VOICE AND DATA SHALL BE DRESSED NEATLY AND DONE IN A WORKMANLIKE MANNER. HOOK & LOOP CABLES AND CUT TO LENGTH AT TERMINATION POINTS.
- WHEN INSTALLING ENHANCED CATEGORY-6 UTP CABLE, MAKE SURE THE CABLE IS NEVER BENT BEYOND A 90 DEGREE ANGLE. A CABLE BEND RADIUS OF 4 TIMES THE DIAMETER OF THE CABLE IS RECOMMENDED. (ON A 4-PAIR CABLE, THIS IS APPROXIMATELY ONE INCH.)
- 6. ALL CABLES SHALL BE PULLED BY THE ELECTRICAL CONTRACTOR IN CONTINUOUS SPLICE-FREE RUNS, WITH NO FACTORY OR FIELD SPLICES, UNLESS OTHERWISE SHOWN ON THE DRAWINGS AND/OR SPECIFICATIONS.
- 7. PULLING AND LAYING CABLE ON SHARP EDGES IS NOT PERMITTED.
- 18. THE CABLE PATHS SHOWN ON DRAWINGS REPRESENT DESIGN INTENT AND APPROXIMATE ROUTING OF CABLES IN HUNG CEILING TO DROP OFF POINTS. ADJUST ACCORDINGLY TO EXISTING FIELD CONDITIONS.
- 19. QUANTITY OF CABLE IS NOT REPRESENTED. CONTRACTOR SHALL TABULATE QUANTITY BASED UPON COMMUNICATION OUTLET SYMBOLS SHOWN (TYPICAL). CONTRACTOR TO VERIFY IN FIELD AND MAKE ADJUSTMENTS AS REQUIRED.
- 20. PROVIDE A MINIMUM OF SIX (6) FEET OF SLACK WITH A 12 INCH DIAMETER COIL AT THE STATION END FOR WORKSTATION LOCATIONS. NEATLY COIL AND CONCEAL SLACK ABOVE THE HUNG CEILING AND PROTECT FROM DAMAGE BY WORKMEN PRIOR TO EXTENDING CABLE AND INSTALLING TO VOICE/DATA WORKSTATION OUTLET.
- ALL VOICE / DATA UTP STATION CABLES SHALL BE HOMERUN BACK TO THE MAIN -OR-IDF COMMUNICATIONS ROOM AS ILLUSTRATED ON THE TECHNOLOGY FLOOR PLANS. REFER TO DETAILS AND ELEVATIONS FOR THE DEMARCATION LOCATIONS OF ALL
- ALL ABANDONED / NON USED CABLES TO BE REMOVED FROM PLENUM SPACES BACK TO THEIR POINT OF ORIGIN.
- 23. ALL NEW NETWORK EQUIPMENT SHALL BE GROUNDED AND BONDED AS PER CODE. 24. E.C. SHALL ROUTE CABLES IN THE BEST, SHORTEST ROUTE POSSIBLE TO THE NEAREST WIRE CLOSET.
- 25. E.C. SHALL REMOVE AND REINSTALL CEILING TILES AS REQUIRED TO ACCOMMODATE CABLE INSTALLATIONS.
- 26. E.C. SHALL FURNISH AND INSTALL ALL NECESSARY COMPONENTS TO FORM A COMPLETE SYSTEM EVEN IF THE COMPONENTS ARE NOT LISTED. REFER TO SPEC SECTION 271501 FOR ADDITIONAL INFORMATION.

PROPOSED KEY NOTES

- LOCATION OF EXISTING NETWORK CLOSET. REFER TO DETAILS FOR ADDITIONAL / INFORMATION.
- EXISTING WIRELESS ACCESS POINT TO REMAIN. E.C. SHALL PROTECT ALL EQUIPMENT AND CABLING DURING CONSTRUCTION.
- E.C. SHALL REMOVE AND REINSTALL EXISTING WIRELESS ACCESS POINT. E.C. SHAL INSTALL NEW CAT 6A CABLING. REFER TO DETAILS FOR ADDITIONAL INFORMATION.
- E.C. SHALL FURNISH AND INSTALL NEW CARD READER AT 44" A.F.F. REFER TO DETAILS FOR ADDITIONAL INFORMATION.
- E.C. SHALL FURNISH AND INSTALL NEW CEILING MOUNTED SECURITY CAMERA. FINA > LOCATION AND FIELD OF VIEW TO BE COORDINATED WITH OWNER. REFER TO DETAILS FOR ADDITIONAL INFORMATION.
- GRADE. FINAL LOCATION AND FIELD OF VIEW TO BE COORDINATED WITH OWNER. REFER TO DETAILS FOR ADDITIONAL INFORMATION.
- FOR ADDITIONAL INFORMATION. E.C. SHALL FURNISH AND INSTALL WALL MOUNT TELEPHONE BRACKET AT 44" A.F.F. REFER TO DETAILS FOR ADDITIONAL INFORMATION.
- E.C. SHALL FURNISH AND INSTALL DATA WALL BOX AT 18" A.F.F. REFER TO DETAILS FOR ADDITIONAL INFORMATION.
- E.C. SHALL FURNISH AND INSTALL DATA RACEWAY AT 18" A.F.F. REFER TO DETAILS FOR ADDITIONAL INFORMATION.
- DETAILS AND CASEWORK DRAWINGS FOR ADDITIONAL INFORMATION.
- 🟡 E.C. SHALL FURNISH AND INSTALL DATA RACEWAY AT COUNTER HEIGHT. REFER TO DETAILS AND CASEWORK DRAWINGS FOR ADDITIONAL INFORMATION.

FIBER OPTIC CABLE NOTES

- ALL LASER OPTIMIZED .50 MICRON OM3 MULTIMODE FIBER PLENUM RATED CABL FOR CLOSET BACKBONE CONNECTIONS SHALL BE A HOMERUN TO THE NETWO OPERATIONS CENTER (N.O.C.) ROOM OR MDF, AS ILLUSTRATED ON THE TECHNOLO FLOOR PLANS
- REFERENCING THE CABLE PATHS ILLUSTRATED ON THE TECHNOLOGY FLOOR PLAI FOR FIBER BACKBONES ON THIS FLOOR, ROUTE THE COMMUNICATIONS CABL THROUGH THE GYPSUM WALLS, CONCRETE BLOCK AND RACEWAY UP TO THE CEILI CAVITY. FIBER CABLES MAIN PATHWAY WILL BE THE HALLWAYS TO THE N.O.C. RO
- ALL FIBER BACKBONE CABLES SHALL LAND SEQUENTIALLY, BY STRAND, ON THE FIB BULK HEADS WITHIN THE FIBER PANELS, IN THE RACKS / CABINETS LOCATED IN T COMMUNICATIONS ROOMS AS INDICATED ON THE TECHNOLOGY FLOOR PLANS.
- . ELECTRICAL CONTRACTOR SHALL BE RESPONSIBLE FOR THE COORDINATION OF ROUTING OF CABLES ABOVE THE HUNG CEILING WITH THE ELECTRICAL, MECHANIC AND GENERAL CONTRACTORS PRIOR TO INSTALLATION.
- 5. ELECTRICAL CONTRACTOR TO VERIFY CEILING HEIGHTS FOR ALL AREAS PRIOR INSTALLING ANY CABLE. ELECTRICAL CONTRACTOR TO COORDINATE INSTALLATION OF ANY COMPONENTS IN THE CEILING WITH ALL OTHER TRADI EQUIPMENT AND FIELD CONDITIONS. ANY CABLE TRANSITIONS ROUTED OVER HV DUCTS MUST NOT LAY ON TOP OF THE DUCTS AND MUST BE SUPPORTED OVER
- DO NOT LAY CABLES OVER LIGHTING FIXTURES OR ELECTRICAL MACHINERY IN ' HUNG CEILING. CABLES SHALL BE PLACED AT A MINIMUM OF 12 INCHES AWAY FRO MAGNETIC INDUCING EQUIPMENT.
- FURNISH AND INSTALL ADDITIONAL SLEEVES (WITH GROMMETED ENDS) AS REQUIR FOR THE ENTRANCES INTO THE COMMUNICATIONS ROOMS AND ANY OTH APPLICABLE AREAS. ALL SLEEVES SHALL BE FIRESTOPPED WHEN THE INSTALLATI PROVIDE ALL PENETRATIONS AND RATED PARTITION FIRESTOPPING EVERY TIME
- PARTITION IS TRAVERSED ABOVE THE HUNG CEILING. EXISTING FIREPROOFI MATERIAL WHICH IS DISTURBED OR DAMAGED BY THE WORK UNDER THIS CONTRACT SHALL BE REPLACED AND RESTORED TO THE SATISFACTION OF THE OWNER. FURNISH AND INSTALL TRAPEZE, BRIDAL RINGS, CADDY HANGERS, J-HOOKS

OTHER INDUSTRY ACCEPTED METHODS REQUIRED TO SUPPORT ALL INSTALLED

CABLES. DO NOT SUPPORT CABLES ON CEILING BLACK IRON, DROP CEILING GRID OR

ON ANY OTHER DEVICES THAT ARE NOT INTENDED FOR THE SUPPORTING OF CABLES.

- EXCEPT FOR GROUPS OF 10 OR FEWER CABLES, CABLE SUPPORTS SHALL BE ANCHORED TO THE UNDERSIDE OF THE SLAB AND CLAMPED TO BUILDING STEEL. . CABLES MUST BE SUPPORTED AT A MINIMUM EVERY SIX (6) FEET AND BUNDLES MUST
- BE HOOK & LOOPED TOGETHER AT A MINIMUM OF EVERY THREE (3) FEET.
- ALL CABLES SHALL BE INSPECTED AS THEY ARE PULLED OFF THE REEL FOR ANY OBVIOUS DEFECTS. REPORT ANY DEFECTS IMMEDIATELY TO THE ENGINEER AND HALT FURTHER USE OF THE CABLE FROM THAT REEL, PENDING A DETERMINATION OF THE QUALITY OF THE REEL BY THE MANUFACTURER.
- 2. ALL CABLES SHALL BE PULLED BY HAND AND CONTINUOUSLY MONITORED BY A TENSION METER SO AS NOT TO EXCEED THE PRESCRIBED MAXIMUM PULLING TENSION RECOMMENDED BY THE MANUFACTURER.
- 3. ELECTRICAL CONTRACTOR SHALL NOT EXCEED THE CABLE PULLING FORCE AND MINIMUM CABLE BENDING RADIUS. CABLE TERMINATIONS AT DISTRIBUTION RACKS/CABINETS FOR FIBER CABLES SHALL BE DRESSED NEATLY AND DONE IN A WORKMANLIKE MANNER. ALL FIBER CABLES TO BE INSTALLED WITHIN THE FAN TRAY OF THE FIBER PANEL UTILIZING THE APPROPRIATE BEND RADIUS AT TERMINATION
- WHEN INSTALLING FIBER CABLE, MAKE SURE THE CABLE IS NEVER BENT BEYOND A 90 DEGREE ANGLE. A CABLE BEND RADIUS OF 10 TIMES THE DIAMETER OF THE CABLE IS RECOMMENDED. (ON A 12-STRAND CABLE, THIS IS APPROXIMATELY TWO INCHES.)
- ALL CABLES SHALL BE PULLED BY THE ELECTRICAL CONTRACTOR IN CONTINUOUS SPLICE-FREE RUNS, WITH NO FACTORY OR FIELD SPLICES, UNLESS OTHERWISE SHOWN ON DRAWINGS AND/OR SPECIFICATIONS.
- 16. PULLING AND LAYING CABLE ON SHARP EDGES IS NOT PERMITTED.
- 7. THE CABLE PATHS SHOWN ON DRAWINGS REPRESENT DESIGN INTENT AND APPROXIMATE ROUTING OF CABLES IN HUNG CEILING TO DROP OFF POINTS. ADJUST ACCORDINGLY TO EXISTING FIELD CONDITIONS.
- . QUANTITY OF CABLE IS NOT REPRESENTED. CONTRACTOR SHALL TABULATE QUANTITY BASED UPON COMMUNICATION OUTLET SYMBOLS SHOWN (TYPICAL). CONTRACTOR TO VERIFY IN FIELD AND MAKE ADJUSTMENTS AS REQUIRED.
- ROOM END AND THE N.O.C. ROOM OR MDF. NEATLY COIL SLACK AND ATTACH TO THE RACK/CABINET USING HOOK AND LOOP. O. ALL FIBER OPTIC CABLE TO BE HOMERUN BACK TO THE N.O.C. ROOM OR MDF AS

PROVIDE A MINIMUM OF SEVEN (7) FEET OF SLACK AT BOTH THE COMMUNICATIONS

- INDICATED. REFER TO DETAIL PLANS AND ELEVATIONS FOR THE DEMARCATION LOCATIONS OF ALL CABLES. 1. ALL ABANDONED/NON USED CABLES TO BE REMOVED FROM THE PLENUM SPACES
- BACK TO THE POINT OF ORIGIN. 22. ALL NEW NETWORK EQUIPMENT SHALL BE GROUNDED AND BONDED AS PER CODE.
- 23. E.C. SHALL FURNISH AND INSTALL ALL NECESSARY COMPONENTS TO FORM A COMPLETE SYSTEM EVEN IF THE COMPONENTS ARE NOT LISTED. REFER TO SPEC SECTION 271501 FOR ADDITIONAL INFORMATION.

$\langle 1 \rangle$	LOCATION OF EXISTING NETWORK CLOSET. REFER TO DETAILS FOR ADDITIONAL	⊢	01202	2233
\vee	INFORMATION. EXISTING WIRELESS ACCESS POINT TO REMAIN. E.C. SHALL PROTECT ALL EQUIPMENT AND CABLING DURING CONSTRUCTION.		X NAME	KEYED NOTE
	E.C. SHALL REMOVE AND REINSTALL EXISTING WIRELESS ACCESS POINT. E.C. SHALL INSTALL NEW CAT 6A CABLING. REFER TO DETAILS FOR ADDITIONAL INFORMATION.		NAME XXX XXX SF	ROOM TAG
4	E.C. SHALL FURNISH AND INSTALL NEW CARD READER AT 44" A.F.F. REFER TO DETAILS FOR ADDITIONAL INFORMATION.		# AX.XX	DETAIL TAG —— DETAIL NUMBER —— DRAWING NUMBER
5	E.C. SHALL FURNISH AND INSTALL NEW CEILING MOUNTED SECURITY CAMERA. FINAL LOCATION AND FIELD OF VIEW TO BE COORDINATED WITH OWNER. REFER TO DETAILS FOR ADDITIONAL INFORMATION.			LOCATION OF NEW LOCAL WIRE CLOSET. REFER TO DETAILS FOR ADDITIONAL INFORMATION.
6>	E.C SHALL FURNISH AND INSTALL EXTERIOR SECURITY CAMERA AT 10 FEET ABOVE GRADE. FINAL LOCATION AND FIELD OF VIEW TO BE COORDINATED WITH OWNER. REFER TO DETAILS FOR ADDITIONAL INFORMATION.		E	LOCATION OF EXISTING LOCAL WIRE CLOSET. REFER TO DETAILS FOR ADDITIONAL INFORMATION.
$\langle \hat{7} \rangle$	E.C. SHALL FURNISH AND INSTALL VIDEO INTERCOM AT 44" A.F.F. REFER TO DETAILS FOR ADDITIONAL INFORMATION.			LOCATION OF NEW SINGLE DATA DROP. REFER TO DETAILS FOR ADDITIONAL INFORMATION.
•	E.C. SHALL FURNISH AND INSTALL WALL MOUNT TELEPHONE BRACKET AT 44" A.F.F.			LOCATION OF NEW MULTI DATA DROP. REFER TO DETAILS FOR ADDITIONAL INFORMATION.
\$ \$\frac{9}{}				LOCATION OF NEW PHONE LOCATION. REFER TO DETAILS FOR ADDITIONAL INFORMATION.
Ť	E.C. SHALL FURNISH AND INSTALL DATA RACEWAY AT 18" A.F.F. REFER TO DETAILS FOR ADDITIONAL INFORMATION.		V _E	LOCATION OF EXISTING SINGLE DATA DROP. REFER TO DETAILS FOR ADDITIONAL INFORMATION.
11>	E.C. SHALL FURNISH AND INSTALL DATA WALL BOX AT COUNTER HEIGHT. REFER TO DETAILS AND CASEWORK DRAWINGS FOR ADDITIONAL INFORMATION.		VE	LOCATION OF EXISTING MULTI DATA DROP. REFER TO DETAILS FOR ADDITIONAL INFORMATION.
12>	E.C. SHALL FURNISH AND INSTALL DATA RACEWAY AT COUNTER HEIGHT. REFER TO DETAILS AND CASEWORK DRAWINGS FOR ADDITIONAL INFORMATION.		E	LOCATION OF EXISTING PHONE LOCATION. REFER TO DETAILS FOR ADDITIONAL INFORMATION.
			W.A.P. 001	LOCATION OF NEW WIRELESS ACCESS POINT. REFER TO DETAILS FOR ADDITIONAL INFORMATION.
FIB	ER OPTIC CABLE NOTES		W.A.P.	LOCATION OF EXISTING WIRELESS ACCESS POINT. REFER TO DETAILS FOR ADDITIONAL INFORMATION.
	ALL LASER OPTIMIZED .50 MICRON OM3 MULTIMODE FIBER PLENUM RATED CABLES		PROJ	LOCATION OF NEW PROJECTOR. REFER TO DETAILS FOR ADDITIONAL INFORMATION.
	FOR CLOSET BACKBONE CONNECTIONS SHALL BE A HOMERUN TO THE NETWORK OPERATIONS CENTER (N.O.C.) ROOM OR MDF, AS ILLUSTRATED ON THE TECHNOLOGY FLOOR PLANS.		PROJ _E	LOCATION OF EXISTING PROJECTOR. REFER TO DETAILS FOR ADDITIONAL INFORMATION.
2.	REFERENCING THE CABLE PATHS ILLUSTRATED ON THE TECHNOLOGY FLOOR PLANS, FOR FIBER BACKBONES ON THIS FLOOR, ROUTE THE COMMUNICATIONS CABLES THROUGH THE GYPSUM WALLS, CONCRETE BLOCK AND RACEWAY UP TO THE CEILING	_		LOCATION OF NEW DROP DOWN PROJECTION SCREEN. REFER TO DETAILS FOR ADDITIONAL INFORMATION.
	CAVITY. FIBER CABLES MAIN PATHWAY WILL BE THE HALLWAYS TO THE N.O.C. ROOM OR MDF.			LOCATION OF NEW DATA/POWER POKE THROUGH. REFER TO DETAILS FOR ADDITIONAL INFORMATION.
3.	ALL FIBER BACKBONE CABLES SHALL LAND SEQUENTIALLY, BY STRAND, ON THE FIBER BULK HEADS WITHIN THE FIBER PANELS, IN THE RACKS / CABINETS LOCATED IN THE COMMUNICATIONS ROOMS AS INDICATED ON THE TECHNOLOGY FLOOR PLANS.			LOCATION OF DATA/POWER RACEWAY. REFER TO DETAILS FOR ADDITIONAL INFORMATION.
4.	ELECTRICAL CONTRACTOR SHALL BE RESPONSIBLE FOR THE COORDINATION OF THE ROUTING OF CABLES ABOVE THE HUNG CEILING WITH THE ELECTRICAL, MECHANICAL AND GENERAL CONTRACTORS PRIOR TO INSTALLATION.		(C)	LOCATION OF NEW CATV STATION. REFER TO DETAILS FOR ADDITIONAL INFORMATION.
5.	ELECTRICAL CONTRACTOR TO VERIFY CEILING HEIGHTS FOR ALL AREAS PRIOR TO INSTALLING ANY CABLE. ELECTRICAL CONTRACTOR TO COORDINATE THE		RWB	LOCATION OF NEW RECESSED DATA/POWER WALL BOX. REFER TO DETAILS FOR ADDITIONAL INFORMATION.
	INSTALLATION OF ANY COMPONENTS IN THE CEILING WITH ALL OTHER TRADES, EQUIPMENT AND FIELD CONDITIONS. ANY CABLE TRANSITIONS ROUTED OVER HVAC DUCTS MUST NOT LAY ON TOP OF THE DUCTS AND MUST BE SUPPORTED OVER THE		WB	LOCATION OF NEW DATA/POWER WALL BOX. REFER TO DETAILS FOR ADDITIONAL INFORMATION.
6.	DUCTS. DO NOT LAY CABLES OVER LIGHTING FIXTURES OR ELECTRICAL MACHINERY IN THE		FLBX	LOCATION OF NEW DATA/POWER FLOOR BOX. REFER TO DETAILS FOR ADDITIONAL INFORMATION.
	HUNG CEILING. CABLES SHALL BE PLACED AT A MINIMUM OF 12 INCHES AWAY FROM MAGNETIC INDUCING EQUIPMENT.		D001	INDICATES DATA DROP ID NUMBER. REFER TO DETAILS FOR ADDITIONAL INFORMATION.
7.	FURNISH AND INSTALL ADDITIONAL SLEEVES (WITH GROMMETED ENDS) AS REQUIRED FOR THE ENTRANCES INTO THE COMMUNICATIONS ROOMS AND ANY OTHER APPLICABLE AREAS. ALL SLEEVES SHALL BE FIRESTOPPED WHEN THE INSTALLATION IS COMPLETED.		V001	INDICATES VOICE DROP ID NUMBER. REFER TO DETAILS FOR ADDITIONAL INFORMATION.
8.	PROVIDE ALL PENETRATIONS AND RATED PARTITION FIRESTOPPING EVERY TIME A PARTITION IS TRAVERSED ABOVE THE HUNG CEILING. EXISTING FIREPROOFING			LOCATION OF NEW DATA/POWER POLE. REFER TO DETAILS FOR ADDITIONAL INFORMATION.
	MATERIAL WHICH IS DISTURBED OR DAMAGED BY THE WORK UNDER THIS CONTRACT SHALL BE REPLACED AND RESTORED TO THE SATISFACTION OF THE OWNER.			REVISION CLOUD AND KEYED DESIGNATION.
9.	FURNISH AND INSTALL TRAPEZE, BRIDAL RINGS, CADDY HANGERS, J-HOOKS AND	L		

TECHNOLOGY SYMBOL LEGEND

DESCRIPTION


SYMBOL

0200111	TY SYMBOL LEGEND
SYMBOL	DESCRIPTION
$\langle x \rangle$	KEYED NOTE
NAME XXX XXX SF	ROOM TAG
# AX.XX	DETAIL TAG DETAIL NUMBER DRAWING NUMBER
\bowtie	LOCATION OF EXISTING INTERIOR SECURITY CAMERA. REFER TO DETAILS FOR ADDITIONAL INFORMATION.
	LOCATION OF EXISTING EXTERIOR CAMERA. REFER TO DETAILS FOR ADDITIONAL INFORMATION.
×	LOCATION OF NEW INTERIOR SECURITY CAMERA. REFER TO DETAILS FOR ADDITIONAL INFORMATION.
	LOCATION OF NEW EXTERIOR SECURITY CAMERA. REFER TO DETAILS FOR ADDITIONAL INFORMATION.
P	LOCATION OF NEW SECURITY PANIC BUTTON. REFER TO DETAILS FOR ADDITIONAL INFORMATION.
	LOCATION OF NEW ACCESS CONTROL CARD READER. REFER TO DETAILS FOR ADDITIONAL INFORMATION.
	LOCATION OF EXISTING ACCESS CONTROL CARD READER. REFER TO DETAILS FOR ADDITIONAL INFORMATION.
R	LOCATION OF NEW REQUEST FOR EXIT SENSOR. REFER TO DETAILS FOR ADDITIONAL INFORMATION.
	LOCATION OF NEW VIDEO INTERCOM CALL BOX. REFER TO DETAILS FOR ADDITIONAL INFORMATION.
(DC)	LOCATION OF NEW ACCESS CONTROL DOOR CONTACT. REFER TO DETAILS FOR ADDITIONAL INFORMATION.
ES	LOCATION OF NEW ELECTRONIC DOOR STRIKE. REFER TO DETAILS FOR ADDITIONAL INFORMATION.
← ①	LOCATION OF NEW MOTION DETECTOR. REFER TO DETAILS FOR ADDITION, INFORMATION.
	LOCATION OF NEW VIDEO INTERCOM STATION PHONE. REFER TO DETAILS FOR ADDITIONAL INFORMATION.
Н	LOCATION OF NEW SECURITY HORN. REFER TO DETAILS FOR ADDITIONAL INFORMATION.
S	LOCATION OF NEW SECURITY STROBE. REFER TO DETAILS FOR ADDITIONA INFORMATION.
HS	LOCATION OF NEW SECURITY HORN STROBE. REFER TO DETAILS FOR ADDITIONAL INFORMATION.
	t e e e e e e e e e e e e e e e e e e e

LOCATION OF EXISTING/NEW LOCAL WIRE CLOSET. REFER TO DETAILS FOR


ADDITIONAL INFORMATION.


REVISION CLOUD AND KEYED DESIGNATION.

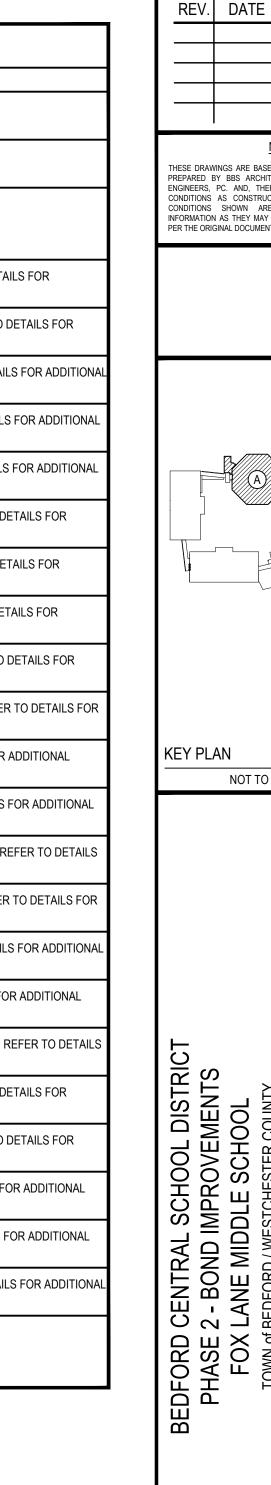

<u>NOTICE</u> HESE DRAWINGS ARE BASED ON CONSTRUCTION DRAWINGS NO REPARED BY BBS ARCHITECTS. LANDSCAPE ARCHITECTS AND CONDITIONS AS CONSTRUCTED AT THE TIME. ALL EXISTI INFORMATION AS THEY MAY NOT HAVE BEEN BUILT AND DETAILE NOT TO SCALE DRAWING BY: CHECK BY: THIS DRAWING, PREPARED FOR THE SPECIFIC PROJECT INDICATED IS AN INSTRUMENT OF SERVICE AND THE PROPERTY OF BBS INFRINGEMENT OR ANY USE OF THIS DRAWING FOR ANY OTH PROJECT IS PROHIBITED. ANY ALTERATION OR REPRODUCTION OF THIS DOCUMENT IS ALSO PROHIBITED WITHOUT THE WRITTEN ONSENT OF THE ARCHITECT OR ENGINEER. LANDSCAPE ARCHITECTS ENGINEERS 44 EAST MAIN STREET | 100 GREAT OAKS BLVD. PATCHOGUE SUITE 115, ALBANY NEW YORK 11772 NEW YORK 12203 T. 631.475.0349 F. 631.475.0361 F. 518.621.7655 www.BBSARCHITECTLIRE.com 66-01-02-06-0-007-013 DISTRICT BEDFORD CENTRAL SCHOOL DISTRICT PHASE 2 -BOND IMPROVEMENTS DWG TITLE GENERAL NOTES, LEGENDS and ABBREVIATIONS SCALE: AS NOTED APRIL 2024 BID PICK-UP: FEBRUARY 24, 2025 FILE No: 23-131b

E9.00

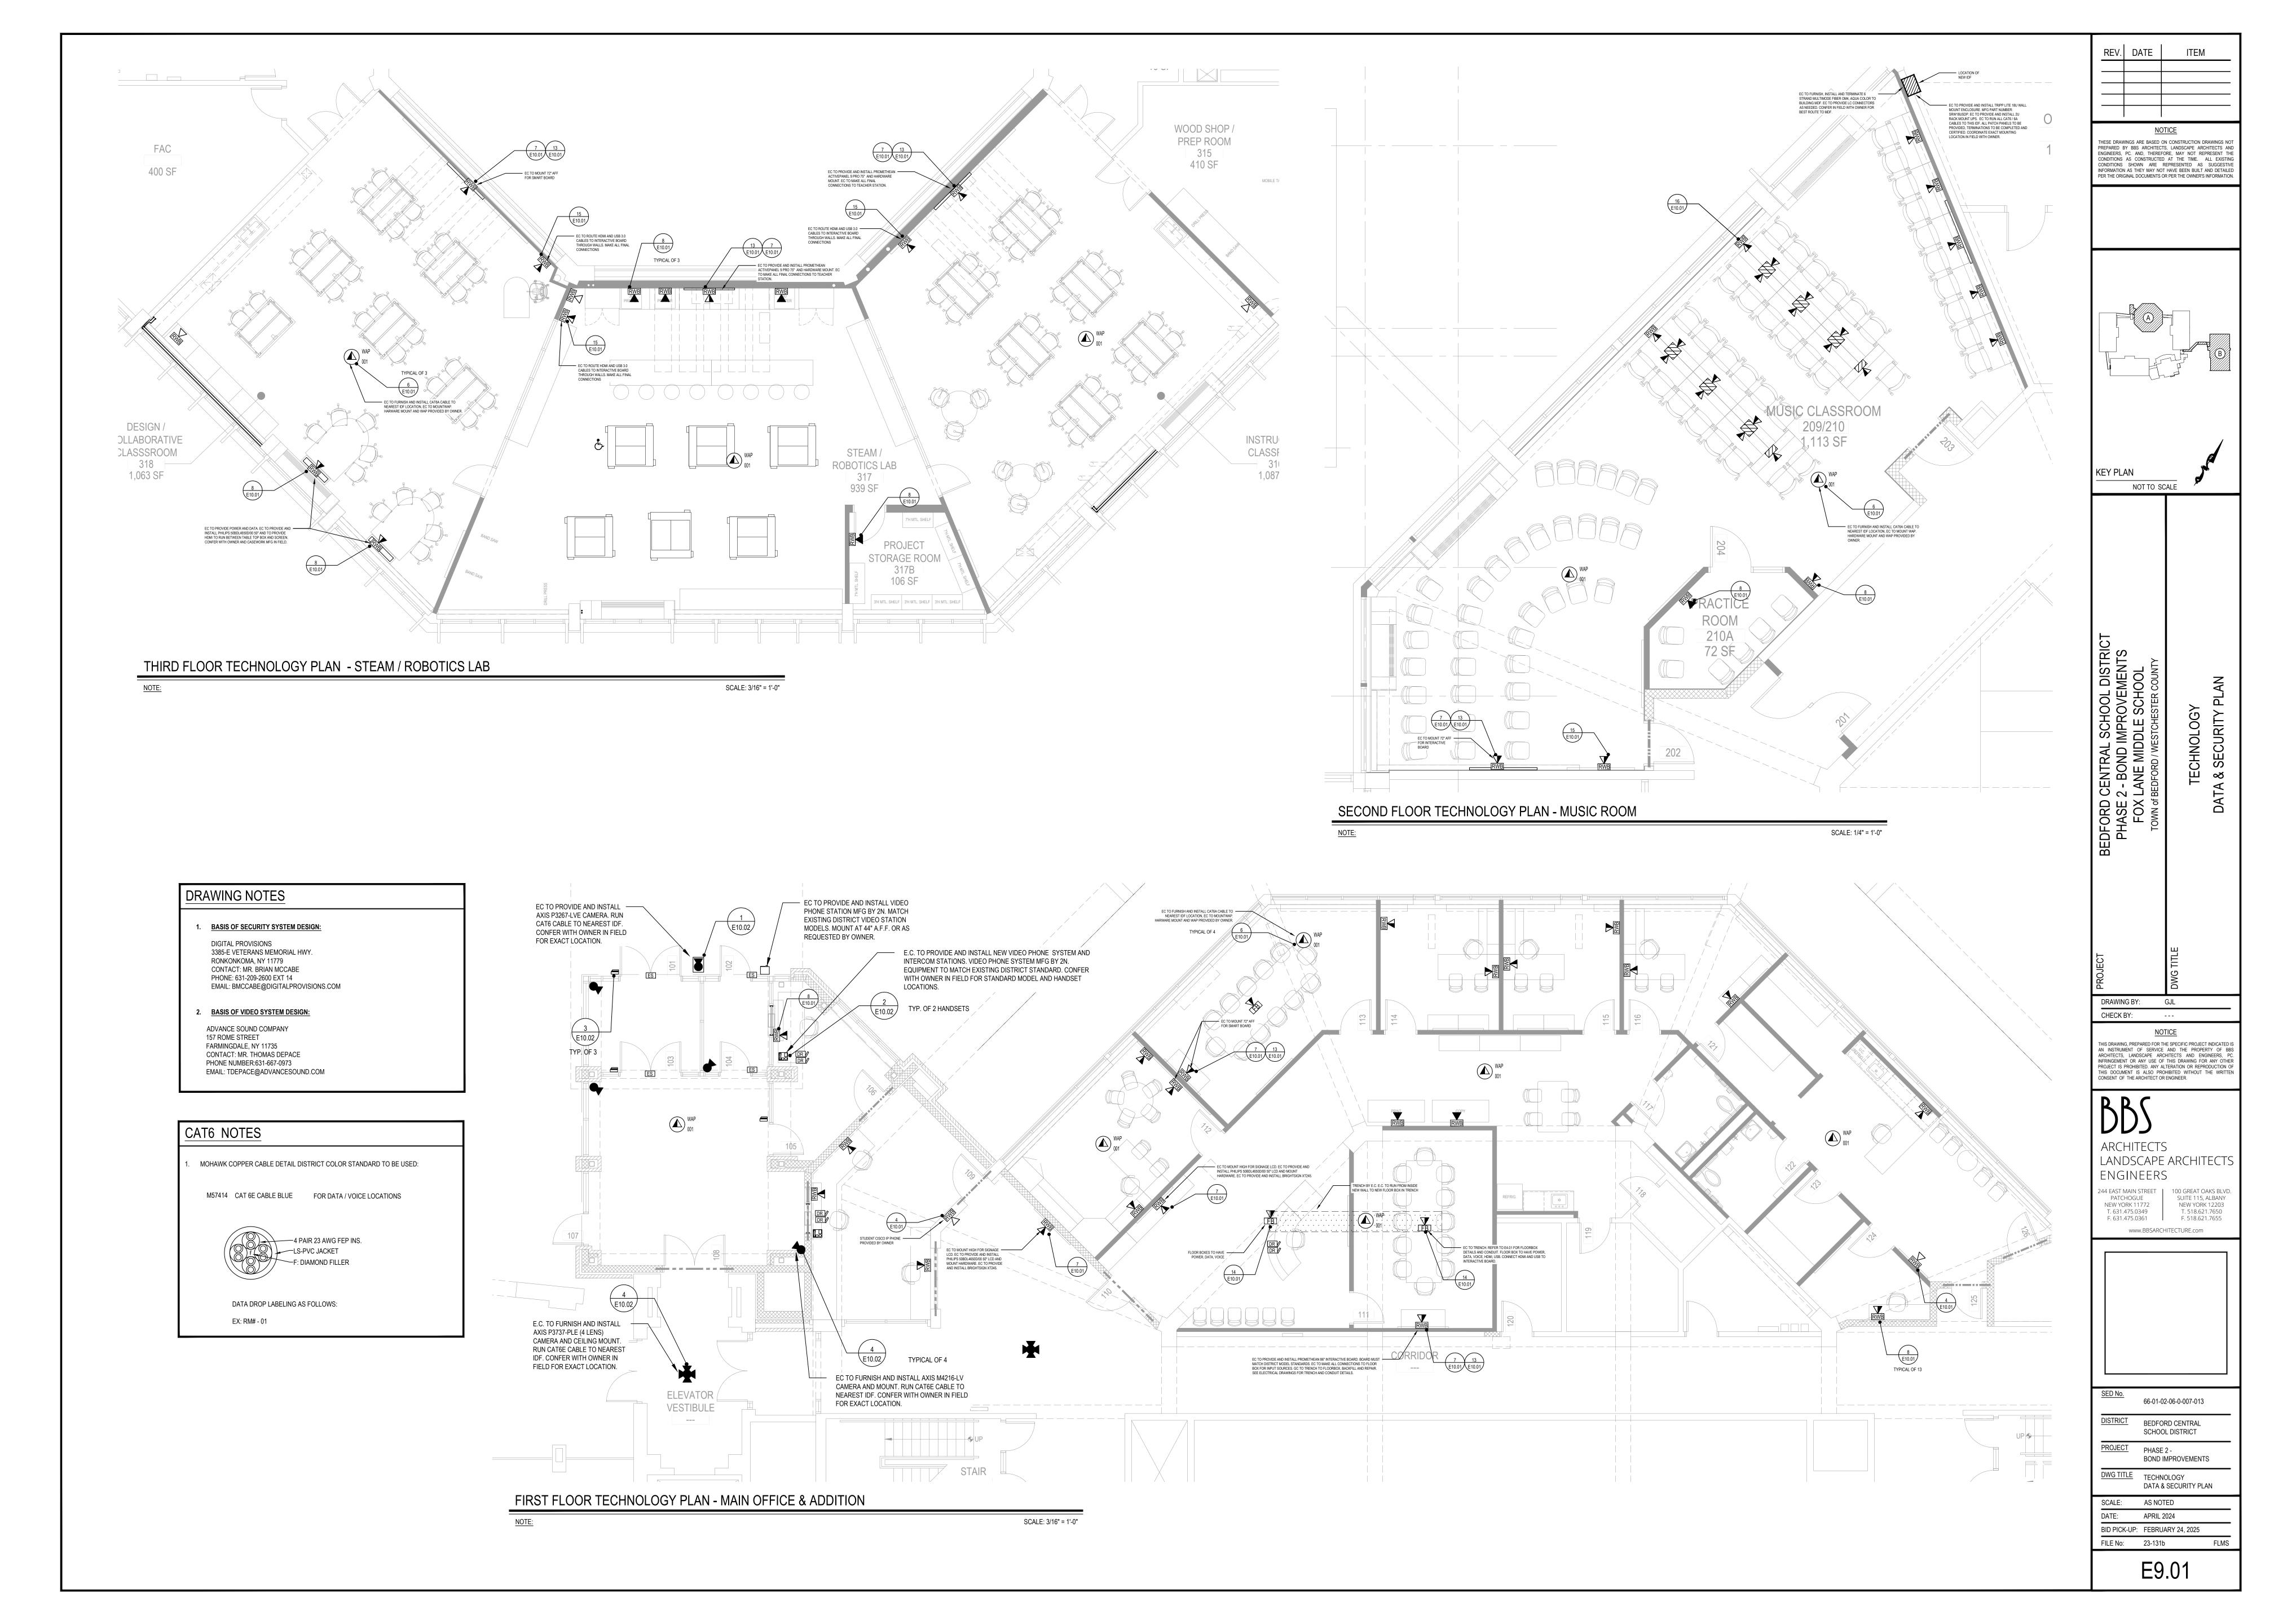

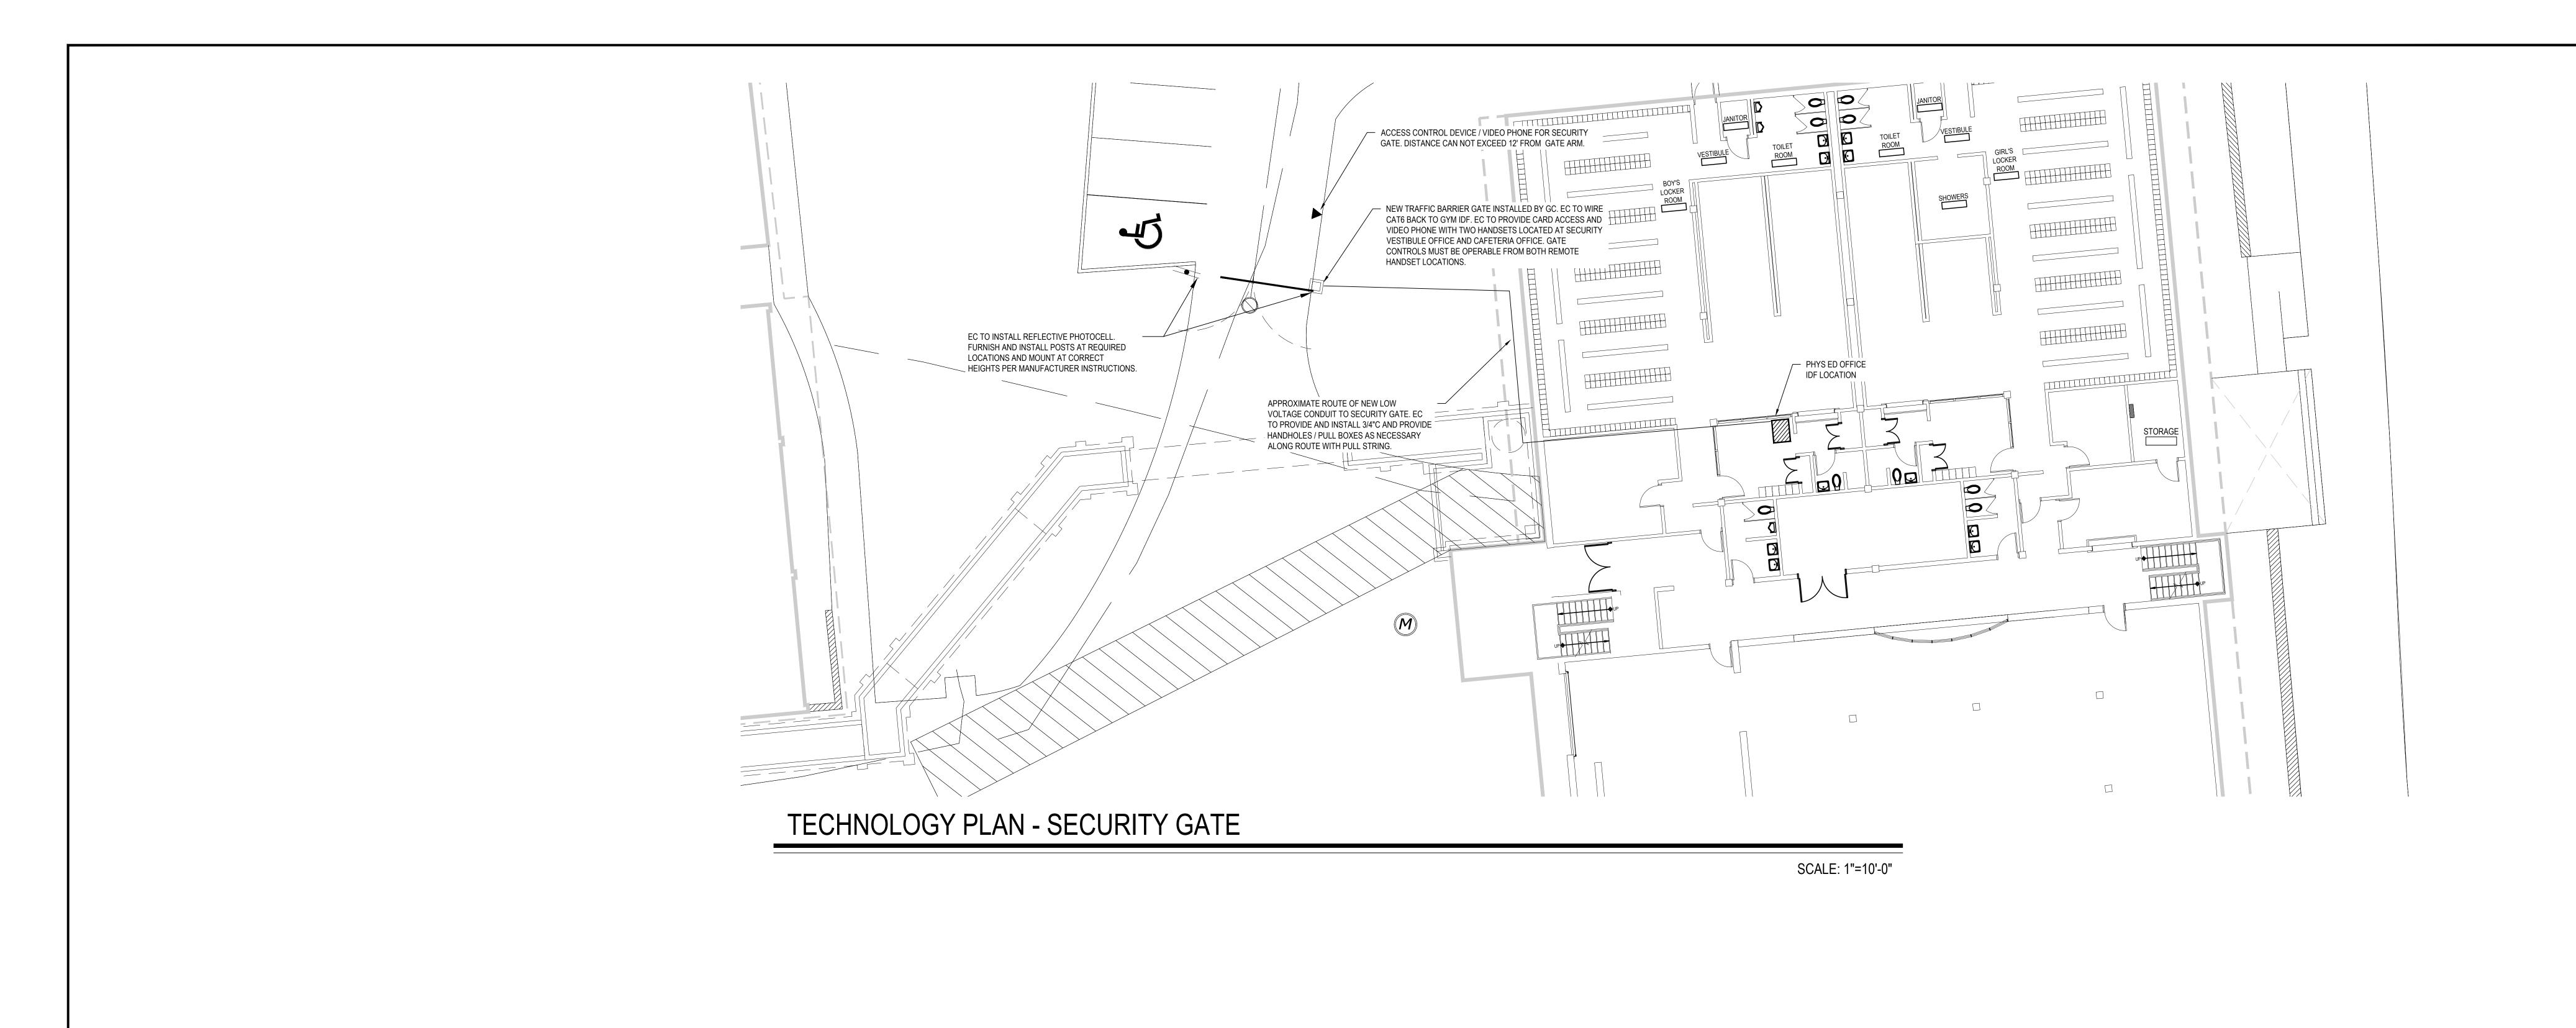




BASIS OF SECURITY SYSTEM DESIGN:
DIGITAL PROVISIONS 3385-E VETERANS MEMORIAL HWY. RONKONKOMA, NY 11779 CONTACT: MR. BRIAN MCCABE PHONE: 631-209-2600 EXT 14 EMAIL: BMCCABE@DIGITALPROVISIONS.COM

CAT6 NOTES

MOHAWK COPPER CABLE DETAIL DISTRICT COLOR STANDARD TO BE USED:


M57414 CAT 6E CABLE BLUE FOR DATA / VOICE LOCATIONS

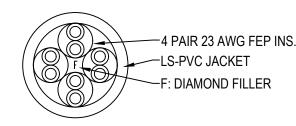

DATA DROP LABELING AS FOLLOWS: EX: RM# - 01

V.	DATE	ITEM	
	NO	<u> TICE</u>	7

THESE DRAWINGS ARE BASED ON CONSTRUCTION DRAWINGS NOT PREPARED BY BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PC. AND, THEREFORE, MAY NOT REPRESENT THE CONDITIONS AS CONSTRUCTED AT THE TIME. ALL EXISTING CONDITIONS SHOWN ARE REPRESENTED AS SUGGESTIVE INFORMATION AS THEY MAY NOT HAVE BEEN BUILT AND DETAILED PER THE ORIGINAL DOCUMENTS OR PER THE OWNER'S INFORMATION.

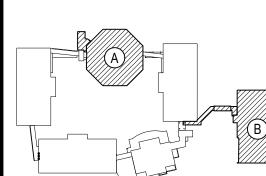

NOT TO SCALE


DRAWING BY: GL CHECK BY: --

THIS DRAWING, PREPARED FOR THE SPECIFIC PROJECT INDICATED IS AN INSTRUMENT OF SERVICE AND THE PROPERTY OF BBS ARCHITECTS, LANDSCAPE ARCHITECTS AND ENGINEERS, PC. INFRINGEMENT OR ANY USE OF THIS DRAWING FOR ANY OTHER PROJECT IS PROHIBITED. ANY ALTERATION OR REPRODUCTION OF THIS DOCUMENT IS ALSO PROHIBITED WITHOUT THE WRITTEN CONSENT OF THE ARCHITECT OR ENGINEER.

ARCHITECTS LANDSCAPE ARCHITECTS ENGINEERS

244 EAST MAIN STREET PATCHOGUE ALBANY
NEW YORK 11772 NEW YORK 12205
T. 631.475.0349 T. 518.621.7650
F. 631.475.0361 F. 518.621.7655

www.BBSARCHITECTURE.com

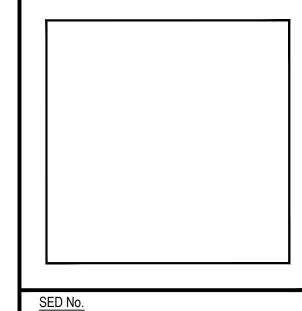

66-01-02-06-0-007-013

DISTRICT BEDFORD CENTRAL SCHOOL DISTRICT PROJECT PHASE 2 -

BOND IMPROVEMENTS DWG TITLE TECHNOLOGY PLAN SECURITY GATE

SCALE: AS NOTED DATE: APRIL 2024 BID PICK-UP: FEBRUARY 24, 2025 FILE No: 23-131b FLMS

