



TETRA TECH
ARCHITECTS & ENGINEERS

SED NO.13-16-01-06-0-009-014

10 Brown Road
Ithaca, New York 14850
607-277-7100

Ithaca, New York
Farmingdale, New York
Albany, New York

VOLUME 1

ARLINGTON CENTRAL SCHOOL DISTRICT

LAGRANGEVILLE, NEW YORK

PROJECT NO. 136396-24002.1

ADDITIONS AND ALTERATIONS TO LAGRANGE MIDDLE SCHOOL

DECEMBER 3, 2025

The engineer that has signed this document certifies that to the best of their knowledge, information and belief, the asbestos plans and specifications are in accordance with applicable requirements of the New York State Uniform Fire Prevention and Building Code, Construction Standards of the Commissioner of Education, New York State Department of Labor Part 56 of Title 12, and the United States Environmental Protection Agency Hazard Emergency Response ACT Regulations. Kevin C. Terry is accredited to the EPA and New York State under AHERA Regulations as an Asbestos Project Designer (Asbestos Handling Certificate Number 14-20336).

To the best of the Architect's knowledge, information and belief, the design of this project conforms to all applicable provisions of the New York State Uniform Fire Prevention and Building Code, the New York State Energy Conservation Construction Code, and the building standards of the New York State Education Department. It is a violation of the Education Law of the State of New York for any person to alter or modify this document in any way unless acting under the direction of a professional architect.

BID SET

TABLE OF CONTENTS**PROJECT MANUAL****Volume 1 of 2****BIDDING REQUIREMENTS AND CONDITIONS OF THE CONTRACT**

00 01 10 Table of Contents	1 - 3
00 01 15 List of Drawing Sheets	1 - 7
00 11 13 Notice to Bidders	1 - 2
00 21 13 Instructions to Bidders (with 1 attachment)	1 - 8
00 41 00 Bid Forms	
General Construction (GC) Contract 1A (with 5 attachments)	1 - 3
00 43 13 Bidder's Qualifications Form (Bid Form Attachment #6)	1 - 2
00 43 14 Insurance Certification Form (Bid Form Attachment #7)	1
00 43 15 Bond Certification Form (Bid Form Attachment #8)	1
00 43 33 Proposed Products Form	1
00 43 36 Proposed Subcontractors Form	1
00 43 73 Proposed Schedule of Values Form	1
General Conditions of the Contract for Construction (AIA Document A232-2019)	1 - 67
Project Labor Agreement	1 - 33
Prevailing Wage Rates	

PLEASE NOTE

All sections of the following **SPECIFICATIONS** are sequentially numbered, beginning with Page 1 and concluding with the last numbered page bearing the marking "END OF SECTION -- -- --".

Sections may include additional attachments as noted in following list of Specification sections.

SPECIFICATIONS

SECTION	TITLE	SECTION	TITLE
<u>DIVISION 01 - GENERAL REQUIREMENTS</u>			
01 08 00	General Commissioning Requirements	01 29 00	Payment Procedures (with one attachment)
01 11 00	Summary of Work (with one attachment)	01 31 00	Project Management and Coordination (with two attachments)
01 21 00	Allowances (with one attachment)	01 32 00	Construction Progress Documentation (with one attachment)
01 23 00	Alternates	01 33 00	Submittal Procedures (with five attachments)
01 25 00	Substitution Procedures (with one attachment)	01 35 26	Governmental Safety Requirements
01 26 00	Contract Modification Procedures		

SECTION TITLE

01 40 00	Quality Requirements (with one attachments)
01 42 00	References
01 50 00	Temporary Facilities and Controls
01 60 00	Product Requirements
01 73 00	Execution
01 77 00	Closeout Procedures
01 78 23	Operation and Maintenance Data
01 78 39	Project Record Documents
01 79 00	Demonstration and Training

DIVISION 02 – EXISTING CONDITIONS

02 41 19	Selective Demolition
02 82 00	Asbestos Abatement
02 83 00	Lead Safe Work Practices

DIVISION 03 - CONCRETE

03 30 00	Cast-in-Place Concrete
03 48 10	Precast Concrete Lighting Pole Bases
03 54 15	Moisture Control System

DIVISION 04 - MASONRY

04 01 20.19	Unit Masonry Restoration
04 20 00	Unit Masonry
04 43 13.13	Anchored Stone Masonry Veneer
04 72 00	Cast Stone Masonry

DIVISION 05 - METALS

05 12 00	Structural Steel Framing
05 21 00	Steel Joist Framing
05 31 00	Steel Decking
05 40 00	Cold-Formed Metal Framing
05 50 00	Metal Fabrications
05 51 13	Metal Pan Stairs
05 52 16	Tube Railings (Steel)

DIVISION 06 – WOOD, PLASTICS, AND COMPOSITES

06 10 00	Rough Carpentry
06 10 26	Roofing Rough Carpentry
06 16 00	Sheathing
06 40 23	Interior Architectural Woodwork
06 61 16	Solid Surfacing Fabrications
06 64 00	Plastic Paneling

DIVISION 07 - THERMAL AND MOISTURE PROTECTION

07 01 50.19	Preparation for Re-roofing
07 11 13	Bituminous Dampproofing
07 21 00	Thermal Insulation

SECTION TITLE

07 24 19	Water-Drainage Exterior Insulation and Finish System (EIFS)
07 27 26	Fluid-Applied Membrane Air Barriers
07 42 11	Rain Screen Securement Systems
07 42 33	Exterior Solid Phenolic Rain Screen Panels
07 53 23	EPDM Roofing
07 71 00	Roof Specialties
07 72 00	Roof Accessories
07 81 00	Applied Fire Protection
07 84 13	Penetration Firestopping
07 84 43	Joint Firestopping
07 92 00	Joint Sealants
07 95 13.13	Interior Expansion Joint Cover Assemblies

DIVISION 08 - OPENINGS

08 11 13	Hollow Metal Doors and Frames
08 14 16	Flush Wood Doors
08 31 13	Access Doors and Frames
08 33 23	Overhead Coiling Doors
08 41 13	Aluminum-Framed Entrances and Storefronts
08 44 13	Glazed Aluminum Curtain Walls
08 51 13	Aluminum Windows
08 56 53	Sliding Security Windows
08 62 00	Unit Skylights
08 71 00	Door Hardware
08 71 13	Automatic Door Operators
08 80 00	Glazing

DIVISION 09 - FINISHES

09 21 16.23	Gypsum Board Shaft Wall Assemblies
09 22 16	Non-Structural Metal Framing
09 29 00	Gypsum Board
09 30 13	Ceramic Tiling
09 30 16	Quarry Tiling
09 51 13	Acoustical Panel Ceilings
09 61 00	Flooring Treatment
09 65 13	Resilient Base and Accessories
09 65 19	Resilient Tile Flooring
09 66 23	Resinous Matrix Terrazzo Flooring
09 68 13	Tile Carpeting
09 72 00	Wall Coverings
09 84 33	Sound Absorbing Wall Units
09 91 00	Painting
09 96 00	High Performance Coatings

DIVISION 10 - SPECIALTIES

10 11 00	Visual Display Surfaces
10 12 00	Display Cases
10 14 00	Signage
10 14 19	Dimensional Letter Signage
10 21 13.19	Plastic Toilet Compartments
10 21 24	Safety Curtain
10 26 00	Wall and Door Protection
10 28 00	Toilet and Shower Accessories
10 44 13	Fire Protection Cabinets
10 44 16	Fire Extinguishers
10 51 13	Metal Lockers

LIST OF DRAWING SHEETS

VOLUME 1 OF 2

GENERAL

- G001 Title Sheet – Volume 1
- G100 Symbols and Abbreviations

PHASING

- KG200 Site 1A Phasing and Logistics Plan
- KG201 First Floor 1A Construction Phasing Plan
- KG202 Second Floor 1A Construction Phasing Plan
- KG203 First Floor 1A Construction Temporary Egress Logistics
- KG204 Second Floor 1A Construction Temporary Egress Logistics

CODE COMPLIANCE

- KG300 Site Code Compliance and Key Plan
- KG350 Code Compliance Review
- KG351 Code Key Plans - First and Second Floor Vintage and Alterations Level Plans
- KG352 Code Key Plans - First and Second Floor Fire Area and Building Area Plans
- KG353 First Floor Occupancy and Egress Plan
- KG354 Second Floor Occupancy and Egress Plan
- KG355 First Floor Travel Distances and Rated Walls
- KG356 Second Floor Travel Distances and Rated Walls

HAZARDOUS MATERIALS

- KH100 First Floor Abatement Plan
- KH101 Second Floor Abatement Plan

SURVEY / MAPPING

- SU-101 Boundary & Topography Survey, 1 of 6
- SU-102 Boundary & Topography Survey, 2 of 6
- SU-103 Boundary & Topography Survey, 3 of 6
- SU-104 Boundary & Topography Survey, 4 of 6
- SU-105 Boundary & Topography Survey, 5 of 6
- SU-106 Boundary & Topography Survey, 6 of 6

CIVIL

- KC100 Site Demolition Plan - Area A
- KC110 Site Erosion and Sediment Control Plan - Area A
- KC120 Site Layout Plan - Area A
- KC130 Site Grading Plan - Area A
- KC140 Site Utility Plan - Area A
- KC500 Site Details
- KC501 Site Details
- KC502 Site Details

ARCHITECTURAL

KA051	First Floor Key Plan
KA052	Second Floor Key Plan
KA053	Roof Key Plan
KA100	First Floor Demolition Plans - Area A and C
KA101	First Floor Demolition Plan - Area B
KA102	First Floor Demolition Plan - Area D
KA103	First Floor Demolition Plan - Area F
KA104	First Floor Demolition Plan - Area G
KA105	Second Floor Demolition Plans - Area A, C and Partial Area D
KA106	Second Floor Demolition Plan - Area B and Partial Area F
KA130	First Floor Plans - Area A and C
KA131	First Floor Plan - Area B
KA132	First Floor Plan - Partial Area D and Area E
KA133	First Floor Plan - Area F
KA134	First Floor Plan - Area G
KA135	Second Floor Plan - Area B and Partial Area F
KA136	Second Floor Plan - Partial Area C and Area E
KA160	First Floor Reflected Ceiling Plans - Areas A and C and Detail
KA161	First Floor Reflected Ceiling Plan, Enlarged Reflected Ceiling Plan, and Details - Area B
KA162	First Floor Reflected Ceiling Plans - Area D
KA163	First Floor Reflected Ceiling Plan - Area E
KA164	First Floor Reflected Ceiling Plan - Areas F and G
KA165	Second Floor Reflected Ceiling Plans - Area A, C, and Partial Area D
KA166	Second Floor Reflected Ceiling - Area B
KA167	Second Floor Reflected Ceiling Plan - Area E
KA168	Reflected Ceiling Plans - Enlarged Plans, Sections, and Details
KA190	Roof Plans - Areas A and C
KA191	Roof Plan - Area B and Details
KA192	Roof Plan - Area D
KA193	Roof Plan - Area E
KA194	Roof Plan - Area F
KA195	Roof Plan - Area G
KA196	Roof Details
KA197	Roof Details
KA200	Exterior Composite Elevations
KA201	Exterior Elevations, 1 of 2
KA202	Exterior Elevations, 2 of 2
KA300	Building Sections, 1 of 4
KA301	Building Sections, 2 of 4
KA302	Building Sections, 3 of 4
KA303	Building Sections, 4 of 4
KA350	Wall Sections, 1 of 10
KA351	Wall Sections, 2 of 10
KA352	Wall Sections, 3 of 10
KA353	Wall Sections, 4 of 10
KA354	Wall Section, 5 of 10
KA355	Wall Sections, 6 of 10
KA356	Wall Sections, 7 of 10
KA357	Wall Sections, 8 of 10
KA358	Wall Sections, 9 of 10

ARCHITECTURAL (CONT'D)

KA359	Wall Sections, 10 of 10
KA400	First Floor Enlarged Plan - Partial Area B, 1 of 8
KA401	First Floor Enlarged Plan - Partial Area B, 2 of 8
KA402	First Floor Enlarged Plans - Partial Area G, 3 of 8
KA403	First Floor Enlarged Plan - Partial Area E, 4 of 8
KA404	First Floor Enlarged Plan - Partial Area E, 5 of 8
KA405	First Floor Enlarged Plans - Partial Areas A, F, and G, 6 of 8
KA406	Second Floor Enlarged Plan - Area B, 7 of 8
KA407	Second Floor Enlarged Plans - Partial Area E, 8 of 8
KA410	Enlarged Toilet Room Plans and Elevations, 1 of 3 and Detail
KA411	Enlarged Toilet Room Plans and Elevations, 2 of 3
KA412	Enlarged Toilet Room Plans and Elevations, 3 of 3 and Detail
KA450	Enlarged Stair and Ramp Plans
KA451	Stair and Ramp Sections and Details
KA452	Stair Details
KA500	Plan Details 1 of 3
KA501	Plan Details 2 of 3
KA502	Plan Detail, 3 of 3
KA600	Door Schedule 1 of 2, Door and Frame Types
KA601	Door Schedule 2 of 2 and Details
KA602	Curtain Wall, Storefront, and Window Types
KA603	Door, Window, and Curtain Wall Details, 1 of 2
KA604	Door, Window, and Curtain Wall Details, 2 of 2
KA605	Curtain Wall Details
KA700	Wall Types and Details
KA701	Wall Details
KA702	Wall Details and CFMF Details
KA703	Ceiling Details, 1 of 2
KA704	Ceiling Details, 2 of 2
KA750	Locker, Expansion Joint, Fire Extinguisher Cabinet, Ladder, and Wall Panel Details
KA900	Interior First Floor Enlarged Plan - Partial Area B and Elevations - 1 of 8
KA901	Interior First Floor Enlarged Plans - Partial Area A and B and Elevations - 2 of 8
KA902	Interior First Floor Enlarged Plans - Partial Area E and Elevations - 3 of 8
KA903	Interior First Floor Enlarged Plan - Partial Area E and Elevations - 4 of 8
KA904	Interior First Floor Enlarged Plans - Partial Area F and G and Elevations - 5 of 8
KA905	Interior First Floor Enlarged Plan - Partial Area G and Elevations - 6 of 8
KA906	Interior Second Floor Enlarged Plan - Area B - 7 of 8
KA907	Interior Second Floor Enlarged Plan - Partial Area E and Elevations - 8 of 8
KA910	Interior Elevations - 1 of 7
KA911	Interior Elevations - 2 of 7
KA912	Interior Elevations - 3 of 7
KA913	Interior Elevations - 4 of 7
KA914	Interior Elevations - 5 of 7
KA915	Interior Elevations - 6 of 7
KA916	Interior Elevations - 7 of 7
KA920	Details - 1 of 3
KA921	Details - 2 of 3
KA922	Details - 3 of 3
KA930	First Floor Finish Plans - Area A and C - 1 of 8
KA931	First Floor Finish Plan - Area B - 2 of 8

ARCHITECTURAL (CONT'D)

KA932	First Floor Finish Plan - Partial Area D and Area E - 3 of 8
KA933	First Floor Finish Plan - Area F - 4 of 8
KA934	First Floor Finish Plan - Area G - 5 of 8
KA935	Second Floor Finish Plan - Area A, Area C and Partial Area D - 6 of 8
KA936	Second Floor Finish Plan - Area B and Partial Area F - 7 of 8
KA937	Second Floor Finish Plan - Partial Area C and Area E - 8 of 8
KA950	Signage

STRUCTURAL

KS050	Structural Layout Plan
KS130	Partial Foundation Plans - Area B, F, and G
KS131	Foundation Plan - Area E
KS160	Partial Second Floor and Low Roof Framing Plan - Area B, F and G
KS161	Partial Second Floor and Low Roof Framing Plans - Area D
KS162	Second Floor Framing Plan - Area E
KS163	Partial Second Floor and Low Roof Framing Plan - Area A, B, C, F and G
KS164	Roof Framing Plan - Area E
KS300	Joist Elevations
KS500	Foundation Details
KS530	Floor Framing Details
KS531	Framing Details
KS532	Framing and Firewall Details
KS560	Lateral Details and Elevations
KS600	Notes and Schedules
KS601	Column Schedules

VOLUME 2 OF 2

GENERAL

G002	Title Sheet – Volume 2
G100	Symbols and Abbreviations

MECHANICAL

KM050	First Floor Key Plan
KM051	Second Floor Key Plan
KM100	First Floor Demolition Plan - Area B
KM101	First Floor Demolition Plan - Areas F and G
KM102	Second Floor Demolition Plan - Area B
KM103	First and Second Floor Plans - Partial Area C and D
KM104	Second Floor Demolition Plan - Area F
KM105	Roof Demolition Plan
KM130	First Floor Plan - Areas A and C
KM131	First Floor Ductwork Plan - Area B
KM132	First Floor Piping Plan - Area B
KM133	First Floor Plan - Area D
KM134	First Floor Ductwork Plan - Area E
KM135	First Floor Piping Plan - Area E
KM136	First Floor Plan - Area F
KM137	First Floor Plan - Area G
KM138	Second Floor Plan - Areas A and C
KM139	Second Floor Ductwork Plan - Area B
KM140	Second Floor Piping Plan - Area B

MECHANICAL (CONT'D)

KM141	Second Floor Plan - Area D
KM142	Second Floor Ductwork Plan - Area E
KM143	Second Floor Piping Plan - Area E
KM144	Second Floor Plan - Area F
KM145	Roof Plan
KM300	Sections 1 of 2
KM301	Sections 2 of 2
KM400	Enlarged Plans
KM500	Mechanical Details 1 of 6
KM501	Mechanical Details 2 of 6
KM502	Mechanical Details 3 of 6
KM503	Mechanical Details 4 of 6
KM504	Mechanical Details 5 of 6
KM505	Mechanical Details 6 of 6
KM600	Schedules 1 of 5
KM601	Schedules 2 of 5
KM602	Schedules 3 of 5
KM603	Schedules 4 of 5
KM604	Schedules 5 of 5
KM700	Control Sequences 1 of 3
KM701	Control Sequences 2 of 3
KM702	Control Sequences 3 of 3

ELECTRICAL

KE001	Electrical Site Plan
KE002	Electrical Site Details
KE050	First Floor Key Plan
KE051	Second Floor Key Plan
KE100	First Floor Demolition Plan - Areas A and C
KE101	First Floor Demolition Plan - Area B
KE102	First Floor Demolition Plan - Area D
KE103	First Floor Demolition Plan - Areas F and G
KE104	Second Floor Demolition Plan - Areas A, C and Partial Area D
KE105	Second Floor Demolition Plan - Area B and Partial Area F
KE106	Roof Demolition Plan
KE130	First Floor Lighting Plan - Areas A and C
KE131	First Floor Lighting Plan - Area B
KE132	First Floor Lighting Plan - Area D
KE133	First Floor Lighting Plan - Area E
KE134	First Floor Lighting Plan - Areas F and G
KE135	Second Floor Lighting Plan - Areas A, C and Partial Area D
KE136	Second Floor Lighting Plan - Area B and Partial Area F
KE137	Second Floor Lighting Plan - Area E
KE160	First Floor Power & Communications Plan - Areas A and C
KE161	First Floor Power & Communications Plan - Area B
KE162	First Floor Power & Communications Plan - Area D
KE163	First Floor Power & Communications Plan - Area E
KE164	First Floor Power & Communications Plan - Areas F and G
KE165	Second Floor Power & Communications Plan - Areas A, C and Partial Area D
KE166	Second Floor Power & Communications Plan - Area B and Partial Area F
KE167	Second Floor Power & Communications Plan - Area E
KE168	Roof Power Plan
KE169	First Floor HVAC Power Plan - Area B
KE170	First Floor HVAC Power Plan - Area E
KE171	First Floor HVAC Power Plan - Areas F and G

ELECTRICAL (CONT'D)

KE172	Second Floor HVAC Power Plan - Area B and Partial Area F
KE173	Second Floor HVAC Power Plan - Area E
KE200	First Floor Fire Alarm Plan - Areas A and C
KE201	First Floor Fire Alarm Plan - Area B
KE202	First Floor Fire Alarm Plan - Area D
KE203	First Floor Fire Alarm Plan - Area E
KE204	First Floor Fire Alarm Plan - Areas F and G
KE205	Second Floor Fire Alarm Plan - Areas A, C and Partial Area D
KE206	Second Floor Fire Alarm Plan - Area B and Partial Area F
KE207	Second Floor Fire Alarm Plan - Area E
KE400	Enlarged Plans
KE500	Details
KE501	Details
KE502	Details
KE503	Details
KE504	Details
KE600	Luminaire Schedule
KE601	Panelboard Schedules
KE602	Panelboard Schedules
KE603	Panelboard Schedules
KE604	Panelboard Schedules
KE605	Panelboard Schedules
KE606	Panelboard Schedules
KE607	Panelboard Schedules
KE608	Panelboard Schedules
KE609	Panelboard Schedules
KE700	Diagrams

PLUMBING

KP100	First Floor Demolition Plan - Areas A and C
KP101	First Floor Demolition Plan - Area B
KP102	First Floor Demolition Plan - Area F
KP103	First Floor Demolition Plan - Area G
KP104	Second Floor Demolition Plan - Area A and C
KP105	Second Floor Demolition Plan - Area B
KP130	First Floor Plan - Areas A and C
KP131	First Floor Plan - Area B
KP132	First Floor Plan - Area D
KP133	First Floor Plan - Area E
KP134	First Floor Plan - Area F
KP135	First Floor and Roof Plans - Area G
KP136	Second Floor Plan - Areas A and C
KP137	Second Floor Plan - Area B
KP138	Second Floor Plan - Area E
KP400	Enlarged Plans - Areas A and B
KP401	Enlarged First and Second Floor Plans - Area E
KP402	Enlarged First and Second Floor Plans - Area E
KP403	Enlarged Below Slab Plans - Area G
KP404	Enlarged Floor Plans - Area G and Schedule
KP500	Details - Sheet 1 of 2
KP501	Details - Sheet 2 of 2
KP600	Schedules

FIRE PROTECTION

KF050 First Floor Fire Protection Plan and Details

KF051 Second Floor Fire Protection Plan

All drawings dated December 3, 2025.

NOTICE TO BIDDERS

NOTICE IS HEREBY GIVEN, that sealed Bids, in duplicate, are sought and requested by the Board of Education, Arlington Central School District (hereinafter called "Owner"), for the Additions and Alterations to LaGrange Middle School.

Separate Bids are requested for the following Contract:

GENERAL CONSTRUCTION (GC) CONTRACT 1A (to be constructed under a Project Labor Agreement) in accordance with the Drawings, Project Manual (including Conditions of the Contract and Specifications), and other Bidding and Contract Documents prepared by:

Tetra Tech Engineers, Architects & Landscape Architects, P.C. d/b/a
Tetra Tech Architects & Engineers
10 Brown Road
Ithaca, New York 14850

A pre-bid conference for potential Bidders and other interested parties will be held on Thursday, May 21, 2026 at 3:00 p.m. at LaGrange Middle School, 110 Stringham Road, LaGrangeville, New York 12540.

Sealed Bids will be received by the Owner until Tuesday, June 16, 2026 at 1:30 p.m. at Arlington Central School District, COA Building, 144 Todd Hill Road, LaGrangeville, New York 12540, at which time and place Bids received will be publicly opened and read aloud.

For the convenience of potential Bidders and other interested parties, the Bidding Documents may be examined at the following locations:

Construction Market Data, 30 Technology Parkway South, Suite 100, Norcross, GA 30092-2912
McGraw Hill Construction/Dodge, c/o Dataflow, 2215 Central Ave, Schenectady NY 12304
The Builders Exchange of the Southern Tier, Inc.-West, 65 E. Main. St., Falconer, NY 14733
Arlington Central School District, 144 Todd Hill Road, LaGrangeville, NY 12540.
Tetra Tech Architects & Engineers, 10 Brown Road, Ithaca, New York 14850

Complete digital sets of Bidding Documents, drawings and specifications, may be obtained online as a download at tetratechaeprojectplanroom.com 'projects' for a non-refundable fee of \$49.00 (Forty-Nine Dollars).

Complete hard copy sets of Bidding Documents, drawings and specifications, may be obtained online at tetratechaeprojectplanroom.com 'projects'. Checks shall be made payable to Arlington Central School District in the sum of \$100.00 (One Hundred Dollars) for each set of documents. A copy of the check can be submitted at the time of checkout. Mail checks to Lohrius Blueprint, 226 Newtown Road, Plainview, New York 11803. Plan deposit is refundable in accordance with the terms in the Instructions to Bidders. Any bidder requiring documents to be shipped shall make arrangements with the printer and pay for all packaging and shipping costs (either by providing FedEx/UPS account number or being charged a flat rate by the printer).

Please note REV tetratechaeprojectplanroom.com is the designated location and means for distributing and obtaining all bid package information, electronic or hard copy. Only those Contract Documents obtained in this manner will enable a prospective bidder to be identified as a registered plan holder. The Provider takes no responsibility for the completeness of Contract Documents obtained from other sources. Contract Documents obtained from other sources may not be accurate or may not contain addenda that may have been issued.

All bid addenda will be transmitted to registered plan holders, regardless of receiving electronic or hard copy Bid Documents, via email and will be available at tetrachaeoprojectplanroom.com. Registered plan holders who have paid for hard copies of the bid documents will need to make the determination if hard copies of the addenda are required for their use, and coordinate directly with REV for hard copies of addenda to be issued (telephone number 845-651-3845). There will be no charge for registered plan holders to obtain hard copies of the bid addenda.

As bid security, each Bid shall be accompanied by a certified check or Bid Bond made payable to the Owner, in accordance with the amounts and terms described in the Instructions to Bidders.

The Owner requires Bids comply with bidding requirements indicated in the Instructions to Bidders. The Owner may, at its discretion, waive informalities in Bids, but is not obligated to do so, nor does it represent that it will do so. The Owner also reserves the right to reject any and all Bids. The Owner will not waive informalities which would give one Bidder substantial advantage or benefit not enjoyed by all affected Bidders. Bids may not be withdrawn before 45 days following the Bid opening thereof, unless an error is claimed by the Bidder in accordance with the Instructions to Bidders.

INSTRUCTIONS TO BIDDERS

ARTICLE 1

PROJECT AND BIDDING INFORMATION

1. Project Identification: Additions and Alterations to LaGrange Middle School – Phase 1A
 - a. Project Location:
 - 1) 110 Stringham Road, LaGrangeville, New York 12540.
2. Owner: Board of Education of Arlington Central School District.
 - a. Address: 144 Todd Hill Road, LaGrangeville, New York 12540.
3. Bid Opening: Bids will be received until the following Bid opening date and time, at the following location:
 - a. Bid Opening Date and Time: **Tuesday, June 16, 2026 at 1:30 p.m.**, local time.
 - b. Bid Opening Location: Arlington Central School District, COA Building, 144 Todd Hill Road, Lagrangeville, New York 12540.
 - c. Special Instructions: All bidders required to have photo ID on them at all times and check in to Main Office before being on site.
4. Bidders are invited to submit Bids for the following Contract:
 - a. **GENERAL CONSTRUCTION (GC) CONTRACT 1A** to be constructed under a Project Labor Agreement.
5. Access to the Project Site: Subject to Owner's prior approval of timing, Bidders will be permitted access to Project site on Monday through Friday, from 9:00 A.M. until 3:00 P.M., except legal holidays.
 - a. Contact Construction Manager prior to visiting Project site, to arrange access.
 - b. The Palombo Group, Tom Chesser, Project Manager, 914-539-1481.
6. Pre-Bid Conference: A pre-bid conference for potential Bidders and other interested parties will be held as follows:
 - a. Pre-Bid Conference Date and Time: **Thursday, May 21, 2026 at 3:00 p.m.**, local time.
 - b. Pre-Bid Conference Location: LaGrange Middle School, 110 Stringham Road, Lagrangeville, New York 12540.
 - 1) Special Instructions: All bidders required to have photo ID on them at all times and check in to Main Office before being on site.

7. Agreement Form: The following will be used as the basis for the form of agreement between the Owner and the Contractor (Owner-Contractor Agreement):
 - a. Standard Form of Agreement Between Owner and Contractor, AIA Document A132.

ARTICLE 2 DEFINITIONS

1. Definitions in the General Conditions of the Contract for Construction, AIA Document A232, or in other Contract Documents are applicable to the Bidding Documents.
 - a. “Addenda”: Written or graphic instruments issued by the Architect prior to execution of the Contract which modify or interpret the Bidding Documents by additions, deletions, clarifications, or corrections.
 - b. “Bid”: Complete and properly executed proposal to do the Work for the sums stipulated therein, submitted in accordance with the Bidding Documents.
 - 1) “Base Bid”: Sum stated in the Bid for which Bidder offers to perform the Work described in the Bidding Documents as the base, to which Work may be added or from which Work may be deleted for sums stated for Alternates.
 - 2) “Alternates”: Amount stated in the Bid to be added to or deducted from the amount of the Base Bid if the corresponding change in the Work, as described in the Bidding Documents, is accepted.
 - c. “Bidder”: Person or entity who submits a Bid.

ARTICLE 3 BIDDING PROCEDURES

1. Bid Form: Complete the Bid Form provided, in duplicate, with all blank spaces for Base Bid and Alternates legibly completed in ink, or typewritten, in both words and figures.
 - a. In the event of a discrepancy between amounts written in words and figures, the amount written in words shall govern.
 - b. Bid Forms without amounts expressed both in words and figures will not be accepted.
2. Bid Attachments: Complete and submit the following attachments with the Bid Form:
 - a. Attachment #1: Non-Collusive Bidding Certification.
 - b. Attachment #2: Certified Corporate Resolution.
 - c. Attachment #3: Iranian Energy Divestment Certification
 - d. Attachment #4: Certificate on Violations
 - e. Attachment #5 – Subcontractors List (in separate sealed envelope bearing the Bidder’s name, name of Contract, and title “Subcontractors List”)
 - f. Attachment #6: Bidders Qualifications Form
 - g. Attachment #7: Insurance Certification Form
 - h. Attachment #8: Bond Certification Form

3. Bid Security:

- a. Submit, with the Bid Form, bid security in the amount of five percent of the Base Bid, in any of the following forms:
 - 1) Certified check, payable to the Owner; or
 - 2) Bid Bond, payable to the Owner, on Bid Bond, AIA Document A310, or standard bid bond form, duly executed by the Bidder as principal, with a surety company acceptable to the Owner.
 - a) Affix a certified and current copy of the power of attorney for the attorney-in-fact who executes the required bond on behalf of the surety.
- b. Within three days following the Bid opening, bid security will be returned to all Bidders, except the three apparent lowest Bidders.
 - 1) Within three days following execution of the Owner-Contractor Agreement, bid security will be returned to the three apparent lowest Bidders.
 - 2) If the Owner-Contractor Agreement has not been executed within 45 days following the Bid opening, bid security will be returned to the three apparent lowest Bidders, except as noted below.
- c. Should the accepted Bidder, within 10 days following Notice of Award, fail or refuse to execute the Owner-Contractor Agreement and to provide the required performance and payment bonds, the accepted Bidder will be deemed to have abandoned the Contract and its bid security will be forfeited to the Owner.

4. Bid Submission: Submit each Bid, including attachments, in a sealed envelope bearing the Bidder's name and address, name of Contract, and name of Project. Deliver Bid to location specified no later than the Bid opening date and time indicated. Any Bid received after the Bid opening date and time indicated will be returned unopened.

5. Bid Withdrawal:

- a. Bid may be withdrawn by the Bidder up until the date and time specified for opening of Bids.
- b. Following the Bid opening, Bid may not be withdrawn before 45 days following the Bid opening, except in the case of Bidder error, as follows:
 - 1) If the Bidder claims an error in the Bid, submit a written notice to the Architect, within three days of the Bid opening, describing in detail the nature of the error, submitting documentary evidence or proof of such error.
 - a) Failure to deliver such notice and evidence or proof, within the time frame required, constitutes a waiver of Bidder's right to claim error.
 - 2) Upon receipt of required notice and evidence or proof, the Owner, in consultation with the Architect, will determine if an excusable error has been made; and if so, the Owner may permit the Bid to be withdrawn. The Owner's determination will be conclusive upon the Bidder, its surety, and all who claim rights under the Bidder.

6. Subcontractors List Return: Sealed Subcontractors List (Bid Form Attachment #5) will be returned, unopened, to unsuccessful Bidders after Contract Award.

ARTICLE 4 BIDDING DOCUMENTS

1. Bidding Documents include the bidding requirements and the proposed Contract Documents, as follows:
 - a. Bidding requirements consist of the following:
 - 1) Notice to Bidders.
 - 2) Instructions to Bidders.
 - 3) Bid Form, with 8 attachments.
 - 4) Proposed Products Form.
 - 5) Proposed Subcontractors Form.
 - 6) Proposed Schedule of Values Form.
 - b. Proposed Contract Documents consist of the following:
 - 1) Owner-Contractor Agreement.
 - 2) Conditions of the Contract.
 - 3) Drawings.
 - 4) Specifications.
 - 5) Addenda.
2. Bidding Document Interpretations or Corrections:
 - a. Submit requests for Bidding Document interpretation to the Architect, in writing using the provided Pre-Bid Request for Interpretation Form, at least five working days prior to the Bid opening.
 - b. Interpretations or corrections will be issued in the form of written Addenda. The Architect will not make oral interpretations or corrections.
 - c. Notification of addenda will be transmitted to registered plan holders via email and will be available to download at tetratechaeprojectplanroom.com under “projects”.
 - 1) Failure of any Bidder to not download addenda and/or failure to receive any such Addendum by reason of not having registered as a plan holder in accordance with the bidding instructions, shall not relieve the Bidder from any obligation required by the Addendum.
3. Equivalents and Substitutions: The use of manufacturer’s brand names, catalog numbers, and similar proprietary identifying data is intended to establish a standard of quality, appearance, and function for those items. It is not the intention of the Owner or the Architect to eliminate from consideration products that are equivalent in quality, appearance, and function to those identified.
 - a. Equivalents are pre-award and substitutions are post-award.

b. Equivalents:

- 1) On Proposed Products Form provided, as post-Bid information, identify and list proposed equivalents to specified products as follows:
 - a) Applicable Specification Section and paragraph.
 - b) Proposed manufacturer's name, product brand name, and catalog number of proposed equivalent.
 - c) Note any aspect of the specified product that the proposed equivalent cannot meet.
 - d) Note any impact that accepting the proposed equivalent would have on work by other Prime Contractors. Failure to identify any such impacts shall deem such impacts the responsibility of the Bidder; Bidder, if awarded the Contract, shall compensate the Owner for additional monies due other Prime Contractors due to the acceptance of the proposed equivalent.
- 2) Failure to identify and list proposed equivalents shall be deemed to mean the Bidder will furnish the materials or products indicated in the Contract Documents without exception.

c. Substitutions: Refer to Division 01 Specification Section "Substitution Procedures".

- d. Note any impact that accepting the proposed equivalent would have on work by other Prime Contractors. Failure to identify any such impacts shall deem such impacts the responsibility of the Bidder; Bidder, if awarded the Contract, shall compensate the Owner for additional monies due other Prime Contractors due to the acceptance of the proposed equivalent.
4. Any required plan deposit shall be refunded to Bidders who submit a bona fide Bid and return the hard copy (paper) Bidding Documents in full, and in good condition within thirty days following the award of the contract or the rejection of the bids covered by such Bid Documents. If the Bid Documents are not returned in full, or in good condition, the cost to replace missing or damaged paper documents will be deducted from the deposit. A Bidder receiving a Contract award may retain the paper Bidding Documents, and the Bidder's deposit will be refunded. Partial reimbursement, in an amount equal to the full amount of such deposit for one set of Bid Documents per non-bidder less the actual cost of reproduction of the Bid Documents as determined by the Architect, shall be made for the return of all other copies of the Bid Documents in good condition within thirty days following the award of the contract or the rejection of the bids covered by such Bid Documents. If the Bid Documents are not returned in full, or in good condition, the cost to replace missing or damaged paper documents will be deducted from the deposit.

ARTICLE 5
BIDDER'S REPRESENTATIONS

1. By submitting a Bid, Bidder represents that:
 - a. Bidder has visited and thoroughly inspected the Project site, and has become fully informed of the conditions relating to the Project;

- b. Bidder has received, read, and is thoroughly familiar with the Bidding Documents, including all Addenda issued; and
- c. Bidder has prepared its Bid based on the materials, equipment and systems required by the Bidding Documents or equivalents; and
- d. Bidder has prepared its Bid based on the subcontractors identified on the accompanying sealed Subcontractors List and the corresponding subcontract amount listed, and if awarded the Contract, intends to engage the listed Subcontractors.
 - 1) Owner retains its right to object to any proposed Subcontractor, in accordance with the Conditions on the Contract.
- e. The Bidder and its subcontractors have completed the required New York State Public Work Contractor and Subcontractor Registry in accordance with the New York State Department of Labor (NYSDOL) requirements. <https://dol.ny.gov/contractor-and-subcontractor-landing>
 - 1) Bidders are required to submit with their bid proof of registration as required by Labor Law Section 220-i as a minimum qualification. Failure to provide such proof of registration will disqualify a bidder.

ARTICLE 6

BID CONSIDERATION

1. Opening of Bids: At the designated Bid opening date and time, Bids received will be publicly opened and read aloud.
2. Bid Rejection:
 - a. The Owner requires Bids comply with bidding requirements; however, the Owner may, at its discretion, waive informalities in Bids. The Owner is not obligated to do so and does not represent that it will do so. The Owner will not waive informalities which would give one Bidder substantial advantage or benefit not enjoyed by all affected Bidders.
 - b. The Owner reserves the right to reject any and all Bids not deemed in the best interests of the Owner, if in its judgment the public interest will be promoted thereby.
 - c. The Owner reserves the right to reject as “informal” any and all Bids which, in its opinion, are incomplete, conditional, obscure, or contain irregularities of any kind.
 - d. In rejecting a Bid, the Owner does not forfeit its right to accept the Bid for any other Contract contained in the Project; and the rejection of a Bid is not necessarily a finding by the Owner of any facts or circumstances which would preclude the Bidder from serving as a subcontractor on any portion of the Project.
3. Bid Acceptance: The Owner intends to award the Contract to the responsible Bidder whose Bid complies with conditions to render it formal, who is able to furnish approved surety bonds, and whose Bid is the lowest number of dollars as defined below.
 - a. Lowest Bid may be Base Bid plus any Alternates the Owner desires to accept.
 - b. If the acceptance of Alternates does not change the low Bidder, the Owner reserves the right to accept any or all Alternates within 45 days following Notice of Award.

ARTICLE 7
POST-BID INFORMATION

1. Contractor Qualifications: The Owner may make such investigations as it deems necessary to determine the ability of the Bidder to perform the Work.
 - a. The Bidder shall furnish to the Owner all such information and data for this purpose as the Owner may request, including the provided Bidder's Qualifications Form.
 - b. The Owner reserves the right to reject any Bid if the evidence submitted, or investigation of Bidder fails to satisfy the Owner that the Bidder is properly qualified to carry out the obligations of the Contract and to complete the Work contemplated therein.
2. Owner's Financial Capability: Successful Bidder may submit request to Owner for information regarding Owner's financial arrangements for this Project in accordance with the General Conditions, no later than 30 days following the Bid opening.
3. Post-Bid Submittals:
 - a. The three apparent low Bidders shall submit the following completed forms within three days following the Bid opening:
 - 1) Proposed Products Form.
 - 2) Proposed Subcontractors Form.
 - 3) Proposed Schedule of Values Form.

ARTICLE 8
PERFORMANCE BOND AND PAYMENT BOND

1. Bond Requirements:
 - a. The successful Bidder shall furnish bonds covering faithful performance of the Contract and payment of obligations arising thereunder.
 - b. Bonds shall be obtained from a surety satisfactory to the Owner, authorized and licensed to do business in the state where the Project is located, and listed in the latest issue of the U.S. Treasury Circular 570. The amount of each bond shall be equal to 100 percent of the Contract Sum. The sufficiency of the bonds is subject to the approval of the Owner and bonds deemed insufficient by the Owner may be rejected.
 - c. Affix a certified and current copy of the power of attorney for the attorney-in-fact who executes the required bonds on behalf of the surety.
2. Time of Delivery and Form of Bonds:
 - a. Deliver required bonds to the Owner not later than the date the Agreement is entered into.
 - b. Use Performance Bond and Payment Bond, AIA Document A312, unless otherwise approved by the Owner.

ARTICLE 9
MISCELLANEOUS PROVISIONS

1. All applicable laws, ordinances, rules, and regulations of Federal, State, and other authorities having jurisdiction over the Project shall apply to the Contract throughout, and will be deemed included in the Contract as though herein written out in full.
 - a. Sections of the New York State Labor Law (LL) and the New York State General Municipal Law (GML) include, but are not limited to, the following:
 - 1) LL §220, subd. 2: Eight-hour day, 40-hour week.
 - 2) LL §220, subd. 3 and LL §220-d: Minimum rate of wage and supplement.
 - 3) LL §220-e: Prohibiting discrimination.
 - 4) LL §222-a: Prevention of dust hazards.
 - 5) GML §103-d: Statement of non-collusion in bids.
 - 6) GML §106-b: Payment on public work contracts.
 - 7) GML §108: Workmen's compensation insurance.
 - 8) GML §109: Assignment of public contracts.
2. Time of Completion: Refer to Division 01 Section "Multiple Contract Project Summary – Project Schedule".

Attachment: Pre-Bid Request for Interpretation Form

END OF SECTION 00 21 13



TETRA TECH
ARCHITECTS & ENGINEERS

INSTRUCTIONS TO BIDDERS
ATTACHMENT #1:
PRE-BID REQUEST FOR INTERPRETATION FORM

SUBMIT FORM BY EMAIL TO INE.Arlington@tetratech.com

Project No.: 136396-24002.1

Date:

Project Name: Additions and Alterations to LaGrange Middle School-Phase 1A

Bidder Contact Person:
Bidder Company Name:
Bidder Phone:
Bidder Email Address:

Question Pertains to:

Drawing Number:
Plan Area:
Room Number:
Drawing Detail Number:
Specification Section:

Question: (Please be specific)

Review by Architect/Engineers:

Responded By: _____ **Date:** _____

Submit requests not less than 5 working days prior to the specified Bid Opening date and time. In the event that this question requires clarification or modification of the Bidding Documents, such written information can only be provided by formal Addendum, distributed to all plan holders.



TETRA TECH
ARCHITECTS & ENGINEERS

10 Brown Road
Ithaca, New York 14850
(607) 277-7100

Ithaca, New York
Farmingdale, New York
Albany, New York

BID FROM (Bidder's Name) : _____

(Address) : _____

Bidder's Telephone : _____

Bidder's Facsimile (Fax) : _____

Bidder's E-mail Address : _____
(if applicable)

BID FORM
(submit in duplicate)

CONTRACT: GENERAL CONSTRUCTION (GC) CONTRACT 1A

PROJECT TITLE: ADDITIONS AND ALTERATIONS TO LAGRANGE MIDDLE SCHOOL

PROJECT NO.: 136396-24002.1

BID TO: Arlington Central School District
144 Todd Hill Road
LaGrangeville, New York 12540

The Bidder hereby certifies that it has examined and fully understands the requirements and intent of the Bidding Documents, including the Bidding Requirements and proposed Contract Documents; and proposes to furnish all labor, materials, and equipment necessary to complete the Work on, or before, the dates specified in the Contract Documents for the **BASE BID** sum of:

(words)

_____ (\$ _____)
(figures)

Show all amounts in both words and figures; in the event of a discrepancy between amounts written in words and figures, the amount written in words shall govern.

Refer to Division 01 Section "Allowances" for description of allowances to be included in the Base Bid above.

ALTERNATES

Indicate in the spaces provided below the amount to be added to or the amount to be deducted from (as applicable) the Base Bid if the Owner accepts the following Alternates described in Division 01 Section "Alternates".

Include in the amount of each Alternate, all labor, materials, overhead and profit, modification of Work specified in the Contract Documents, and additional work that may be required by acceptance of the Alternate.

ALTERNATE NO. 1A-1 - 30 YEAR TOTAL ROOF SYSTEM WARRANTY

ADD to the Base Bid the sum of:

_____ (\$ _____)
(words) (figures)

OR

DEDUCT from the Base Bid the sum of:

_____ (\$ _____)
(words) (figures)

ALTERNATE NO. 1A-2 - TERRAZZO FLOORING AT ADDITION FIRST AND SECOND FLOOR CORRIDORS AND VESTIBULES

ADD to the Base Bid the sum of:

_____ (\$ _____)
(words) (figures)

OR

DEDUCT from the Base Bid the sum of:

_____ (\$ _____)
(words) (figures)

LIST OF ADDENDA RECEIVED

No. _____	Date _____	No. _____	Date _____
No. _____	Date _____	No. _____	Date _____
No. _____	Date _____	No. _____	Date _____

BID ATTACHMENTS

Enclosed with this Bid are the following attachments:

- Attachment #1 - Non-Collusive Bidding Certification.
- Attachment #2 - Certified Corporate Resolution.
- Attachment #3 – Iranian Energy Divestment Certification
- Attachment #4 – Certification on Violations
- Attachment #5 – Subcontractors List (in separate sealed envelope bearing the Bidder’s name, name of Contract, and title “Subcontractors List”)
- Attachment #6 – Bidder’s Qualification Form
- Attachment #7 – Insurance Certification
- Attachment #8 – Bond Certification

BID SECURITY

Enclosed with this Bid is bid security in the amount of five percent of the Base Bid.

PUBLIC WORK CONTRACTOR AND SUBCONTRACTOR REGISTRY

The Bidder hereby certifies that the Bidder and its subcontractors have completed the required New York State Public Work Contractor and Subcontractor Registry in accordance with the New York State Department of Labor (NYSDOL) requirements. **Bidders are required to attach to this bid form proof of registration as required by Labor Law Section 220-i as a minimum qualification and failure to provide proof of registration will disqualify a bidder.**

EXECUTION OF CONTRACT

If written notice of the acceptance of this Bid is transmitted to the undersigned within 45 days following the Bid opening, the undersigned will, within 10 days following the Notice of Award, execute and transmit a Contract in the form as required by the Architect.

This Bid may be withdrawn at any time prior to the Bid opening.

SIGNATURE

(	)	NAME OF BIDDER (Corporate Name)
(	)	
(	)	_____
(	)	Corporate Seal
(	)	
(	)	SIGNATURE (Corporate Officer)
(	)	
(	)	_____
(	)	
(	)	DATE: _____

BID FORM
ATTACHMENT #1

GENERAL CONDITIONS TO BID
NON-COLLUSIVE BIDDING CERTIFICATION

No bid will be accepted that does not have this form completely executed.

By submission of this bid, each bidder and each person signing on behalf of any bidder certifies, and in the case of a joint bid each party thereto certifies as to its own organization, under penalty of perjury, that to the best of knowledge and belief:

- (a) The prices in this bid have been arrived at independently without collusion, consultation, communication, or agreement, for the purpose of restricting competition, as to any matter relating to such prices with any other bidder or any competitor;
- (b) Unless otherwise required by law, the prices which have been quoted in this bid have not been knowingly disclosed by the bidder and will not knowingly be disclosed by the bidder prior to opening, directly or indirectly, to any other bidder or to any competitor;
- (c) No attempt has been made or will be made by the bidder to induce any other person, partnership, or corporation to submit or not to submit a bid for the purpose of restricting competition;
- (d) The person signing this bid or proposal certifies that he has fully informed himself regarding the accuracy of the statements contained in this certification, and under the penalties of perjury, affirms the truth thereof, such penalties being applicable to the bidder as well as to the person signing in its behalf;
- (e) That attached hereto (if corporate bidder) is a certified copy of resolution authorizing the execution of this certified by the signature of this bid or proposal in behalf of the corporate bidder.

(Individual)

(Corporation)

Dated: _____ By _____
(Signature of Officer)

This Non-Collusive Bidding Certificate must be submitted with the bid.

BID FORM
ATTACHMENT #2

CERTIFIED CORPORATE RESOLUTION

RESOLVED THAT _____ be authorized to sign and submit the bid or proposal of this corporation for the following project:

and to include in such bid or proposal the certificate as to non-collusion required by section one hundred three-d (103-d) of the general municipal law as to the act and deed of such corporation, and for any inaccuracies or mis-statements in such certificate this corporate bidder shall be liable under the penalties of perjury.

The foregoing is a true and correct copy of the resolution and adopted by

_____ at a meeting of its board of directors held on the
_____ day of _____ 20__ .

(Secretary)

BID FORM
ATTACHMENT #3

IRANIAN ENERGY DIVESTMENT CERTIFICATION

**Pursuant to Section 103-g
Of the New York State
General Municipal Law**

- A. By submission of this bid/proposal, each bidder/proposer and each person signing on behalf of any bidder/proposer certifies, and in the case of a joint bid, each party thereto certifies as to its own organization, under penalty of perjury, that to the best of its knowledge and belief that each bidder is not on the list created pursuant to paragraph (b) of subdivision 3 of Section 165-a of the New York State Finance Law.
- B. A Bid/Proposal shall not be considered for award, nor shall any award be made where the condition set forth in Paragraph A above has not been complied with; provided, however, that in any case the bidder/proposer cannot make the foregoing certification set forth in Paragraph A above, the bidder/proposer shall so state and shall furnish with the bid a signed statement which sets forth in detail the reasons therefore. Where Paragraph A above cannot be complied with, the Purchasing Unit to the political subdivision, public department, agency or official thereof to which the bid/proposal is made, or his designee, may award a bid/proposal, on a case by case business under the following circumstances:
1. The investment activities in Iran were made before April 12, 2012, the investment activities in Iran have not been expanded or renewed after April 12, 2012, and the Bidder/Proposer has adopted, publicized and is implementing a formal plan to cease the investment activities in Iran and to refrain from engaging in any new investments in Iran; or
 2. The political subdivision makes a determination that the goods or services are necessary for the political subdivision to perform its functions and that, absent such an exemption, the political subdivision would be unable to obtain the goods or services for which the contract is offered. Such determination shall be made in writing and shall be a public document.

Signature

Title

Date

Company

BID FORM
ATTACHMENT #4

CERTIFICATION ON VIOLATIONS

_____, a representative of _____, hereby swears to and certifies that, to the best of his or her knowledge and belief:

1. Neither _____, nor any substantially owned-affiliated entity of the Bidder (collectively the "Bidder"), has been found to be in violation of the Davis-Bacon Act pursuant to 40 U.S.C. 3144, the Copeland Act pursuant to 18 U.S.C. 874 and 40 U.S.C. 3145 or the Contract Work Hours and Safety Standards Act pursuant to 40 U.S.C. 332, or their New York State counterparts.

☐ True ☐ False

If False is selected, information for questions 2 and 3 must be provided. If True is selected questions 2 and 3 are not applicable, continue to question 4.

2. If the Bidder has been found to be in violation of the Davis-Bacon Act, the Copeland Act, the Contract Work Hours and Safety Standards Act, or any of their New York State counterparts, state the name of the agency, the date of the violation, the nature of the violation and any consequence of the violation, including warnings, fines and debarments below.

3. The Bidder is not currently under investigation by any local, state or federal government agency. If Bidder is under investigation, state the name of the agency, the date of the alleged violation and the nature of the alleged violation below.

4. The Bidder's Dun & Bradstreet D-U-N-S number is _____.

5. I have authority to execute this certification, knowing it will be relied upon by the Owner of this Project.

Name Title

Sworn to before me this _____ day of _____, 20__.

Notary Public

BID FORM
ATTACHMENT #5

SUBCONTRACTORS LIST

In accordance with New York State law, list below names of each subcontractor for Plumbing, Mechanical and Electrical work whose figures have been used in preparing the Bid, and to whom subcontracts are expected to be awarded, should the Contract be awarded to the Bidder.

Include amount to be paid to each subcontractor.

Any changes to this list will require the approval of the Owner upon a showing of legitimate construction need for the change.

Scope of Subcontractor's Work	Subcontractor Name	Dollar Amount of Subcontract
Plumbing		
Mechanical		
Electrical		

NAME OF BIDDER _____

BID FORM ATTACHMENT #6**BIDDER'S QUALIFICATIONS FORM****NOTARIZED AND SUBMITTED WITH THE BID**

All questions must be answered and the data given must be clear and comprehensive. If necessary, questions may be answered on separate attached sheet.

1. Name of Bidder:
2. Permanent main office address:
3. When organized:
4. If a corporation, where incorporated:
5. How many years have you been engaged in the contracting business under your present firm or trade name?
6. Contracts on hand: (List these, showing amount of each contract and the appropriate anticipated dates of completion.)
7. General character of work performed by your company:
8. Have you ever failed to complete any work awarded to you?
If so, where and why?
9. Have you ever defaulted on a contract?
If so, where and why?
10. List the more important projects recently completed by your company, stating the approximate cost for each, and the month and year completed.
11. List your major equipment available for this Contract.
12. List your experience in work similar to this project.
13. List the background and experience of the principal members of your organization, including officers.
14. List the work to be performed by Subcontractors and summarize the dollar value of each Subcontract.
15. Credit available: \$
16. Give bank reference:

BID FORM ATTACHMENT #7**INSURANCE CERTIFICATION FORM**

THIS FORM MUST BE SUBMITTED WITH THE BID

Project Number: 136396-24002.1

Project Name: ACSD Additions and Alterations to LaGrange Middle School-Phase 1A

Your Insurance representative must complete the form below in order to be considered for the award of this Bid or Project, and it is important that you complete the Bidder's Acknowledgement section of this form (below).

Please note that a Standard Certificate of Insurance must accompany your Bid submission in order for your Bid to be considered.

Insurance Representative's Acknowledgement:

We have reviewed the insurance requirements set forth in the Bid and are capable of providing such insurance to our insured in accordance with such requirements in the event the Contract is awarded to our insured and provided our insured pays the appropriate premium.

Insurance Representative: _____

Address: _____

Are you an agent for the companies providing coverage? Yes _____ No _____

Insurance Representative

Date

Bidder's Acknowledgement:

I acknowledge that I have received the insurance requirements of this Bid and have considered the costs, if any, of procuring the required insurance and will be able to supply the insurance required in accordance with the Bid, if it is awarded. I understand that a Standard Certificate of Insurance must be submitted with my Bid; and if it is not, the Arlington Central School District may reject my Bid and award to the next lowest Bidder.

Firm Name: _____

Address: _____

Date: _____

Bidder's Signature

BID FORM ATTACHMENT #8
BOND CERTIFICATION FORM

Project Number: 136396-24002.1

Project Name: ACSD Additions and Alterations to LaGrange Middle School-Phase 1A

I acknowledge that I have reviewed the Performance Bond and Payment Bond requirements of this Bid and have considered the costs, if any, of procuring the required bonding and will be able to supply the bonds required in accordance with the Bid, if it is awarded.

I understand that this form must be submitted with my Bid; and if it is not, the Arlington Central School District may reject my Bid and award to the next lowest Bidder.

Name of Bonding Company: _____

Address of Bonding
Company: _____

Bidder's Firm Name: _____

Address: _____

Date: _____

Bidder's Signature

Print Name

NAME OF BIDDER _____

PROPOSED PRODUCTS FORM**SUBMITTED BY THREE LOW BIDDERS WITHIN THREE DAYS FOLLOWING BID OPENING**

In accordance with Articles 4 and 6 of the Instructions to Bidders, list specified products and corresponding proposed equivalent products below. Include additional pages as necessary.

Attach additional sheet explaining any aspect of the Contract Documents that cannot be complied with by the manufacturer or supplier of the proposed equivalent product.

Specified Product**Equivalent Product**

Technical Section: _____

Manufacturer: _____

Specified Product: _____

Product
Designation: _____

Technical Section: _____

Manufacturer: _____

Specified Product: _____

Product
Designation: _____

Technical Section: _____

Manufacturer: _____

Specified Product: _____

Product
Designation: _____

Technical Section: _____

Manufacturer: _____

Specified Product: _____

Product
Designation: _____

Technical Section: _____

Manufacturer: _____

Specified Product: _____

Product
Designation: _____

Technical Section: _____

Manufacturer: _____

Specified Product: _____

Product
Designation: _____

Technical Section: _____

Manufacturer: _____

Specified Product: _____

Product
Designation: _____

NAME OF BIDDER _____

PROPOSED SUBCONTRACTORS FORM**SUBMITTED BY THREE LOW BIDDERS**
WITHIN THREE DAYS FOLLOWING BID OPENING

Review of proposed subcontractors shall be in accordance with Article 5.2 of the General Conditions.

Instructions:

1. List below name of each subcontractor whose figures have been used in preparing the Bid, and to whom a subcontract is expected to be awarded, upon Architect's review, should the Contract be awarded to the Bidder.
2. For each subcontractor, identify the Specification section(s) included in that subcontract.

Subcontractor Name**Specification Section**

NAME OF BIDDER _____

PROPOSED SCHEDULE OF VALUES FORM - LMS PHASE 1ASUBMITTED BY THREE LOW BIDDERS WITHIN THREE DAYS FOLLOWING BID OPENING

For the convenience of the Owner's preliminary analysis of the Bid, list the value of the Work included in the Base Bid sum as follows:

Site Alterations..... \$ _____

Site Work for Additions..... \$ _____

Two Story Classroom Addition - Area E..... \$ _____

One Story Classroom Addition - Area F/G..... \$ _____

Alterations..... \$ _____

Total Base Bid..... \$ _____

 AIA® Document A232® – 2019**General Conditions of the Contract for Construction, Construction Manager as Adviser Edition****for the following PROJECT:***(Name, and location or address)*

Additions and Alterations to
LaGrange Middle School
110 Stringham Road
LaGrangeville, New York 12540
Tt Project Number 136396-24002.1

THE CONSTRUCTION MANAGER:*(Name, legal status, and address)*

The Palombo Group
22 Noxon Street
Poughkeepsie, New York 12601

THE OWNER:*(Name, legal status, and address)*

Arlington Central School District
144 Todd Hill Road
LaGrangeville, New York 12540

THE ARCHITECT:*(Name, legal status, and address)*

Tetra Tech Engineers, Architects & Landscape Architects, P.C.
d/b/a Tetra Tech Architects & Engineers
Cornell Business & Technology Park
10 Brown Road
Ithaca, New York 14850

ADDITIONS AND DELETIONS:

The author of this document may have revised the text of the original AIA standard form. An *Additions and Deletions Report* that notes revisions to the standard form text is available from the author and should be reviewed. A vertical line in the left margin of this document indicates where the author has added to or deleted from the original AIA text.

This document has important legal consequences. Consultation with an attorney is encouraged with respect to its completion or modification.

This document is intended to be used in conjunction with AIA Documents A132™–2019, Standard Form of Agreement Between Owner and Contractor, Construction Manager as Adviser Edition; B132™–2019, Standard Form of Agreement Between Owner and Architect, Construction Manager as Adviser Edition; and C132™–2019, Standard Form of Agreement Between Owner and Construction Manager as Adviser.

TABLE OF ARTICLES

- 1 GENERAL PROVISIONS
- 2 OWNER
- 3 CONTRACTOR
- 4 ARCHITECT AND CONSTRUCTION MANAGER
- 5 SUBCONTRACTORS
- 6 CONSTRUCTION BY OWNER OR BY SEPARATE CONTRACTORS
- 7 CHANGES IN THE WORK
- 8 TIME
- 9 PAYMENTS AND COMPLETION
- 10 PROTECTION OF PERSONS AND PROPERTY
- 11 INSURANCE AND BONDS
- 12 UNCOVERING AND CORRECTION OF WORK
- 13 MISCELLANEOUS PROVISIONS
- 14 TERMINATION OR SUSPENSION OF THE CONTRACT
- 15 CLAIMS AND DISPUTES

ARTICLE 1 GENERAL PROVISIONS

§ 1.1 Basic Definitions

§ 1.1.1 The Contract Documents. The Contract Documents are enumerated in the Agreement between the Owner and Contractor (hereinafter the Agreement) and consist of the Agreement, Conditions of the Contract (General, Supplementary and other Conditions), Drawings, Specifications, Addenda issued prior to execution of the Contract, other documents listed in the Agreement, and Modifications issued after execution of the Contract. A Modification is (1) a written amendment to the Contract signed by both parties, (2) a Change Order, (3) a Construction Change Directive, or (4) a written order for a minor change in the Work issued by the Architect. The Contract Documents include the Notice to Bidders, Instructions to Bidders, sample forms and the Contractor's bid.

§ 1.1.2 The Contract. The Contract Documents form the Contract for Construction. The Contract represents the entire and integrated agreement between the parties hereto and supersedes prior negotiations, representations, or agreements, either written or oral. The Contract may be amended or modified only by a Modification. The Contract Documents shall not be construed to create a contractual relationship of any kind (1) between the Contractor and the Architect or the Architect's consultants, (2) between the Owner and the Construction Manager or the Construction Manager's consultants, (3) between the Owner and the Architect or the Architect's consultants, (4) between the Contractor and the Construction Manager or the Construction Manager's consultants, (5) between the Owner and a Subcontractor or Sub-subcontractor (6) between the Construction Manager and the Architect, or (7) between any persons or entities other than the Owner and Contractor. The Construction Manager and Architect shall, however, be entitled to performance and enforcement of obligations under the Contract intended to facilitate performance of their duties.

§ 1.1.3 The Work. The term "Work" means the construction and services required by the Contract Documents, whether completed or partially completed, and includes all other labor, materials, equipment, and services provided or to be provided by the Contractor to fulfill the Contractor's obligations. The Work may constitute the whole or a part of the Project.

§ 1.1.4 The Project. The Project is the total construction of which the Work performed under the Contract Documents may be the whole or a part and which may include construction by other Contractors, and by the Owner's own forces and Separate Contractors.

§ 1.1.5 Contractors. Contractors are persons or entities who perform Work under contracts with the Owner that are administered by the Architect and Construction Manager.

§ 1.1.6 Separate Contractors. Separate Contractors are persons or entities who perform construction under separate contracts with the Owner not administered by the Architect and Construction Manager.

§ 1.1.7 The Drawings. The Drawings are the graphic and pictorial portions of the Contract Documents showing the design, location and dimensions of the Work, generally including plans, elevations, sections, details, schedules, and diagrams.

§ 1.1.8 The Specifications. The Specifications are that portion of the Contract Documents consisting of the written requirements for materials, equipment, systems, standards and workmanship for the Work, and performance of related services.

§ 1.1.9 Instruments of Service. Instruments of Service are representations, in any medium of expression now known or later developed, of the tangible and intangible creative work performed by the Architect and the Architect's consultants under their respective professional services agreements. Instruments of Service may include, without limitation, studies, surveys, models, sketches, drawings, specifications, and other similar materials.

§ 1.1.10 Initial Decision Maker. The Initial Decision Maker is the person identified in the Agreement to render initial decisions on Claims in accordance with Section 15.2. The Initial Decision Maker shall not show partiality to the Owner or Contractor and shall not be liable for results of interpretations or decisions rendered in good faith.

§ 1.2 Correlation and Intent of the Contract Documents

§ 1.2.1 The intent of the Contract Documents is to include all items necessary for the proper execution and completion of the Work by the Contractor. The Contract Documents are complementary, and what is required by

one shall be as binding as if required by all; performance by the Contractor shall be required only to the extent consistent with the Contract Documents and reasonably inferable from them as being necessary to produce the indicated results.

§ 1.2.1.1 The invalidity of any provision of the Contract Documents shall not invalidate the Contract or its remaining provisions. If it is determined that any provision of the Contract Documents violates any law, or is otherwise invalid or unenforceable, then that provision shall be revised to the extent necessary to make that provision legal and enforceable. In such case the Contract Documents shall be construed, to the fullest extent permitted by law, to give effect to the parties' intentions and purposes in executing the Contract.

§ 1.2.2 Organization of the Specifications into divisions, sections and articles, and arrangement of Drawings shall not control the Contractor in dividing the Work among Subcontractors or in establishing the extent of Work to be performed by any trade.

§ 1.2.3 Unless otherwise stated in the Contract Documents, words that have well-known technical or construction industry meanings are used in the Contract Documents in accordance with such recognized meanings.

§ 1.3 Capitalization

Terms capitalized in these General Conditions include those that are (1) specifically defined, (2) the titles of numbered articles, or (3) the titles of other documents published by the American Institute of Architects.

§ 1.2.3.1 In the event of conflicts or discrepancies among the Contract Documents, interpretations will be based on the following priorities:

- .1 Modifications, as defined in Section 1.1.1.
- .2 The Agreement.
- .3 Addenda, with those of later date having precedence over those of earlier date.
- .4 The General Conditions of the Contract for Construction.
- .5 Division 01 of the Specifications.
- .6 Drawings and remaining Divisions of the Specifications.

In the case of conflicts or discrepancies between Drawings and Divisions of the Specifications (other than Division 01), or within or among the Contract Documents and not clarified by Addendum, the Architect will determine which takes precedence in accordance with Sections 4.2.11, 4.2.12, and 4.2.13.

§ 1.4 Interpretation

In the interest of brevity the Contract Documents frequently omit modifying words such as "all" and "any" and articles such as "the" and "an," but the fact that a modifier or an article is absent from one statement and appears in another is not intended to affect the interpretation of either statement.

§ 1.5 Ownership and Use of Drawings, Specifications, and Other Instruments of Service

§ 1.5.1 The Architect and the Architect's consultants shall be deemed the authors and owners of their respective Instruments of Service, including the Drawings and Specifications, and retain all common law, statutory, and other reserved rights in their Instruments of Service, including copyrights. The Contractor, Subcontractors, sub-subcontractors, and suppliers shall not own or claim a copyright in the Instruments of Service. Submittal or distribution to meet official regulatory requirements or for other purposes in connection with the Project is not to be construed as publication in derogation of the Architect's or Architect's consultants' reserved rights.

§ 1.5.2 The Contractor, Subcontractors, Sub-subcontractors, and suppliers are authorized to use and reproduce the Instruments of Service provided to them, subject to any protocols established pursuant to Sections 1.7 and 1.8, solely and exclusively for execution of the Work. All copies made under this authorization shall bear the copyright notice, if any, shown on the Instruments of Service. The Contractor, Subcontractors, Sub-subcontractors, and suppliers may not use the Instruments of Service on other projects or for additions to the Project outside the scope of the Work without the specific written consent of the Owner, Architect, and the Architect's consultants.

§ 1.6 Notice

§ 1.6.1 Except as otherwise provided in Section 1.6.2, where the Contract Documents require one party to notify or give notice to the other party, such notice shall be provided in writing to the designated representative of the party to whom the notice is addressed and shall be deemed to have been duly served if delivered in person, by mail, by courier, or by electronic transmission if a method for electronic transmission is set forth in the

Agreement.

§ 1.6.2 Notice of Claims as provided in Section 15.1.3 shall be provided in writing and shall be deemed to have been duly served only if delivered to the designated representative of the party to whom the notice is addressed by certified or registered mail, or by courier providing proof of delivery.

§ 1.7 Digital Data Use and Transmission

The parties shall agree upon protocols governing the transmission and use of, and reliance on, Instruments of Service or any other information or documentation in digital form.

§ 1.8 Building Information Models Use and Reliance

Any use of, or reliance on, all or a portion of a building information model without agreement to protocols governing the use of, and reliance on, the information contained in the model shall be at the using or relying party's sole risk and without liability to the other party and its contractors or consultants, the authors of, or contributors to, the building information model, and each of their agents and employees.

§ 1.9 Submittal Exchange

Submittal Exchange, a web-based construction phase software for managing project submittals, RFI's, and other construction phase paperwork, shall be used by all parties on this project. The Architect will be the administrator for the Submittal Exchange system on this project.

§ 1.9.1 The Owner is entitled to reimbursement from the Contractor for amounts paid to the Architect and/or Construction Manager for services required by the Contractor's failure to properly use Submittal Exchange in the submission and processing of construction phase paperwork.

ARTICLE 2 OWNER

§ 2.1 General

§ 2.1.1 The Owner is the person or entity identified as such in the Agreement and is referred to throughout the Contract Documents as if singular in number. The Owner shall designate in writing a representative who shall have express authority to bind the Owner with respect to all matters requiring the Owner's approval or authorization. Except as otherwise provided in Section 4.2.1, the Construction Manager and the Architect do not have such authority. The term "Owner" means the Owner or the Owner's authorized representative.

§ 2.1.2 The Owner shall furnish to the Contractor, within fifteen days after receipt of a written request, information necessary and relevant for the Contractor to evaluate, give notice of, or enforce mechanic's lien rights. Such information shall include a correct statement of the record legal title to the property on which the Project is located, usually referred to as the site, and the Owner's interest therein.

§ 2.2 Evidence of the Owner's Financial Arrangements

§ 2.2.1 Prior to commencement of the Work, and upon written request by the Contractor, the Owner shall furnish to the Contractor reasonable evidence that the Owner has made financial arrangements to fulfill the Owner's obligations under the Contract. The Contractor shall have no obligation to commence the Work until the Owner provides such evidence. If commencement of the Work is delayed under this Section 2.2.1, the Contract Time shall be extended appropriately.

§ 2.2.2 Following commencement of the Work and upon written request by the Contractor, the Owner shall furnish to the Contractor reasonable evidence that the Owner has made financial arrangements to fulfill the Owner's obligations under the Contract only if (1) the Owner fails to make payments to the Contractor as the Contract Documents require; (2) the Contractor identifies in writing a reasonable concern regarding the Owner's ability to make payment when due; or (3) a change in the Work materially changes the Contract Sum. If the Owner fails to provide such evidence, as required, within fourteen days of the Contractor's request, the Contractor may immediately stop the Work and, in that event, shall notify the Owner that the Work has stopped. However, if the request is made because a change in the Work materially changes the Contract Sum under (3) above, the Contractor may immediately stop only that portion of the Work affected by the change until reasonable evidence is provided. If the Work is stopped under this Section 2.2.2, the Contract Time shall be extended appropriately and the Contract Sum shall be increased by the amount of the Contractor's reasonable costs of shutdown, delay and start-up, plus interest as provided in the Contract Documents.

§ 2.2.3 After the Owner furnishes evidence of financial arrangements under this Section 2.2, the Owner shall not

materially vary such financial arrangements without prior notice to the Contractor.

§ 2.2.4 Where the Owner has designated information furnished under this Section 2.2 as “confidential,” the Contractor shall keep the information confidential and shall not disclose it to any other person. However, the Contractor may disclose “confidential” information, after seven (7) days’ notice to the Owner, where disclosure is required by law, including a subpoena or other form of compulsory legal process issued by a court or governmental entity, or by court or arbitrator(s) order. The Contractor may also disclose “confidential” information to its employees, consultants, sureties, Subcontractors and their employees, Sub-subcontractors, and others who need to know the content of such information solely and exclusively for the Project and who agree to maintain the confidentiality of such information.

§ 2.3 Information and Services Required of the Owner

§ 2.3.1 Except for permits and fees that are the responsibility of the Contractor under the Contract Documents, including those required under Section 3.7.1, the Owner shall secure and pay for necessary approvals, easements, assessments and charges required for construction, use or occupancy of permanent structures or for permanent changes in existing facilities. Unless otherwise provided under the Contract Documents, the Owner, assisted by the Construction Manager, shall secure and pay for the building permit.

§ 2.3.2 The Owner shall retain an architect lawfully licensed to practice architecture, or an entity lawfully practicing architecture, in the jurisdiction where the Project is located. That person or entity is identified as the Architect in the Agreement and is referred to throughout the Contract Documents as if singular in number.

§ 2.3.3 The Owner shall retain a construction manager adviser lawfully practicing construction management in the jurisdiction where the Project is located. That person or entity is identified as the Construction Manager in the Agreement and is referred to throughout the Contract Documents as if singular in number.

§ 2.3.4 If the employment of the Construction Manager or Architect terminates, the Owner shall employ a successor construction manager or architect to whom the Contractor has no reasonable objection and whose status under the Contract Documents shall be that of the Construction Manager or Architect, respectively.

§ 2.3.5 The Owner shall furnish surveys describing physical characteristics, legal limitations and utility locations for the site of the Project, and a legal description of the site. The Contractor shall be entitled to rely on the accuracy of information furnished by the Owner but shall exercise proper precautions relating to the safe performance of the Work.

§ 2.3.6 The Owner shall furnish information or services required of the Owner by the Contract Documents with reasonable promptness. The Owner shall also furnish any other information or services under the Owner’s control and relevant to the Contractor’s performance of the Work with reasonable promptness after receiving the Contractor’s written request for such information or services.

§ 2.3.7 The Owner shall furnish the Contractor three (3) copies of the Contract Documents, including one set to be used for the Project Record Drawings. The Contractor may purchase additional copies at the cost of reproduction, postage and handling.

§ 2.3.8 The Owner shall endeavor to forward all communications to the Contractor through the Construction Manager and shall contemporaneously provide the same communications to the Architect about matters arising out of or relating to the Contract Documents.

§ 2.4 Owner’s Right to Stop the Work

If the Contractor fails to correct Work that is not in accordance with the requirements of the Contract Documents as required by Section 12.2 or repeatedly fails to carry out Work in accordance with the Contract Documents, the Owner may issue a written order to the Contractor to stop the Work, or any portion thereof, until the cause for such order has been eliminated; however, the right of the Owner to stop the Work shall not give rise to a duty on the part of the Owner to exercise this right for the benefit of the Contractor or any other person or entity, except to the extent required by Section 6.1.3.

§ 2.5 Owner’s Right to Carry Out the Work

If the Contractor defaults or neglects to carry out the Work in accordance with the Contract Documents and fails within a three-day period after receipt of written notice from the Owner to commence and continue correction of

such default or neglect with diligence and promptness, the Owner may, without prejudice to other remedies the Owner may have, correct such default or neglect. Such action by the Owner and amounts charged to the Contractor are both subject to review by the Construction Manager and prior approval of the Architect, and the Construction Manager or Architect may, pursuant to Section 9.5.1, withhold or nullify a Certificate for Payment in whole or in part, to the extent reasonably necessary to reimburse the Owner for the reasonable cost of correcting such deficiencies, including Owner's expenses and compensation for the Construction Manager's and Architect's and their respective consultants' additional services made necessary by such default, neglect, or failure. If current and future payments are not sufficient to cover such amounts, the Contractor shall pay the difference to the Owner. If the Contractor disagrees with the actions of the Owner or the Architect, or the amounts claimed as costs to the Owner, the Contractor may file a Claim pursuant to Article 15.

§ 2.5.1 Where the Contractor's default and/or neglect to carry out its Work in accordance with the Contract Documents threatens the health, safety and/or welfare of the occupants of the Owner's facilities and/or threatens the structural integrity and/or preservation of the Owner's facilities, the Owner may proceed to carry out the Contractor's Work upon twenty-four (24) hours' written notice of its intention to do so to the Contractor. In such case an appropriate Change Order or Construction Change Directive shall be issued deducting from payments then or thereafter due the Contractor the reasonable cost of correcting such deficiencies and defaults, including the Owner's expenses and compensation for the Architect's and its respective consultants' additional services and other expenses made necessary by such default, neglect or failure.

ARTICLE 3 CONTRACTOR

§ 3.1 General

§ 3.1.1 The Contractor is the person or entity identified as such in the Agreement and is referred to throughout the Contract Documents as if singular in number. The Contractor shall be lawfully licensed, if required in the jurisdiction where the Project is located. The Contractor shall designate in writing a representative who shall have express authority to bind the Contractor with respect to all matters under this Contract. The term "Contractor" means the Contractor or the Contractor's authorized representative.

§ 3.1.2 The Contractor shall perform the Work in accordance with the Contract Documents.

§ 3.1.3 The Contractor shall not be relieved of its obligations to perform the Work in accordance with the Contract Documents either by activities or duties of the Construction Manager or Architect in their administration of the Contract, or by tests, inspections or approvals required or performed by persons or entities other than the Contractor.

§ 3.2 Review of Contract Documents and Field Conditions by Contractor

§ 3.2.1 Execution of the Contract by the Contractor is a representation that the Contractor has visited the site, become generally familiar with local conditions under which the Work is to be performed, and correlated personal observations with requirements of the Contract Documents.

§ 3.2.2 Because the Contract Documents are complementary, the Contractor shall, before starting each portion of the Work, carefully study and compare the various Contract Documents relative to that portion of the Work, as well as the information furnished by the Owner pursuant to Section 2.3.5, shall take field measurements of any existing conditions related to that portion of the Work, and shall observe any conditions at the site affecting it. These obligations are for the purpose of facilitating coordination and construction by the Contractor and are not for the purpose of discovering errors, omissions, or inconsistencies in the Contract Documents; however, the Contractor shall promptly report to the Construction Manager and Architect any errors, inconsistencies or omissions discovered by or made known to the Contractor as a request for information submitted to the Construction Manager in such form as the Construction Manager and Architect may require. It is recognized that the Contractor's review is made in the Contractor's capacity as a contractor and not as a licensed design professional, unless otherwise specifically provided in the Contract Documents.

§ 3.2.2.1 Do not scale Drawings. Follow figure dimensions, confirming on site.

§ 3.2.3 The Contractor is not required to ascertain that the Contract Documents are in accordance with applicable laws, statutes, ordinances, codes, rules and regulations, or lawful orders of public authorities, but the Contractor shall promptly report to the Construction Manager and Architect any nonconformity discovered by or made known to the Contractor as a request for information submitted to Construction Manager in such form as the Construction Manager and Architect may require.

§ 3.2.4 If the Contractor believes that additional cost or time is involved because of clarifications or instructions the Architect issues in response to the Contractor's notices or requests for information pursuant to Sections 3.2.2 or 3.2.3, the Contractor shall submit Claims as provided in Article 15. If the Contractor fails to perform the obligations of Sections 3.2.2 or 3.2.3, the Contractor shall pay such costs and damages to the Owner, subject to section 15.1.7, as would have been avoided if the Contractor had performed such obligations. If the Contractor performs those obligations, the Contractor shall not be liable to the Owner or Architect for damages resulting from errors, inconsistencies or omissions in the Contract Documents, for differences between field measurements or conditions and the Contract Documents, or for nonconformities of the Contract Documents to applicable laws, statutes, ordinances, codes, rules and regulations, and lawful orders of public authorities.

§ 3.2.5 The Owner is entitled to reimbursement from the Contractor for amounts paid to the Architect for evaluating and responding to the Contractor's requests for information that are not prepared in accordance with the Contract Documents or where the requested information is available to the Contractor from a careful study and comparison of the Contract Documents, field conditions, other Owner-provided information, Contractor-prepared coordination drawings, or prior Project correspondence or documentation.

§ 3.3 Supervision and Construction Procedures

§ 3.3.1 The Contractor shall supervise and direct the Work, using the Contractor's best skill and attention. The Contractor shall be solely responsible for, and have control over, construction means, methods, techniques, sequences, and procedures, and for coordinating all portions of the Work under the Contract. If the Contract Documents give specific instructions concerning construction means, methods, techniques, sequences, or procedures, the Contractor shall evaluate the jobsite safety thereof and shall be solely responsible for the jobsite safety of such means, methods, techniques, sequences, or procedures. If the Contractor determines that such means, methods, techniques, sequences or procedures may not be safe, the Contractor shall give timely notice to the Owner, the Construction Manager, and the Architect, and shall propose alternative means, methods, techniques, sequences, or procedures. The Architect shall evaluate the proposed alternative solely for conformance with the design intent for the completed construction. The Construction Manager shall review the proposed alternative for sequencing, constructability, and coordination impacts on the other Contractors. Unless the Architect or the Construction Manager objects to the Contractor's proposed alternative, the Contractor shall perform the Work using its alternative means, methods, techniques, sequences, or procedures.

§ 3.3.2 The Contractor shall be responsible to the Owner for acts and omissions of the Contractor's employees, Subcontractors and their agents and employees, and other persons or entities performing portions of the Work for, or on behalf of, the Contractor or any of its Subcontractors.

§ 3.3.3 The Contractor shall be responsible for inspection of portions of the Project already performed to determine that such portions are in proper condition to receive subsequent Work.

§ 3.4 Labor and Materials

§ 3.4.1 Unless otherwise provided in the Contract Documents, the Contractor shall provide and pay for labor, materials, equipment, tools, construction equipment and machinery, water, heat, utilities, transportation, and other facilities and services necessary for proper execution and completion of the Work, whether temporary or permanent and whether or not incorporated or to be incorporated in the Work.

§ 3.4.2 Except in the case of minor changes in the Work approved by the Architect in accordance with Section 3.12.8 or ordered by the Architect in accordance with Section 7.4, the Contractor may make substitutions only with the consent of the Owner, after evaluation by the Architect, in consultation with the Construction Manager, and in accordance with a Change Order or Construction Change Directive.

§ 3.4.2.1 After the Contract has been executed, the Owner and Architect will consider requests for the substitution of products in place of those specified only under the conditions set forth in the General Requirements (Division 01 of the Specifications). By making requests for substitutions, the Contractor:

- .1 represents that it has personally investigated the proposed substitute product and determined that it is equal or superior in all respects to that specified;
- .2 represents that it will provide the same warranty for the substitution as it would have provided for the product specified;
- .3 certifies that the cost data presented is complete and includes all related costs for the substituted product and for Work that must be changed as a result of the substitution, except for the Architect's

- redesign costs, and waives all claims for additional costs related to the substitution that subsequently become apparent; and
- .4** shall coordinate the installation of the accepted substitute, making such changes as may be required for the Work to be complete in all respects.

§ 3.4.2.2 The Owner shall be entitled to reimbursement from the Contractor for amounts paid to the Architect for reviewing the Contractor's proposed substitutions for convenience after the period noted in Division 01 Section "Substitution Procedures" and making agreed-upon changes in the Drawings and Specifications resulting from such substitutions.

§ 3.4.3 The Contractor shall enforce strict discipline and good order among the Contractor's employees and other persons carrying out the Work. The Contractor shall not permit employment of unfit persons or persons not properly skilled in tasks assigned to them.

§ 3.5 Warranty

§ 3.5.1 The Contractor warrants to the Owner, Construction Manager, and Architect that materials and equipment furnished under the Contract will be of good quality and new unless the Contract Documents require or permit otherwise. The Contractor further warrants that the Work will conform to the requirements of the Contract Documents and will be free from defects, except for those inherent in the quality of the Work the Contract Documents require or permit. Work, materials, or equipment not conforming to these requirements may be considered defective. The Contractor's warranty excludes remedy for damage or defect caused by abuse, alterations to the Work not executed by the Contractor, improper or insufficient maintenance, improper operation, or normal wear and tear and normal usage. If required by the Construction Manager or Architect, the Contractor shall furnish satisfactory evidence as to the kind and quality of materials and equipment.

§ 3.5.2 All material, equipment, or other special warranties required by the Contract Documents shall be issued in the name of the Owner, or shall be transferable to the Owner, and shall commence in accordance with Section 9.8.4.

§ 3.6 Taxes

The Contractor shall pay sales, consumer, use and similar taxes for the Work or portions thereof provided by the Contractor that are legally enacted when bids are received or negotiations concluded, whether or not yet effective or merely scheduled to go into effect.

§ 3.6.1 The Owner is exempt from payment of Federal, State, local taxes, and from payment of sales and compensating use taxes of the State of New York and of cities and counties on all materials and supplies sold to the Owner pursuant to the provisions of this Contract. These taxes are not to be included in bids. This exemption does not, however, apply to tools, machinery, equipment, or other property leased by, or to the Contractor or a subcontractor; and the Contractor and its subcontractor shall be responsible for, and pay, any and all applicable taxes, including sales and compensating use taxes, on such leased tools, machinery, equipment or other property.

§ 3.7 Permits, Fees, Notices, and Compliance with Laws

§ 3.7.1 Unless otherwise provided in the Contract Documents, the Owner, assisted by the Construction Manager, shall secure and pay for the building permit. The Contractor shall secure and pay for other permits, fees, licenses, and inspections by government agencies necessary for proper execution and completion of the Work that are customarily secured after execution of the Contract and legally required at the time bids are received or negotiations concluded.

§ 3.7.1.1 The Owner shall secure the building permit from the New York State Education Department.

§ 3.7.2 The Contractor shall comply with and give notices required by applicable laws, statutes, ordinances, codes, rules and regulations, and lawful orders of public authorities applicable to performance of the Work.

§ 3.7.2.1 In accordance New York State Labor Law Article 8, Section 220, subd. 3-a(a), the Contractor shall submit to the Owner within 30 days after issuance of Contractor's first payroll, and every 30 days thereafter, a transcript of the original payroll record, subscribed and affirmed as true under the penalties of perjury. In addition, all contractors and subcontractors working on projects covered by Article 8 of NYS Labor Law also must electronically provide certified payroll records to the New York State Department of Labor ("DOL") through the DOL Certified Payroll portal. Payroll information and records must be provided in the format, manner and

frequency required by the DOL. The Contractor shall ensure that its subcontractors comply with these requirements and shall provide the Owner, on request, proof of electronic submission by the Contractor and all subcontractors.

§ 3.7.2.2 The Contractor shall comply with all applicable New York State Department of Labor requirements, including the provision that every worker employed in performance of a public work contract shall be certified as having completed an OSHA 10-hour safety training course. The Contractor and subcontractor shall be solely responsible for compliance with this requirement with respect to their employees. The Contractor's or subcontractor's failure to comply with this requirement shall not transfer or in any way impose the responsibility for worker safety upon the Owner or the Architect.

§ 3.7.3 If the Contractor performs Work knowing it to be contrary to applicable laws, statutes, ordinances, codes, rules and regulations, or lawful orders of public authorities, the Contractor shall assume appropriate responsibility for such Work and shall bear the costs attributable to correction.

§ 3.7.4 Concealed or Unknown Conditions. If the Contractor encounters conditions at the site that are (1) subsurface or otherwise concealed physical conditions that differ materially from those indicated in the Contract Documents or (2) unknown physical conditions of an unusual nature that differ materially from those ordinarily found to exist and generally recognized as inherent in construction activities of the character provided for in the Contract Documents, the Contractor shall promptly provide notice to the Owner, Construction Manager, and the Architect before conditions are disturbed and in no event later than 14 days after first observance of the conditions. The Architect and Construction Manager will promptly investigate such conditions and, if the Architect, in consultation with the Construction Manager, determines that they differ materially and cause an increase or decrease in the Contractor's cost of, or time required for, performance of any part of the Work, will recommend that an equitable adjustment be made in the Contract Sum or Contract Time, or both. If the Architect, in consultation with the Construction Manager, determines that the conditions at the site are not materially different from those indicated in the Contract Documents and that no change in the terms of the Contract is justified, the Architect shall promptly notify the Owner, Construction Manager, and Contractor, stating the reasons. If the Owner or Contractor disputes the Architect's determination or recommendation, either party may submit a Claim as provided in Article 15.

§ 3.7.5 If, in the course of the Work, the Contractor encounters human remains or recognizes the existence of burial markers, archaeological sites or wetlands not indicated in the Contract Documents, the Contractor shall immediately suspend any operations that would affect them and shall notify the Owner, Construction Manager, and Architect. Upon receipt of such notice, the Owner shall promptly take any action necessary to obtain governmental authorization required to resume the operations. The Contractor shall continue to suspend such operations until otherwise instructed by the Owner but shall continue with all other operations that do not affect those remains or features. Requests for adjustments in the Contract Sum and Contract Time arising from the existence of such remains or features may be made as provided in Article 15.

§ 3.8 Allowances

§ 3.8.1 The Contractor shall include in the Contract Sum all allowances stated in the Contract Documents. Items covered by allowances shall be supplied for such amounts and by such persons or entities as the Owner may direct, but the Contractor shall not be required to employ persons or entities to whom the Contractor has reasonable objection.

§ 3.8.2 Unless otherwise provided in the Contract Documents:

- 1 Allowances shall cover the cost to the Contractor of materials and equipment delivered at the site and all required taxes, less applicable trade discounts;
- 2 Lump Sum Allowances, Unit Cost Allowances and Quantity Allowances: Contractor's costs for unloading and handling at the site, labor, installation costs, overhead, profit, and other expenses contemplated for stated allowance amounts shall be included in the Contract Sum but not in the allowances; and
- 3 Contingency Allowances: Contractor's costs, including all such subcontractor costs, for receiving and handling at Project site, labor, installation, and similar costs related to products and materials under allowance shall be included as part of the allowance. Contractor, Overhead and profit related to the allowance shall be included as part of the Contract Sum and not part of the allowance however subcontractor overhead and profit shall be part of allowance. Refer to Section 7.1.4 for maximum combined Contractor and subcontractor overhead and profit percentage;

- .4 Whenever costs are more than or less than allowances, the Contract Sum shall be adjusted accordingly by Change Order. The amount of the Change Order shall reflect (1) the difference between actual costs and the allowances under Section 3.8.2.1 and (2) changes in Contractor's costs under Section 3.8.2.2; and
- .5 The Architect shall create and process Allowance Access Authorizations for the Construction Manager and Owner's approval and execution in accordance with the Contract Documents.

§ 3.8.3 Materials and equipment under an allowance shall be selected by the Owner with reasonable promptness.

§ 3.8.4 Refer to Division 01 Section "Allowances" for additional information.

§ 3.9 Superintendent

§ 3.9.1 The Contractor shall employ a competent superintendent and necessary assistants who shall be in attendance at the Project site during performance of the Work. The superintendent shall represent the Contractor, and communications given to the superintendent shall be as binding as if given to the Contractor.

§ 3.9.2 The Contractor, as soon as practicable after award of the Contract, shall notify the Owner and Architect in writing, through the Construction Manager, of the name and qualifications of a proposed superintendent. Within 14 days of receipt of the information, the Construction Manager may notify the Contractor, stating whether the Owner, the Construction Manager, or the Architect (1) has reasonable objection to the proposed superintendent or (2) require additional time for review. Failure of the Construction Manager to provide notice within the 14-day period shall constitute notice of no reasonable objection.

§ 3.9.3 The Contractor shall not employ a proposed superintendent to whom the Owner, Construction Manager, or Architect has made reasonable and timely objection. The Contractor shall not change the superintendent without the Owner's consent, which shall not unreasonably be withheld or delayed.

§ 3.10 Contractor's Construction and Submittal Schedules

§ 3.10.1 The Contractor, promptly after being awarded the Contract, shall prepare and submit for the Owner's and Architect's information, and the Construction Manager's use in developing the Project schedule, a Contractor's construction schedule for the Work. The schedule shall contain detail appropriate for the Project, including (1) the date of commencement of the Work, interim schedule milestone dates, and the date of Substantial Completion; (2) an apportionment of the Work by construction activity; and (3) the time required for completion of each portion of the Work. The schedule shall provide for the orderly progression of the Work to completion and shall not exceed time limits current under the Contract Documents. The schedule shall be revised at appropriate intervals as required by the conditions of the Work and Project, shall be related to the entire Project to the extent required by the Contract Documents, and shall provide for expeditious and practicable execution of the Work. The Contractor shall cooperate with the Construction Manager in scheduling and performing the Contractor's Work to avoid conflict with, and as to cause no delay in, the work or activities of other Contractors, or the construction or operations of the Owner's own forces or Separate Contractors.

§ 3.10.2 The Contractor shall participate with other Contractors, the Construction Manager, and the Owner in reviewing and coordinating all schedules for incorporation into the Project schedule that is prepared by the Construction Manager. The Contractor shall make revisions to the construction schedule and submittal schedule as deemed necessary by the Construction Manager to conform to the Project schedule.

§ 3.10.3 The Contractor shall perform the Work in general accordance with the most recent schedules submitted to the Owner, Construction Manager, and Architect, and incorporated into the approved Project schedule.

§ 3.11 Documents and Samples at the Site

The Contractor shall make available, at the Project site, the Contract Documents, including Change Orders, Construction Change Directives, and other Modifications, in good order and marked currently to indicate field changes and selections made during construction, and the approved Shop Drawings, Product Data, Samples, and similar required submittals. These shall be in electronic form or paper copy, available to the Construction Manager, Architect, and Owner, and delivered to the Construction Manager for submittal to the Owner upon completion of the Work as a record of the Work as constructed.

§ 3.12 Shop Drawings, Product Data, and Samples

§ 3.12.1 Shop Drawings are drawings, diagrams, schedules, and other data specially prepared for the Work by the

Contractor or a Subcontractor, Sub-subcontractor, manufacturer, supplier, or distributor to illustrate some portion of the Work.

§ 3.12.2 Product Data are illustrations, standard schedules, performance charts, instructions, brochures, diagrams, and other information furnished by the Contractor to illustrate materials or equipment for some portion of the Work.

§ 3.12.3 Samples are physical examples that illustrate materials, equipment, or workmanship, and establish standards by which the Work will be judged.

§ 3.12.4 Shop Drawings, Product Data, Samples, and similar submittals are not Contract Documents. Their purpose is to demonstrate how the Contractor proposes to conform to the information given and the design concept expressed in the Contract Documents for those portions of the Work for which the Contract Documents require submittals. Review by the Architect and Construction Manager is subject to the limitations of Sections 4.2.10 through 4.2.12. Informational submittals upon which the Construction Manager and Architect are not expected to take responsive action may be so identified in the Contract Documents. Submittals that are not required by the Contract Documents may be returned by the Construction Manager or Architect without action.

§ 3.12.5 The Contractor shall review for compliance with the Contract Documents, approve, and submit to the Construction Manager, Shop Drawings, Product Data, Samples, and similar submittals required by the Contract Documents, with reasonable promptness and in such sequence as to cause no delay in the Work or in the activities of other Contractors, Separate Contractors, or the Owner's own forces. The Contractor shall cooperate with the Construction Manager in the coordination of the Contractor's Shop Drawings, Product Data, Samples, and similar submittals with related documents submitted by other Contractors.

§ 3.12.6 By submitting Shop Drawings, Product Data, Samples, and similar submittals, the Contractor represents to the Owner, Construction Manager, and Architect, that the Contractor has (1) reviewed and approved them, (2) determined and verified materials, field measurements and field construction criteria related thereto, or will do so, and (3) checked and coordinated the information contained within such submittals with the requirements of the Work and of the Contract Documents.

§ 3.12.7 The Contractor shall perform no portion of the Work for which the Contract Documents require submittal and review of Shop Drawings, Product Data, Samples, or similar submittals, until the respective submittal has been reviewed and approved by the Architect.

§ 3.12.8 The Work shall be in accordance with approved submittals except that the Contractor shall not be relieved of responsibility for deviations from the requirements of the Contract Documents by the Architect's approval of Shop Drawings, Product Data, Samples, or similar submittals, unless the Contractor has specifically notified the Construction Manager and Architect in writing of such deviation at the time of submittal and (1) the Architect has given written approval to the specific deviation as a minor change in the Work, or (2) a Change Order or Construction Change Directive has been issued authorizing the deviation. The Contractor shall not be relieved of responsibility for errors or omissions in Shop Drawings, Product Data, Samples, or similar submittals, by the Architect's approval thereof.

§ 3.12.9 The Contractor shall direct specific attention, in writing or on resubmitted Shop Drawings, Product Data, Samples, or similar submittals, to revisions other than those requested by the Construction Manager and Architect on previous submittals. In the absence of such notice, the Architect's approval of a resubmission shall not apply to such revisions.

§ 3.12.10 The Contractor shall not be required to provide professional services that constitute the practice of architecture or engineering unless such services are specifically required by the Contract Documents for a portion of the Work or unless the Contractor needs to provide such services in order to carry out the Contractor's responsibilities for construction means, methods, techniques, sequences, and procedures. The Contractor shall not be required to provide professional services in violation of applicable law.

§ 3.12.10.1 If professional design services or certifications by a design professional related to systems, materials, or equipment are specifically required of the Contractor by the Contract Documents, the Owner and the Architect will specify all performance and design criteria that such services must satisfy. The Contractor shall be entitled to rely upon the adequacy and accuracy of the performance and design criteria provided in the Contract Documents.

The Contractor shall cause such services or certifications to be provided by an appropriately licensed design professional, whose signature and seal shall appear on all drawings, calculations, specifications, certifications, Shop Drawings, and other submittals prepared by such professional. Shop Drawings, and other submittals related to the Work, designed or certified by such professional, if prepared by others, shall bear such professional's written approval when submitted to the Architect. The Owner, the Architect, and the Construction Manager shall be entitled to rely upon the adequacy and accuracy of the services, certifications, and approvals performed or provided by such design professionals, provided the Owner and Architect have specified to the Contractor the performance and design criteria that such services must satisfy. Pursuant to this Section 3.12.10, the Architect will review and approve or take other appropriate action on submittals only for the limited purpose of checking for conformance with information given and the design concept expressed in the Contract Documents. The Construction Manager shall review submittals for sequencing, constructability, and coordination impacts on other Contractors.

§ 3.12.10.2 If the Contract Documents require the Contractor's design professional to certify that the Work has been performed in accordance with the design criteria, the Contractor shall furnish such certifications to the Construction Manager and Architect at the time and in the form specified by the Architect.

§ 3.12.11 The Contractor is required to provide all submittals for the Architect's review; all submittals to be provided to the Architect by the Submittal deadlines noted in the Contract Documents. The Architect's review of Contractor's submittals will be limited to the time preceding the Submittal deadline and will consist of an examination of an initial submittal and one (1) resubmittal. The Owner is entitled to obtain reimbursement from the Contractor for amounts paid to the Architect for evaluation of additional resubmittals, and for evaluation of submittals for which the initial submission is received after the Submittal deadlines.

§ 3.13 Use of Site

§ 3.13.1 The Contractor shall confine operations at the site to areas permitted by applicable laws, statutes, ordinances, codes, rules and regulations, lawful orders of public authorities, and the Contract Documents and shall not unreasonably encumber the site with materials or equipment.

§ 3.13.2 The Contractor shall coordinate the Contractor's operations with, and secure the approval of, the Construction Manager before using any portion of the site.

§ 3.13.3 The Contractor shall be responsible for enforcing the Owner's security and access policies and procedures and the following rules of conduct for its personnel and those of its subcontractors, sub-subcontractors, and suppliers at the Project site, and the Owner's Project Representative shall provide interpretations should a question arise if the rules of conduct are being adequately enforced by the Contractor:

- .1 No smoking or use of tobacco products.
- .2 No drinking of alcoholic beverages or use of controlled substances.
- .3 No working, or presence on site, under the influence of alcoholic beverages or controlled substances.
- .4 No use of indecent language or display of indecent images, publications or terms.
- .5 No use of radios or other entertainment devices.
- .6 No horseplay or dangerous behavior.
- .7 No firearms or other weapons.

-
- .8 No communication with staff or students.

§ 3.13.4 The Contractor shall require its personnel and those of its subcontractors, sub-subcontractors and suppliers to wear visible photo-identification badges acceptable to the Owner, at all times for identification and security purposes.

§ 3.14 Cutting and Patching

§ 3.14.1 The Contractor shall be responsible for cutting, fitting, or patching required to complete the Work or to make its parts fit together properly. All areas requiring cutting, fitting, or patching shall be restored to the condition existing prior to the cutting, fitting, or patching, unless otherwise required by the Contract Documents.

§ 3.14.2 The Contractor shall not damage or endanger a portion of the Work or fully or partially completed construction of the Owner, Separate Contractors, or of other Contractors by cutting, patching, or otherwise altering such construction, or by excavation. The Contractor shall not cut or otherwise alter construction by the Owner,

Separate Contractors, or by other Contractors except with written consent of the Construction Manager, Owner, and such other Contractors or Separate Contractors. Consent shall not be unreasonably withheld. The Contractor shall not unreasonably withhold, from the Separate Contractors, other Contractors, or the Owner, its consent to cutting or otherwise altering the Work.

§ 3.15 Cleaning Up

§ 3.15.1 The Contractor shall keep the premises and surrounding area free from accumulation of waste materials and rubbish caused by operations under the Contract. At completion of the Work, the Contractor shall remove waste materials, rubbish, the Contractor's tools, construction equipment, machinery, and surplus materials from and about the Project.

§ 3.15.2 If the Contractor fails to clean up as provided in the Contract Documents, the Owner, or Construction Manager with the Owner's approval, may do so and the Owner shall be entitled to reimbursement from the Contractor.

§ 3.16 Access to Work

The Contractor shall provide the Owner, Construction Manager, and Architect with access to the Work in preparation and progress wherever located.

§ 3.17 Royalties, Patents and Copyrights

The Contractor shall pay all royalties and license fees. The Contractor shall defend suits or claims for infringement of copyrights and patent rights and shall hold the Owner, Construction Manager, and Architect harmless from loss on account thereof, but shall not be responsible for defense or loss when a particular design, process, or product of a particular manufacturer or manufacturers is required by the Contract Documents, or where the copyright violations are contained in Drawings, Specifications, or other documents prepared by the Owner, Architect, or Construction Manager. However, if an infringement of a copyright or patent is discovered by, or made known to, the Contractor, the Contractor shall be responsible for the loss unless the information is promptly furnished to the Architect through the Construction Manager.

§ 3.18 Indemnification

§ 3.18.1 To the fullest extent permitted by law, the Contractor shall indemnify and hold harmless the Owner, Construction Manager, Architect, Construction Manager's and Architect's consultants, and agents and employees of any of them from and against claims, damages, losses, and expenses, including but not limited to attorneys' fees, arising out of or resulting from performance of the Work, provided that such claim, damage, loss, or expense is attributable to bodily injury, sickness, disease or death, or to injury to or destruction of tangible property (other than the Work itself), but only to the extent caused by the negligent acts or omissions of the Contractor, a Subcontractor, anyone directly or indirectly employed by them, or anyone for whose acts they may be liable, regardless of whether or not such claim, damage, loss, or expense is caused in part by a party indemnified hereunder. Such obligation shall not be construed to negate, abridge, or reduce other rights or obligations of indemnity that would otherwise exist as to a party or person described in this Section 3.18.

§ 3.18.2 In claims against any person or entity indemnified under this Section 3.18 by an employee of the Contractor, a Subcontractor, anyone directly or indirectly employed by them, or anyone for whose acts they may be liable, the indemnification obligation under Section 3.18.1 shall not be limited by a limitation on amount or type of damages, compensation, or benefits payable by or for the Contractor or a Subcontractor under workers' compensation acts, disability benefit acts, or other employee benefit acts.

ARTICLE 4 ARCHITECT AND CONSTRUCTION MANAGER

§ 4.1 General

§ 4.1.1 The Architect is the person or entity retained by the Owner pursuant to Section 2.3.2 and identified as such in the Agreement.

§ 4.1.2 The Construction Manager is the person or entity retained by the Owner pursuant to Section 2.3.3 and identified as such in the Agreement.

§ 4.1.3 Duties, responsibilities, and limitations of authority of the Construction Manager and Architect as set forth in the Contract Documents shall not be restricted, modified, or extended without written consent of the Owner, Construction Manager, Architect, and Contractor. Consent shall not be unreasonably withheld.

§ 4.2 Administration of the Contract

§ 4.2.1 The Construction Manager and Architect will provide administration of the Contract as described in the Contract Documents and will be the Owner's representatives during construction until the date the Architect issues the final Certificate for Payment. The Construction Manager and Architect will have authority to act on behalf of the Owner only to the extent provided in the Contract Documents.

§ 4.2.2 The Architect will visit the site at intervals appropriate to the stage of construction, or as otherwise agreed with the Owner, to become generally familiar with the progress and quality of the portion of the Work completed, and to determine in general if the Work observed is being performed in a manner indicating that the Work, when fully completed, will be in accordance with the Contract Documents. However, the Architect will not be required to make exhaustive or continuous on-site inspections to check the quality or quantity of the Work. The Architect will not have control over, charge of, or responsibility for the construction means, methods, techniques, sequences or procedures, or for the safety precautions and programs in connection with the Work, since these are solely the Contractor's rights and responsibilities under the Contract Documents. On the basis of the site visits, the Architect will keep the Owner and the Construction Manager reasonably informed about the progress and quality of the portion of the Work completed and promptly report to the Owner and Construction Manager known deviations from the Contract Documents and defects and deficiencies observed in the Work.

§ 4.2.2.1 The Owner is entitled to reimbursement from the Contractor for the amounts paid to the Architect for site visits made necessary by the fault of the Contractor or by defects and deficiencies in the Work.

§ 4.2.2.2 The Owner is entitled to reimbursement from the Contractor for the amounts paid to the Construction Manager for site visits made necessary by the fault of the Contractor or by defects and deficiencies in the Work.

§ 4.2.3 The Construction Manager shall provide one or more representatives who shall be in attendance at the Project site whenever the Work is being performed. The Construction Manager will determine in general if the Work observed is being performed in accordance with the Contract Documents, will keep the Owner and Architect reasonably informed of the progress of the Work, and will promptly report to the Owner and Architect known deviations from the Contract Documents and the most recent Project schedule, and defects and deficiencies observed in the Work.

§ 4.2.4 The Construction Manager will schedule and coordinate the activities of the Contractor and other Contractors in accordance with the latest approved Project schedule.

§ 4.2.5 The Construction Manager, except to the extent required by Section 4.2.4, and Architect will not have control over, charge of, or responsibility for, the construction means, methods, techniques, sequences or procedures, or for the safety precautions and programs in connection with the Work, since these are solely the Contractor's rights and responsibilities under the Contract Documents, and neither will be responsible for the Contractor's failure to perform the Work in accordance with the requirements of the Contract Documents. Neither the Construction Manager nor the Architect will have control over or charge of, or be responsible for acts or omissions of, the Contractor, Subcontractors, or their agents or employees, or of any other persons or entities performing portions of the Work.

§ 4.2.6 Communications. The Owner shall communicate with the Contractor and the Construction Manager's consultants through the Construction Manager about matters arising out of or relating to the Contract Documents. The Owner and Construction Manager shall include the Architect in all communications that relate to or affect the Architect's services or professional responsibilities. The Owner shall promptly notify the Architect of the substance of any direct communications between the Owner and the Construction Manager otherwise relating to the Project. Communications by and with the Architect's consultants shall be through the Architect. Communications by and with Subcontractors and suppliers shall be through the Contractor. Communications by and with other Contractors shall be through the Construction Manager. Communications by and with the Owner's own forces and Separate Contractors shall be through the Owner. The Contract Documents may specify other communication protocols.

§ 4.2.7 The Construction Manager and Architect will review and certify all Applications for Payment by the Contractor, in accordance with the provisions of Article 9.

§ 4.2.8 The Architect and Construction Manager have authority to reject Work that does not conform to the Contract Documents and will notify each other about the rejection. The Construction Manager shall determine in general whether the Work of the Contractor is being performed in accordance with the requirements of the

Contract Documents and notify the Owner, Contractor and Architect of defects and deficiencies in the Work. Whenever the Construction Manager considers it necessary or advisable, the Construction Manager will have authority to require inspection or testing of the Work in accordance with Sections 13.4.2 and 13.4.3, upon written authorization of the Owner, whether or not the Work is fabricated, installed or completed. The foregoing authority of the Construction Manager will be subject to the provisions of Sections 4.2.18 through 4.2.20 inclusive, with respect to interpretations and decisions of the Architect. However, neither the Architect's nor the Construction Manager's authority to act under this Section 4.2.8 nor a decision made by either of them in good faith either to exercise or not to exercise such authority shall give rise to a duty or responsibility of the Architect or the Construction Manager to the Contractor, Subcontractors, material and equipment suppliers, their agents or employees, or other persons performing any of the Work.

§ 4.2.9 Utilizing the submittal schedule provided by the Contractor, the Construction Manager shall prepare, and revise as necessary, a Project submittal schedule incorporating information from other Contractors, the Owner, Owner's consultants, Owner's Separate Contractors and vendors, governmental agencies, and participants in the Project under the management of the Construction Manager. The Project submittal schedule and any revisions shall be submitted to the Architect for approval.

§ 4.2.10 The Construction Manager will receive and promptly review for conformance with the submittal requirements of the Contract Documents, all submittals from the Contractor such as Shop Drawings, Product Data, and Samples. Where there are other Contractors, the Construction Manager will also check and coordinate the information contained within each submittal received from the Contractor and other Contractors and transmit to the Architect those recommended for approval. By submitting Shop Drawings, Product Data, Samples, and similar submittals, the Construction Manager represents to the Owner and Architect that the Construction Manager has reviewed and recommended them for approval. The Construction Manager's actions will be taken in accordance with the Project submittal schedule approved by the Architect or, in the absence of an approved Project submittal schedule, with reasonable promptness while allowing sufficient time to permit adequate review by the Architect.

§ 4.2.11 The Architect will review and approve, or take other appropriate action upon, the Contractor's submittals such as Shop Drawings, Product Data, and Samples, but only for the limited purpose of checking for conformance with information given and the design concept expressed in the Contract Documents. The Architect's action will be taken with reasonable promptness while allowing sufficient time in the Architect's professional judgment to permit adequate review. Upon the Architect's completed review, the Architect shall transmit its submittal review to the Construction Manager.

§ 4.2.12 Review of the Contractor's submittals by the Construction Manager and Architect is not conducted for the purpose of determining the accuracy and completeness of other details such as dimensions and quantities, or for substantiating instructions for installation or performance of equipment or systems, all of which remain the responsibility of the Contractor as required by the Contract Documents. The Construction Manager and Architect's review of the Contractor's submittals shall not relieve the Contractor of the obligations under Sections 3.3, 3.5, and 3.12. The Construction Manager and Architect's review shall not constitute approval of safety precautions or of any construction means, methods, techniques, sequences, or procedures. The Architect's approval of a specific item shall not indicate approval of an assembly of which the item is a component.

§ 4.2.13 The Architect will prepare Change Orders, Construction Change Directives and Allowance Change Authorizations.

§ 4.2.14 The Construction Manager and the Architect will take appropriate action on Change Orders or Construction Change Directives in accordance with Article 7, and the Architect will have authority to order minor changes in the Work as provided in Section 7.4. The Architect, in consultation with the Construction Manager, will investigate and make determinations and recommendations regarding concealed and unknown conditions as provided in Section 3.7.4.

§ 4.2.15 Utilizing the documents provided by the Contractor, the Construction Manager will maintain at the site for the Owner one copy of all Contract Documents, approved Shop Drawings, Product Data, Samples, and similar required submittals, in good order and marked currently to record all changes and selections made during construction. These will be available to the Architect and the Contractor and will be delivered to the Owner upon completion of the Project.

§ 4.2.16 The Construction Manager will assist the Architect in conducting inspections to determine the date or

dates of Substantial Completion and the date of final completion; issue Certificates of Substantial Completion in conjunction with the Architect pursuant to Section 9.8; and receive and forward to the Owner written warranties and related documents required by the Contract and assembled by the Contractor pursuant to Section 9.10. The Construction Manager will forward to the Architect a final Application and Certificate for Payment or final Project Application and Project Certificate for Payment upon the Contractor's compliance with the requirements of the Contract Documents.

§ 4.2.17 If the Owner and Architect agree, the Architect will provide one or more Project representatives to assist in carrying out the Architect's responsibilities at the site. The duties, responsibilities and limitations of authority of the Project representatives shall be as set forth in an exhibit to be incorporated in the Contract Documents. The Owner shall notify the Construction Manager of any change in the duties, responsibilities and limitations of authority of the Project representatives.

§ 4.2.18 The Architect will interpret and decide matters concerning performance under, and requirements of, the Contract Documents on written request of the Construction Manager, Owner, or Contractor through the Construction Manager. The Architect's response to such requests will be made in writing within any time limits agreed upon or otherwise with reasonable promptness.

§ 4.2.19 Interpretations and decisions of the Architect will be consistent with the intent of, and reasonably inferable from, the Contract Documents and will be in writing or in the form of drawings. When making such interpretations and decisions, the Architect will endeavor to secure faithful performance by both Owner and Contractor, will not show partiality to either, and will not be liable for results of interpretations or decisions so rendered in good faith.

§ 4.2.20 The Architect's decisions on matters relating to aesthetic effect will be final if consistent with the intent expressed in the Contract Documents.

§ 4.2.21 The Construction Manager will receive and review requests for information from the Contractor, and forward each request for information to the Architect, with the Construction Manager's recommendation. The Architect will review and respond in writing, through the Construction Manager, to requests for information about the Contract Documents. The Construction Manager's recommendation and the Architect's response to each request will be made in writing within any time limits agreed upon or otherwise with reasonable promptness. If appropriate, the Architect will prepare and issue supplemental Drawings and Specifications in response to the requests for information.

ARTICLE 5 SUBCONTRACTORS

§ 5.1 Definitions

§ 5.1.1 A Subcontractor is a person or entity who has a direct contract with the Contractor to perform a portion of the Work at the site. The term "Subcontractor" is referred to throughout the Contract Documents as if singular in number and means a Subcontractor or an authorized representative of the Subcontractor. The term "Subcontractor" does not include other Contractors or Separate Contractors or the subcontractors of Separate Contractors.

§ 5.1.2 A Sub-subcontractor is a person or entity who has a direct or indirect contract with a Subcontractor to perform a portion of the Work at the site. The term "Sub-subcontractor" is referred to throughout the Contract Documents as if singular in number and means a Sub-subcontractor or an authorized representative of the Sub-subcontractor.

§ 5.2 Award of Subcontracts and Other Contracts for Portions of the Work

§ 5.2.1 Unless otherwise stated in the Contract Documents, the Contractor or the bidding requirements, as soon as practicable after award of the Contract, shall notify the Construction Manager, for review by the Owner, Construction Manager and Architect, of the persons or entities proposed for each principal portion of the Work, including those who are to furnish materials or equipment fabricated to a special design for each principal portion of the Work. Within 14 days of receipt of the information, the Construction Manager may notify the Contractor whether the Owner, the Construction Manager or the Architect (1) has reasonable objection to any such proposed person or entity or, (2) requires additional time for review. Failure of the Construction Manager to provide notice within the 14-day period shall constitute notice of no reasonable objection.

§ 5.2.2 The Contractor shall not contract with a proposed person or entity to whom the Owner, Construction

Manager or Architect has made reasonable and timely objection. The Contractor shall not be required to contract with anyone to whom the Contractor has made reasonable objection.

§ 5.2.3 If the Owner, Construction Manager or Architect has reasonable objection to a person or entity proposed by the Contractor, the Contractor shall propose another to whom the Owner, Construction Manager or Architect has no reasonable objection. If the proposed but rejected Subcontractor was reasonably capable of performing the Work, the Contract Sum and Contract Time shall be increased or decreased by the difference, if any, occasioned by such change, and an appropriate Change Order shall be issued before commencement of the substitute Subcontractor's Work. However, no increase in the Contract Sum or Contract Time shall be allowed for such change unless the Contractor has acted promptly and responsively in submitting names as required.

§ 5.2.4 The Contractor shall not substitute a Subcontractor, person, or entity for one previously selected if the Owner, Construction Manager or Architect makes reasonable objection to such substitution.

§ 5.2.5 The Contractor shall perform at least 25 percent of the cost of the Contract (not including the costs of materials, insurance, bonds, submittals and similar items) with its own employees.

§ 5.3 Subcontractual Relations

By appropriate written agreement, the Contractor shall require each Subcontractor, to the extent of the Work to be performed by the Subcontractor, to be bound to the Contractor by terms of the Contract Documents, and to assume toward the Contractor all the obligations and responsibilities, including the responsibility for safety of the Subcontractor's Work, that the Contractor, by these Contract Documents, assumes toward the Owner, Construction Manager and Architect. Each subcontract agreement shall preserve and protect the rights of the Owner, Construction Manager and Architect under the Contract Documents with respect to the Work to be performed by the Subcontractor so that subcontracting thereof will not prejudice such rights, and shall allow to the Subcontractor, unless specifically provided otherwise in the subcontract agreement, the benefit of all rights, remedies, and redress against the Contractor that the Contractor, by the Contract Documents, has against the Owner. Where appropriate, the Contractor shall require each Subcontractor to enter into similar agreements with Sub-subcontractors. The Contractor shall make available to each proposed Subcontractor, prior to the execution of the subcontract agreement, copies of the Contract Documents to which the Subcontractor will be bound, and, upon written request of the Subcontractor, identify to the Subcontractor terms and conditions of the proposed subcontract agreement that may be at variance with the Contract Documents. Subcontractors will similarly make copies of applicable portions of such documents available to their respective proposed Sub-subcontractors.

§ 5.4 Contingent Assignment of Subcontracts

§ 5.4.1 Each subcontract agreement for a portion of the Work is assigned by the Contractor to the Owner, provided that

- .1 assignment is effective only after termination of the Contract by the Owner for cause pursuant to Section 14.2 and only for those subcontract agreements that the Owner accepts by notifying the Subcontractor and Contractor; and
- .2 assignment is subject to the prior rights of the surety, if any, obligated under bond relating to the Contract.

When the Owner accepts the assignment of a subcontract agreement, the Owner assumes the Contractor's rights and obligations under the subcontract.

§ 5.4.2 Upon such assignment, if the Work has been suspended for more than 30 days, the Subcontractor's compensation shall be equitably adjusted for increases in cost resulting from the suspension.

§ 5.4.3 Upon assignment to the Owner under this Section 5.4, the Owner may further assign the subcontract to a successor Contractor or other entity. If the Owner assigns the subcontract to a successor Contractor or other entity, the Owner shall nevertheless remain legally responsible for all of the successor Contractor's obligations under the subcontract.

ARTICLE 6 CONSTRUCTION BY OWNER OR BY SEPARATE CONTRACTORS

§ 6.1 Owner's Right to Perform Construction with Own Forces and to Award Other Contracts

§ 6.1.1 The term "Separate Contractor(s)" shall mean other contractors retained by the Owner under separate agreements. The Owner reserves the right to perform construction or operations related to the Project with the Owner's own forces, and with Separate Contractors retained under Conditions of the Contract substantially similar to those of this Contract, including those provisions of the Conditions of the Contract related to insurance and waiver of subrogation. If the Contractor claims that delay or additional cost is involved because of such action by the Owner, the Contractor shall make such Claim as provided in Article 15.

§ 6.1.2 When separate contracts are awarded for different portions of the Project or other construction or operations on the site, the term "Contractor" in the Contract Documents in each case shall mean the Contractor who executes each separate Owner-Contractor Agreement.

§ 6.1.3 The Owner shall provide for coordination of the activities of the Owner's own forces and of each Separate Contractor with the Work of the Contractor, who shall cooperate with them. The Contractor shall participate with any Separate Contractors and the Owner in reviewing their construction schedules. The Contractor shall make any revisions to its construction schedule deemed necessary after a joint review and mutual agreement. The construction schedules shall then constitute the schedules to be used by the Contractor, Separate Contractors, and the Owner until subsequently revised.

§ 6.1.4 Unless otherwise provided in the Contract Documents, when the Owner performs construction or operations related to the Project with the Owner's own forces or with Separate Contractors, the Owner or its Separate Contractors shall have the same obligations and rights that the Contractor has under the Conditions of the Contract, including, without excluding others, those stated in Article 3, this Article 6, and Articles 10, 11, and 12.

§ 6.2 Mutual Responsibility

§ 6.2.1 The Contractor shall afford the Owner's own forces, Separate Contractors, Construction Manager and other Contractors reasonable opportunity for introduction and storage of their materials and equipment and performance of their activities and shall connect and coordinate the Contractor's construction and operations with theirs as required by the Contract Documents.

§ 6.2.2 If part of the Contractor's Work depends for proper execution or results upon construction or operations by the Owner's own forces, Separate Contractors or other Contractors, the Contractor shall, prior to proceeding with that portion of the Work, promptly notify the Construction Manager and Architect of apparent discrepancies or defects in the construction or operations by the Owner or Separate Contractor or other Contractors that would render it unsuitable for proper execution and results of the Contractor's Work. Failure of the Contractor to notify the Construction Manager and the Architect of apparent discrepancies or defects prior to proceeding with the Work shall constitute an acknowledgment that the Owner's or Separate Contractor's or other Contractors' completed or partially completed construction is fit and proper to receive the Contractor's Work. The Contractor shall not be responsible for discrepancies or defects in the construction or operations by the Owner or Separate Contractors or other Contractors that are not apparent.

§ 6.2.3 The Contractor shall reimburse the Owner for costs the Owner incurs, including costs that are payable to a Separate Contractors or to other Contractors, because of the Contractor's delays, improperly timed activities or defective construction. The Owner shall be responsible to the Contractor for costs the Contractor incurs because of delays, improperly timed activities, damage to the Work or defective construction by the Owner's own forces, Separate Contractors, or other Contractors.

§ 6.2.4 The Contractor shall promptly remedy damage that the Contractor wrongfully causes to completed or partially completed construction, or to property of the Owner, Separate Contractors, or other Contractors as provided in Section 10.2.5.

§ 6.2.5 The Owner, Separate Contractors, and other Contractors shall have the same responsibilities for cutting and patching as are described for the Contractor in Section 3.14.

§ 6.3 Owner's Right to Clean Up

If a dispute arises among the Contractor, Separate Contractors, other Contractors, and the Owner as to the responsibility under their respective contracts for maintaining the premises and surrounding area free from waste materials and rubbish, the Owner may clean up and the Construction Manager, with notice to the Architect, will

allocate the cost among those responsible.

ARTICLE 7 CHANGES IN THE WORK

§ 7.1 General

§ 7.1.1 Changes in the Work may be accomplished after execution of the Contract, and without invalidating the Contract, by Change Order, Construction Change Directive or order for a minor change in the Work, subject to the limitations stated in this Article 7 and elsewhere in the Contract Documents.

§ 7.1.2 A Change Order shall be based upon agreement among the Owner, Construction Manager, Architect and Contractor. A Construction Change Directive requires agreement by the Owner, Construction Manager and Architect and may or may not be agreed to by the Contractor. An order for a minor change in the Work may be issued by the Architect alone.

§ 7.1.3 Changes in the Work shall be performed under applicable provisions of the Contract Documents. The Contractor shall proceed promptly with changes in the Work, unless otherwise provided in the Change Order, Construction Change Directive, or order for a minor change in the Work.

§ 7.1.4 The combined overhead and profit (for Contractor, subcontractors, suppliers, and contractors of a lower-tier) included in the total cost to the Owner for a change in the Work shall be as follows:

- .1 Maximum combined overhead and profit, 15 percent of the cost.
- .2 Cost to which overhead and profit is to be applied shall be determined in accordance with Section 7.3.4.
- .3 To facilitate checking of quotations for extras or credits, all proposals shall be accompanied by a complete itemization of costs including labor, materials, rental costs, and Subcontracts. Subcontracts shall be itemized also.

§ 7.2 Change Orders

A Change Order is a written instrument prepared by the Architect and signed by the Owner, Construction Manager, Architect, and Contractor, stating their agreement upon all of the following:

- .1 The change in the Work;
- .2 The amount of the adjustment, if any, in the Contract Sum; and
- .3 The extent of the adjustment, if any, in the Contract Time.

§ 7.3 Construction Change Directives

§ 7.3.1 A Construction Change Directive is a written order prepared by the Construction Manager and signed by the Owner, Construction Manager and Architect, directing a change in the Work prior to agreement on adjustment, if any, in the Contract Sum or Contract Time, or both. The Owner may by Construction Change Directive, without invalidating the Contract, order changes in the Work within the general scope of the Contract consisting of additions, deletions, or other revisions, the Contract Sum and Contract Time being adjusted accordingly.

§ 7.3.2 A Construction Change Directive shall be used in the absence of total agreement on the terms of a Change Order.

§ 7.3.3 If the Construction Change Directive provides for an adjustment to the Contract Sum, the adjustment shall be based on one of the following methods:

- .1 Mutual acceptance of a lump sum properly itemized and supported by sufficient substantiating data to permit evaluation;
- .2 Unit prices stated in the Contract Documents or subsequently agreed upon;
- .3 Cost to be determined in a manner agreed upon by the parties and a mutually acceptable fixed or percentage fee; or
- .4 As provided in Section 7.3.4.

§ 7.3.4 If unit prices are stated in the Contract Documents or subsequently agreed upon, and if quantities originally contemplated are materially changed in a proposed Change Order or Construction Change Directive so that application of such unit prices to quantities of Work proposed will cause substantial inequity to the Owner or Contractor, the applicable unit prices shall be equitably adjusted.

§ 7.3.5 If the Contractor does not respond promptly or disagrees with the method for adjustment in the Contract Sum, the Construction Manager shall determine the adjustment on the basis of reasonable expenditures and savings

of those performing the Work attributable to the change, including, in case of an increase in the Contract Sum, an amount for overhead and profit as set forth in the Agreement, or if no such amount is set forth in the Agreement, a reasonable amount. In such case, and also under Section 7.3.3.3, the Contractor shall keep and present, in such form as the Construction Manager may prescribe, an itemized accounting together with appropriate supporting data. Unless otherwise provided in the Contract Documents, costs for the purposes of this Section 7.3.4 shall be limited to the following:

- .1 Costs of labor, including applicable payroll taxes, fringe benefits required by agreement or custom, workers' compensation insurance, and other employee costs approved by the Construction Manager and Architect;
- .2 Costs of materials, supplies, and equipment, including cost of transportation, whether incorporated or consumed;
- .3 Rental costs of machinery and equipment, exclusive of hand tools, whether rented from the Contractor or others;
- .4 Overhead and profit mark-up shall include, but not be limited to, the following:
 - .1 home office expense;
 - .2 field office expense;
 - .3 supervision;
 - .4 project management & estimation; and
 - .5 small tools & equipment.

§ 7.3.6 If the Contractor disagrees with the adjustment in the Contract Time, the Contractor may make a Claim in accordance with applicable provisions of Article 15.

§ 7.3.7 Upon receipt of a Construction Change Directive, the Contractor shall promptly proceed with the change in the Work involved and advise the Construction Manager of the Contractor's agreement or disagreement with the method, if any, provided in the Construction Change Directive for determining the proposed adjustment in the Contract Sum or Contract Time.

§ 7.3.8 A Construction Change Directive signed by the Contractor indicates the Contractor's agreement therewith, including adjustment in Contract Sum and Contract Time or the method for determining them. Such agreement shall be effective immediately and shall be recorded as a Change Order.

§ 7.3.9 The amount of credit to be allowed by the Contractor to the Owner for a deletion or change that results in a net decrease in the Contract Sum shall be actual net cost as confirmed by the Construction Manager and Architect. When both additions and credits covering related Work or substitutions are involved in a change, the allowance for overhead and profit shall be figured on the basis of net increase, if any, with respect to that change.

§ 7.3.10 Pending final determination of the total cost of a Construction Change Directive to the Owner, the Contractor may request payment for Work completed under the Construction Change Directive in Applications for Payment. The Construction Manager and Architect will make an interim determination for purposes of monthly certification for payment for those costs and certify for payment the amount that the Construction Manager and Architect determine to be reasonably justified. The interim determination of cost shall adjust the Contract Sum on the same basis as a Change Order, subject to the right of either party to disagree and assert a Claim in accordance with Article 15.

§ 7.3.11 When the Owner and Contractor agree with a determination made by the Construction Manager and Architect concerning the adjustments in the Contract Sum and Contract Time, or otherwise reach agreement upon the adjustments, such agreement shall be effective immediately and the Architect shall prepare a Change Order. Change Orders may be issued for all or any part of a Construction Change Directive.

§ 7.4 Minor Changes in the Work

The Architect may order minor changes in the Work that are consistent with the intent of the Contract Documents and do not involve an adjustment in the Contract Sum or an extension of the Contract Time. The Architect's order for minor changes shall be in writing. If the Contractor believes that the proposed minor change in the Work will affect the Contract Sum or Contract Time, the Contractor shall notify the Construction Manager and shall not proceed to implement the change in the Work. If the Contractor performs the Work set forth in the Architect's order for a minor change without prior notice to the Construction Manager that such change will affect the Contract Sum or Contract Time, the Contractor waives any adjustment to the Contract Sum or extension of the

Contract Time.

ARTICLE 8 TIME

§ 8.1 Definitions

§ 8.1.1 Unless otherwise provided, Contract Time is the period of time, including authorized adjustments, allotted in the Contract Documents for Substantial Completion of the Work.

§ 8.1.2 The date of commencement of the Work is the date established in the Agreement.

§ 8.1.3 The date of Substantial Completion is the date certified by the Architect in accordance with Section 9.8.

§ 8.1.4 The term “day” as used in the Contract Documents shall mean calendar day unless otherwise specifically defined.

§ 8.2 Progress and Completion

§ 8.2.1 Time limits stated in the Contract Documents are of the essence of the Contract. By executing the Agreement, the Contractor confirms that the Contract Time is a reasonable period for performing the Work.

§ 8.2.2 The Contractor shall not knowingly, except by agreement or instruction of the Owner in writing, commence the Work prior to the effective date of insurance required to be furnished by the Contractor and Owner. The date of commencement of the Work shall not be changed by the effective date of such insurance.

§ 8.2.3 The Contractor shall proceed expeditiously with adequate forces and shall achieve Substantial Completion within the Contract Time.

§ 8.3 Delays and Extensions of Time

§ 8.3.1 If the Contractor is delayed at any time in the commencement or progress of the Work by (1) an act or neglect of the Owner, Architect, Construction Manager, or an employee of any of them, or of the Owner’s own forces, Separate Contractors, or other Contractors; (2) by changes ordered in the Work; (3) by labor disputes, fire, unusual delay in deliveries, unavoidable casualties, adverse weather conditions documented in accordance with Section 15.1.6.2, or other causes beyond the Contractor’s control; (4) by delay authorized by the Owner pending mediation and binding dispute resolution; or (5) by other causes that the Contractor asserts and the Architect, based on the recommendation of the Construction Manager, determines justify delay, then the Contract Time shall be extended for such reasonable time as the Architect may determine.

§ 8.3.2 Claims relating to time shall be made in accordance with applicable provisions of Article 15.

§ 8.3.3 This Section 8.3 does not preclude recovery of damages for delay by either party under other provisions of the Contract Documents.

ARTICLE 9 PAYMENTS AND COMPLETION

§ 9.1 Contract Sum

§ 9.1.1 The Contract Sum is stated in the Agreement and, including authorized adjustments, is the total amount payable by the Owner to the Contractor for performance of the Work under the Contract Documents.

§ 9.1.2 If unit prices are stated in the Contract Documents or subsequently agreed upon, and if quantities originally contemplated are materially changed so that application of such unit prices to the actual quantities causes substantial inequity to the Owner or Contractor, the applicable unit prices shall be equitably adjusted.

§ 9.2 Schedule of Values

Where the Contract is based on a stipulated sum or Guaranteed Maximum Price, the Contractor shall submit a schedule of values to the Construction Manager, before the first Application for Payment, allocating the entire Contract Sum to the various portions of the Work. The schedule of values shall be prepared in the form, and supported by the data to substantiate its accuracy, required by the Construction Manager and the Architect. This schedule, unless objected to by the Construction Manager or Architect, shall be used as a basis for reviewing the Contractor’s Applications for Payment. The Construction Manager shall forward to the Architect the Contractor’s schedule of values. Any changes to the schedule of values shall be submitted to the Construction Manager and supported by such data to substantiate its accuracy as the Construction Manager and the Architect may require, and unless objected to by the Construction Manager or the Architect, shall be used as a basis for reviewing the

Contractor's subsequent Applications for Payment.

§ 9.3 Applications for Payment

§ 9.3.1 At least fifteen days before the date established for each progress payment, the Contractor shall submit to the Construction Manager an itemized Application for Payment prepared in accordance with the schedule of values, if required under Section 9.2, for completed portions of the Work. The application shall be notarized, if required, and supported by all data substantiating the Contractor's right to payment that the Owner, Construction Manager or Architect require, such as copies of requisitions, and releases of waivers of lien from Subcontractors and suppliers and shall reflect retainage if provided for in the Contract Documents. The form of Application for Payment, duly notarized, shall be a current authorized edition of AIA Document G7032, Application and Certificate for Payment. Alternative payment application forms are not permitted. AIA Document G732 shall be supported by a current authorized edition of AIA Document G703, Continuation Sheet or equivalent continuation sheet, subject to the approval of Owner and Architect.

§ 9.3.1.1 As provided in Section 7.3.9, such applications may include requests for payment on account of changes in the Work that have been properly authorized by Construction Change Directives, or by interim determinations of the Construction Manager and Architect, but not yet included in Change Orders.

§ 9.3.1.2 Applications for Payment shall not include requests for payment for portions of the Work for which the Contractor does not intend to pay a Subcontractor or supplier, unless such Work has been performed by others whom the Contractor intends to pay.

§ 9.3.1.3 Until Substantial Completion, the Owner shall pay 95 percent of the amount due the Contractor on account of progress payments. At Substantial Completion, the Construction Manager and Architect may authorize remaining partial payments to be made in full, less twice the value of items remaining to be completed and an amount necessary to satisfy any outstanding claims, liens, or judgments.

§ 9.3.1.4 "Applications for Payment must be accompanied by any and all releases of liens for previous applications from Contractor and his/her subcontractors and a sworn and notarized statement that all subcontractors have been paid to at least 95% of previously requisitioned sums.

§ 9.3.2 Unless otherwise provided in the Contract Documents, payments shall be made on account of materials and equipment delivered and suitably stored at the site for subsequent incorporation in the Work. If approved in advance by the Owner, payment may similarly be made for materials and equipment suitably stored off the site at a location agreed upon in writing. Payment for materials and equipment stored on or off the site shall be conditioned upon compliance by the Contractor with procedures satisfactory to the Owner to establish the Owner's title to such materials and equipment or otherwise protect the Owner's interest, and shall include the costs of applicable insurance, storage, and transportation to the site, for such materials and equipment stored off the site.

§ 9.3.3 The Contractor warrants that title to all Work covered by an Application for Payment will pass to the Owner no later than the time of payment. The Contractor further warrants that upon submittal of an Application for Payment all Work for which Certificates for Payment have been previously issued and payments received from the Owner shall, to the best of the Contractor's knowledge, information, and belief, be free and clear of liens, claims, security interests, or encumbrances, in favor of the Contractor, Subcontractors, material suppliers, or other persons or entities that provided labor, materials and equipment relating to the Work.

§ 9.4 Certificates for Payment

§ 9.4.1 The Construction Manager will, within seven days after the Construction Manager's receipt of the Contractor's Application for Payment, review the Application, certify the amount the Construction Manager determines is due the Contractor, and forward the Contractor's Application and Certificate for Payment to the Architect. Within seven days after the Architect receives the Contractor's Application for Payment from the Construction Manager, the Architect will either (1) issue to the Owner a Certificate for Payment, in the full amount of the Application for Payment, with a copy to the Construction Manager; or (2) issue to the Owner a Certificate for Payment for such amount as the Architect determines is properly due, and notify the Construction Manager and Owner of the Architect's reasons for withholding certification in part as provided in Section 9.5.1; or (3) withhold certification of the entire Application for Payment, and notify the Construction Manager and Owner of the Architect's reason for withholding certification in whole as provided in Section 9.5.1. The Construction Manager will promptly forward to the Contractor the Architect's notice of withholding certification.

§ 9.4.2 The Construction Manager's certification of an Application for Payment shall be based upon the Construction Manager's evaluation of the Work and the data in the Application or Applications for Payment. The Construction Manager's certification will constitute a representation that, to the best of the Construction Manager's knowledge, information, and belief, the Work has progressed to the point indicated, the quality of the Work is in accordance with the Contract Documents, and that the Contractor is, or Contractors are, entitled to payment in the amount certified.

§ 9.4.3 The Architect's issuance of a Certificate for Payment shall be based upon the Architect's evaluation of the Work, the recommendation of the Construction Manager, and data in the Application for Payment or Project Application for Payment. The Architect's certification will constitute a representation that, to the best of the Architect's knowledge, information, and belief, the Work has progressed to the point indicated, the quality of the Work is in accordance with the Contract Documents, and that the Contractor is, or Contractors are, entitled to payment in the amount certified.

§ 9.4.4 The representations made pursuant to Sections 9.4.3 and 9.4.4 are subject to an evaluation of the Work for conformance with the Contract Documents upon Substantial Completion, to results of subsequent tests and inspections, to correction of minor deviations from the Contract Documents prior to completion, and to specific qualifications expressed by the Construction Manager or Architect.

§ 9.4.5 The issuance of a Certificate for Payment will not be a representation that the Construction Manager or Architect has (1) made exhaustive or continuous on-site inspections to check the quality or quantity of the Work; (2) reviewed construction means, methods, techniques, sequences, or procedures; (3) reviewed copies of requisitions received from Subcontractors and suppliers and other data requested by the Owner to substantiate the Contractor's right to payment; or (4) made examination to ascertain how or for what purpose the Contractor has used money previously paid on account of the Contract Sum.

§ 9.5 Decisions to Withhold Certification

§ 9.5.1 The Construction Manager or Architect may withhold a Certificate for Payment or Project Certificate for Payment in whole or in part, to the extent reasonably necessary to protect the Owner, if in the Construction Manager's or Architect's opinion the representations to the Owner required by Section 9.4.2 and 9.4.3 cannot be made. If the Construction Manager or Architect is unable to certify payment in the amount of the Application, the Construction Manager will notify the Contractor and Owner as provided in Section 9.4.1. If the Contractor, Construction Manager and Architect cannot agree on a revised amount, the Architect will promptly issue a Certificate for Payment or a Project Certificate for Payment for the amount for which the Architect is able to make such representations to the Owner. The Construction Manager or Architect may also withhold a Certificate for Payment or, because of subsequently discovered evidence, may nullify the whole or a part of a Certificate for Payment or Project Certificate for Payment previously issued, to such extent as may be necessary in the Construction Manager's or Architect's opinion to protect the Owner from loss for which the Contractor is responsible, including loss resulting from the acts and omissions described in Section 3.3.2 because of

- .1 defective Work not remedied;
- .2 third party claims filed or reasonable evidence indicating probable filing of such claims, unless security acceptable to the Owner is provided by the Contractor;
- .3 failure of the Contractor to make payments properly to Subcontractors or suppliers for labor, materials or equipment;
- .4 reasonable evidence that the Work cannot be completed for the unpaid balance of the Contract Sum;
- .5 damage to the Owner or a Separate Contractor or other Contractor;
- .6 reasonable evidence that the Work will not be completed within the Contract Time, and that the unpaid balance would not be adequate to cover actual or liquidated damages for the anticipated delay; or
- .7 repeated failure to carry out the Work in accordance with the Contract Documents.

§ 9.5.2 When either party disputes the Architect's decision regarding a Certificate for Payment under Section 9.5.1, in whole or in part, that party may submit a Claim in accordance with Article 15.

§ 9.5.3 When the reasons for withholding certification are removed, certification will be made for amounts previously withheld.

§ 9.5.4 If the Architect or Construction Manager withholds certification for payment under Section 9.5.1, the Owner may, at its sole option, issue joint checks to the Contractor and to any Subcontractor or supplier to whom the Contractor failed to make payment for Work properly performed or material or equipment suitably delivered. If the Owner makes payments by joint check, the Owner shall notify the Architect and the Construction Manager, and both will reflect such payment on the next Certificate for Payment.

§ 9.6 Progress Payments

§ 9.6.1 After the Architect has issued a Certificate for Payment, the Owner shall make payment in the manner and within the time provided in the Contract Documents and shall so notify the Construction Manager and Architect.

§ 9.6.2 The Contractor shall pay each Subcontractor, no later than seven days after receipt of payment from the Owner, the amount to which the Subcontractor is entitled, reflecting percentages actually retained from payments to the Contractor on account of the Subcontractor's portion of the Work. The Contractor shall, by appropriate agreement with each Subcontractor, require each Subcontractor to make payments to Sub-subcontractors in a similar manner.

§ 9.6.3 The Construction Manager will, on request, furnish to a Subcontractor, if practicable, information regarding percentages of completion or amounts applied for by the Contractor and action taken thereon by the Owner, Construction Manager and Architect on account of portions of the Work done by such Subcontractor.

§ 9.6.4 The Owner has the right to request written evidence from the Contractor that the Contractor has properly paid Subcontractors and material and equipment suppliers' amounts paid by the Owner to the Contractor for subcontracted Work. If the Contractor fails to furnish such evidence within seven days, the Owner shall have the right to contact Subcontractors and suppliers to ascertain whether they have been properly paid. Neither the Owner, Construction Manager nor Architect shall have an obligation to pay, or to see to the payment of money to, a Subcontractor or supplier, except as may otherwise be required by law.

§ 9.6.5 The Contractor's payments to material and equipment suppliers shall be treated in a manner similar to that provided in Sections 9.6.2, 9.6.3 and 9.6.4.

§ 9.6.6 A Certificate for Payment, a progress payment, or partial or entire use or occupancy of the Project by the Owner shall not constitute acceptance of Work not in accordance with the Contract Documents.

§ 9.6.7 Unless the Contractor provides the Owner with a payment bond in the full penal sum of the Contract Sum, payments received by the Contractor for Work properly performed by Subcontractors or provided by suppliers shall be held by the Contractor for those Subcontractors or suppliers who performed Work or furnished materials, or both, under contract with the Contractor for which payment was made by the Owner. Nothing contained herein shall require money to be placed in a separate account and not commingled with money of the Contractor, create any fiduciary liability or tort liability on the part of the Contractor for breach of trust, or entitle any person or entity to an award of punitive damages against the Contractor for breach of the requirements of this provision.

§ 9.6.8 Provided the Owner has fulfilled its payment obligations under the Contract Documents, the Contractor shall defend and indemnify the Owner from all loss, liability, damage or expense, including reasonable attorney's fees and litigation expenses, arising out of any lien claim or other claim for payment by any Subcontractor or supplier of any tier. Upon receipt of notice of a lien claim or other claim for payment, the Owner shall notify the Contractor. If approved by the applicable court, when required, the Contractor may substitute a surety bond for the property against which the lien or other claim for payment has been asserted.

§ 9.7 Failure of Payment

If the Construction Manager and Architect do not issue a Certificate for Payment or a Project Certificate for Payment, through no fault of the Contractor, within fourteen days after the Construction Manager's receipt of the Contractor's Application for Payment, or if the Owner does not pay the Contractor within seven days after the date established in the Contract Documents, the amount certified by the Construction Manager and Architect or awarded by binding dispute resolution, then the Contractor may, upon seven additional days' written notice to the Owner, Construction Manager and Architect, stop the Work until payment of the amount owing has been received. The Contract Time shall be extended appropriately and the Contract Sum shall be increased by the amount of the Contractor's reasonable costs of shutdown, delay and start-up, plus interest as provided for in the Contract Documents.

§ 9.8 Substantial Completion

§ 9.8.1 Substantial Completion is the stage in the progress of the Work when the Work or designated portion thereof is sufficiently complete in accordance with the Contract Documents so the Owner can occupy or utilize the Work for its intended use.

§ 9.8.2 No later than 14 days prior to the Contract-scheduled date of Substantial Completion, the Contractor shall issue a letter to the Architect and Construction Manager confirming their work is on schedule for Substantial Completion by the contract specified date. No later than seven days after Contract-scheduled date of Substantial Completion (including authorized adjustments), the Architect will make an inspection to determine whether the Work or designated portion thereof is substantially complete. Absence the contractor letter confirming readiness of work, the Architect may elect to postpone the substantial completion inspection. If the Architect's inspection discloses any item which is not sufficiently complete in accordance with the Contract Documents so that the Owner can occupy or utilize the Work or designated portion thereof for its intended use, the Contractor shall, before issuance of Certificate of Substantial Completion, complete or correct such item upon notification by the Architect. In such case, the Contractor shall then submit a request for another inspection by the Architect to determine the actual date of Substantial Completion.

§ 9.8.2.1 The Architect will perform no more than one inspection to determine whether the Work or a designated portion thereof has attained Substantial Completion in accordance with the Contract Documents. The Owner is entitled to reimbursement from the Contractor for amounts paid to the Architect for any additional inspections.

§ 9.8.3 When the Work or designated portion thereof is substantially complete, the Architect will prepare a Certificate of Substantial Completion that shall establish the date of Substantial Completion; establish responsibilities of the Owner and Contractor for security, maintenance, heat, utilities, damage to the Work and insurance; and fix the time within which the Contractor shall finish all items on the list accompanying the Certificate. Warranties required by the Contract Documents shall commence on the date of Substantial Completion of the Work or designated portion thereof unless otherwise provided in the Certificate of Substantial Completion.

§ 9.8.4 The Certificate of Substantial Completion shall be submitted to the Owner and Contractor for their written acceptance of responsibilities assigned to them in the Certificate. Upon such acceptance, and consent of surety if any, the Owner shall make payment of retainage applying to the Work or designated portion thereof. Such payment shall be adjusted for Work that is incomplete or not in accordance with the requirements of the Contract Documents.

§ 9.9 Partial Occupancy or Use

§ 9.9.1 The Owner may occupy or use any completed or partially completed portion of the Work at any stage when such portion is designated by separate agreement with the Contractor, provided such occupancy or use is consented to by the insurer and authorized by public authorities having jurisdiction over the Project. Such partial occupancy or use may commence whether or not the portion is substantially complete, provided the Owner and Contractor have accepted in writing the responsibilities assigned to each of them for payments, retainage if any, security, maintenance, heat, utilities, damage to the Work and insurance, and have agreed in writing concerning the period for correction of the Work. Warranties for all equipment, materials, and systems on the Project are to start no sooner than the date of substantial completion. Contractor shall provide extended warranties for all equipment, materials, and systems that may have been turned over to the Owner for partial use or occupancy. Consent of the Contractor to partial occupancy or use shall not be unreasonably withheld. The stage of the progress of the Work shall be determined by written agreement between the Owner and Contractor or, if no agreement is reached, by decision of the Architect after consultation with the Construction Manager.

§ 9.9.2 Immediately prior to such partial occupancy or use, the Owner, Construction Manager, Contractor, and Architect shall jointly inspect the area to be occupied or portion of the Work to be used in order to determine and record the condition of the Work.

§ 9.9.3 Unless otherwise agreed upon, partial occupancy or use of a portion or portions of the Work shall not constitute acceptance of Work not complying with the requirements of the Contract Documents.

§ 9.10 Final Completion and Final Payment

§ 9.10.1 On or within seven (7) days following the date of Final Completion (as established in the bid documents or modified by Change Order) the Architect will conduct a final inspection of the work. As a result of that

inspection, the Architect will issue a Final Inspection Report. This report will document the condition of the work and will render a formal opinion as to the whether or not the work or designated portion is complete. If, as a result of the Architect's inspection, it is determined that the work is not complete and in accordance with the Contract Documents, the Architect shall notify the Owner and Contractor in writing of this opinion. This notice will include the Final Inspection Report documenting the conditions of the work and will be considered a formal notice to the Contractor of their failure to fulfill the terms and conditions of their contract.

If as a result of this inspection, it is determined that the work is complete, the Contractor shall submit their Final Payment Application and Certificate for Payment. The Architect will then certify and issue the final Certificate for Payment stating that to the best of the Architects knowledge, information and belief, and on the basis of the Architect's periodic site visits and inspections, the Work has been completed in accordance with the terms and conditions of the Contract Documents and that the entire balance found to be due the Contractor and noted in the final Certificate is due and payable. The Architect's final Certificate for payment will constitute a further representation that the conditions listed in section 9.10.2 as precedent to the Contractor's being entitled to final payment have been fulfilled. The final Certificate for Payment will not be issued until all work on the final inspection report is completed or corrected.

§ 9.10.1.1 The Architect will perform no more than one on-site observation to determine whether the Work or a designated portion thereof has attained Final Completion in accordance with the Contract Documents. The Owner is entitled to reimbursement from the Contractor for amounts paid to the Architect for any additional on-site observations.

§ 9.10.2 Neither final payment nor any remaining retained percentage shall become due until the Contractor submits to the Architect through the Construction Manager (1) an affidavit that payrolls, bills for materials and equipment, and other indebtedness connected with the Work for which the Owner or the Owner's property might be responsible or encumbered (less amounts withheld by Owner) have been paid or otherwise satisfied, (2) a certificate evidencing that insurance required by the Contract Documents to remain in force after final payment is currently in effect, (3) a written statement that the Contractor knows of no reason that the insurance will not be renewable to cover the period required by the Contract Documents, (4) consent of surety, if any, to final payment (5) documentation of any special warranties, such as manufacturers' warranties or specific Subcontractor warranties, and (6), if required by the Owner, other data establishing payment or satisfaction of obligations, such as receipts and releases and waivers of liens, claims, security interests, or encumbrances arising out of the Contract, to the extent and in such form as may be designated by the Owner. If a Subcontractor refuses to furnish a release or waiver required by the Owner, the Contractor may furnish a bond satisfactory to the Owner to indemnify the Owner against such lien, claim, security interest, or encumbrance. If a lien, claim, security interest, or encumbrance remains unsatisfied after payments are made, the Contractor shall refund to the Owner all money that the Owner may be compelled to pay in discharging the lien, claim, security interest, or encumbrance, including all costs and reasonable attorneys' fees.

§ 9.10.3 If, after Substantial Completion of the Work, final completion thereof is materially delayed through no fault of the Contractor or by issuance of Change Orders affecting final completion, and the Construction Manager and Architect so confirm, the Owner shall, upon application by the Contractor and certification by the Construction Manager and Architect, and without terminating the Contract, make payment of the balance due for that portion of the Work fully completed, corrected, and accepted. If the remaining balance for Work not fully completed or corrected is less than retainage stipulated in the Contract Documents, and if bonds have been furnished, the written consent of the surety to payment of the balance due for that portion of the Work fully completed and accepted shall be submitted by the Contractor to the Architect through the Construction Manager prior to certification of such payment. Such payment shall be made under terms and conditions governing final payment, except that it shall not constitute a waiver of Claims.

§ 9.10.4 The making of final payment shall constitute a waiver of Claims by the Owner except those arising from

- .1 liens, Claims, security interests, or encumbrances arising out of the Contract and unsettled;
- .2 failure of the Work to comply with the requirements of the Contract Documents;
- .3 terms of special warranties required by the Contract Documents; or
- .4 audits performed by the Owner, if permitted by the Contract Documents, after final payment.

§ 9.10.5 Acceptance of final payment by the Contractor, a Subcontractor, or a supplier, shall constitute a waiver of claims by that payee except those previously made in writing and identified by that payee as unsettled at the time of final Application for Payment.

§ 9.10.6 If the Contractor is responsible for delays in the final completion and closeout beyond the contract specified time, the Owner is entitled to reimbursement from the Contractor for amounts paid by the Owner to subsequently extend the Electronic Submittal System (Submittal Exchange).

ARTICLE 10 PROTECTION OF PERSONS AND PROPERTY

§ 10.1 Safety Precautions and Programs

The Contractor shall be responsible for initiating, maintaining, and supervising all safety precautions and programs in connection with the performance of the Contract. The Contractor shall submit the Contractor's safety program to the Construction Manager for review and coordination with the safety programs of other Contractors. The Contractor shall be responsible for maintaining safety data sheets at the site.

The Construction Manager's responsibilities for review and coordination of safety programs shall not extend to direct control over or charge of the acts or omissions of the Contractors, Subcontractors, agents or employees of the Contractors or Subcontractors, or any other persons performing portions of the Work and not directly employed by the Construction Manager.

§ 10.2 Safety of Persons and Property

§ 10.2.1 The Contractor shall take reasonable precautions for safety of, and shall provide reasonable protection to prevent damage, injury, or loss to

- .1 employees on the Work and other persons who may be affected thereby;
- .2 the Work and materials and equipment to be incorporated therein, whether in storage on or off the site, under care, custody, or control of the Contractor, a Subcontractor, or a Sub-subcontractor;
- .3 other property at the site or adjacent thereto, such as trees, shrubs, lawns, walks, pavements, roadways, structures, and utilities not designated for removal, relocation, or replacement in the course of construction; and
- .4 construction or operations by the Owner, Separate Contractors, or other Contractors.

§ 10.2.2 The Contractor shall comply with, and give notices required by applicable laws, statutes, ordinances, codes, rules and regulations, and lawful orders of public authorities, bearing on safety of persons or property or their protection from damage, injury, or loss.

§ 10.2.3 The Contractor shall implement, erect, and maintain, as required by existing conditions and performance of the Contract, reasonable safeguards for safety and protection, including posting danger signs and other warnings against hazards; promulgating safety regulations; and notifying the owners and users of adjacent sites and utilities of the safeguards.

§ 10.2.4 When use or storage of explosives or other hazardous materials or equipment or unusual methods are necessary for execution of the Work, the Contractor shall exercise utmost care and carry on such activities under supervision of properly qualified personnel.

§ 10.2.5 The Contractor shall promptly remedy damage and loss (other than damage or loss insured under property insurance required by the Contract Documents) to property referred to in Sections 10.2.1.2, 10.2.1.3 and 10.2.1.4 caused in whole or in part by the Contractor, a Subcontractor, a Sub-subcontractor, or anyone directly or indirectly employed by any of them, or by anyone for whose acts they may be liable and for which the Contractor is responsible under Sections 10.2.1.2, 10.2.1.3 and 10.2.1.4. The Contractor may make a Claim for the cost to remedy the damage or loss to the extent such damage or loss is attributable to acts or omissions of the Owner, Construction Manager or Architect or anyone directly or indirectly employed by any of them, or by anyone for whose acts any of them may be liable, and not attributable to the fault or negligence of the Contractor. The foregoing obligations of the Contractor are in addition to the Contractor's obligations under Section 3.18.

§ 10.2.6 The Contractor shall designate a responsible member of the Contractor's organization at the site whose duty shall be the prevention of accidents. This person shall be the Contractor's superintendent unless otherwise designated by the Contractor in writing to the Owner, Construction Manager and Architect.

§ 10.2.7 The Contractor shall not permit any part of the construction or site to be loaded so as to cause damage or create an unsafe condition.

§ 10.2.8 Injury or Damage to Person or Property

If either party suffers injury or damage to person or property because of an act or omission of the other party, or of others for whose acts such party is legally responsible, written notice of the injury or damage, whether or not insured, shall be given to the other party within a reasonable time not exceeding 21 days after discovery. The notice shall provide sufficient detail to enable the other party to investigate the matter.

§ 10.3 Hazardous Materials

§ 10.3.1 The Contractor is responsible for compliance with any requirements included in the Contract Documents regarding hazardous materials or substances. If the Contractor encounters a hazardous material or substance not addressed in the Contract Documents and if reasonable precautions will be inadequate to prevent foreseeable bodily injury or death to persons resulting from a material or substance, including but not limited to asbestos or polychlorinated biphenyl (PCB), encountered on the site by the Contractor, the Contractor shall, upon recognizing the condition, immediately stop Work in the affected area and notify the Owner, Construction Manager and Architect of the condition.

§ 10.3.2 Upon receipt of the Contractor's written notice, the Owner shall obtain the services of a licensed laboratory to verify the presence or absence of the material or substance reported by the Contractor and, in the event such material or substance is found to be present, to cause it to be rendered harmless. Unless otherwise required by the Contract Documents, the Owner shall furnish in writing to the Contractor, Construction Manager and Architect the names and qualifications of persons or entities who are to perform tests verifying the presence or absence of the material or substance or who are to perform the task of removal or safe containment of the material or substance. The Contractor, the Construction Manager and the Architect will promptly reply to the Owner in writing stating whether or not any of them has reasonable objection to the persons or entities proposed by the Owner. If the Contractor, Construction Manager or Architect has an objection to a person or entity proposed by the Owner, the Owner shall propose another to whom the Contractor, the Construction Manager and the Architect have no reasonable objection. When the material or substance has been rendered harmless, Work in the affected area shall resume upon written agreement of the Owner and Contractor. By Change Order, the Contract Time shall be extended appropriately, and the Contract Sum shall be increased by the amount of the Contractor's reasonable additional costs of shutdown, delay, and start-up.

§ 10.3.3 To the fullest extent permitted by law, the Owner shall indemnify and hold harmless the Contractor, Subcontractors, Construction Manager, Architect, their consultants, and agents and employees of any of them from and against claims, damages, losses, and expenses, including but not limited to attorneys' fees, arising out of or resulting from performance of the Work in the affected area if in fact the material or substance presents the risk of bodily injury or death as described in Section 10.3.1 and has not been rendered harmless, provided that such claim, damage, loss, or expense is attributable to bodily injury, sickness, disease or death, or to injury to or destruction of tangible property (other than the Work itself), except to the extent that such damage, loss, or expense is due to the fault or negligence of the party seeking indemnity.

§ 10.3.4 The Owner shall not be responsible under this Section 10.3 for hazardous materials or substances the Contractor brings to the site unless such materials or substances are required by the Contract Documents. The Owner shall be responsible for hazardous materials or substances required by the Contract Documents, except to the extent of the Contractor's fault or negligence in the use and handling of such materials or substances.

§ 10.3.5 The Contractor shall reimburse the Owner for the cost and expense the Owner incurs (1) for remediation of hazardous materials or substances the Contractor brings to the site and negligently handles, or (2) where the Contractor fails to perform its obligations under Section 10.3.1, except to the extent that the cost and expense are due to the Owner's fault or negligence.

§ 10.3.6 If, without negligence on the part of the Contractor, the Contractor is held liable by a government agency for the cost of remediation of a hazardous material or substance solely by reason of performing Work as required by the Contract Documents, the Owner shall reimburse the Contractor for all cost and expense thereby incurred.

§ 10.4 Emergencies

In an emergency affecting safety of persons or property, the Contractor shall act, at the Contractor's discretion, to prevent threatened damage, injury, or loss. Additional compensation or extension of time claimed by the Contractor on account of an emergency shall be determined as provided in Article 15 and Article 7.

ARTICLE 11 INSURANCE AND BONDS

§ 11.1 Contractor's Insurance and Bonds

§ 11.1.1 The Contractor shall obtain, pay for and keep in full force and effect during the entire term of this Contract, and during the performance, final completion and acceptance of any Work, and after the term of this Contract (as may be specified herein) insurance, in a company or companies lawfully licensed to do business in the State of New York, as designated by this Article 11 and any other insurance required by applicable law, regulations, or orders of state, municipality or other entity having jurisdiction over the Work or the Project. Contractor shall not take any action, or omit to take any action that would suspend or invalidate any of the required coverages during the time period such coverages are required to be in effect.

§ 11.1.1.1 **Workers' Compensation.** and any other federal and/or state coverages as appropriate, including but not limited to: Occupational Disease Benefits, Voluntary Compensation, and Disability Benefits, for not less than the statutory requirements, and if applicable an "Other States Endorsement"; and

Employer's Liability Insurance with limits not less than the statutory requirements or \$1,000,000 (each accident), \$1,000,000 (disease policy limit), and \$1,000,000 (disease, each employee), whichever is greater. Proof of coverage must be on the approved specific form, as required by the New York State Workers' Compensation Board. ACORD certificates are not acceptable.

§ 11.1.1.2 **Commercial General Liability Insurance** is to be provided under the Insurance Service Office's (ISO) most current form, on a project specific basis, with limits not less than the following required limits:

Each Occurrence:	\$1,000,000
General Aggregate (per project):	\$2,000,000
Products and Completed/Operations:	\$2,000,000
Personal & Advertising Injury:	\$1,000,000
Fire Damage (any one fire):	\$ 100,000
Medical Expense (any one person):	\$ 10,000

Such insurance shall include the following coverages:

- (i) claims for damages because of bodily injury, occupational sickness or disease, or death;
- (ii) claims for damages insured by usual personal injury liability coverage;
- (iii) claims for damages, other than to the Work itself, because of injury to or destruction of tangible property, including loss of use resulting therefrom;
- (iv) premises operations;
- (v) product liability and completed operations, and the policy shall specifically include coverage for two (2) years of extended completed operations coverage, which will commence immediately following the expiration date of the Commercial General Liability policy;
- (vi) owner's protective;
- (vii) contractors protective;
- (viii) contractual liability covering liabilities assumed under the Contract (including the tort liability of another assumed in a contract), and including, coverage for claims arising out of construction or demolition operations when working within 50 feet of railroad track;
- (ix) personal injury and advertising injury liability;
- (x) extended bodily injury coverage with respect to bodily injury resulting from the use of reasonable force to protect persons or property;
- (xi) medical payments coverage;
- (xii) broad form property damage liability coverage, including coverage for completed operations;
- (xiii) explosion, collapse, and underground property damage (XCU);
- (xiv) construction means and methods;
- (xv) independent contractors;
- (xvi) Owner and others' identified herein as additional insured to be specifically evidenced as additional insureds via ISO Endorsements GC 2010 and CG 2037.

§11.1.1.3 **Comprehensive Auto Liability Insurance**, including uninsured/underinsured and medical payment protection, and including all owned, non-owned and hired autos, with a limit of liability of not less than \$1,000,000 each occurrence (combined single limit for personal injury, including bodily injury or death, and property damage).

§11.1.1.4 Umbrella/Excess Policy. providing excess coverage in excess of the limits for the insurance coverages required by Sections 11.1.1.1, 11.1.1.2, and 11.1.1.3 above, with such excess/umbrella coverage being at least as broad as each and every one of the underlying policies), with the provision that coverage shall extend for a period of at least two (2) years from the date of final completion and acceptance by Owner of all Work; with a minimum limit not less than \$5,000,000 per occurrence/annual general aggregate. In the event the underlying policies have different renewal dates, the Contractor shall ensure that the underlying policies are maintained for the term specified in this Contract. Subcontractors shall be held to the same coverage requirement. Failure by the contractor to secure such insurance shall be deemed to be a material breach of contract.

§ 11.1.2 All insurance shall be written on an occurrence basis. A copy of the additional insured endorsement shall be attached.

§ 11.1.3 Contractor's insurance requirements shall be provided by an insurance carrier licensed to do business in the State of New York and have an A.M. Best Rating of A- or better as determined in the most recent A.M. Best Publication, or as may otherwise be agreed by Owner.

§ 11.1.4 Insurance coverage to be provided by the Contractor shall state that the Contractor's coverage shall be primary and non-contributing to any insurances (or self-insurance), including any deductible, maintained by, or provided to Owner or the other Additional Insureds; and shall contain a Waiver of Subrogation in favor of Owner and the other Additional Insureds, so that in no event shall the insurance carriers have any right of recovery against the Owner, the other Additional Insureds, or the agents or employees or either of them; and shall contain a separation of insured provision (severability of interest clause). If the Owner or another Additional Insured has other insurance which is applicable to the loss, such other insurance shall be on an excess or contingent basis.

§ 11.1.5 In the event that any of the insurance coverage to be provided by the Contractor contains a deductible or self-insured retention, the Contractor shall indemnify and hold the Owner, and any Additional Insured harmless from the payment of such deductible, which deductible shall in all circumstances remain the sole obligation and expense of the Contractor.

§ 11.1.6 The Contractor shall require all Subcontractors to carry the same insurance coverages and limits of liability as set forth herein and adjusted to the nature of Subcontractors' operations and submit same to the Owner through the Construction Manager for approval prior to start of any Work. In the event Contractor fails to obtain the required certificates of insurance from Subcontractor and prove them to Construction Manager and a claim is made or suffered, the Contractor shall, to the fullest extent permitted by law, indemnify, defend, and hold harmless the Owner and the Additional Insureds from any and all claims for which the required insurance would have provided coverage. This indemnity obligation is in addition to any other indemnity obligation provided in the Contract Documents and shall survive the term or earlier termination of the Contract.

§ 11.1.7 Environmental Impairment Liability (Pollution Insurance) (EIL): All Contractors and Subcontractors involved with the removal and/or abatement of pollutants (including but not limited to asbestos abatement contractors, lead abatement contractors, roofing contractors, tank removal contractors) are required to maintain a minimum of \$1,000,000 per occurrence and \$2,000,000 in the aggregate. Owner and all other parties required by this Contract to be Additional Insureds and all others identified by Owner as such, shall be included as Additional Insured son any EIL policy on a primary and non-contributing basis.

§ 11.1.8 The Contractor assumes responsibility for all injury or destruction of the Contractor's and Subcontractors' materials, tools, machinery, equipment, appliances, shoring, scaffolding, and personal property of Contractor's and Subcontractors' employees from whatever cause arises. Any policy of insurance secured covering the Contractor's or Subcontractors' property leased or hired by them and any policy of insurance covering the Contractor or Subcontractors against physical loss or damage to such property shall include an endorsement waiving the right of subrogation against the Owner for any loss or damage to such property.

§ 11.1.9 Additional Insured/Certificate Holder. The Contractor shall cause the commercial liability and other coverage required by the Contract to include the following as Additional Insureds:

- (i) Arlington Central School District;
- (ii) Members of the Board of Education, officers and employees, of the Arlington Central School District;
- (iii) The Construction Manager
- (iv) The Architect ; and

Contractor shall also add any other entities and/or individuals as may be required by Owner as Additional Insured.

The certificate holder shall be Arlington Central School District unless Owner requires otherwise.

Contractor shall provide an Additional Insured endorsement that expressly names each of the above identified Additional Insureds (non-blanket) and shall ensure that the endorsement does not include language that requires an Additional Insured to have a written contract with the named insured for coverage to apply.

Additional insured status shall be provided by standard or other endorsements that extend coverage to the District for ongoing operations (CG 20 38) and products and completed operations (CG 20 37). The decision to accept an endorsement rest solely with the District. A completed copy of the endorsements must be attached to the Certificate of Insurance

§ 11.1.10 Certificates of insurance acceptable to the Construction Manager and Owner shall be provided to the Construction Manager and filed with the Owner prior to commencement of the Work. A fully completed New York Construction Certificate of Liability Insurance Addendum (ACORD 855 2014/15) must be included with the certificates of insurance. The certificates and the insurance policies shall contain a provision that coverages afforded under the policies will not be allowed to be materially changed or canceled or allowed to expire until at least thirty (30) days' prior written notice has been given to the Owner via Certified/Registered Mail. If any of the foregoing insurance coverages are required to remain in force after final payment, an additional certificate evidencing continuation of such coverage shall be submitted with the final Application for Payment. Information concerning reduction of coverage on account of revised limits or claims paid under the General Aggregate, or both, shall be furnished by the Contractor with reasonable promptness in accordance with the Contractor's information and belief.

§ 11.1.11 The Contractor acknowledges that its failure to obtain or keep current the required insurance coverage shall constitute a material breach of contract and subjects the Contractor to liability for damages the Owner (or others, including without limitation the other Additional Insured) sustains as a result of such breach. In addition, the Contractor shall be responsible to the fullest extent permitted by law for the indemnification to the Owner and all Additional Insured of any and all costs associated with such lapse in coverage, including but not limited to reasonable attorneys' fees (and this indemnification obligation shall survive the term or earlier termination of the Contract).

§ 11.1.12 The amount of insurance required by the Contract shall not be construed to be a limitation of the liability of on the part of the Contractor or any of its Subcontractors.

§ 11.1.13 No act or omission of any insurance agent, broker, or insurance company representative shall relieve Contractor of any of its obligations under this Contract.

§ 11.1.14 Notwithstanding anything in Section 11.3 and its subsections to the contrary, the Contractor shall provide insurance coverage for portions of the Work stored off the site, in transit, and stored on the site but not incorporated into the Work on a full replacement cost basis. The Contractor is responsible for all deductible amounts.

§ 11.1.15 The Contractor shall provide surety bonds of the types, for such penal sums, and subject to such terms and conditions as required by the Contract Documents. The Contractor shall purchase and maintain the required bonds from a company or companies lawfully authorized to issue surety bonds in the jurisdiction where the Project is located.

§ 11.1.16 Upon the request of any person or entity appearing to be a potential beneficiary of bonds covering payment of obligations arising under the Contract, the Contractor shall promptly furnish a copy of the bonds or shall authorize a copy to be furnished.

§ 11.1.17 Notice of Cancellation or Expiration of Contractor's Required Insurance. Within three (3) business days of the date the Contractor becomes aware of an impending or actual cancellation or expiration of any insurance required by the Contract Documents, the Contractor shall provide notice directly to the Owner, and separately to the Construction Manager, of such impending or actual cancellation or expiration. Upon receipt of notice from the Contractor, the Owner shall, unless the lapse in coverage arises from an act or omission of the Owner, have the right to stop the Work until the lapse in coverage has been cured by the procurement of

replacement coverage by the Contractor. The furnishing of notice by the Contractor shall not relieve the Contractor of any contractual obligation to provide any required coverage.

§ 11.2 Owner's Insurance

§ 11.2.1 The Owner shall purchase and maintain insurance of the types and limits of liability, containing the endorsements, and subject to the terms and conditions, as described in the Agreement or elsewhere in the Contract Documents. The Owner shall purchase and maintain the required insurance from an insurance company or insurance companies lawfully authorized to issue insurance in the jurisdiction where the Project is located.

§ 11.2.2 Failure to Purchase Required Property Insurance. If the Owner fails to purchase and maintain the required property insurance, with all of the coverages and in the amounts described in the Agreement or elsewhere in the Contract Documents, the Owner shall inform both the Contractor and the Construction Manager, separately and in writing, prior to commencement of the Work. Upon receipt of notice from the Owner, the Contractor may delay commencement of the Work and may obtain insurance that will protect the interests of the Contractor, Subcontractors, and Sub-Subcontractors in the Work. When the failure to provide coverage has been cured or resolved, the Contract Sum and Contract Time shall be equitably adjusted. In the event the Owner fails to procure coverage, the Owner waives all rights against the Contractor, Subcontractors, and Sub-subcontractors to the extent the loss to the Owner would have been covered by the insurance to have been procured by the Owner. The cost of the insurance shall be charged to the Owner by a Change Order. If the Owner does not provide written notice, and the Contractor is damaged by the failure or neglect of the Owner to purchase or maintain the required insurance, the Owner shall reimburse the Contractor for all reasonable costs and damages attributable thereto.

§ 11.2.3 Notice of Cancellation or Expiration of Owner's Required Property Insurance. Within three (3) business days of the date the Owner becomes aware of an impending or actual cancellation or expiration of any property insurance required by the Contract Documents, the Owner shall provide notice directly to the Contractor, and separately to the Construction Manager, of such impending or actual cancellation or expiration. Unless the lapse in coverage arises from an act or omission of the Contractor: (1) the Contractor, upon receipt of notice from the Owner, shall have the right to stop the Work until the lapse in coverage has been cured by the procurement of replacement coverage by either the Owner or the Contractor; (2) the Contract Time and Contract Sum shall be equitably adjusted; and (3) the Owner waives all rights against the Contractor, Subcontractors, and Sub-subcontractors to the extent any loss to the Owner would have been covered by the insurance had it not expired or been cancelled. If the Contractor purchases replacement coverage, the cost of the insurance shall be charged to the Owner by an appropriate Change Order. The furnishing of notice by the Owner shall not relieve the Owner of any contractual obligation to provide required insurance.

§ 11.3 Waivers of Subrogation

§ 11.3.1 The Owner and Contractor waive all rights against (1) each other and any of their subcontractors, sub-subcontractors, agents, and employees, each of the other; (2) the Construction Manager and Construction Manager's consultants; (3) the Architect and Architect's consultants; (4) other Contractors and any of their subcontractors, sub-subcontractors, agents, and employees; and (5) Separate Contractors, if any, and any of their subcontractors, sub-subcontractors, agents, and employees, for damages caused by fire, or other causes of loss, to the extent those losses are covered by property insurance required by the Agreement or other property insurance applicable to the Project, except such rights as they have to proceeds of such insurance. The Owner or Contractor, as appropriate, shall require similar written waivers in favor of the individuals and entities identified above from the Construction Manager, Construction Manager's consultants, Architect, Architect's consultants, other Contractors, Separate Contractors, subcontractors, and sub-subcontractors. The policies of insurance purchased and maintained by each person or entity agreeing to waive claims pursuant to this Section 11.3.1 shall not prohibit this waiver of subrogation. This waiver of subrogation shall be effective as to a person or entity (1) even though that person or entity would otherwise have a duty of indemnification, contractual or otherwise, (2) even though that person or entity did not pay the insurance premium directly or indirectly, or (3) whether or not the person or entity had an insurable interest in the damaged property.

§ 11.3.2 If during the Project construction period the Owner insures properties, real or personal or both, at or adjacent to the site by property insurance under policies separate from those insuring the Project, or if after final payment property insurance is to be provided on the completed Project through a policy or policies other than those insuring the Project during the construction period, to the extent permissible by such policies, the Owner waives all rights in accordance with the terms of Section 11.3.1 for damages caused by fire or other causes of loss covered by this separate property insurance.

§ 11.4 Loss of Use, Business Interruption, and Delay in Completion Insurance

The Owner, at the Owner's option, may purchase and maintain insurance that will protect the Owner against loss of use of the Owner's property, or the inability to conduct normal operations, due to fire or other causes of loss. The Owner waives all rights of action against the Contractor, Architect, and Construction Manager for loss of use of the Owner's property, due to fire or other hazards however caused.

§ 11.5 Adjustment and Settlement of Insured Loss

§ 11.5.1 A loss insured under the property insurance required by the Agreement shall be adjusted by the Owner as fiduciary and made payable to the Owner as fiduciary for the insureds, as their interests may appear, subject to requirements of any applicable mortgagee clause and of Section 11.5.2. The Owner shall pay the Construction Manager, Architect and Contractor their just shares of insurance proceeds received by the Owner, and by appropriate agreements the Construction Manager, Architect and Contractor shall make payments to their consultants and Subcontractors in similar manner.

§ 11.5.2 Prior to settlement of an insured loss, the Owner shall notify the Contractor of the terms of the proposed settlement as well as the proposed allocation of the insurance proceeds. The Contractor shall have 14 days from receipt of notice to object to the proposed settlement or allocation of the proceeds. If the Contractor does not object, the Owner shall settle the loss and the Contractor shall be bound by the settlement and allocation. Upon receipt, the Owner shall deposit the insurance proceeds in a separate account and make the appropriate distributions. Thereafter, if no other agreement is made or the Owner does not terminate the Contract for convenience, the Owner and Contractor shall execute a Change Order for reconstruction of the damaged or destroyed Work in the amount allocated for that purpose. If the Contractor timely objects to either the terms of the proposed settlement or the allocation of the proceeds, the Owner may proceed to settle the insured loss, and any dispute between the Owner and Contractor arising out of the settlement or allocation of the proceeds shall be resolved pursuant to Article 15. Pending resolution of any dispute, the Owner may issue a Construction Change Directive for the reconstruction of the damaged or destroyed Work.

ARTICLE 12 UNCOVERING AND CORRECTION OF WORK

§ 12.1 Uncovering of Work

§ 12.1.1 If a portion of the Work is covered contrary to the Construction Manager's or Architect's request or to requirements specifically expressed in the Contract Documents, it must, if requested in writing by either, be uncovered for their examination and be replaced at the Contractor's expense without change in the Contract Time.

§ 12.1.2 If a portion of the Work has been covered that the Construction Manager or Architect has not specifically requested to examine prior to its being covered, the Construction Manager or Architect may request to see such Work and it shall be uncovered by the Contractor. If such Work is in accordance with the Contract Documents, the Contractor shall be entitled to an equitable adjustment to the Contract Sum and Contract Time as may be appropriate. If such Work is not in accordance with the Contract Documents, the costs of uncovering the Work, and the cost of correction, shall be at the Contractor's expense.

§ 12.2 Correction of Work

§ 12.2.1 Before Substantial Completion

The Contractor shall promptly correct Work rejected by the Construction Manager or Architect or failing to conform to the requirements of the Contract Documents, discovered before Substantial Completion, and whether or not fabricated, installed or completed. Costs of correcting such rejected Work, including additional testing and inspections, the cost of uncovering and replacement, and compensation for the Construction Manager's and Architect's services and expenses made necessary thereby, shall be at the Contractor's expense.

§ 12.2.2 After Substantial Completion

§ 12.2.2.1 In addition to the Contractor's obligations under Section 3.5, if, within two years after the date of Substantial Completion of the Work or designated portion thereof, or after the date for commencement of warranties established under Section 9.9.1, or by terms of any applicable special warranty required by the Contract Documents, any of the Work is found to be not in accordance with the requirements of the Contract Documents, the Contractor shall correct it promptly after receipt of written notice from the Owner to do so, unless the Owner has previously given the Contractor a written acceptance of such condition. The Owner shall give such notice promptly after discovery of the condition. During the two-year period for correction of Work, if the Owner fails to notify the Contractor and give the Contractor an opportunity to make the correction, the Owner waives the rights to require correction by the Contractor and to make a claim for breach of warranty. If the Contractor fails to correct nonconforming Work within a reasonable time during that period after receipt of notice from the Owner,

Construction Manager or Architect, the Owner may correct it in accordance with Section 2.5.

§ 12.2.2.2 The two-year period for correction of Work shall be extended with respect to portions of Work first performed after Substantial Completion by the period of time between Substantial Completion and the actual completion of that portion of the Work.

§ 12.2.2.3 The two-year period for correction of Work shall not be extended by corrective Work performed by the Contractor pursuant to this Section 12.2.

§ 12.2.3 The Contractor shall remove from the site portions of the Work that are not in accordance with the requirements of the Contract Documents and are neither corrected by the Contractor nor accepted by the Owner.

§ 12.2.4 The Contractor shall bear the cost of correcting destroyed or damaged construction of the Owner, Separate Contractors, or other Contractors, whether completed or partially completed, caused by the Contractor's correction or removal of Work that is not in accordance with the requirements of the Contract Documents.

§ 12.2.5 Nothing contained in this Section 12.2 shall be construed to establish a period of limitation with respect to other obligations the Contractor has under the Contract Documents. Establishment of the two-year period for correction of Work as described in Section 12.2.2 relates only to the specific obligation of the Contractor to correct the Work, and has no relationship to the time within which the obligation to comply with the Contract Documents may be sought to be enforced, nor to the time within which proceedings may be commenced to establish the Contractor's liability with respect to the Contractor's obligations other than specifically to correct the Work.

§ 12.3 Acceptance of Nonconforming Work

If the Owner prefers to accept Work that is not in accordance with the requirements of the Contract Documents, the Owner may do so instead of requiring its removal and correction, in which case the Contract Sum will be reduced as appropriate and equitable. Such adjustment shall be affected whether or not final payment has been made.

ARTICLE 13 MISCELLANEOUS PROVISIONS

§ 13.1 Governing Law

The Contract shall be governed by the law of the place where the Project is located.

§ 13.2 Successors and Assigns

§ 13.2.1 The Owner and Contractor respectively bind themselves, their partners, successors, assigns, and legal representatives to covenants, agreements, and obligations contained in the Contract Documents. Except as provided in Section 13.2.2, neither party to the Contract shall assign the Contract as a whole without written consent of the other. If either party attempts to make an assignment without such consent, that party shall nevertheless remain legally responsible for all obligations under the Contract.

§ 13.2.2 The Owner may, without consent of the Contractor, assign the Contract to a lender providing construction financing for the Project, if the lender assumes the Owner's rights and obligations under the Contract Documents. The Contractor shall execute all consents reasonably required to facilitate the assignment.

§ 13.3 Rights and Remedies

§ 13.3.1 Duties and obligations imposed by the Contract Documents and rights and remedies available thereunder shall be in addition to and not a limitation of duties, obligations, rights, and remedies otherwise imposed or available by law.

§ 13.3.2 No action or failure to act by the Owner, Construction Manager, Architect, or Contractor shall constitute a waiver of a right or duty afforded them under the Contract, nor shall such action or failure to act constitute approval of or acquiescence in a breach thereunder, except as may be specifically agreed upon in writing.

§ 13.4 Tests and Inspections

§ 13.4.1 Tests, inspections, and approvals of portions of the Work shall be made as required by the Contract Documents and by applicable laws, statutes, ordinances, codes, rules, and regulations or lawful orders of public authorities. Unless otherwise provided, the Contractor shall make arrangements for such tests, inspections, and approvals with an independent testing laboratory or entity acceptable to the Owner, or with the appropriate public

authority, and shall bear all related costs of tests, inspections, and approvals. The Contractor shall give the Construction Manager and Architect timely notice of when and where tests and inspections are to be made so that the Construction Manager and Architect may be present for such procedures. The Owner shall bear costs of tests, inspections, or approvals that do not become requirements until after bids are received or negotiations concluded. The Owner shall directly arrange and pay for tests, inspections, or approvals where building codes or applicable laws or regulations so require.

§ 13.4.2 If the Construction Manager, Architect, Owner, or public authorities having jurisdiction determine that portions of the Work require additional testing, inspection, or approval not included under Section 13.4.1, the Construction Manager and Architect will, upon written authorization from the Owner, instruct the Contractor to make arrangements for such additional testing, inspection, or approval, by an entity acceptable to the Owner, and the Contractor shall give timely notice to the Construction Manager and Architect of when and where tests and inspections are to be made so that the Construction Manager and Architect may be present for such procedures. Such costs, except as provided in Section 13.4.3, shall be at the Owner's expense.

§ 13.4.3 If procedures for testing, inspection, or approval under Sections 13.4.1 and 13.4.2 reveal failure of the portions of the Work to comply with requirements established by the Contract Documents, all costs made necessary by such failure, including those of repeated procedures and compensation for the Construction Manager's and Architect's services and expenses, shall be at the Contractor's expense.

§ 13.4.4 Required certificates of testing, inspection, or approval shall, unless otherwise required by the Contract Documents, be secured by the Contractor and promptly delivered to the Construction Manager for transmittal to the Architect.

§ 13.4.5 If the Construction Manager or Architect is to observe tests, inspections, or approvals required by the Contract Documents, the Construction Manager or Architect will do so promptly and, where practicable, at the normal place of testing.

§ 13.4.6 Tests or inspections conducted pursuant to the Contract Documents shall be made promptly to avoid unreasonable delay in the Work.

§ 13.5 Interest

Payments due and unpaid under the Contract Documents shall bear interest from the date payment is due at the rate the parties agree upon in writing or, in the absence thereof, at the legal rate prevailing from time to time at the place where the Project is located.

§ 13.6 Time Limits on Claims

The Owner and Contractor shall commence all claims and causes of action, whether in contract, tort, breach of warranty or otherwise, against the other arising out of or related to the Contract in accordance with the requirements of the final dispute resolution method selected in the Agreement within the time period specified by applicable law, but in any case, not more than 10 years after the date of Substantial Completion of the Work. The Owner and Contractor waive all claims and causes of action not commenced in accordance with this Section 13.7.

§ 13.7 Equal Opportunity

§ 13.7.1 The Contractor shall maintain policies of employment as follows:

- .1** The Contractor and the Contractor's subcontractors shall not discriminate against any employee or applicant for employment because of race, religion, color, sex, or national origin. The Contractor shall take affirmative action to ensure that applicants are employed, and that employees are treated during employment without regard to their race, religion, color, sex, or natural origin. Such action shall include, but not be limited to, the following: employment, upgrading, demotion or transfer; recruitment or recruitment advertising; layoff or termination; rates of pay or other forms of compensation; and selection for training, including apprenticeship. The Contractor agrees to post in conspicuous places, available to employees and applicants for employment, notice setting forth the policies of non-discrimination.
- .2** The Contractor and the Contractor's subcontractors shall, in all solicitations or advertisement for employees placed by them or on their behalf, state that all qualified applicants will receive consideration for employment without regard to race, religion, color, sex or national origin.

§ 13.8 Wage Rates

§ 13.8.1 The Contractor shall comply with Prevailing Wage Rates issued and periodically updated, by the New York State Department of Labor, for the location and duration of the Project.

ARTICLE 14 TERMINATION OR SUSPENSION OF THE CONTRACT

§ 14.1 Termination by the Contractor

§ 14.1.1 The Contractor may terminate the Contract if the Work is stopped for a period of 30 consecutive days through no act or fault of the Contractor, a Subcontractor, a Sub-subcontractor, their agents or employees, or any other persons or entities performing portions of the Work, under direct or indirect contract with the Contractor, for any of the following reasons:

- .1 Issuance of an order of a court or other public authority having jurisdiction that requires all Work to be stopped;
- .2 An act of government, such as a declaration of national emergency, that requires all Work to be stopped;
- .3 Because the Construction Manager has not certified or the Architect has not issued a Certificate for Payment and has not notified the Contractor of the reason for withholding certification as provided in Section 9.4, or because the Owner has not made payment on a Certificate for Payment within the time stated in the Contract Documents; or
- .4 The Owner has failed to furnish to the Contractor reasonable evidence as required by Section 2.2.

§ 14.1.2 The Contractor may terminate the Contract if, through no act or fault of the Contractor, a Subcontractor, a Sub-subcontractor, their agents or employees, or any other persons or entities performing portions of the Work, under direct or indirect contract with the Contractor, repeated suspensions, delays, or interruptions of the entire Work by the Owner as described in Section 14.3, constitute in the aggregate more than 100 percent of the total number of days scheduled for completion, or 120 days in any 365-day period, whichever is less.

§ 14.1.3 If one of the reasons described in Section 14.1.1 or 14.1.2 exists, the Contractor may, upon seven days' notice to the Owner, Construction Manager and Architect, terminate the Contract and recover from the Owner payment for Work executed, as well as reasonable overhead and profit on Work not executed, and costs incurred by reason of such termination.

§ 14.1.4 If the Work is stopped for a period of 60 consecutive days through no act or fault of the Contractor, a Subcontractor, a Sub-subcontractor, or their agents or employees, or any other persons performing portions of the Work because the Owner has repeatedly failed to fulfill the Owner's obligations under the Contract Documents with respect to matters important to the progress of the Work, the Contractor may, upon seven additional days' notice to the Owner, Construction Manager and Architect, terminate the Contract and recover from the Owner as provided in Section 14.1.3.

§ 14.2 Termination by the Owner for Cause

§ 14.2.1 The Owner may terminate the Contract if the Contractor

- .1 repeatedly refuses or fails to supply enough properly skilled workers or proper materials;
- .2 fails to make payment to Subcontractors or suppliers in accordance with the respective agreements between the Contractor and the Subcontractors or suppliers;
- .3 repeatedly disregards applicable laws, statutes, ordinances, codes, rules and regulations, or lawful orders of a public authority; or
- .4 otherwise is guilty of substantial breach of a provision of the Contract Documents.

§ 14.2.2 When any of the reasons described in Section 14.2.1 exist, after consultation with the Construction Manager, and upon certification by the Architect that sufficient cause exists to justify such action, the Owner may, without prejudice to any other rights or remedies of the Owner and after giving the Contractor and the Contractor's surety, if any, seven days' written notice, terminate employment of the Contractor and may, subject to any prior rights of the surety:

- .1 Exclude the Contractor from the site and take possession of all materials, equipment, tools, and construction equipment and machinery thereon owned by the Contractor;
- .2 Accept assignment of subcontracts pursuant to Section 5.4; and
- .3 Finish the Work by whatever reasonable method the Owner may deem expedient. Upon written request of the Contractor, the Owner shall furnish to the Contractor a detailed accounting of the costs incurred by the Owner in finishing the Work.

§ 14.2.3 When the Owner terminates the Contract for one of the reasons stated in Section 14.2.1, the Contractor

shall not be entitled to receive further payment until the Work is finished.

§ 14.2.4 If the unpaid balance of the Contract Sum exceeds costs of finishing the Work, including compensation for the Construction Manager's and Architect's services and expenses made necessary thereby, and other damages incurred by the Owner and not expressly waived, such excess shall be paid to the Contractor. If such costs and damages exceed the unpaid balance, the Contractor shall pay the difference to the Owner. The amount to be paid to the Contractor or Owner, as the case may be, shall, upon application, be certified by the Initial Decision Maker after consultation with the Construction Manager, and this obligation for payment shall survive termination of the Contract.

§ 14.3 Suspension by the Owner for Convenience

§ 14.3.1 The Owner may, without cause, order the Contractor in writing to suspend, delay or interrupt the Work, in whole or in part for such period of time as the Owner may determine.

§ 14.3.2 The Contract Sum and the Contract Time shall be adjusted for increases in the cost and time caused by suspension, delay, or interruption under Section 14.3.1. Adjustment of the Contract Sum shall include profit. No adjustment shall be made to the extent:

- .1 that performance is, was, or would have been, so suspended, delayed, or interrupted, by another cause for which the Contractor is responsible; or
- .2 that an equitable adjustment is made or denied under another provision of this Contract.

§ 14.4 Termination by the Owner for Convenience

§ 14.4.1 The Owner may, at any time, terminate the Contract for the Owner's convenience and without cause.

§ 14.4.2 Upon receipt of written notice from the Owner of such termination for the Owner's convenience, the Contractor shall

- .1 cease operations as directed by the Owner in the notice;
- .2 take actions necessary, or that the Owner may direct, for the protection and preservation of the Work; and
- .3 except for Work directed to be performed prior to the effective date of termination stated in the notice, terminate all existing subcontracts and purchase orders and enter into no further subcontracts and purchase orders.

§ 14.4.3 In case of such termination for the Owner's convenience, the Owner shall pay the Contractor for Work properly executed; costs incurred by reason of the termination, including costs attributable to termination of Subcontracts; and the termination fee, if any, set forth in the Agreement.

ARTICLE 15 CLAIMS AND DISPUTES

§ 15.1 Claims

§ 15.1.1 Definition. A Claim is a demand or assertion by one of the parties seeking, as a matter of right, payment of money, a change in the Contract Time, or other relief with respect to the terms of the Contract. The term "Claim" also includes other disputes and matters in question between the Owner and Contractor arising out of or relating to the Contract. The responsibility to substantiate Claims shall rest with the party making the Claim. This Section 15.1.1 does not require the Owner to file a Claim in order to impose liquidated damages in accordance with the Contract Documents.

§ 15.1.2 Time Limits on Claims

The Owner and Contractor shall commence all Claims and causes of action against the other and arising out of or related to the Contract, whether in contract, tort, breach of warranty or otherwise, in accordance with the requirements of the binding dispute resolution method selected in the Agreement and within the period specified by applicable law, but in any case not more than 10 years after the date of Substantial Completion of the Work. The Owner and Contractor waive all Claims and causes of action not commenced in accordance with this Section 15.1.2.

§ 15.1.3 Notice of Claims

§ 15.1.3.1 Claims by either the Owner or Contractor, where the condition giving rise to the Claim is first discovered prior to expiration of the period for correction of the Work set forth in Section 12.2.2, shall be initiated by notice to the other party and to the Initial Decision Maker with a copy sent to the Construction Manager and Architect, if the Architect is not serving as the Initial Decision Maker. Claims by either party under this Section

15.1.3.1 shall be initiated within 21 days after occurrence of the event giving rise to such Claim or within 21 days after the claimant first recognizes the condition giving rise to the Claim, whichever is later.

§ 15.1.3.2 Written notice shall contain a heading stating “Notice of Claim” to clearly identify it as such. Such notice shall set forth in detail the circumstances that form the basis for the Claim and shall include the following:

- .1 Clear statement of claim matter, including background and chronology.
- .2 Documentation in support of claim matter.
- .3 Documentation in support of claimed damages.
- .4 Certification by responsible officer of claimant.

§ 15.1.3.3 Claims by either the Owner or Contractor, where the condition giving rise to the Claim is first discovered after expiration of the period for correction of the Work set forth in Section 12.2.2, shall be initiated by notice to the other party. In such an event, no decision by the Initial Decision Maker is required.

§ 15.1.4 Continuing Contract Performance

§ 15.1.4.1 Pending final resolution of a Claim, except as otherwise agreed in writing or as provided in Section 9.7 and Article 14, the Contractor shall proceed diligently with performance of the Contract and the Owner shall continue to make payments in accordance with the Contract Documents. The Architect will prepare Change Orders and issue Certificates for Payment in accordance with the decisions of the Initial Decision Maker.

§ 15.1.4.2 The Contract Sum and Contract Time shall be adjusted in accordance with the Initial Decision Maker’s decision, subject to the right of either party to proceed in accordance with this Article 15. The Architect will issue Certificates for Payment in accordance with the decision of the Initial Decision Maker.

§ 15.1.5 Claims for Additional Cost. If the Contractor wishes to make a Claim for an increase in the Contract Sum, written notice as provided in Section 15.1.3 shall be given before proceeding to execute the portion of the Work that is the subject of the Claim. Prior notice is not required for Claims relating to an emergency endangering life or property arising under Section 10.4.

§ 15.1.6 Claims for Additional Time

§ 15.1.6.1 If the Contractor wishes to make a Claim for an increase in the Contract Time, notice as provided in Section 15.1.3 shall be given. The Contractor’s Claim shall include an estimate of cost and of probable effect of delay on progress of the Work. In the case of a continuing delay only one Claim is necessary.

§ 15.1.6.2 If adverse weather conditions are the basis for a Claim for additional time, such Claim shall be documented by data substantiating that weather conditions were abnormal for the period of time, could not have been reasonably anticipated and had an adverse effect on the scheduled construction.

§ 15.1.6.3 Claims for increase in the Contract Time shall set forth in detail the circumstances that form the basis for the Claim, the date upon which each cause of delay began to affect the progress of the Work, the date upon which each cause of delay ceased to affect the progress of the Work and the number of days’ increase in the Contract Time claimed as a consequence of each such cause of delay. The Contractor shall provide such supporting documentation as the Owner may require including, where appropriate, a revised construction schedule indicating all the activities affected by the circumstances forming the basis of the Claim.

§ 15.1.6.4 The Contractor shall not be entitled to a separate increase in the Contract Time for each one of the number of causes of delay which may have concurrent or interrelated effects on the progress of the Work, or for concurrent delays due to the fault of the Contractor.

§ 15.1.7 Waiver of Claims for Consequential Damages. The Contractor and Owner waive Claims against each other for consequential damages arising out of or relating to this Contract. This mutual waiver includes

- .1 damages incurred by the Owner for rental expenses, for losses of use, income, profit, financing, business and reputation, and for loss of management or employee productivity or of the services of such persons; and
- .2 damages incurred by the Contractor for principal office expenses including the compensation of personnel stationed there, for losses of financing, business and reputation, and for loss of profit except anticipated profit arising directly from the Work.

This mutual waiver is applicable, without limitation, to all consequential damages due to either party’s termination

in accordance with Article 14.

§ 15.2 Initial Decision

§ 15.2.1 Claims, excluding those where the condition giving rise to the Claim is first discovered after expiration of the period for correction of the Work set forth in Section 12.2.2 or arising under Sections 10.3, 10.4, and 11.5, shall be referred to the Initial Decision Maker for initial decision. The Architect will serve as the Initial Decision Maker, unless otherwise indicated in the Agreement. Except for those Claims excluded by this Section 15.2.1, an initial decision shall be required as a condition precedent to mediation of any Claim arising prior to the date of final payment is due. If an initial decision has not been rendered within 30 days after the Claim has been referred to the Initial Decision Maker, the party asserting the Claim may demand mediation and binding dispute resolution without a decision having been rendered. Unless the Initial Decision Maker and all affected parties agree, the Initial Decision Maker will not decide disputes between the Contractor and persons or entities other than the Owner.

§ 15.2.2 The Initial Decision Maker will review Claims and within ten days of the receipt of a Claim take one or more of the following actions: (1) request additional supporting data from the claimant or a response with supporting data from the other party, (2) reject the Claim in whole or in part, (3) approve the Claim, (4) suggest a compromise, or (5) advise the parties that the Initial Decision Maker is unable to resolve the Claim if the Initial Decision Maker lacks sufficient information to evaluate the merits of the Claim or if the Initial Decision Maker concludes that, in the Initial Decision Maker's sole discretion, it would be inappropriate for the Initial Decision Maker to resolve the Claim.

§ 15.2.3 In evaluating Claims, the Initial Decision Maker may, but shall not be obligated to, consult with or seek information from either party or from persons with special knowledge or expertise who may assist the Initial Decision Maker in rendering a decision. The Initial Decision Maker may request the Owner to authorize retention of such persons at the Owner's expense.

§ 15.2.4 If the Initial Decision Maker requests a party to provide a response to a Claim or to furnish additional supporting data, such party shall respond, within ten days after receipt of the request, and shall either (1) provide a response on the requested supporting data, (2) advise the Initial Decision Maker when the response or supporting data will be furnished, or (3) advise the Initial Decision Maker that no supporting data will be furnished. Upon receipt of the response or supporting data, if any, the Initial Decision Maker will either reject or approve the Claim in whole or in part.

§ 15.2.5 The Initial Decision Maker will render an initial decision approving or rejecting the Claim or indicating that the Initial Decision Maker is unable to resolve the Claim. This initial decision shall (1) be in writing; (2) state the reasons therefor; and (3) notify the parties, the Construction Manager, and the Architect, if the Architect is not serving as the Initial Decision Maker, of any change in the Contract Sum or Contract Time or both. The initial decision shall be final and binding on the parties but subject to mediation and, if the parties fail to resolve their dispute through mediation, to binding dispute resolution.

§ 15.2.6 Either party may file for mediation of an initial decision at any time, subject to the terms of Section 15.2.6.1.

§ 15.2.6.1 Either party may, within 30 days from the date of receipt of an initial decision, demand in writing that the other party file for mediation. If such a demand is made and the party receiving the demand fails to file for mediation within 30 days of receipt thereof, then both parties waive their rights to mediate or pursue binding dispute resolution proceedings with respect to the initial decision.

§ 15.2.7 In the event of a Claim against the Contractor, the Owner may, but is not obligated to, notify the surety, if any, of the nature and amount of the Claim. If the Claim relates to the possibility of a Contractor's default, the Owner may, but is not obligated to, notify the surety and request the surety's assistance in resolving the controversy.

§ 15.2.8 If a Claim relates to or is the subject of a mechanic's lien, the party asserting such Claim may proceed in accordance with applicable law to comply with the lien notice or filing deadlines.

§ 15.3 Mediation

§ 15.3.1 Claims, disputes, or other matters in controversy arising out of or related to the Contract, except those

waived as provided for in Sections 9.10.4, 9.10.5, and 15.1.7, shall be subject to mediation as a condition precedent to binding dispute resolution.

§ 15.3.2 The parties shall endeavor to resolve their Claims by mediation which, unless the parties mutually agree otherwise, shall be administered by the American Arbitration Association in accordance with its Construction Industry Mediation Procedures in effect on the date of the Agreement. A request for mediation shall be made in writing, delivered to the other party to the Contract, and filed with the person or entity administering the mediation. The request may be made concurrently with the filing of binding dispute resolution proceedings but, in such event, mediation shall proceed in advance of binding dispute resolution proceedings, which shall be stayed pending mediation for a period of 60 days from the date of filing, unless stayed for a longer period by agreement of the parties or court order.

§ 15.3.3 Either party may, within 30 days from the date that mediation has been concluded without resolution of the dispute or 60 days after mediation has been demanded without resolution of the dispute, demand in writing that the other party file for binding dispute resolution. If such a demand is made and the party receiving the demand fails to file for binding dispute resolution within 60 days after receipt thereof, then both parties waive their rights to binding dispute resolution proceedings with respect to the initial decision.

§ 15.3.4 The parties shall share the mediator's fee and any filing fees equally. The mediation shall be held in the place where the Project is located, unless another location is mutually agreed upon. Agreements reached in mediation shall be enforceable as settlement agreements in any court having jurisdiction thereof.

Additions and Deletions Report for **AIA® Document A232® – 2019**

This Additions and Deletions Report, as defined on page 1 of the associated document, reproduces below all text the author has added to the standard form AIA document in order to complete it, as well as any text the author may have added to or deleted from the original AIA text. Added text is shown underlined. Deleted text is indicated with a horizontal line through the original AIA text.

Note: This Additions and Deletions Report is provided for information purposes only and is not incorporated into or constitute any part of the associated AIA document. This Additions and Deletions Report and its associated document were generated simultaneously by AIA software at 14:44:18 EDT on 05/08/2026.

Changes to original AIA text

PAGE 1

PAGE 2

- 1— GENERAL PROVISIONS
- 2— OWNER
- 3— CONTRACTOR
- 4— ARCHITECT AND CONSTRUCTION MANAGER
- 5— SUBCONTRACTORS
- 6— CONSTRUCTION BY OWNER OR BY SEPARATE CONTRACTORS
- 7— CHANGES IN THE WORK
- 8— TIME
- 9— PAYMENTS AND COMPLETION
- 10— PROTECTION OF PERSONS AND PROPERTY
- 11— INSURANCE AND BONDS
- 12— UNCOVERING AND CORRECTION OF WORK
- 13— MISCELLANEOUS PROVISIONS
- 14— TERMINATION OR SUSPENSION OF THE CONTRACT
- 15— CLAIMS AND DISPUTES

PAGE 3

§ 1.1.1 The Contract Documents. The Contract Documents are enumerated in the Agreement between the Owner and Contractor (hereinafter the Agreement) and consist of the Agreement, Conditions of the Contract (General, Supplementary and other Conditions), Drawings, Specifications, Addenda issued prior to execution of the Contract, other documents listed in the Agreement, and Modifications issued after execution of the Contract. A Modification is (1) a written amendment to the Contract signed by both parties, (2) a Change Order, (3) a Construction Change Directive, or (4) a written order for a minor change in the Work issued by the Architect. ~~Unless specifically enumerated in the Agreement, the~~ The Contract Documents ~~do not include the advertisement or invitation to bid~~ Notice to Bidders, Instructions to Bidders, sample forms, ~~other information furnished by the~~ Owner in anticipation of receiving bids or proposals, ~~the Contractor's bid or proposal, or portions of addenda relating to bidding or proposal requirements and the Contractor's bid.~~

§ 1.1.5 Contractors. Contractors are persons or entities, ~~other than the Contractor or Separate Contractors,~~ who perform Work under contracts with the Owner that are administered by the Architect and Construction Manager.

PAGE 4

§ 1.2.3.1 In the event of conflicts or discrepancies among the Contract Documents, interpretations will be based on the following priorities:

- .1 Modifications, as defined in Section 1.1.1.
- .2 The Agreement.
- .3 Addenda, with those of later date having precedence over those of earlier date.
- .4 The General Conditions of the Contract for Construction.
- .5 Division 01 of the Specifications.
- .6 Drawings and remaining Divisions of the Specifications.

In the case of conflicts or discrepancies between Drawings and Divisions of the Specifications (other than Division 01), or within or among the Contract Documents and not clarified by Addendum, the Architect will determine which takes precedence in accordance with Sections 4.2.11, 4.2.12, and 4.2.13.

PAGE 5

The parties shall agree upon ~~written~~ protocols governing the transmission and use of, and reliance on, Instruments of Service or any other information or documentation in digital form.

Any use of, or reliance on, all or a portion of a building information model without agreement to ~~written~~ protocols governing the use of, and reliance on, the information contained in the model shall be at the using or relying party's sole risk and without liability to the other party and its contractors or consultants, the authors of, or contributors to, the building information model, and each of their agents and employees.

§ 1.9 Submittal Exchange

Submittal Exchange, a web-based construction phase software for managing project submittals, RFI's, and other construction phase paperwork, shall be used by all parties on this project. The Architect will be the administrator for the Submittal Exchange system on this project.

§ 1.9.1 The Owner is entitled to reimbursement from the Contractor for amounts paid to the Architect and/or Construction Manager for services required by the Contractor's failure to properly use Submittal Exchange in the submission and processing of construction phase paperwork.

§ 2.3.7 Unless otherwise provided in The Owner shall furnish the Contractor three (3) copies of the Contract Documents, the Owner shall furnish to the Contractor one copy of the Contract Documents for purposes of making reproductions pursuant to Section 1.5.2 including one set to be used for the Project Record Drawings. The Contractor may purchase additional copies at the cost of reproduction, postage and handling.

§ 2.3.8 The Owner shall endeavor to forward all communications to the Contractor through the Construction Manager. Other communication and shall be made as set forth in Section 4.2.6 contemporaneously provide the same communications to the Architect about matters arising out of or relating to the Contract Documents.

If the Contractor defaults or neglects to carry out the Work in accordance with the Contract Documents and fails within a ~~ten~~three-day period after receipt of written notice from the Owner to commence and continue correction of such default or neglect with diligence and promptness, the Owner may, without prejudice to other remedies the Owner may have, correct such default or neglect. Such action by the Owner and amounts charged to the Contractor are both subject to review by the Construction Manager and prior approval of the Architect, and the Construction Manager or Architect may, pursuant to Section 9.5.1, withhold or nullify a Certificate for Payment in whole or in part, to the extent reasonably necessary to reimburse the Owner for the reasonable cost of correcting such deficiencies, including Owner's expenses and compensation for the Construction Manager's and Architect's and their respective consultants' additional services made necessary by such default, neglect, or failure. If current and future payments are not sufficient to cover such amounts, the Contractor shall pay the difference to the Owner. If the Contractor disagrees with the actions of the Owner or the Architect, or the amounts claimed as costs to the Owner, the Contractor may file a Claim pursuant to Article 15.

§ 2.5.1 Where the Contractor's default and/or neglect to carry out its Work in accordance with the Contract Documents threatens the health, safety and/or welfare of the occupants of the Owner's facilities and/or threatens the structural integrity and/or preservation of the Owner's facilities, the Owner may proceed to carry out the Contractor's Work upon twenty-four (24) hours' written notice of its intention to do so to the Contractor. In such case an appropriate Change Order or Construction Change Directive shall be issued deducting from payments then or thereafter due the Contractor the reasonable cost of correcting such deficiencies and defaults, including the Owner's expenses and compensation for the Architect's and its respective consultants' additional services and other expenses made necessary by such default, neglect or failure.

§ 3.2.2.1 Do not scale Drawings. Follow figure dimensions, confirming on site.

§ 3.2.5 The Owner is entitled to reimbursement from the Contractor for amounts paid to the Architect for evaluating and responding to the Contractor's requests for information that are not prepared in accordance with the Contract Documents or where the requested information is available to the Contractor from a careful study and comparison of the Contract Documents, field conditions, other Owner-provided information, Contractor-prepared coordination drawings, or prior Project correspondence or documentation.

§ 3.4.2.1 After the Contract has been executed, the Owner and Architect will consider requests for the substitution of products in place of those specified only under the conditions set forth in the General Requirements (Division 01 of the Specifications). By making requests for substitutions, the Contractor:

- .1 represents that it has personally investigated the proposed substitute product and determined that it is equal or superior in all respects to that specified;
- .2 represents that it will provide the same warranty for the substitution as it would have provided for the product specified;

- .3 certifies that the cost data presented is complete and includes all related costs for the substituted product and for Work that must be changed as a result of the substitution, except for the Architect's redesign costs, and waives all claims for additional costs related to the substitution that subsequently become apparent; and
- .4 shall coordinate the installation of the accepted substitute, making such changes as may be required for the Work to be complete in all respects.

PAGE 9

§ 3.4.2.2 The Owner shall be entitled to reimbursement from the Contractor for amounts paid to the Architect for reviewing the Contractor's proposed substitutions for convenience after the period noted in Division 01 Section "Substitution Procedures" and making agreed-upon changes in the Drawings and Specifications resulting from such substitutions.

§ 3.6.1 The Owner is exempt from payment of Federal, State, local taxes, and from payment of sales and compensating use taxes of the State of New York and of cities and counties on all materials and supplies sold to the Owner pursuant to the provisions of this Contract. These taxes are not to be included in bids. This exemption does not, however, apply to tools, machinery, equipment, or other property leased by, or to the Contractor or a subcontractor; and the Contractor and its subcontractor shall be responsible for, and pay, any and all applicable taxes, including sales and compensating use taxes, on such leased tools, machinery, equipment or other property.

§ 3.7.1.1 The Owner shall secure the building permit from the New York State Education Department.

§ 3.7.2.1 In accordance New York State Labor Law Article 8, Section 220, subd. 3-a(a), the Contractor shall submit to the Owner within 30 days after issuance of Contractor's first payroll, and every 30 days thereafter, a transcript of the original payroll record, subscribed and affirmed as true under the penalties of perjury. In addition, all contractors and subcontractors working on projects covered by Article 8 of NYS Labor Law also must electronically provide certified payroll records to the New York State Department of Labor ("DOL") through the DOL Certified Payroll portal. Payroll information and records must be provided in the format, manner and frequency required by the DOL. The Contractor shall ensure that its subcontractors comply with these requirements and shall provide the Owner, on request, proof of electronic submission by the Contractor and all subcontractors.

§ 3.7.2.2 The Contractor shall comply with all applicable New York State Department of Labor requirements, including the provision that every worker employed in performance of a public work contract shall be certified as having completed an OSHA 10-hour safety training course. The Contractor and subcontractor shall be solely responsible for compliance with this requirement with respect to their employees. The Contractor's or subcontractor's failure to comply with this requirement shall not transfer or in any way impose the responsibility for worker safety upon the Owner or the Architect.

PAGE 10

- .1—allowances Allowances shall cover the cost to the Contractor of materials and equipment delivered at the site and all required taxes, less applicable trade discounts;
- .2—Lump Sum Allowances, Unit Cost Allowances and Quantity Allowances: Contractor's costs for unloading and handling at the site, labor, installation costs, overhead, profit, and other expenses contemplated for stated allowance amounts shall be included in the Contract Sum but not in the allowances; and
- .3—whenever Contingency Allowances: Contractor's costs, including all such subcontractor costs, for receiving and handling at Project site, labor, installation, and similar costs related to products and materials under allowance shall be included as part of the allowance. Contractor, Overhead and profit related to the allowance shall be included as part of the Contract Sum and not part of the allowance however subcontractor overhead and profit shall be part of allowance. Refer to Section 7.1.4 for maximum combined Contractor and subcontractor overhead and profit percentage;

- 4 Whenever costs are more than or less than allowances, the Contract Sum shall be adjusted accordingly by Change Order. The amount of the Change Order shall reflect (1) the difference between actual costs and the allowances under Section 3.8.2.1 and (2) changes in Contractor's costs under Section 3.8.2.2; and
- 5 The Architect shall create and process Allowance Access Authorizations for the Construction Manager and Owner's approval and execution in accordance with the Contract Documents.

§ 3.8.4 Refer to Division 01 Section "Allowances" for additional information.

PAGE 11

§ 3.9.2 The Contractor, as soon as practicable after award of the Contract, shall notify the Owner and Architect in writing, through the Construction Manager, of the name and qualifications of a proposed superintendent. Within 14 days of receipt of the information, the Construction Manager may notify the Contractor, stating whether the Owner, the Construction Manager, or the Architect (1) has reasonable objection to the proposed superintendent or (2) require additional time for review. Failure of the Construction Manager to provide notice within the 14-day period shall constitute notice of no reasonable objection.

§ 3.10.1 The Contractor, promptly after being awarded the Contract, shall prepare and submit for the Owner's and Architect's information, and the Construction Manager's use in developing the Project schedule, a Contractor's construction schedule for the Work. The schedule shall contain detail appropriate for the Project, including (1) the date of commencement of the Work, interim schedule milestone dates, and the date of Substantial Completion; (2) an apportionment of the Work by construction activity; and (3) the time required for completion of each portion of the Work. The schedule shall provide for the orderly progression of the Work to completion and shall not exceed time limits current under the Contract Documents. The schedule shall be revised at appropriate intervals as required by the conditions of the Work and Project. ~~The Contractor, shall cooperate with the Construction Manager in scheduling and performing the Contractor's Work to avoid conflict with, and as to cause no delay in, the work or activities of other Contractors, or the construction or operations of the Owner's own forces or Separate Contractors.~~

~~§ 3.10.2 The Contractor, promptly after being awarded the Contract and thereafter as necessary to maintain a current submittal schedule, shall submit a submittal schedule for the Construction Manager's and Architect's approval. The Architect and Construction Manager's approval shall not be unreasonably delayed or withheld. The submittal schedule shall (1) be coordinated with the Contractor's construction schedule, and (2) allow the Construction Manager and Architect reasonable time to review submittals. If the Contractor fails to submit a submittal schedule, or fails to provide submittals in accordance with the approved submittal schedule, the Contractor shall not be entitled to any increase in Contract Sum or extension of Contract Time based on the time required for review of submittals be related to the entire Project to the extent required by the Contract Documents, and shall provide for expeditious and practicable execution of the Work. The Contractor shall cooperate with the Construction Manager in scheduling and performing the Contractor's Work to avoid conflict with, and as to cause no delay in, the work or activities of other Contractors, or the construction or operations of the Owner's own forces or Separate Contractors.~~

§ 3.10.32 The Contractor shall participate with other Contractors, the Construction Manager, and the Owner in reviewing and coordinating all schedules for incorporation into the Project schedule that is prepared by the Construction Manager. The Contractor shall make revisions to the construction schedule and submittal schedule as deemed necessary by the Construction Manager to conform to the Project schedule.

§ 3.10.43 The Contractor shall perform the Work in general accordance with the most recent schedules submitted to the Owner, Construction Manager, and Architect, and incorporated into the approved Project schedule.

PAGE 12

§ 3.12.5 The Contractor shall review for compliance with the Contract Documents, approve, and submit to the Construction Manager, Shop Drawings, Product Data, Samples, and similar submittals required by the Contract Documents, ~~in accordance with the Project submittal schedule approved by the Construction Manager and~~

~~Architect or, in the absence of an approved Project submittal schedule,~~ with reasonable promptness and in such sequence as to cause no delay in the Work or in the activities of other Contractors, Separate Contractors, or the Owner's own forces. The Contractor shall cooperate with the Construction Manager in the coordination of the Contractor's Shop Drawings, Product Data, Samples, and similar submittals with related documents submitted by other Contractors.

§ 3.12.8 The Work shall be in accordance with approved submittals except that the Contractor shall not be relieved of responsibility for deviations from the requirements of the Contract Documents by the Architect's approval of Shop Drawings, Product Data, Samples, or similar submittals, unless the Contractor has specifically notified the Construction Manager and Architect in writing of such deviation at the time of submittal and (1) the Architect has given written approval to the specific deviation as a minor change in the Work, or (2) a Change Order or Construction Change Directive has been issued authorizing the deviation. The Contractor shall not be relieved of responsibility for errors or omissions in Shop Drawings, Product Data, Samples, or similar submittals, by the Architect's approval thereof.

PAGE 13

§ 3.12.11 The Contractor is required to provide all submittals for the Architect's review; all submittals to be provided to the Architect by the Submittal deadlines noted in the Contract Documents. The Architect's review of Contractor's submittals will be limited to the time preceding the Submittal deadline and will consist of an examination of an initial submittal and one (1) resubmittal. The Owner is entitled to obtain reimbursement from the Contractor for amounts paid to the Architect for evaluation of additional resubmittals, and for evaluation of submittals for which the initial submission is received after the Submittal deadlines.

§ 3.13.3 The Contractor shall be responsible for enforcing the Owner's security and access policies and procedures and the following rules of conduct for its personnel and those of its subcontractors, sub-subcontractors, and suppliers at the Project site, and the Owner's Project Representative shall provide interpretations should a question arise if the rules of conduct are being adequately enforced by the Contractor:

- .1 No smoking or use of tobacco products.
- .2 No drinking of alcoholic beverages or use of controlled substances.
- .3 No working, or presence on site, under the influence of alcoholic beverages or controlled substances.
- .4 No use of indecent language or display of indecent images, publications or terms.
- .5 No use of radios or other entertainment devices.
- .6 No horseplay or dangerous behavior.
- .7 No firearms or other weapons.
- .8 No communication with staff or students.

§ 3.13.4 The Contractor shall require its personnel and those of its subcontractors, sub-subcontractors and suppliers to wear visible photo-identification badges acceptable to the Owner, at all times for identification and security purposes.

PAGE 15

§ 4.2.2 The Architect will visit the site at intervals appropriate to the stage of construction, or as otherwise agreed with the Owner, to become generally familiar with the progress and quality of the portion of the Work completed, and to determine in general if the Work observed is being performed in a manner indicating that the Work, when fully completed, will be in accordance with the Contract Documents. However, the Architect will not be required to make exhaustive or continuous on-site inspections to check the quality or quantity of the Work. The Architect will not have control over, charge of, or responsibility for the construction means, methods, techniques, sequences

or procedures, or for the safety precautions and programs in connection with the Work, since these are solely the Contractor's rights and responsibilities under the Contract Documents. On the basis of the site visits, the Architect will keep the Owner and the Construction Manager reasonably informed about the progress and quality of the portion of the Work completed, and promptly report to the Owner and Construction Manager known deviations from the Contract Documents and defects and deficiencies observed in the Work.

§ 4.2.2.1 The Owner is entitled to reimbursement from the Contractor for the amounts paid to the Architect for site visits made necessary by the fault of the Contractor or by defects and deficiencies in the Work.

§ 4.2.2.2 The Owner is entitled to reimbursement from the Contractor for the amounts paid to the Construction Manager for site visits made necessary by the fault of the Contractor or by defects and deficiencies in the Work.

§ 4.2.8 The Architect and Construction Manager have authority to reject Work that does not conform to the Contract Documents, and will notify each other about the rejection. The Construction Manager shall determine in general whether the Work of the Contractor is being performed in accordance with the requirements of the Contract Documents and notify the Owner, Contractor and Architect of defects and deficiencies in the Work. Whenever the Construction Manager considers it necessary or advisable, the Construction Manager will have authority to require inspection or testing of the Work in accordance with Sections 13.4.2 and 13.4.3, upon written authorization of the Owner, whether or not the Work is fabricated, installed or completed. The foregoing authority of the Construction Manager will be subject to the provisions of Sections 4.2.18 through 4.2.20 inclusive, with respect to interpretations and decisions of the Architect. However, neither the Architect's nor the Construction Manager's authority to act under this Section 4.2.8 nor a decision made by either of them in good faith either to exercise or not to exercise such authority shall give rise to a duty or responsibility of the Architect or the Construction Manager to the Contractor, Subcontractors, material and equipment suppliers, their agents or employees, or other persons performing any of the Work.

PAGE 16

§ 4.2.10 The Construction Manager will receive and promptly review for conformance with the submittal requirements of the Contract Documents, all submittals from the Contractor such as Shop Drawings, Product Data, and Samples. Where there are other Contractors, the Construction Manager will also check and coordinate the information contained within each submittal received from the Contractor and other Contractors, and transmit to the Architect those recommended for approval. By submitting Shop Drawings, Product Data, Samples, and similar submittals, the Construction Manager represents to the Owner and Architect that the Construction Manager has reviewed and recommended them for approval. The Construction Manager's actions will be taken in accordance with the Project submittal schedule approved by the Architect or, in the absence of an approved Project submittal schedule, with reasonable promptness while allowing sufficient time to permit adequate review by the Architect.

§ 4.2.11 The Architect will review and approve, or take other appropriate action upon, the Contractor's submittals such as Shop Drawings, Product Data, and Samples, but only for the limited purpose of checking for conformance with information given and the design concept expressed in the Contract Documents. The Architect's action will be taken ~~in accordance with the submittal schedule approved by the Architect or, in the absence of an approved submittal schedule,~~ with reasonable promptness while allowing sufficient time in the Architect's professional judgment to permit adequate review. Upon the Architect's completed review, the Architect shall transmit its submittal review to the Construction Manager.

§ 4.2.13 ~~The Construction Manager~~Architect will prepare Change Orders, ~~and Construction Change Directives and Allowance Change Authorizations.~~

§ 4.2.15 Utilizing the documents provided by the Contractor, the Construction Manager will maintain at the site for the Owner one copy of all Contract Documents, approved Shop Drawings, Product Data, Samples, and similar required submittals, in good order and marked currently to record all changes and selections made during construction. These will be available to the Architect and the Contractor, and will be delivered to the Owner upon completion of the Project.

§ 4.2.17 If the Owner and Architect agree, the Architect will provide one or more Project representatives to assist in carrying out the Architect's responsibilities at the site. The duties, responsibilities and limitations of authority of

the Project representatives shall be as set forth in an exhibit to be incorporated in the Contract Documents. The Owner shall notify the Construction Manager of any change in the duties, responsibilities and limitations of authority of the Project representatives.

PAGE 17

§ 5.1.1 A Subcontractor is a person or entity who has a direct contract with the Contractor to perform a portion of the Work at the site. The term "Subcontractor" is referred to throughout the Contract Documents as if singular in number and means a Subcontractor or an authorized representative of the Subcontractor. The term "Subcontractor" does not include other Contractors or Separate Contractors or the subcontractors of ~~other Contractors or Separate Contractors.~~

§ 5.2.1 Unless otherwise stated in the Contract Documents, the Contractor or the bidding requirements, as soon as practicable after award of the Contract, shall notify the Construction Manager, for review by the Owner, Construction Manager and Architect, of the persons or entities proposed for each principal portion of the Work, including those who are to furnish materials or equipment fabricated to a special design for each principal portion of the Work. Within 14 days of receipt of the information, the Construction Manager may notify the Contractor whether the Owner, the Construction Manager or the Architect (1) has reasonable objection to any such proposed person or entity or, (2) requires additional time for review. Failure of the Construction Manager to provide notice within the 14-day period shall constitute notice of no reasonable objection.

§ 5.2.5 The Contractor shall perform at least 25 percent of the cost of the Contract (not including the costs of materials, insurance, bonds, submittals and similar items) with its own employees.

PAGE 18

- .1—assignment is effective only after termination of the Contract by the Owner for cause pursuant to Section 14.2 and only for those subcontract agreements that the Owner accepts by notifying the Subcontractor and Contractor; and
- .2—assignment is subject to the prior rights of the surety, if any, obligated under bond relating to the Contract.

§ 6.1.1 The term "Separate Contractor(s)" shall mean other contractors retained by the Owner under separate agreements. The Owner reserves the right to perform construction or operations related to the Project with the Owner's own forces, and with Separate Contractors retained under Conditions of the Contract substantially similar to those of this Contract, including those provisions of the Conditions of the Contract related to insurance and waiver of subrogation. If the Contractor claims that delay or additional cost is involved because of such action by the Owner, the Contractor shall make such Claim as provided in Article 15.

§ 6.1.2 When the Owner performs separate contracts are awarded for different portions of the Project or other construction or operations ~~within the Owner's own forces or Separate Contractors, the site, the term "Contractor" in the Contract Documents in each case shall mean the Contractor who executes each separate Owner-Contractor Agreement.~~

§ 6.1.3 The Owner shall provide for coordination of ~~such~~ the activities of the Owner's own forces and of each Separate Contractors Contractor with the Work of the Contractor, who shall cooperate with them. The Contractor shall participate with any Separate Contractors and the Owner in reviewing their construction schedules. The Contractor shall make any revisions to its construction schedule deemed necessary after a joint review and mutual agreement. The construction schedules shall then constitute the schedules to be used by the Contractor, Separate Contractors, and the Owner until subsequently revised.

§ 6.1.34 Unless otherwise provided in the Contract Documents, when the Owner performs construction or operations related to the Project with the Owner's own forces or with Separate Contractors, the Owner or its Separate Contractors shall have the same obligations and rights that the Contractor has under the Conditions of the Contract, including, without excluding others, those stated in Article 3, this Article 6, and Articles 10, 11, and 12.

§ 6.2.1 The Contractor shall afford the Owner's own forces, Separate Contractors, Construction Manager and other Contractors reasonable opportunity for introduction and storage of their materials and equipment and performance of their activities, and shall connect and coordinate the Contractor's construction and operations with theirs as required by the Contract Documents.

PAGE 19

§ 7.1.1 Changes in the Work may be accomplished after execution of the Contract, and without invalidating the Contract, by Change Order, Construction Change Directive or order for a minor change in the Work, subject to the limitations stated in ____ this Article 7 and elsewhere in the Contract Documents.

§ 7.1.4 The combined overhead and profit (for Contractor, subcontractors, suppliers, and contractors of a lower-tier) included in the total cost to the Owner for a change in the Work shall be as follows:

- .1 Maximum combined overhead and profit, 15 percent of the cost.
- .2 Cost to which overhead and profit is to be applied shall be determined in accordance with Section 7.3.4.
- .3 To facilitate checking of quotations for extras or credits, all proposals shall be accompanied by a complete itemization of costs including labor, materials, rental costs, and Subcontracts. Subcontracts shall be itemized also.

A Change Order is a written instrument prepared by the ~~Construction Manager~~ Architect and signed by the Owner, Construction Manager, Architect, and Contractor, stating their agreement upon all of the following:

- .1— The change in the Work;
- .2— The amount of the adjustment, if any, in the Contract Sum; and
- .3— The extent of the adjustment, if any, in the Contract Time.

PAGE 20

- .1— Mutual acceptance of a lump sum properly itemized and supported by sufficient substantiating data to permit evaluation;
- .2— Unit prices stated in the Contract Documents or subsequently agreed upon;
- .3— Cost to be determined in a manner agreed upon by the parties and a mutually acceptable fixed or percentage fee; or
- .4— As provided in Section 7.3.4.

§ 7.3.4 If unit prices are stated in the Contract Documents or subsequently agreed upon, and if quantities originally contemplated are materially changed in a proposed Change Order or Construction Change Directive so that application of such unit prices to quantities of Work proposed will cause substantial inequity to the Owner or Contractor, the applicable unit prices shall be equitably adjusted.

§ 7.3.5 If the Contractor does not respond promptly or disagrees with the method for adjustment in the Contract Sum, the Construction Manager shall determine the adjustment on the basis of reasonable expenditures and savings of those performing the Work attributable to the change, including, in case of an increase in the Contract Sum, an amount for overhead and profit as set forth in the Agreement, or if no such amount is set forth in the Agreement, a reasonable amount. In such case, and also under Section 7.3.3.3, the Contractor shall keep and present, in such

form as the Construction Manager may prescribe, an itemized accounting together with appropriate supporting data. Unless otherwise provided in the Contract Documents, costs for the purposes of this Section 7.3.4 shall be limited to the following:

- .1—Costs of labor, including applicable payroll taxes, fringe benefits required by agreement or custom, workers' compensation insurance, and other employee costs approved by the Construction Manager and Architect;
- .2—Costs of materials, supplies, and equipment, including cost of transportation, whether incorporated or consumed;
- .3—Rental costs of machinery and equipment, exclusive of hand tools, whether rented from the Contractor or others;
- .4—Costs of premiums for all bonds and insurance, permit fees, and sales, use, or similar taxes, directly related to the change; and Overhead and profit mark-up shall include, but not be limited to, the following:
- .5—Costs of supervision and field office personnel directly attributable to the change.

§ 7.3.5

- .1 home office expense;
- .2 field office expense;
- .3 supervision;
- .4 project management & estimation; and
- .5 small tools & equipment.

§ 7.3.6 If the Contractor disagrees with the adjustment in the Contract Time, the Contractor may make a Claim in accordance with applicable provisions of Article 15.

§ 7.3.67 Upon receipt of a Construction Change Directive, the Contractor shall promptly proceed with the change in the Work involved and advise the Construction Manager of the Contractor's agreement or disagreement with the method, if any, provided in the Construction Change Directive for determining the proposed adjustment in the Contract Sum or Contract Time.

§ 7.3.78 A Construction Change Directive signed by the Contractor indicates the Contractor's agreement therewith, including adjustment in Contract Sum and Contract Time or the method for determining them. Such agreement shall be effective immediately and shall be recorded as a Change Order.

PAGE 21

§ 7.3.89 The amount of credit to be allowed by the Contractor to the Owner for a deletion or change that results in a net decrease in the Contract Sum shall be actual net cost as confirmed by the Construction Manager and Architect. When both additions and credits covering related Work or substitutions are involved in a change, the allowance for overhead and profit shall be figured on the basis of net increase, if any, with respect to that change.

§ 7.3.910 Pending final determination of the total cost of a Construction Change Directive to the Owner, the Contractor may request payment for Work completed under the Construction Change Directive in Applications for Payment. The Construction Manager and Architect will make an interim determination for purposes of monthly certification for payment for those costs and certify for payment the amount that the Construction Manager and Architect determine to be reasonably justified. The interim determination of cost shall adjust the Contract Sum on the same basis as a Change Order, subject to the right of either party to disagree and assert a Claim in accordance with Article 15.

§ 7.3.4011 When the Owner and Contractor agree with a determination made by the Construction Manager and

Architect concerning the adjustments in the Contract Sum and Contract Time, or otherwise reach agreement upon the adjustments, such agreement shall be effective immediately and the ~~Construction Manager~~ Architect shall prepare a Change Order. Change Orders may be issued for all or any part of a Construction Change Directive.

§ 8.2.2 The Contractor shall not knowingly, except by agreement or instruction of the Owner in writing, commence the Work prior to the effective date of insurance required to be furnished by the Contractor and Owner. The date of commencement of the Work shall not be changed by the effective date of such insurance.

PAGE 22

§ 9.3.1 At least fifteen days before the date established for each progress payment, the Contractor shall submit to the Construction Manager an itemized Application for Payment prepared in accordance with the schedule of values, if required under Section 9.2, for completed portions of the Work. The application shall be notarized, if required, and supported by all data substantiating the Contractor's right to payment that the Owner, Construction Manager or Architect require, such as copies of requisitions, and releases of waivers of lien from Subcontractors and suppliers; and shall reflect retainage if provided for in the Contract Documents. The form of Application for Payment, duly notarized, shall be a current authorized edition of AIA Document G7032, Application and Certificate for Payment. Alternative payment application forms are not permitted. AIA Document G732 shall be supported by a current authorized edition of AIA Document G703, Continuation Sheet or equivalent continuation sheet, subject to the approval of Owner and Architect.

§ 9.3.1.3 Until Substantial Completion, the Owner shall pay 95 percent of the amount due the Contractor on account of progress payments. At Substantial Completion, the Construction Manager and Architect may authorize remaining partial payments to be made in full, less twice the value of items remaining to be completed and an amount necessary to satisfy any outstanding claims, liens, or judgments.

§ 9.3.1.4 "Applications for Payment must be accompanied by any and all releases of liens for previous applications from Contractor and his/her subcontractors and a sworn and notarized statement that all subcontractors have been paid to at least 95% of previously requisitioned sums.

PAGE 23

§ 9.3.3 The Contractor warrants that title to all Work covered by an Application for Payment will pass to the Owner no later than the time of payment. The Contractor further warrants that upon submittal of an Application for Payment all Work for which Certificates for Payment have been previously issued and payments received from the Owner shall, to the best of the Contractor's knowledge, information, and belief, be free and clear of liens, claims, security interests, or encumbrances, in favor of the Contractor, Subcontractors, material suppliers, or other persons or entities that provided labor, materials and equipment relating to the Work.

§ 9.4.1 ~~Where there is only one Contractor, the~~ The Construction Manager will, within seven days after the Construction Manager's receipt of the Contractor's Application for Payment, review the Application, certify the amount the Construction Manager determines is due the Contractor, and forward the Contractor's Application and Certificate for Payment to the Architect. Within seven days after the Architect receives the Contractor's Application for Payment from the Construction Manager, the Architect will either (1) issue to the Owner a Certificate for Payment, in the full amount of the Application for Payment, with a copy to the Construction Manager; or (2) issue to the Owner a Certificate for Payment for such amount as the Architect determines is properly due, and notify the Construction Manager and Owner of the Architect's reasons for withholding certification in part as provided in Section 9.5.1; or (3) withhold certification of the entire Application for Payment, and notify the Construction Manager and Owner of the Architect's reason for withholding certification in whole as provided in Section 9.5.1. The Construction Manager will promptly forward to the Contractor the Architect's notice of withholding certification.

§ 9.4.2 ~~Where there is more than one Contractor performing portions of the Project, the Construction Manager will, within seven days after the Construction Manager receives all of the Contractors' Applications for Payment: (1) review the Applications and certify the amount the Construction Manager determines is due each of the Contractors; (2) prepare a Summary of Contractors' Applications for Payment by combining information from~~

each Contractor's application with information from similar applications for progress payments from the other Contractors; (3) prepare a Project Application and Certificate for Payment; (4) certify the amount the Construction Manager determines is due all Contractors; and (5) forward the Summary of Contractors' Applications for Payment and Project Application and Certificate for Payment to the Architect.

§ 9.4.2.1 Within seven days after the Architect receives the Project Application and Project Certificate for Payment and the Summary of Contractors' Applications for Payment from the Construction Manager, the Architect will either (1) issue to the Owner a Project Certificate for Payment, with a copy to the Construction Manager; or (2) issue to the Owner a Project Certificate for Payment for such amount as the Architect determines is properly due, and notify the Construction Manager and Owner of the Architect's reasons for withholding certification in part as provided in Section 9.5.1; or (3) withhold certification of the entire Project Application for Payment, and notify the Construction Manager and Owner of the Architect's reason for withholding certification in whole as provided in Section 9.5.1. The Construction Manager will promptly forward the Architect's notice of withholding certification to the Contractors.

§ 9.4.3 The Construction Manager's certification of an Application for Payment or, in the case of more than one Contractor, a Project Application and Certificate for Payment, The Construction Manager's certification of an Application for Payment shall be based upon the Construction Manager's evaluation of the Work and the data in the Application or Applications for Payment. The Construction Manager's certification will constitute a representation that, to the best of the Construction Manager's knowledge, information, and belief, the Work has progressed to the point indicated, the quality of the Work is in accordance with the Contract Documents, and that the Contractor is, or Contractors are, entitled to payment in the amount certified.

§ 9.4.43 The Architect's issuance of a Certificate for Payment ~~or, in the case of more than one Contractor, Project Application and Certificate for Payment,~~ shall be based upon the Architect's evaluation of the Work, the recommendation of the Construction Manager, and data in the Application for Payment or Project Application for Payment. The Architect's certification will constitute a representation that, to the best of the Architect's knowledge, information, and belief, the Work has progressed to the point indicated, the quality of the Work is in accordance with the Contract Documents, and that the Contractor is, or Contractors are, entitled to payment in the amount certified.

PAGE 24

§ 9.4.54 The representations made pursuant to Sections 9.4.3 and 9.4.4 are subject to an evaluation of the Work for conformance with the Contract Documents upon Substantial Completion, to results of subsequent tests and inspections, to correction of minor deviations from the Contract Documents prior to completion, and to specific qualifications expressed by the Construction Manager or Architect.

§ 9.4.65 The issuance of a Certificate for Payment ~~or a Project Certificate for Payment~~ will not be a representation that the Construction Manager or Architect has (1) made exhaustive or continuous on-site inspections to check the quality or quantity of the Work; (2) reviewed construction means, methods, techniques, sequences, or procedures; (3) reviewed copies of requisitions received from Subcontractors and suppliers and other data requested by the Owner to substantiate the Contractor's right to payment; or (4) made examination to ascertain how or for what purpose the Contractor has used money previously paid on account of the Contract Sum.

§ 9.5.1 The Construction Manager or Architect may withhold a Certificate for Payment or Project Certificate for Payment in whole or in part, to the extent reasonably necessary to protect the Owner, if in the Construction Manager's or Architect's opinion the representations to the Owner required by Section 9.4.32 and 9.4.43 cannot be made. If the Construction Manager or Architect is unable to certify payment in the amount of the Application, the Construction Manager will notify the Contractor and Owner as provided in Section 9.4.1 ~~and 9.4.2~~. If the Contractor, Construction Manager and Architect cannot agree on a revised amount, the Architect will promptly issue a Certificate for Payment or a Project Certificate for Payment for the amount for which the Architect is able to make such representations to the Owner. The Construction Manager or Architect may also withhold a Certificate for Payment or, because of subsequently discovered evidence, may nullify the whole or a part of a Certificate for Payment or Project Certificate for Payment previously issued, to such extent as may be necessary in the Construction Manager's or Architect's opinion to protect the Owner from loss for which the Contractor is responsible, including loss resulting from the acts and omissions described in Section 3.3.2 because of

.1—defective Work not remedied;

- .2—third party claims filed or reasonable evidence indicating probable filing of such claims, unless security acceptable to the Owner is provided by the Contractor;
- .3—failure of the Contractor to make payments properly to Subcontractors or suppliers for labor, materials or equipment;
- .4—reasonable evidence that the Work cannot be completed for the unpaid balance of the Contract Sum;
- .5—damage to the Owner or a Separate Contractor or other Contractor;
- .6—reasonable evidence that the Work will not be completed within the Contract Time, and that the unpaid balance would not be adequate to cover actual or liquidated damages for the anticipated delay; or
- .7—repeated failure to carry out the Work in accordance with the Contract Documents.

§ 9.6.1 After the Architect has issued a Certificate for Payment or Project Certificate for Payment, the Owner shall make payment in the manner and within the time provided in the Contract Documents; and shall so notify the Construction Manager and Architect.

PAGE 25

§ 9.6.4 The Owner has the right to request written evidence from the Contractor that the Contractor has properly paid Subcontractors and suppliers material and equipment suppliers' amounts paid by the Owner to the Contractor for subcontracted Work. If the Contractor fails to furnish such evidence within seven days, the Owner shall have the right to contact Subcontractors and suppliers to ascertain whether they have been properly paid. Neither the Owner, Construction Manager nor Architect shall have an obligation to pay, or to see to the payment of money to, a Subcontractor or supplier, except as may otherwise be required by law.

§ 9.6.5 The Contractor's payments to material and equipment suppliers shall be treated in a manner similar to that provided in Sections 9.6.2, 9.6.3 and 9.6.4.

If the Construction Manager and Architect do not issue a Certificate for Payment or a Project Certificate for Payment, through no fault of the Contractor, within fourteen days after the Construction Manager's receipt of the Contractor's Application for Payment, or if the Owner does not pay the Contractor within seven days after the date established in the Contract Documents, the amount certified by the Construction Manager and Architect or awarded by binding dispute resolution, then the Contractor may, upon seven additional days' written notice to the Owner, Construction Manager and Architect, stop the Work until payment of the amount owing has been received. The Contract Time shall be extended appropriately and the Contract Sum shall be increased by the amount of the Contractor's reasonable costs of shutdown, delay and start-up, plus interest as provided for in the Contract Documents.

§ 9.8.2 ~~When the Contractor considers that the Work, or a portion thereof which the Owner agrees to accept separately, is substantially complete, the Contractor shall notify the Construction Manager, and the Contractor and Construction Manager shall jointly prepare and submit to the Architect a comprehensive list of items to be completed or corrected prior to final payment. Failure to include an item on such list does not alter the responsibility of the Contractor to complete all Work in accordance with the Contract Documents.~~

§ 9.8.3 ~~Upon receipt of the list, the Architect, assisted by the Construction Manager, will make an inspection to determine whether the Work or designated portion thereof is substantially complete. If the Architect's inspection discloses any item, whether or not included on the list, No later than 14 days prior to the Contract-scheduled date of Substantial Completion, the Contractor shall issue a letter to the Architect and Construction Manager confirming their work is on schedule for Substantial Completion by the contract specified date. No later than seven days after Contract-scheduled date of Substantial Completion (including authorized adjustments), the Architect will make an inspection to determine whether the Work or designated portion thereof is substantially complete. Absence the contractor letter confirming readiness of work, the Architect may elect to postpone the~~

substantial completion inspection. If the Architect's inspection discloses any item which is not sufficiently complete in accordance with the Contract Documents so that the Owner can occupy or utilize the Work or designated portion thereof for its intended use, the Contractor shall, before issuance of the Certificate of Substantial Completion, complete or correct such item upon notification by the Architect. In such case, the Contractor shall then submit a request for another inspection by the Architect, assisted by the Construction Manager, to determine to determine the actual date of Substantial Completion.

PAGE 26

~~§ 9.8.4 When the~~2.1 The Architect, assisted by the Construction Manager, determines that the Work of all of the Contractors, or will perform no more than one inspection to determine whether the Work or a designated portion thereof, is substantially complete, the Construction Manager will prepare, and the Construction Manager and Architect shall execute, has attained Substantial Completion in accordance with the Contract Documents. The Owner is entitled to reimbursement from the Contractor for amounts paid to the Architect for any additional inspections.

§ 9.8.3 When the Work or designated portion thereof is substantially complete, the Architect will prepare a Certificate of Substantial Completion that shall establish the date of Substantial Completion; establish responsibilities of the Owner and Contractor for security, maintenance, heat, utilities, damage to the Work and insurance; and fix the time within which the Contractor shall finish all items on the list accompanying the Certificate. Warranties required by the Contract Documents shall commence on the date of Substantial Completion of the Work or designated portion thereof unless otherwise provided in the Certificate of Substantial Completion.

§ 9.8.54 The Certificate of Substantial Completion shall be submitted to the Owner and Contractor for their written acceptance of responsibilities assigned to them in the Certificate. Upon such acceptance, and consent of surety if any, the Owner shall make payment of retainage applying to the Work or designated portion thereof. Such payment shall be adjusted for Work that is incomplete or not in accordance with the requirements of the Contract Documents.

§ 9.9.1 The Owner may occupy or use any completed or partially completed portion of the Work at any stage when such portion is designated by separate agreement with the Contractor, provided such occupancy or use is consented to by the insurer and authorized by public authorities having jurisdiction over the Project. Such partial occupancy or use may commence whether or not the portion is substantially complete, provided the Owner and Contractor have accepted in writing the responsibilities assigned to each of them for payments, retainage if any, security, maintenance, heat, utilities, damage to the Work and insurance, and have agreed in writing concerning the period for correction of the Work and commencement of warranties required by the Contract Documents. When the Contractor considers a portion substantially complete, the Contractor and Construction Manager shall jointly prepare and submit a list to the Architect as provided under Section 9.8.2. Warranties for all equipment, materials, and systems on the Project are to start no sooner than the date of substantial completion. Contractor shall provide extended warranties for all equipment, materials, and systems that may have been turned over to the Owner for partial use or occupancy. Consent of the Contractor to partial occupancy or use shall not be unreasonably withheld. The stage of the progress of the Work shall be determined by written agreement between the Owner and Contractor or, if no agreement is reached, by decision of the Architect after consultation with the Construction Manager.

PAGE 27

~~§ 9.10.1 Upon completion of the Work, the Contractor shall forward to the Construction Manager a notice that the Work is ready for final inspection and acceptance, and shall also forward to the Construction Manager a final Contractor's Application for Payment. Upon receipt, the Construction Manager shall perform an inspection to confirm the completion of Work of the Contractor. The Construction Manager shall make recommendations to the Architect when the Work of all of the Contractors is ready for final inspection, and shall then forward the Contractors' notices and Application for Payment or Project Application for Payment, to the Architect, who will promptly make such inspection. When the Architect finds the Work acceptable under the Contract Documents and the Contract fully performed, the Construction Manager and Architect will promptly issue a final Certificate for Payment or Project Certificate for Payment stating that to the best of their knowledge, information and belief, and~~

on the basis of their on-site visits and inspections, the Work has been completed in accordance with the Contract Documents and that the entire balance found to be due the Contractor and noted in the final Certificate is due and payable. The Construction Manager's and Architect's final Certificate for Payment or Project Certificate for Payment will constitute a further representation that conditions listed in Section 9.10.2 as precedent to the Contractor's being entitled to final payment have been fulfilled. On or within seven (7) days following the date of Final Completion (as established in the bid documents or modified by Change Order) the Architect will conduct a final inspection of the work. As a result of that inspection, the Architect will issue a Final Inspection Report. This report will document the condition of the work and will render a formal opinion as to the whether or not the work or designated portion is complete. If, as a result of the Architect's inspection, it is determined that the work is not complete and in accordance with the Contract Documents, the Architect shall notify the Owner and Contractor in writing of this opinion. This notice will include the Final Inspection Report documenting the conditions of the work and will be considered a formal notice to the Contractor of their failure to fulfill the terms and conditions of their contract.

If as a result of this inspection, it is determined that the work is complete, the Contractor shall submit their Final Payment Application and Certificate for Payment. The Architect will then certify and issue the final Certificate for Payment stating that to the best of the Architects knowledge, information and belief, and on the basis of the Architect's periodic site visits and inspections, the Work has been completed in accordance with the terms and conditions of the Contract Documents and that the entire balance found to be due the Contractor and noted in the final Certificate is due and payable. The Architect's final Certificate for payment will constitute a further representation that the conditions listed in section 9.10.2 as precedent to the Contractor's being entitled to final payment have been fulfilled. The final Certificate for Payment will not be issued until all work on the final inspection report is completed or corrected.

§ 9.10.1.1 The Architect will perform no more than one on-site observation to determine whether the Work or a designated portion thereof has attained Final Completion in accordance with the Contract Documents. The Owner is entitled to reimbursement from the Contractor for amounts paid to the Architect for any additional on-site observations.

- .1—liens, Claims, security interests, or encumbrances arising out of the Contract and unsettled;
- .2—failure of the Work to comply with the requirements of the Contract Documents;
- .3—terms of special warranties required by the Contract Documents; or
- .4—audits performed by the Owner, if permitted by the Contract Documents, after final payment.

PAGE 28

§ 9.10.6 If the Contractor is responsible for delays in the final completion and closeout beyond the contract specified time, the Owner is entitled to reimbursement from the Contractor for amounts paid by the Owner to subsequently extend the Electronic Submittal System (Submittal Exchange).

The Contractor shall be responsible for initiating, maintaining, and supervising all safety precautions and programs in connection with the performance of the Contract. The Contractor shall submit the Contractor's safety program to the Construction Manager for review and coordination with the safety programs of other Contractors. The Contractor shall be responsible for maintaining safety data sheets at the site.

- .1—employees on the Work and other persons who may be affected thereby;
- .2—the Work and materials and equipment to be incorporated therein, whether in storage on or off the site, under care, custody, or control of the Contractor, a Subcontractor, or a Sub-subcontractor;
- .3—other property at the site or adjacent thereto, such as trees, shrubs, lawns, walks, pavements, roadways, structures, and utilities not designated for removal, relocation, or replacement in the course of construction; and

.4— construction or operations by the Owner, Separate Contractors, or other Contractors.

PAGE 29

If either party suffers injury or damage to person or property because of an act or omission of the other party, or of others for whose acts such party is legally responsible, written notice of the injury or damage, whether or not insured, shall be given to the other party within a reasonable time not exceeding 21 days after discovery. The notice shall provide sufficient detail to enable the other party to investigate the matter.

§ 10.3.2 Upon receipt of the Contractor's written notice, the Owner shall obtain the services of a licensed laboratory to verify the presence or absence of the material or substance reported by the Contractor and, in the event such material or substance is found to be present, to cause it to be rendered harmless. Unless otherwise required by the Contract Documents, the Owner shall furnish in writing to the Contractor, Construction Manager and Architect the names and qualifications of persons or entities who are to perform tests verifying the presence or absence of the material or substance or who are to perform the task of removal or safe containment of the material or substance. The Contractor, the Construction Manager and the Architect will promptly reply to the Owner in writing stating whether or not any of them has reasonable objection to the persons or entities proposed by the Owner. If the Contractor, Construction Manager or Architect has an objection to a person or entity proposed by the Owner, the Owner shall propose another to whom the Contractor, the Construction Manager and the Architect have no reasonable objection. When the material or substance has been rendered harmless, Work in the affected area shall resume upon written agreement of the Owner and Contractor. By Change Order, the Contract Time shall be extended appropriately, and the Contract Sum shall be increased by the amount of the Contractor's reasonable additional costs of shutdown, delay, and start-up.

PAGE 30

§ 11.1.1 ~~The Contractor shall purchase and maintain insurance of the types and limits of liability, containing the endorsements, and subject to the terms and conditions, as described in the Agreement or elsewhere in the Contract Documents. The Contractor shall purchase and maintain the required insurance from an insurance company or insurance companies lawfully authorized to issue insurance in the jurisdiction where the Project is located. The Owner, Construction Manager and Construction Manager's consultants, and the Architect and Architect's consultants, shall be named as additional insureds under the Contractor's commercial general liability policy or as otherwise described in the Contract Documents obtain, pay for and keep in full force and effect during the entire term of this Contract, and during the performance, final completion and acceptance of any Work, and after the term of this Contract (as may be specified herein) insurance, in a company or companies lawfully licensed to do business in the State of New York, as designated by this Article 11 and any other insurance required by applicable law, regulations, or orders of state, municipality or other entity having jurisdiction over the Work or the Project. Contractor shall not take any action, or omit to take any action that would suspend or invalidate any of the required coverages during the time period such coverages are required to be in effect.~~

§ 11.1.1.1 Workers' Compensation. and any other federal and/or state coverages as appropriate, including but not limited to: Occupational Disease Benefits, Voluntary Compensation, and Disability Benefits, for not less than the statutory requirements, and if applicable an "Other States Endorsement"; and

Employer's Liability Insurance with limits not less than the statutory requirements or \$1,000,000 (each accident), \$1,000,000 (disease policy limit), and \$1,000,000 (disease, each employee), whichever is greater. Proof of coverage must be on the approved specific form, as required by the New York State Workers' Compensation Board. ACORD certificates are not acceptable.

§ 11.1.1.2 Commercial General Liability Insurance is to be provided under the Insurance Service Office's (ISO) most current form, on a project specific basis, with limits not less than the following required limits:

Each Occurrence: _____ \$1,000,000

General Aggregate (per project): _____ \$2,000,000

Products and Completed/Operations: _____ \$2,000,000

Personal & Advertising Injury: _____ \$1,000,000

Fire Damage (any one fire): _____ \$ 100,000

Medical Expense (any one person): _____ \$ 10,000

Such insurance shall include the following coverages:

- (i) claims for damages because of bodily injury, occupational sickness or disease, or death;
 - (ii) claims for damages insured by usual personal injury liability coverage;
 - (iii) claims for damages, other than to the Work itself, because of injury to or destruction of tangible property, including loss of use resulting therefrom;
 - (iv) premises operations;
 - (v) product liability and completed operations, and the policy shall specifically include coverage for two (2) years of extended completed operations coverage, which will commence immediately following the expiration date of the Commercial General Liability policy;
 - (vi) owner's protective;
 - (vii) contractors protective;
 - (viii) contractual liability covering liabilities assumed under the Contract (including the tort liability of another assumed in a contract), and including, coverage for claims arising out of construction or demolition operations when working within 50 feet of railroad track;
 - (ix) personal injury and advertising injury liability;
 - (x) extended bodily injury coverage with respect to bodily injury resulting from the use of reasonable force to protect persons or property;
 - (xi) medical payments coverage;
- PAGE 31
- (xii) broad form property damage liability coverage, including coverage for completed operations;
 - (xiii) explosion, collapse, and underground property damage (XCU);
 - (xiv) construction means and methods;

(xv) independent contractors;

(xvi) Owner and others' identified herein as additional insured to be specifically evidenced as additional insureds via ISO Endorsements GC 2010 and CG 2037.

§11.1.1.3 Comprehensive Auto Liability Insurance. including uninsured/underinsured and medical payment protection, and including all owned, non-owned and hired autos, with a limit of liability of not less than \$1,000,000 each occurrence (combined single limit for personal injury, including bodily injury or death, and property damage).

§11.1.1.4 Umbrella/Excess Policy. providing excess coverage in excess of the limits for the insurance coverages required by Sections 11.1.1.1, 11.1.1.2, and 11.1.1.3 above, with such excess/umbrella coverage being at least as broad as each and every one of the underlying policies), with the provision that coverage shall extend for a period of at least two (2) years from the date of final completion and acceptance by Owner of all Work; with a minimum limit not less than \$5,000,000 per occurrence/annual general aggregate. In the event the underlying policies have different renewal dates, the Contractor shall ensure that the underlying policies are maintained for the term specified in this Contract. Subcontractors shall be held to the same coverage requirement. Failure by the contractor to secure such insurance shall be deemed to be a material breach of contract.

§ 11.1.2 All insurance shall be written on an occurrence basis. A copy of the additional insured endorsement shall be attached.

§ 11.1.3 Contractor's insurance requirements shall be provided by an insurance carrier licensed to do business in the State of New York and have an A.M. Best Rating of A- or better as determined in the most recent A.M. Best Publication, or as may otherwise be agreed by Owner.

§ 11.1.4 Insurance coverage to be provided by the Contractor shall state that the Contractor's coverage shall be primary and non-contributing to any insurances (or self-insurance), including any deductible, maintained by, or provided to Owner or the other Additional Insureds; and shall contain a Waiver of Subrogation in favor of Owner and the other Additional Insureds, so that in no event shall the insurance carriers have any right of recovery against the Owner, the other Additional Insureds, or the agents or employees or either of them; and shall contain a separation of insured provision (severability of interest clause). If the Owner or another Additional Insured has other insurance which is applicable to the loss, such other insurance shall be on an excess or contingent basis.

§ 11.1.5 In the event that any of the insurance coverage to be provided by the Contractor contains a deductible or self-insured retention, the Contractor shall indemnify and hold the Owner, and any Additional Insured harmless from the payment of such deductible, which deductible shall in all circumstances remain the sole obligation and expense of the Contractor.

§ 11.1.6 The Contractor shall require all Subcontractors to carry the same insurance coverages and limits of liability as set forth herein and adjusted to the nature of Subcontractors' operations and submit same to the Owner through the Construction Manager for approval prior to start of any Work. In the event Contractor fails to obtain the required certificates of insurance from Subcontractor and prove them to Construction Manager and a claim is made or suffered, the Contractor shall, to the fullest extent permitted by law, indemnify, defend, and hold harmless the Owner and the Additional Insureds from any and all claims for which the required insurance would have provided coverage. This indemnity obligation is in addition to any other indemnity obligation provided in the Contract Documents and shall survive the term or earlier termination of the Contract.

§ 11.1.7 Environmental Impairment Liability (Pollution Insurance) (EIL): All Contractors and Subcontractors involved with the removal and/or abatement of pollutants (including but not limited to asbestos abatement contractors, lead abatement contractors, roofing contractors, tank removal contractors) are required to maintain a minimum of \$1,000,000 per occurrence and \$2,000,000 in the aggregate. Owner and all other parties required by this Contract to be Additional Insureds and all others identified by Owner as such, shall be included as Additional Insured son any EIL policy on a primary and non-contributing basis.

§ 11.1.8 The Contractor assumes responsibility for all injury or destruction of the Contractor's and Subcontractors' materials, tools, machinery, equipment, appliances, shoring, scaffolding, and personal property of Contractor's and Subcontractors' employees from whatever cause arises. Any policy of insurance secured covering the Contractor's or Subcontractors' property leased or hired by them and any policy of insurance covering the Contractor or Subcontractors against physical loss or damage to such property shall include an endorsement waiving the right of subrogation against the Owner for any loss or damage to such property.

§ 11.1.9 Additional Insured/Certificate Holder. The Contractor shall cause the commercial liability and other coverage required by the Contract to include the following as Additional Insureds:

- (i) Arlington Central School District;
- (ii) Members of the Board of Education, officers and employees, of the Arlington Central School District;
- (iii) The Construction Manager
- (iv) The Architect ; and

Contractor shall also add any other entities and/or individuals as may be required by Owner as Additional Insured.

The certificate holder shall be Arlington Central School District unless Owner requires otherwise.

Contractor shall provide an Additional Insured endorsement that expressly names each of the above identified Additional Insureds (non-blanket) and shall ensure that the endorsement does not include language that requires an Additional Insured to have a written contract with the named insured for coverage to apply.

Additional insured status shall be provided by standard or other endorsements that extend coverage to the District for ongoing operations (CG 20 38) and products and completed operations (CG 20 37). The decision to accept an endorsement rest solely with the District. A completed copy of the endorsements must be attached to the Certificate of Insurance

§ 11.1.10 Certificates of insurance acceptable to the Construction Manager and Owner shall be provided to the Construction Manager and filed with the Owner prior to commencement of the Work. A fully completed New York Construction Certificate of Liability Insurance Addendum (ACORD 855 2014/15) must be included with the certificates of insurance. The certificates and the insurance policies shall contain a provision that coverages afforded under the policies will not be allowed to be materially changed or canceled or allowed to expire until at least thirty (30) days' prior written notice has been given to the Owner via Certified/Registered Mail. If any of the foregoing insurance coverages are required to remain in force after final payment, an additional certificate evidencing continuation of such coverage shall be submitted with the final Application for Payment. Information concerning reduction of coverage on account of revised limits or claims paid under the General Aggregate, or both, shall be furnished by the Contractor with reasonable promptness in accordance with the Contractor's information and belief.

§ 11.1.11 The Contractor acknowledges that its failure to obtain or keep current the required insurance coverage shall constitute a material breach of contract and subjects the Contractor to liability for damages the Owner (or others, including without limitation the other Additional Insured) sustains as a result of such breach. In addition, the Contractor shall be responsible to the fullest extent permitted by law for the indemnification to the Owner and all Additional Insured of any and all costs associated with such lapse in coverage, including but not limited to reasonable attorneys' fees (and this indemnification obligation shall survive the term or earlier termination of the Contract).

§ 11.1.12 The amount of insurance required by the Contract shall not be construed to be a limitation of the liability of on the part of the Contractor or any of its Subcontractors.

§ 11.1.213 No act or omission of any insurance agent, broker, or insurance company representative shall relieve Contractor of any of its obligations under this Contract.

§ 11.1.14 Notwithstanding anything in Section 11.3 and its subsections to the contrary, the Contractor shall provide insurance coverage for portions of the Work stored off the site, in transit, and stored on the site but not incorporated into the Work on a full replacement cost basis. The Contractor is responsible for all deductible amounts.

§ 11.1.15 The Contractor shall provide surety bonds of the types, for such penal sums, and subject to such terms and conditions as required by the Contract Documents. The Contractor shall purchase and maintain the required bonds from a company or companies lawfully authorized to issue surety bonds in the jurisdiction where the Project is located.

PAGE 33

§ 11.1.316 Upon the request of any person or entity appearing to be a potential beneficiary of bonds covering payment of obligations arising under the Contract, the Contractor shall promptly furnish a copy of the bonds or shall authorize a copy to be furnished.

§ 11.1.417 Notice of Cancellation or Expiration of Contractor's Required Insurance. Within three (3) business days of the date the Contractor becomes aware of an impending or actual cancellation or expiration of any insurance required by the Contract Documents, the Contractor shall provide notice directly to the Owner, and separately to the Construction Manager, of such impending or actual cancellation or expiration. Upon receipt of notice from the Contractor, the Owner shall, unless the lapse in coverage arises from an act or omission of the Owner, have the right to stop the Work until the lapse in coverage has been cured by the procurement of replacement coverage by the Contractor. The furnishing of notice by the Contractor shall not relieve the Contractor of any contractual obligation to provide any required coverage.

PAGE 34

§ 12.2.2.1 In addition to the Contractor's obligations under Section 3.5, if, within ~~one year~~two years after the date of Substantial Completion of the Work or designated portion thereof, or after the date for commencement of warranties established under Section 9.9.1, or by terms of any applicable special warranty required by the Contract Documents, any of the Work is found to be not in accordance with the requirements of the Contract Documents, the Contractor shall correct it promptly after receipt of written notice from the Owner to do so, unless the Owner has previously given the Contractor a written acceptance of such condition. The Owner shall give such notice promptly after discovery of the condition. During the ~~one~~two-year period for correction of Work, if the Owner fails to notify the Contractor and give the Contractor an opportunity to make the correction, the Owner waives the rights to require correction by the Contractor and to make a claim for breach of warranty. If the Contractor fails to correct nonconforming Work within a reasonable time during that period after receipt of notice from the Owner, Construction Manager or Architect, the Owner may correct it in accordance with Section 2.5.

PAGE 35

§ 12.2.2.2 The ~~one~~two-year period for correction of Work shall be extended with respect to portions of Work first performed after Substantial Completion by the period of time between Substantial Completion and the actual completion of that portion of the Work.

§ 12.2.2.3 The ~~one~~two-year period for correction of Work shall not be extended by corrective Work performed by the Contractor pursuant to this Section 12.2.

§ 12.2.5 Nothing contained in this Section 12.2 shall be construed to establish a period of limitation with respect to other obligations the Contractor has under the Contract Documents. Establishment of the ~~one~~two-year period for correction of Work as described in Section 12.2.2 relates only to the specific obligation of the Contractor to correct the Work, and has no relationship to the time within which the obligation to comply with the Contract Documents may be sought to be enforced, nor to the time within which proceedings may be commenced to establish the Contractor's liability with respect to the Contractor's obligations other than specifically to correct the Work.

If the Owner prefers to accept Work that is not in accordance with the requirements of the Contract Documents, the Owner may do so instead of requiring its removal and correction, in which case the Contract Sum will be reduced as appropriate and equitable. Such adjustment shall be ~~effected~~affected whether or not final payment has been made.

The Contract shall be governed by the law of the place where the Project is located ~~excluding that jurisdiction's choice of law rules. If the parties have selected arbitration as the method of binding dispute resolution, the Federal Arbitration Act shall govern~~ Section 15.4.

PAGE 36

§ 13.6 Time Limits on Claims

The Owner and Contractor shall commence all claims and causes of action, whether in contract, tort, breach of warranty or otherwise, against the other arising out of or related to the Contract in accordance with the requirements of the final dispute resolution method selected in the Agreement within the time period specified by applicable law, but in any case, not more than 10 years after the date of Substantial Completion of the Work. The Owner and Contractor waive all claims and causes of action not commenced in accordance with this Section 13.7.

§ 13.7 Equal Opportunity

§ 13.7.1 The Contractor shall maintain policies of employment as follows:

- .1 The Contractor and the Contractor's subcontractors shall not discriminate against any employee or applicant for employment because of race, religion, color, sex, or national origin. The Contractor shall take affirmative action to ensure that applicants are employed, and that employees are treated during employment without regard to their race, religion, color, sex, or national origin. Such action shall include, but not be limited to, the following: employment, upgrading, demotion or transfer; recruitment or recruitment advertising; layoff or termination; rates of pay or other forms of compensation; and selection for training, including apprenticeship. The Contractor agrees to post in conspicuous places, available to employees and applicants for employment, notice setting forth the policies of non-discrimination.

PAGE 37

- .2 The Contractor and the Contractor's subcontractors shall, in all solicitations or advertisement for employees placed by them or on their behalf, state that all qualified applicants will receive consideration for employment without regard to race, religion, color, sex or national origin.

§ 13.8 Wage Rates

§ 13.8.1 The Contractor shall comply with Prevailing Wage Rates issued and periodically updated, by the New York State Department of Labor, for the location and duration of the Project.

§ 14.1.1 The Contractor may terminate the Contract if the Work is stopped for a period of 30 consecutive days through no act or fault of the Contractor, a Subcontractor, a Sub-subcontractor, their agents or employees, or any other persons or entities performing portions of the Work, under direct or indirect contract with the Contractor, for any of the following reasons:

- .1— Issuance of an order of a court or other public authority having jurisdiction that requires all Work to be stopped;
- .2— An act of government, such as a declaration of national emergency, that requires all Work to be stopped;
- .3— Because the Construction Manager has not certified or the Architect has not issued a Certificate for

Payment and has not notified the Contractor of the reason for withholding certification as provided in Section 9.4, or because the Owner has not made payment on a Certificate for Payment within the time stated in the Contract Documents; or

- .4— The Owner has failed to furnish to the Contractor reasonable evidence as required by Section 2.2.

§ 14.1.2 The Contractor may terminate the Contract if, through no act or fault of the Contractor, a Subcontractor, a Sub-subcontractor, their agents or employees, or any other persons or entities performing portions of the Work, under direct or indirect contract with the Contractor, repeated suspensions, delays, or interruptions of the entire Work by the Owner as described in Section 14.3, constitute in the aggregate more than 100 percent of the total number of days scheduled for completion, or 120 days in any 365-day period, whichever is less.

- .1—repeatedly refuses or fails to supply enough properly skilled workers or proper materials;
- .2— fails to make payment to Subcontractors or suppliers in accordance with the respective agreements between the Contractor and the Subcontractors or suppliers;
- .3—repeatedly disregards applicable laws, statutes, ordinances, codes, rules and regulations, or lawful orders of a public authority; or
- .4—otherwise is guilty of substantial breach of a provision of the Contract Documents.

§ 14.2.2 When any of the reasons described in Section 14.2.1 exist, after consultation with the Construction Manager, and upon certification by the Architect that sufficient cause exists to justify such action, the Owner may, without prejudice to any other rights or remedies of the Owner and after giving the Contractor and the Contractor's surety, if any, seven days' written notice, terminate employment of the Contractor and may, subject to any prior rights of the surety:

- .1—Exclude the Contractor from the site and take possession of all materials, equipment, tools, and construction equipment and machinery thereon owned by the Contractor;
- .2—Accept assignment of subcontracts pursuant to Section 5.4; and
- .3—Finish the Work by whatever reasonable method the Owner may deem expedient. Upon written request of the Contractor, the Owner shall furnish to the Contractor a detailed accounting of the costs incurred by the Owner in finishing the Work.

PAGE 38

- .1—that performance is, was, or would have been, so suspended, delayed, or interrupted, by another cause for which the Contractor is responsible; or
- .2—that an equitable adjustment is made or denied under another provision of this Contract.

§ 14.4.2 Upon receipt of written notice from the Owner of such termination for the Owner's convenience, the Contractor shall

- .1—cease operations as directed by the Owner in the notice;
- .2—take actions necessary, or that the Owner may direct, for the protection and preservation of the Work; and
- .3—except for Work directed to be performed prior to the effective date of termination stated in the notice, terminate all existing subcontracts and purchase orders and enter into no further subcontracts and purchase orders.

§ 15.1.3.2 Written notice shall contain a heading stating “Notice of Claim” to clearly identify it as such. Such notice shall set forth in detail the circumstances that form the basis for the Claim and shall include the following:

- .1 Clear statement of claim matter, including background and chronology.
- .2 Documentation in support of claim matter.
- .3 Documentation in support of claimed damages.
- .4 Certification by responsible officer of claimant.

§ 15.1.3.3 Claims by either the Owner or Contractor, where the condition giving rise to the Claim is first discovered after expiration of the period for correction of the Work set forth in Section 12.2.2, shall be initiated by notice to the other party. In such an event, no decision by the Initial Decision Maker is required.

§ 15.1.4.1 Pending final resolution of a Claim, except as otherwise agreed in writing or as provided in Section 9.7 and Article 14, the Contractor shall proceed diligently with performance of the Contract and the Owner shall continue to make payments in accordance with the Contract Documents. The Architect will prepare Change Orders and issue Certificates for Payment in accordance with the decisions of the Initial Decision Maker.

§ 15.1.5 Claims for Additional Cost. If the Contractor wishes to make a Claim for an increase in the Contract Sum, written notice as provided in Section 15.1.3 shall be given before proceeding to execute the portion of the Work that is the subject of the Claim. Prior notice is not required for Claims relating to an emergency endangering life or property arising under Section 10.4.

§ 15.1.6.3 Claims for increase in the Contract Time shall set forth in detail the circumstances that form the basis for the Claim, the date upon which each cause of delay began to affect the progress of the Work, the date upon which each cause of delay ceased to affect the progress of the Work and the number of days’ increase in the Contract Time claimed as a consequence of each such cause of delay. The Contractor shall provide such supporting documentation as the Owner may require including, where appropriate, a revised construction schedule indicating all the activities affected by the circumstances forming the basis of the Claim.

§ 15.1.6.4 The Contractor shall not be entitled to a separate increase in the Contract Time for each one of the number of causes of delay which may have concurrent or interrelated effects on the progress of the Work, or for concurrent delays due to the fault of the Contractor.

- .1—damages incurred by the Owner for rental expenses, for losses of use, income, profit, financing, business and reputation, and for loss of management or employee productivity or of the services of such persons; and
- .2—damages incurred by the Contractor for principal office expenses including the compensation of personnel stationed there, for losses of financing, business and reputation, and for loss of profit except anticipated profit arising directly from the Work.

This mutual waiver is applicable, without limitation, to all consequential damages due to either party’s termination in accordance with Article 14. ~~Nothing contained in this Section 15.1.7 shall be deemed to preclude assessment of liquidated damages, when applicable, in accordance with the requirements of the Contract Documents.~~

§ 15.2.1 Claims, excluding those where the condition giving rise to the Claim is first discovered after expiration of the period for correction of the Work set forth in Section 12.2.2 or arising under Sections 10.3, 10.4, and 11.5, shall be referred to the Initial Decision Maker for initial decision. The Architect will serve as the Initial Decision

Maker, unless otherwise indicated in the Agreement. Except for those Claims excluded by this Section 15.2.1, an initial decision shall be required as a condition precedent to mediation of any Claim arising prior to the date of final payment is due. If an initial decision has not been rendered within 30 days after the Claim has been referred to the Initial Decision Maker, the party asserting the Claim may demand mediation and binding dispute resolution without a decision having been rendered. Unless the Initial Decision Maker and all affected parties agree, the Initial Decision Maker will not decide disputes between the Contractor and persons or entities other than the Owner.

§ 15.2.5 The Initial Decision Maker will render an initial decision approving or rejecting the Claim, or indicating that the Initial Decision Maker is unable to resolve the Claim. This initial decision shall (1) be in writing; (2) state the reasons therefor; and (3) notify the parties, the Construction Manager, and the Architect, if the Architect is not serving as the Initial Decision Maker, of any change in the Contract Sum or Contract Time or both. The initial decision shall be final and binding on the parties but subject to mediation and, if the parties fail to resolve their dispute through mediation, to binding dispute resolution.

§ 15.2.7 In the event of a Claim against the Contractor, the Owner may, but is not obligated to, notify the surety, if any, of the nature and amount of the Claim. If the Claim relates to the possibility of a Contractor's default, the Owner may, but is not obligated to, notify the surety and request the surety's assistance in resolving the controversy.

PAGE 41

§ 15.3.2 The parties shall endeavor to resolve their Claims by mediation which, unless the parties mutually agree otherwise, shall be administered by the American Arbitration Association in accordance with its Construction Industry Mediation Procedures in effect on the date of the Agreement. A request for mediation shall be made in writing, delivered to the other party to the Contract, and filed with the person or entity administering the mediation. The request may be made concurrently with the filing of binding dispute resolution proceedings but, in such event, mediation shall proceed in advance of binding dispute resolution proceedings, which shall be stayed pending mediation for a period of 60 days from the date of filing, unless stayed for a longer period by agreement of the parties or court order. ~~If an arbitration is stayed pursuant to this Section 15.3.2, the parties may nonetheless proceed to the selection of the arbitrator(s) and agree upon a schedule for later proceedings.~~

§ 15.4 Arbitration

§ 15.4.1 ~~If the parties have selected arbitration as the method for binding dispute resolution in the Agreement, any Claim subject to, but not resolved by, mediation shall be subject to arbitration which, unless the parties mutually agree otherwise, shall be administered by the American Arbitration Association in accordance with its Construction Industry Arbitration Rules in effect on the date of the Agreement. The Arbitration shall be conducted in the place where the Project is located, unless another location is mutually agreed upon. A demand for arbitration shall be made in writing, delivered to the other party to the Contract, and filed with the person or entity administering the arbitration. The party filing a notice of demand for arbitration must assert in the demand all Claims then known to that party on which arbitration is permitted to be demanded.~~

§ 15.4.1.1 ~~A demand for arbitration shall be made no earlier than concurrently with the filing of a request for mediation, but in no event shall it be made after the date when the institution of legal or equitable proceedings based on the Claim would be barred by the applicable statute of limitations. For statute of limitations purposes, receipt of a written demand for arbitration by the person or entity administering the arbitration shall constitute the institution of legal or equitable proceedings based on the Claim.~~

§ 15.4.2 The award rendered by the arbitrator or arbitrators shall be final, and judgment may be entered upon it in accordance with applicable law in any court having jurisdiction thereof.

§ 15.4.3 ~~The foregoing agreement to arbitrate and other agreements to arbitrate with an additional person or entity duly consented to by parties to the Agreement, shall be specifically enforceable under applicable law in any court having jurisdiction thereof.~~

§ 15.4.4 Consolidation or Joinder

§ 15.4.4.1 ~~Subject to the rules of the American Arbitration Association or other applicable arbitration rules, either party may consolidate an arbitration conducted under this Agreement with any other arbitration to which it is a party provided that (1) the arbitration agreement governing the other arbitration permits consolidation, (2) the arbitrations to be consolidated substantially involve common questions of law or fact, and (3) the arbitrations employ materially similar procedural rules and methods for selecting arbitrator(s).~~

~~§ 15.4.4.2 Subject to the rules of the American Arbitration Association or other applicable arbitration rules, either party may include by joinder persons or entities substantially involved in a common question of law or fact whose presence is required if complete relief is to be accorded in arbitration, provided that the party sought to be joined consents in writing to such joinder. Consent to arbitration involving an additional person or entity shall not constitute consent to arbitration of any claim, dispute or other matter in question not described in the written consent.~~

~~§ 15.4.4.3 The Owner and Contractor grant to any person or entity made a party to an arbitration conducted under this Section 15.4, whether by joinder or consolidation, the same rights of joinder and consolidation as those of the Owner and Contractor under this Agreement.~~

Variable Information

PAGE 1

Additions and Alterations top

LaGrange Middle School

110 Stringham Road

LaGrangeville, New York 12540

Tt Project Number 136396-24002.1

The Palombo Group

22 Noxon Street

Poughkeepsie, New York 12601

Arlington Central School District

144 Todd Hill Road

LaGrangeville, New York 12540

Tetra Tech Engineers, Architects & Landscape Architects, P.C.

d/b/a Tetra Tech Architects & Engineers

Cornell Business & Technology Park

10 Brown Road

Ithaca, New York 14850

Certification of Document's Authenticity

AIA® Document D401™ – 2003

I, Kim Ruebel, hereby certify, to the best of my knowledge, information and belief, that I created the attached final document simultaneously with its associated Additions and Deletions Report and this certification at 14:44:18 EDT on 05/08/2026 under Order No. 20250100070 from AIA Contract Documents software and that in preparing the attached final document I made no changes to the original text of AIA® Document A232™ - 2019, General Conditions of the Contract for Construction, Construction Manager as Adviser Edition, other than those additions and deletions shown in the associated Additions and Deletions Report.

(Signed)

(Title)

(Dated)

PROJECT LABOR AGREEMENT

PREAMBLE

WHEREAS, ARLINGTON CENTRAL SCHOOL DISTRICT desires to provide for the cost efficient, safe, quality, and timely completion of the ARLINGTON CENTRAL SCHOOL DISTRICT CAPITAL IMPROVEMENT PROJECTS in a manner designed to afford the lowest reasonable costs to the ARLINGTON CENTRAL SCHOOL DISTRICT, and the advancement of permissible statutory objectives;

WHEREAS, ARLINGTON CENTRAL SCHOOL DISTRICT engaged Arace & Company, ("Arace") to undertake a study of which a copy is on file with ARLINGTON CENTRAL SCHOOL DISTRICT of whether the use of a Project Labor Agreement will best serve ARLINGTON CENTRAL SCHOOL DISTRICT interest in obtaining the best work at the lowest possible price, preventing favoritism, fraud and corruption, and other considerations such as the impact of delay, the possibility of cost saving advantages, and any local history of labor unrest; and

WHEREAS, the Arace's Project Labor Agreement Feasibility Study (the "Study") concluded that use of a Project Labor Agreement would provide ARLINGTON CENTRAL SCHOOL DISTRICT with measurable economic benefits and would promote ARLINGTON CENTRAL SCHOOL DISTRICT's interest in obtaining the best work at the lowest prices as well as preventing favoritism, fraud and corruption; and

WHEREAS, ARLINGTON CENTRAL SCHOOL DISTRICT has carefully reviewed and considered the Study and determined, among other things, that ARLINGTON CENTRAL SCHOOL DISTRICT's interest in obtaining the best work at the lowest possible price, preventing favoritism, fraud and corruption, preventing the impact of delay owing to labor unrest, obtaining cost savings advantages, and gaining measurable management flexibility and benefits are best met by requiring a Project Labor Agreement and, therefore, directs that a Project Labor Agreement be made part of the Project; and

WHEREAS, this Project Labor Agreement will foster the achievement of these goals, inter alia, by:

- (1) expediting the construction process and otherwise minimizing the disruption to the project;
- (2) avoiding the costly delays of potential strikes, slowdowns, and walkouts arising from work disputes and promoting labor harmony and peace for the duration of the project;
- (3) standardizing the terms and conditions governing the employment of labor on the project;
- (4) permitting flexibility in work scheduling where necessary at affordable pay rates;

- (5) permitting adjustments to work rules and staffing requirements from those which otherwise might apply;
- (6) providing comprehensive and standardized mechanisms for the settlement of work disputes, including those relating to jurisdiction;
- (7) promoting work opportunities for those within the surrounding areas.
- (8) ensuring a reliable source of skilled and experienced labor;
- (9) promoting and creating work opportunities on this project for former and future ARLINGTON CENTRAL SCHOOL DISTRICT graduates.

WHEREAS, ARLINGTON CENTRAL SCHOOL DISTRICT, has, through independent investigation and analysis, determined the likelihood of substantial cost savings to the Project will result from the application of this Agreement; and

WHEREAS, the Hudson Valley Building & Construction Trades Council, and its affiliated Local Unions and their members, desire to provide for stability, security and work opportunities which are afforded by a Project Labor Agreement; and others; and

WHEREAS, the Parties desire to maximize project safety conditions for both workers and others;

NOW, THEREFORE, the Parties enter into this Agreement:

I. ARTICLE 1 - PARTIES TO THE AGREEMENT

SECTION 1.1 PARTIES TO THE AGREEMENT

This is a Project Labor Agreement ("Agreement") entered into for all Project construction, as defined herein, as part of the ARLINGTON CENTRAL SCHOOL DISTRICT CAPITAL IMPROVEMENT PROJECTS (as defined below) between (1) ARLINGTON CENTRAL SCHOOL DISTRICT (2) the Palumbo Group as Construction Managers (3) Hudson Valley Building and Construction Trades Council ("Council") on behalf of itself and its affiliated Local Unions ("Local Unions"); and the signatory Local Unions on behalf of themselves and their members.

II. ARTICLE 2 - GENERAL CONDITIONS SECTION

SECTION 2.1 DEFINITIONS

Throughout this Agreement:

- (A) "**Contractor(s)**" means any contractor and subcontractors of whatever tier engaged in Project Work within the scope of this Agreement as defined in Article 3, subject to exclusions defined in Section 3.3; 20.3 and 20.4.

- (B) "**Council**" means the Hudson Valley Building & Construction Trades Council, AFL-CIO.
- (C) "**Local Union(s)**" means the Local Unions signatory to this Agreement, individually and collectively.
- (D) "**Owner**" means ARLINGTON CENTRAL SCHOOL DISTRICT.
- (E) "**Owner's Representative**" means any Construction Manager or other individual or entity designated by the Owner to enter into this Agreement or otherwise act on its behalf.
- (F) "**The Project**" means the work to be performed in connection with all construction associated with the ARLINGTON CENTRAL SCHOOL DISTRICT CAPITAL IMPROVEMENT PROJECT; PHASE I-LAGRANGE MIDDLE SCHOOL, SED PROJECT NO. 13-16-01-06-0-009-014, as more fully set forth in Article 3, Section 3.1, subject to exclusions defined in Sections 3.3, 20.3 and 20.4.
- (G) "**Project Work**" means the work covered by this Agreement as described in Paragraph (F) immediately above and fully defined in Article 3, Section 3.1, subject to exclusions defined in Section 3.3; 20.3 and 20.4.
- (H) "**Schedule A**" means and refers to collective bargaining agreements of affiliated Local Unions.
- (I) "**Union Parties**" and "**Unions**" means the Hudson Valley Building & Construction Trades Council, AFL-CIO and the signatory Local Unions to this Agreement, individually and collectively.

SECTION 2.2 CONDITIONS FOR AGREEMENT TO BECOME EFFECTIVE

This Agreement shall not become effective unless each of the following conditions are met: (1) the Agreement is signed by the Council and the Local Unions having jurisdiction over the Project Work; (2) the Agreement is approved by the NYS Building & Construction Trades Council (NYSBCTC); (3) the Agreement is approved by the NABTU and (4) the Agreement is authorized by the Owner and signed by the Owner or the Construction Manager (CM).

SECTION 2.3 ENTITIES BOUND & ADMINISTRATION OF AGREEMENT

This Agreement shall be binding on all signatory Unions and their affiliates and all Contractors performing Project Work as defined in Article 3, subject to exceptions in Sections 3.3, 20.3 and 20.4. The Contractors shall include in any subcontract that they let for performance during the term of this Agreement a requirement that their Subcontractors, of whatever tier, become bound by this Agreement with respect to that subcontracted Project Work performed within the scope of Article 3, and require that each Subcontractor, of whatever tier, sign a Letter of Assent (Schedule B). This Agreement shall be administered by the Designee named by the Owner pursuant to Schedule C.

SECTION 2.4 SUPREMACY CLAUSE

This Agreement, together with the local Collective Bargaining Agreements appended hereto and referred to herein as "Schedule A" represents the complete understanding with respect to the Project and supersedes any national agreement, local agreement, or other collective bargaining agreement of any type which would otherwise apply to Project Work, in whole or in part except that, to the NTL Articles of Agreement, the National Stack/Chimney Agreement, the National Cooling Tower Agreement, the UA/IBEW Joint National Agreement for Instrument and Control Systems Technicians, and the National Agreement of the International Union of Elevator Constructors (the "National Agreements"), those National Agreements shall apply, except that when Contractor is also a signatory to an agreement listed in Schedule A hereof, Articles 7, 9, and 10 of this Agreement shall prevail over the applicable National Agreement and any Schedule A agreement. Where a subject covered by the provisions of this Agreement is also covered by a Schedule A agreement, the provisions of this Agreement shall prevail. If this Agreement is silent on any matter addressed in the applicable Schedule A agreement, the Schedule A agreement shall govern. It is understood that by virtue of having become bound by this Project Labor Agreement, the Contractors will not be obligated to sign any other local, area, or national agreement.

SECTION 2.5 LIABILITY

The liability of any Contractor and the liability of any Union under this Agreement shall be several and not joint. The Contractors, and Subcontractors shall not be liable for any violations of this Agreement by any other Contractor or Subcontractor; and the Council and Local Unions shall not be liable for any violations of this Agreement by any other Union. Notwithstanding the above, every signatory to the Agreement further acknowledges that it will be liable for its own breach, partial breach or otherwise, whether related or not to the breach of another signatory.

SECTION 2.6 THE BID SPECIFICATIONS

The Owner shall require in its bid specifications for all Project Work within the scope of Article 3 that all successful bidders and their Subcontractors of whatever tier (unless otherwise excepted under this Agreement) become bound by this Agreement. Every Contractor shall require its Subcontractors, of whatever tier, to execute the Letter of Assent in Schedule B and to become bound by this Agreement.

SECTION 2.7 AVAILABILITY AND APPLICABILITY TO ALL SUCCESSFUL BIDDERS

This Agreement shall be binding on all signatory Unions and their affiliates, and all Contractors, Unions and/or non-Unions performing Project Work, unless otherwise excepted under this Agreement. Unless expressly provided for in this Agreement, this Agreement shall not apply to the work of any Contractor which is performed at any location other than the site of Project Work.

III. ARTICLE 3 - SCOPE OF THE AGREEMENT

SECTION 3.1 PROJECT WORK

This Agreement shall only apply to Project Work expressly designated by Owner in its bid specifications as work performed pursuant to the ARLINGTON CENTRAL SCHOOL DISTRICT CAPITAL IMPROVEMENT PROJECTS in various locations as defined below in this Article. Covered Program Work will be designated in bid specifications as “ARLINGTON School District Capital Improvement Projects Work.”

Without restricting the Owner’s right to designate, or not designate, work as ARLINGTON School District Capital Improvement Projects Work, the parties understand that generally included within covered Project Work will be, unless otherwise excepted under Sections 3.3, 20.3 or 20.4, all sitework, utilities, demolition, environmental work, MEP’s and all construction performed on-site and any off-site work when covered under NYS Labor Law 220.

SECTION 3.2 TIME LIMITATIONS

A. To be covered by this Agreement, Project Work must be awarded after the effective date of this Agreement.

B. This Agreement shall expire upon completion and acceptance of Project Work by the Owner. Except as may be provided in this Agreement or any addendum to this Agreement, any phase, portion, section, system or segment of Project Work shall be deemed complete when such phase, portion, section, system or segment has been turned over to Owner by Contractors and such phase, portion, section, system or segment has been accepted as established by a letter of acceptance from Owner for the beneficial use of that phase, portion, section, system or segment. As phases, portions, sections, systems, or segments of the Project are inspected, tested, and accepted by Owner, the Agreement shall have no further force or effect on such items, systems, or areas, except when the Contractor is directed to engage in repairs or modifications required by the Contractor’s contract with Owner for the Project Work.

C. This Agreement may be extended by written mutual agreement of the parties.

SECTION 3.3 EXCLUDED EMPLOYEES

Notwithstanding the provisions of Section 3.1 of this Article, the following person/entities are not subject to the provisions of this Agreement even though performing work on or in connection with the Project:

- A. Superintendents, supervisors (excluding general and forepersons specifically covered by a craft’s Schedule A), engineers, inspectors and testers, quality control/assurance personnel, timekeepers, mail carriers, clerks, office workers, messengers, guards employed by Owner, technicians, non-manual employees, and all professional, engineering (except field surveyors), administrative and management persons;
- B. Employees of the Project Owner and Certain Owner’s Vendors;

1. Owners Fire Alarm vendor procured from NYS or Co-operative contract shall be exempt from this PLA agreement. Meaning all wiring, cabling, device installation, testing and system certification is performed by the owners vendor who will provide a “turn-key” system; provided, however, that electricians under the PLA will provide raceway and terminated and tested cabling from point of connection to each device location within the “***new building addition only***” subject to this PLA agreement.
2. Owners Security Vendor shall be exempt from this PLA agreement allowing installation and connection of devices that become part of the owners security system. These devices shall include but not be limited to electrified hardware, lockdown buttons, cameras and all other security related devices. Electricians under the PLA will provide raceway and terminated and tested cabling from point of connection to each device location.
3. Owners’ kitchen equipment vendors shall be exempt from this PLA agreement allowing for the procurement, delivery and setting, component testing and training. Handling from others will lead to warranty and acceptance issues. Loose kitchen equipment shall be handled according to Section 20.4 Furniture, Fixtures, and Equipment (FFE) as excluded work.
4. Owners IT personnel and PA vendor shall be exempt from this PLA agreement allowing installation and connection of devices that become part of the owners technology and PA system. These devices shall include but not be limited to patch cables, switches, racks, modems, Wireless access points, classroom smart devices and complete PA system installation and testing. Electricians under the PLA will provide raceway, terminated and tested cabling (Cat 6a & Fiber optic) from each device location punched down to owners installed equipment.
5. Owner will use Stark Tech, a union company, for all Building Management System HVAC control.
6. Employees and entities engaged in off-site manufacture, modifications, repairs, maintenance, or painting, handling or fabrication of project components, materials, equipment, or machinery not covered under NYS Labor Law 220.
7. Deliveries of materials, supplies and equipment to the site except for any local deliveries of materials such as fill, construction debris removal, ready mix, asphalt, concrete and other aggregates which shall be covered under this Agreement.

8. Employees of the Construction Manager, except that performing manual, onsite construction labor who will be covered by this Agreement.
9. Employees engaged in onsite equipment warranty work;
10. Employees engaged in geophysical testing (whether land or water) other than boring for core samples;
11. Employees engaged in laboratory or specialty testing or inspections, unless ordinarily done by a member of a Trade Union;
12. All 3rd party testing and inspection agencies shall be exempt from this PLA agreement.
13. Employees engaged in ancillary Project Work performed by third parties such as electric utilities, gas utilities, telephone companies, and railroads. Utility work provided by gas, electric, and cable companies, which is not performed by utility company employees, shall be subject to the terms of this Agreement.

IV. ARTICLE 4 - UNION RECOGNITION AND EMPLOYMENT

SECTION 4.1 PRE-HIRE RECOGNITION

The Contractors recognize the signatory Unions as the sole and exclusive bargaining representatives of all craft employees who are performing Project Work within the scope of Article 3 of this Agreement.

SECTION 4.2 UNION REFERRAL

- A. The Contractors agree to hire craft employees for Project Work covered by this Agreement through the job referral systems and hiring halls established in the Local Unions' area collective bargaining agreements (attached as Schedule A to this Agreement), where those referrals meet the qualifications set forth in items 1, 2, and 4 of subparagraph B. The Unions agree to provide such craft employees (including apprentices) to all Contractors on a non-discriminatory basis. Notwithstanding this, Contractors shall have sole right to determine the competency of all referrals; the number of employees required; and the selection of employees for layoff (subject to Article 5, Section 5.3). In the event that a Local Union is unable to fill any request for qualified employees within a 48-hour period after such requisition is made by a Contractor (Saturdays, Sundays and holidays excepted), a Contractor may employ qualified applicants from any other available source. In the event that the Local Union does not have a job referral system, the Contractor shall give the Local Union first preference to refer applicants, subject to the other provisions of this Article. The Contractor shall notify the Local Union of craft employees hired for Project Work within its jurisdiction from any source other than referral by the Union.

- B. A Contractor may request by name, and the Local Union will honor, referral of persons who have applied to the Local Union for Project Work and who meet the following qualifications:
- (1) Possess any license required by New York State law for the Project Work to be performed;
 - (2) Have worked a total of at least 1000 hours in the construction craft during the prior two years, and
 - (3) Were on the Contractor's active payroll for at least 60 out of the 180 calendar days prior to the contract award.
 - (4) Have the ability to safely perform the basic functions of the applicable trade.
 - (5) Have not committed a felony or misdemeanor, or other violation that would render such person unfit to work on County property.
- C. No more than twelve and a half (20%) per centum of the employees covered by this Agreement, per Contractor by craft, shall be hired through the provisions of Paragraph B of this section (any fraction shall be rounded to the next highest whole number). Craft forepersons and/or general forepersons shall be included in these twelve and a half (20%) percent. If requested by the appropriate Union, a Contractor utilizing this provision for by- name referrals shall furnish the Union with a written certification that the individuals requested for referral meet the requirements of (1) - (5) above.
- D. The Local Unions shall exert their utmost efforts to recruit sufficient numbers of skilled craft workers to fulfill the manpower requirements of the Contractor. When a Contractor of any tier is contracted to perform Project Work and such Contractor is not signatory to a Schedule A agreement (not including signatory through this Agreement) and the Union cannot provide ample labor to support the construction schedule or project, then the Contractor shall hire outside the Union hiring halls and the Contractor shall, at their discretion, replace the non-Union or non-dispatched employee when notified by the Union that labor has become available through the Union. The Contractor shall use other employees affiliated with the Council before hiring except, where specifically addressed in this Agreement if those employees from the other Unions have the required trade skills to perform the Project Work. Those hired through this provision shall be laid off before those of an affiliated Union.
- E. Notwithstanding the foregoing, ARLINGTON CENTRAL SCHOOL DISTRICT or a representative of, shall have the sole discretion to request that a person be removed from working on this Project.

SECTION 4.3 NON-DISCRIMINATION IN REFERRALS

- A. The Local Unions represent that their hiring halls and referral systems shall be operated in a non-discriminatory manner and in full compliance with all applicable federal, state and local laws and regulations which require equal employment opportunities. Referrals shall not be affected in any way by the rules, regulations, bylaws, constitutional provisions or any other aspects or obligations of Union membership, policies, or requirements and shall be subject to such other conditions as are established in this Article. No employment applicant shall be discriminated against by any referral system or hiring hall because of the applicant's Union membership, or lack thereof.

SECTION 4.4 WORKFORCE INCLUSION UTILIZATION

The Unions recognize and acknowledge that workforce inclusion is consistent with our values of fair play. The Local Unions agree and will strive to utilize their best efforts to provide qualified applicants on a non-discriminatory basis.

SECTION 4.5 CROSS AND QUALIFIED REFERRALS

The Local Unions shall not knowingly refer to a Contractor an employee then employed by another Contractor working under this Agreement. The Local Unions shall exert their utmost efforts to recruit sufficient numbers of skilled and qualified crafts employees to fulfill the requirements of each Contractor.

SECTION 4.6 UNION DUES

Nothing in this Agreement requires employees to join a Union or pay dues or fees to a Union as a condition of working on the Project. This Agreement is not, however, intended to supersede independent requirements in applicable Local Union Agreements as to Contractors that are otherwise signatory to those Agreements in relation to employees of such Contractors performing Project Work.

V. ARTICLE 5 - UNION REPRESENTATION

SECTION 5.1 LOCAL UNION REPRESENTATIVE

Each Local Union signatory to this Agreement shall be entitled to designate a representative and/or Business Manager who shall be afforded access to the Project site only during times when Project Work is being conducted.

SECTION 5.2 STEWARDS

- A. If required under Schedule A, each Local Union shall have the right to designate from among those referred to the Project a working journey person as a Steward or Lead Engineer per shift, and shall notify the Construction Manager of the identity of the designated Steward or Lead Engineer prior to the assumption of such duties. Stewards or Lead Engineer shall not exercise supervisory functions and shall receive the rate of pay for their craft classifications. There will be no nonworking Stewards or Lead Engineer on the Project.

- B. In addition to his/her work as an employee, the Steward or Lead Engineer shall have the right to receive complaints or grievances and to discuss and assist in their adjustment with the Contractor's appropriate supervisor; such activities, however, are not to interfere with the Steward's work unless an emergency situation exists. Each Steward or Lead Engineer shall be concerned with the employees of the Steward's Contractor and, if applicable, Subcontractors of that Contractor, but not with the employees of any other Contractor. The Contractor will not discriminate against the Steward or Lead Engineer in the proper performance of Union duties.

SECTION 5.3 LAYOFF OF A STEWARD

Contractors agree to notify the appropriate Union 24 hours prior to the layoff of a Steward or Lead Engineer, except in cases of discipline or discharge for just cause. If a Steward is protected against layoff by a Schedule A agreement, such provisions shall be recognized to the extent the Steward or Lead Engineer possesses the necessary qualifications to perform the Project Work required. In any case in which a Steward or Lead Engineer is discharged or disciplined for just cause, the Local Union involved shall be notified immediately by the Contractor.

SECTION 5.4 UNION STANDARDS

- A. The Council and its affiliates have a legitimate interest in preventing the undermining of the work opportunities and standards gained through collective bargaining and desire to preserve and protect work opportunities for its members.
- B. ARLINGTON CENTRAL SCHOOL DISTRICT, while recognizing this interest, must maintain its ability to utilize the services of off-site fabricators and those entities involved in deliveries of construction materials, except those materials included in Section 3.3, when not covered under New York State Labor Law 220.
- C. While the scope of the Agreement is limited to Project Work as defined and subject to exceptions herein, Contractors should, whenever economically feasible, make reasonable efforts to use Union signatory vendors, which includes, but not limited to, UA Yellow Label and SMW Blue Label products for off-site assemblies or fabrications.
- D. This Section does not refer to construction material normally purchased pre-assembled or manufactured, it references Project Work normally and historically done on-site or in Local Union fabrications shops.
- E. After substantial completion, in matters involving warranties secured through vendors, it is expected that work covered by the warranties may be performed by vendor employees to the exclusion of craft employee, to preserve the warranty.
- F. If any dispute should arise with respect to this Section, the Contractors agree to install any off-site assemblies or fabricated items regardless of the source. The parties shall endeavor to settle such dispute in the Labor Management forum or appropriate sub-committee before a grievance is filed under Article 9.

VI. ARTICLE 6 - MANAGEMENT RIGHTS

SECTION 6.1 RESERVATION OF RIGHTS

- A. Except as expressly limited by a specific provision of this Agreement, Contractors retain full and exclusive authority for the management of their operations including, but not limited to: the right to direct the Project Work force, including determination as to the number to be hired and the qualifications therefore; the promotion, transfer, layoff of its employees; or the discipline or discharge for just cause of its employees; the assignment and schedule of Project Work; the promulgation of reasonable Project Work rules; require compliance with the directives of the ARLINGTON CENTRAL SCHOOL DISTRICT including standard restrictions related to security and access to the site that are equally applicable to ARLINGTON CENTRAL SCHOOL DISTRICT employees, guests, or vendors and the requirement, timing and number of employees to be utilized for overtime Project Work. Nothing contained herein shall be construed so as to allow direction of an Employee to perform Project Work outside the jurisdiction of that Employee's Labor Union affiliation, if any. No rules, customs, or practices which limit or restrict productivity or efficiency of the individual (as determined by the Contractor) and/or joint working efforts with other employees shall be permitted or observed.
- B. All workforce subject to this Project Labor Agreement must present O.S.H.A. ten (10) hour training certificates and participate in an internal safety audit and security badge system.

SECTION 6.2 MATERIALS, METHODS & EQUIPMENT

- A. There shall be no limitation or restriction upon the Owner's choice of materials, techniques, methods, technology or design, or, regardless of source or location, upon the use and installation of equipment, machinery, package units, pre-cast, prefabricated, pre-finished, or pre-assembled materials, tools, or other labor-saving devices. Contractors may, without restriction, install or use materials, supplies or equipment regardless of their source. The on-site installation or application of such items shall be performed by the craft having jurisdiction over such Project Work pursuant to an applicable collective bargaining agreement; provided, however, it is recognized that other personnel having special qualifications may participate, in a supervisory capacity, in the installation, check-off or testing of specialized or unusual equipment or facilities as designated by the Contractor.
- B. Notwithstanding the above, in matters involving warranties secured through vendors, it is expected that work covered by the warranties may be performed by vendor employees to the exclusion of craft employee, to preserve the warranty.

VII. ARTICLE 7 - WORK STOPPAGES AND LOCKOUTS SECTION

SECTION 7.1 NO STRIKES-NO LOCK OUT

There shall be no strikes, sympathy strikes, picketing, work stoppages, slowdowns, demonstrations, or other disruptive activity on Project Work site for any reason by any signatory

to this Agreement. There shall be no Union or concerted or employee activity which disrupts or interferes with the Project Work. In addition, failure of any Union or employee to cross any picket line established by any Union, signatory or non-signatory to this Agreement, or the picket or demonstration line of any other organization, at or in proximity to a Project Work site where the failure to cross disrupts or interferes with the operation of Project Work is a violation of this Article. Should any employee breach this provision, the Local Unions will use their best efforts to immediately end the breach and return all employees to work. There shall be no lockout by any signatory to this Agreement.

SECTION 7.2 DISCHARGE FOR VIOLATION

A Contractor may discharge any employee violating Section 7.1, above, and any such employee will not be eligible thereafter for referral under this Agreement for a period of 100 working days.

SECTION 7.3 NOTIFICATION

If a Contractor contends that any Union has violated this Article, it shall notify the Council of such fact, with copies of the notification to the Local Union involved. The Council and Local Union shall instruct, order, and otherwise use their best efforts to cause the employee(s) to immediately cease and desist from any violation of this Article. The Council shall not be liable for the unauthorized acts of a Local Union or its members. Similarly, a Local Union and its members shall not be liable for any unauthorized acts of its members, the Council, or another Local Union.

SECTION 7.4 EXPEDITED ARBITRATION

Any Contractor or Union alleging a violation of Section 7.1 of this Article or Section 8.3(D)(2) of Article 8 may utilize the expedited procedure set forth below (in lieu of, or in addition to, any actions at law or equity) that may be brought.

- A. A party invoking this procedure shall notify J. Selchick, M. Scheinman and J. Pierson, who shall alternate as Arbitrator under this expedited arbitration procedure. If the Arbitrator next on the list is not available to hear the matter within 24 hours of notice, the next Arbitrator on the list shall be called. Copies of such notification will be simultaneously sent to all parties (the alleged violator, the Council, the Local Union, the Contractor, and the Owner).
- B. The Arbitrator shall hold a hearing within 48 hours of receiving the notice invoking the procedure if it is contended that the violation still exists. The Arbitrator shall provide at least 24 hours' notice (excluding Sundays and holidays) to all parties as to time and place of the hearing.
- C. All notices pursuant to this Article must be delivered to all parties (Local Union, Council, Contractor, alleged violator, and Owner) and may be provided by telephone, telegraph, hand delivery, fax, email, or confirmed overnight delivery. The hearing may be held on any day including Saturdays or Sundays. The hearing shall be completed in one session which shall not exceed 8 hours duration (no more than 4 hours being allowed to either side to present their case and conduct

their cross examination) unless otherwise agreed. A failure of any party to attend the hearing shall not delay the hearing of evidence by those present or the issuance of an award by the Arbitrator.

D. (i) Section 7.1 hearings:

The sole issue at the hearing shall be whether a violation of Section 7.1 occurred. If a violation is found to have occurred, the Arbitrator shall issue a Cease-and-Desist Award restraining such violation and serve copies on all parties. The Arbitrator shall have no authority to consider any matter in justification, explanation or mitigation of such violation or to award damages (any damages issue is reserved solely for court proceedings, if any). The Award shall be issued in writing within 3 hours after the close of the hearing, and may be issued without an Opinion. If any involved party desires an Opinion, one shall be issued within 15 calendar days, but its issuance shall not delay compliance with, or enforcement of, the Award.

(ii) Section 8.3(D)(2) hearings:

The sole issue at the hearing shall be whether a violation of Section 8.3(D)(ii) occurred. If a violation is found to have occurred, it shall be prima facie evidence of intentional mis-assignment, and the Arbitrator shall issue an immediate stop-work order with respect to the Project Work involved and reassign the Project Work as necessary. The Arbitrator is also authorized to (a) award damages or back pay in order to make the aggrieved trade whole, and (b) remove the offending Contractor from the job in egregious situations.

- E. An Award issued under this procedure may be enforced by any court of competent jurisdiction upon the filing of this Agreement together with the Award. Notice of the filing of such enforcement proceedings shall be given to all parties. In any court proceeding to obtain a temporary or preliminary order enforcing the Arbitrator's Award as issued under this expedited procedure, the involved Union and Contractor waive their right to a hearing and agree that such proceeding may be commenced by order to show cause. Such agreement does not waive any party's right to participate in a hearing for a final court order of enforcement or in any contempt proceeding.
- F. Any rights created by statute or law governing arbitration proceedings which are inconsistent with the procedure set forth in this Article, or which interfere with compliance thereto, are hereby waived by the Contractors and Unions to whom they accrue.
- G. The fees and expenses of the Arbitrator shall be equally divided between the involved Contractor and Union.

SECTION 7.5 ARBITRATION OF DISCHARGES FOR VIOLATION

Procedures contained in Article 9 shall not be applicable to any alleged violation of this Article, with the single exception that an employee discharged for violation of Section 7.1, above,

may have recourse to the procedures of Article 9 to determine only if the employee did, in fact, violate the provisions of Section 7.1 of this Article; but not for the purpose of modifying the discipline imposed where a violation is found to have occurred.

VIII. ARTICLE 8 - LABOR MANAGEMENT COMMITTEE

SECTION 8.1 SUBJECTS

The Project Labor Management Committee ("Committee") will meet as established by the Committee to: 1) promote harmonious relations among the Contractors and Unions; 2) enhance safety awareness, cost effectiveness and productivity of construction operations; 3) protect the public interest; 4) discuss matters relating to staffing and scheduling with safety and productivity as considerations; 5) review equal employment opportunity matters pertaining to the Project, if any and increase work opportunity within the County for County residents, and former or future ARLINGTON CENTRAL SCHOOL DISTRICT graduates.

SECTION 8.2 COMPOSITION

The Committee shall be jointly chaired by a designee of the Owner and the Council. It may include representatives of the Local Unions and Contractors involved in the issues being discussed. The Committee may conduct business through mutually agreed upon sub-committees.

SECTION 8.3 PRE-JOB CONFERENCE

- A. So that the start and continuation of Project Work may progress without interruption, the Committee shall require each Contractor and Subcontractor of whatever tier to conduct a pre-job conference with the Council prior to commencing work. The Construction Manager or General Contractor shall be advised in advance of such conferences and may participate if they wish. This pre-job conference with the Council is in addition to any pre-job/pre-construction conferences required by the Project Contract Documents.
- B. The purpose of the pre-job conference with the Council shall be for the parties to gain an understanding of each Contractor's proposed work assignments, the standard work day and work week, the number of employees to be employed, the method of referral, the applicable wage rates and fringe benefit contributions and any other matters in accordance with this Agreement.
- C. Proposed Trade Assignments. In conjunction with the pre-job conference with the Council required by this Section, each Contractor shall fill out the attached Schedule E- Proposed Trade Assignments identifying all Subcontractors and indicating what trades will be used to perform the Project Work. This form shall be submitted to the Council at least fourteen (14) days in advance of the commencement of Project Work. If any Local Union(s) objects to or disagrees with the Proposed Trade Assignment of either the Contractor or Subcontractor, the Local Union will state its objection within three (3) days of the submission of the Proposed Trade Assignments and there shall be a good faith discussion among the Contractor or Subcontractor and the objecting Local Union and other affected Unions to resolve the matter. If no resolution is reached, any involved Local

Union may submit their objection position in writing, together with support documentation, within seven (7) calendar days of the submission of the Proposed Trade Assignments to the Contractor or Subcontractor with a copy to all affected Local Unions. Failure of any objecting Local Union and/or other affected Unions to timely object or submit such objection positions in writing waives any objection to the Proposed Trade Assignments. The Contractor or Subcontractor will review all submitted supporting documentation regarding the Proposed Trade Assignments and will submit to the Construction Manager, the Council, and all affected Local Unions a "Final Trade Assignment" letter within fourteen (14) days calendar days of the pre-job meeting at which the Proposed Trade Assignments were made.

D. Disputes and Violations.

(1) Unresolved disputes concerning trade assignments shall be handled in accordance with Section 10.1, 10.2, and 10.3 of Article 10 in accordance with the National Plan for Settlement of Jurisdictional Dispute in the Construction Industry established by the Building and Construction Trades Department, incorporated by reference in Schedule D, provided however, that disputes concerning intra-trade assignments (assignments between trades within the same International Union) will be determined by the applicable International Union.

(2) Contractor's failure to conduct a pre-job conference with the Council, failure to include all required parties in a pre-job conference with the Council, or failure to adhere to agreed-upon Schedule E trade assignments is a violation of this Agreement and prima facie evidence of intentional mis-assignment. Alleged violations of this provision shall be considered a lock-out and subject to the expedited arbitration procedures of Article 7, Section 7.4.

(3) All remaining unresolved issues shall be subject to the provisions of Article 9.

IX. ARTICLE 9 - GRIEVANCE & ARBITRATION PROCEDURE

SECTION 9.1 CLOSE COOPERATION

The Contractors, Unions, and employees, collectively and individually, realize the importance to all parties to maintain continuous and uninterrupted performance of Project Work and agree to resolve disputes in accordance with the grievance-arbitration provisions set forth in this Article.

SECTION 9.2 PROCEDURE

Any question, dispute or claim arising during the term of this Agreement involving the interpretation or application of this Agreement (other than jurisdictional disputes and alleged violations of Section 7.1, and Section 8.3(D)(2)), shall be considered a grievance and shall be resolved pursuant to the following procedure.

Step 1:

- A. When any employee covered by this Agreement feels aggrieved by a claimed violation of this Agreement, the employee shall give notice of the claimed violation to the Local Union representative or job steward, who shall notify the Project Work site representative of the involved Contractor and the Construction Manager. To be timely, such notice must be in writing given within 7 calendar days after the act, occurrence or event giving rise to the grievance. Strict compliance with this 7-day notice is a condition precedent to proceeding with such grievance. The Local Union representative or the job steward shall meet with the Project Work site representative of the involved Contractor and the Construction Manager and endeavor to adjust the matter within 7 calendar days after timely notice has been given. The representative of the involved Contractor shall keep the minutes of the meeting and shall respond to the Union representative in writing, with copy to the Construction Manager, within twenty-four (24) hours after the conclusion of the meeting. If they fail to resolve the matter within the prescribed period, the grieving party, may, within 7 calendar days thereafter, pursue Step 2 of the grievance procedure by serving the involved Contractor with written copies of the grievance setting forth a description of the claimed violation, the date on which the grievance occurred, and the provisions of the Agreement alleged to have been violated. Grievances and disputes settled at Step 1 are non-precedential except as to the specific Local Union, employee and Contractor directly involved, unless the settlement is accepted in writing by the Labor-Management Committee as creating a precedent with respect to Project Work.
- B. Should any signatory to this Agreement have a dispute, excepting jurisdictional disputes and alleged violations of Section 7.1 or Section 8.3(D)(1) or (2i) with any other signatory to this Agreement and, if after conferring, a settlement is not reached within 7 calendar days, the dispute may be reduced to writing and the grieving party may proceed to Step 2 in the same manner as outlined in subparagraph (a) for the adjustment of employee grievances.

Step 2:

Upon timely receiving a written grievance, the involved Contractor shall notify and schedule a meeting with the Business Manager of the involved Local Union, the Council, and the Construction Manager, and their respective representatives, for the purpose of arriving at a satisfactory settlement. Such meeting shall be held within 7 calendar days of the involved Contractor's receipt of the written grievance. Meeting minutes shall be kept by the Contractor with copies to the parties within twenty-four (24) hours.

Step 3:

- A. If the grievance shall have been submitted but not resolved in Step 2, any of the participating Step 2 entities may, within 21 calendar days after the initial Step 2 meeting, submit the grievance in writing (copies to other participants, including the Construction Manager) along with copies of the minutes from Step 1 and Step 2, to the acting Arbitrator under this procedure alternating between J. Selchick, M. Scheinman and J. Pierson. The Labor Arbitration Rules of the American

Arbitration Association shall govern the conduct of the arbitration hearing, at which all Step 2 participants shall be parties. The decision of the Arbitrator shall be final and binding on the involved Contractor, Local Union, and employees, and the fees and expenses of such arbitrations shall be borne equally by the involved Contractor and Local Union.

- B. Failure of the grieving party to adhere to the time limits set forth in this Article shall render the grievance null and void. These time limits may be extended only by written consent of the Construction Manager, the involved Contractor, and the involved Local Union at the particular step where the extension is agreed upon. The Arbitrator shall have authority to make decisions only on the issues presented to him and shall not have the authority to change, add to, delete or modify any provision of this Agreement.

X. ARTICLE 10 - JURISDICTIONAL DISPUTES

SECTION 10.1 ASSIGNMENT

The assignment of Project Work shall be solely the responsibility of the Contractor performing the Project Work involved, subject to the pre-job conference with the Council and the procedures set forth in Section 8.3(C), and such Project Work assignments shall be in accordance with the National Plan for the Settlement of Jurisdictional Disputes in the Construction Industry ("National Plan"), incorporated by reference into Schedule D, or any successor Plan approved by the Building & Construction Trades Department, AFL-CIO

SECTION 10.2 PROCEDURE FOR SETTLEMENT OF JURISDICTIONAL DISPUTES

All jurisdictional disputes involving Project Work shall be settled according to the National Plan, provided however, that disputes concerning intra-trade assignments (assignments between trades within the same International Union) will be determined by the applicable International Union.

SECTION 10.3 NO DISRUPTIONS

There will be no strikes, work stoppages, or slowdowns, arising out of any jurisdictional dispute. Pending the resolution of the dispute, the Project Work shall continue uninterrupted and as assigned by each Contractor. No jurisdictional dispute shall excuse a violation of Article 7.

SECTION 10.4 AWARD

Any jurisdictional award pursuant to this Article shall be final and binding on the disputing Unions and the involved Contractor on this Project only and may be enforced in any court of competent jurisdiction. Such award or resolution shall not establish a precedent on any other construction work not covered by this Agreement.

SECTION 10.5. LIMITATIONS

Awards made under this Article shall determine only to whom the disputed Project Work belongs. The deciding person or group hereunder shall have no authority to (a) assign Project

Work to a double crew, that is, to more employees than the minimum required by the Contractor to perform the Project Work involved; (b) assign work to employees who are not qualified to perform the work involved; or (c) assign Project Work being performed by non-Union employees to Union employees. This provision does not prohibit the establishment, with the agreement of the involved Contractor, of composite crews where more than one (1) employee is needed for the job.

XI. ARTICLE 11 - WAGES AND BENEFITS

SECTION 11.1 CLASSIFICATION AND HOURLY RATE

All employees covered by this Agreement shall be classified in accordance with the work performed and paid the wage rates applicable for those classifications as required by New York State Labor Law Section 220 ("Section 220"). The term "straight time" in this Agreement shall mean the hourly wage rate applicable for those classifications as required by the applicable Section 220 prevailing wage determination.

SECTION 11.2 EMPLOYEE BENEFITS

- A. Unless expressly provided differently in this Agreement, Contractors agree to pay employee benefits/supplements on behalf of all of their employees covered by this Agreement in the amounts required by the applicable Section 220 schedule in effect. Except as provided herein, the Contractors agree that such payments shall be made to those established jointly trustee employee benefit funds designated in the applicable Schedule A agreement, and in the amounts so designated, to the extent such payments are required by and satisfy the Section 220 obligation. Bona fide jointly trustee fringe benefit plans established or negotiated through collective bargaining during the life of this Agreement may be added if they similarly fall within Section 220. Contractors not otherwise contractually bound to do so, shall not be required to contribute to non-Section 220 benefits, trusts or plans; however, this provision does not relieve Contractors which are signatory to local collective bargaining agreements with any Local Union from complying with the benefit requirements for all funds contained in those collective bargaining agreements.
- B. Notwithstanding Section 11.2(A):
 - (1) Contractors who designate employees pursuant to Article 4 may satisfy the above benefits obligation with respect to those employees by: (1) providing those employees with coverage under their private benefit plans for health, welfare, pension, annuity and 401(k); or (2) paying the full amount of such benefit to the employee in employees' wages. The total benefit payments to be made on behalf of each such employee must equal the total Section 220 benefit/supplement amount. If the Contractor's contribution into the private benefit plan for the above funds is less than the amount required by Section 220, the difference must be paid to the employee in cash. Payments of other benefits covered under Section 220 shall be paid to the respective Unions on behalf of each employee.

(2) This same option shall apply with respect to any other employee who is referred to the Contractor through the hiring hall process provided such employee was previously employed by the Contractor and was a participant in a bona fide private benefit plan maintained by the Contractor which satisfies the requirements of Section 220.

(3) The option for a private plan equivalent supplement shall not apply to contributions into Joint Apprentice Training Committee (JATC), or similar apprentice funds designated in the applicable Schedule A agreement, if the Contractor does not have an apprentice training program approved by the Department of Labor. Upon request by the Council, any Contractor providing coverage under this provision will provide the Council with documentation of benefit payments made to individual employees during the term of their employment on the Project.

(4) Contractors who exercise the option under Section 11.2(B) of this Article to pay into their own private benefit plans rather than the applicable jointly trusteed funds designated in the applicable Schedule A agreement shall be responsible for and guarantee employee benefit/supplement payments and shall indemnify and hold harmless the jointly trusteed funds designated in the applicable Schedule A agreement against any and all benefit/ supplement claims by its employees.

- C. Contractors who contribute to jointly trusteed funds under this Section agree to be bound by the written terms of the legally-established jointly trusteed Trust agreements specifying the detailed basis on which payments are to be paid into, and benefits paid out of, such trust funds but only with regard to Project Work done and only for those employees for whom this Agreement requires such benefit payments. Notwithstanding the foregoing, a Contractor's liability shall be at all times limited to the amount of contributions required to be made to the Trust Funds.
- D. Each Contractor shall be responsible for and guarantee the payment of all required fringe benefits on the Project. The Local Unions and/or the Council shall notify the Construction Manager within 120 hours excluding weekends whenever a Contractor or Subcontractor fails to make a required benefit payment and such delinquency remain outstanding after 30 days. Notification must be in writing and may be by email. If written notice of such a delinquency is received by the Construction Manager within that 120-hour period it shall withhold from any funds due to the delinquent Contractor the amount of that delinquency, up to the total amount due, until any dispute regarding the delinquency has been resolved. The Construction Manager shall have no other obligation with respect to contributions owed by any Contractor (or its Subcontractor); but that each Contractor shall continue to be obligated with respect to contributions based on Project Work done by that respective Contractor. If notice of a delinquency is not received by the Construction Manager within the required time periods, Owner shall have no basis upon which to withhold, with respect to that delinquency, any

part of a payment which is otherwise due. Construction Manager shall require Contractors to submit proof of benefit payment with pay request.

XII. ARTICLE 12 - HOURS OF WORK, PREMIUM PAYMENTS, SHIFTS AND HOLIDAYS

SECTION 12.1 WORK WEEK AND WORK DAY

- A. Unless otherwise provided for in this Agreement, the standard work week shall be five days, Monday through Friday, eight hours per day plus a 1/2 hour unpaid lunch period each day. The starting time for the standard work week shall start at either 6:00 a.m., 6:30 a.m., 7:00 a.m., 7:30 a.m. or 8:00 a.m. Multiple starting times shall be allowed.
- B. Four-tens: notwithstanding any other provision of the Agreement and with the prior approval of the Construction Manager when working a four-day work week, the work shall consist of 4 days, Monday through Thursday, ten hours per day plus a 1/2 hour unpaid lunch period at the straight time rate. The starting time for four-tens shall be 6:00 a.m. 6:30 a.m. 7:00 a.m. A three-day minimal notice shall be required for four-tens to the respective involved Unions.
- C. On a 5-day work week, Saturday may be used as a make-up day at straight time to fulfill the 40-hour work week due to inclement weather. On a 4-day work week, with the prior approval of the Construction Manager, Friday may be used as a make-up day at straight time to fulfill the 40-hour work week. Make-up days shall be scheduled for a minimum of 8 hours, except in the case of inclement weather in which Section 12.5 shall apply. This minimum shall also apply when more than one shift or multiple shifts are worked.
- D. Start times may be adjusted for a single day or period of time accommodate the owners program. The intent is not to change times erratically on a daily basis but to work around special events, testing and other activities that are part of ARLINGTON CENTRAL SCHOOL DISTRICT standard programing. We will need some flexibility on this and would provide advanced notice a minimum of 48 hours prior to but ideally one week in advance.

SECTION 12.2 OVERTIME

Overtime pay for hours outside of the standard work week and work day, defined in Section 12.1, and all work on Saturdays shall be paid at time and one half the hourly rate and benefits will be paid on straight time, UNLESS A Saturday is a make-up day pursuant to Article 12.1.C All work on Sundays shall be paid at two times the hourly rate and benefits will be paid at straight time.

SECTION 12.3 SHIFTS

- A. Flexible Schedules - Scheduling of shift work, including Saturday and Sunday work, shall be within the discretion of the Contractor and at the direction and approval of the Construction Manager, in order to meet Project Work schedules and existing Project Work conditions. Shifts must have prior approval of the Construction Manager and Owner and must be scheduled with not less than three work days' notice to the Local Union.

Second shift weekend and holidays should be used to maintain schedule and are not to be used in place of insufficient workforce during normal work hours.

- B. Second and/or Third Shifts - Saturday and/or Sunday Work.

The second shift shall start between 3 p.m. and 6 p.m. and the third shift shall start between 11 p.m. and 2 a.m. Shift differentials shall be straight time plus fifty percent (50%) of the applicable Schedule A agreement shift differential. No other premium or payments for such work shall be required unless such work is in excess of 40 hours during the week. There shall be no reduction in hours worked on a second and/or third shift, except that when 3 shifts are working together, the length of one or more shifts can be reduced to accommodate a 24-hour day and only actual hours worked will be paid. Work performed on Saturdays or Sundays shall be paid as provided in the applicable Schedule A Agreement.

- C. To clarify above, Schedule A Shift Differential designated percentage rates vary according to each trade's prevailing Collective Bargaining Agreement. Shift work as part of this Project Labor Agreement is 50% of the designated percentage of the shift percentages of each trade, for example if a trade's shift differential is 15% it would be 7.5%.

SECTION 12.4 HOLIDAYS

- A. Schedule - There shall be seven (7) recognized holidays:

- New Year's Day,
- Memorial Day
- Fourth of July
- Labor Day
- Thanksgiving Day
- Day After Thanksgiving Day
- Christmas Day

All said holidays shall be observed on the dates designated by New York State Law. In the absence of such designation, they shall be observed on the calendar date, except that holidays which occur on Sunday shall be observed on the

following Monday and holidays which occur on a Saturday shall be observed on the previous Friday.

- B. Holiday pay, if any, for work performed on a recognized holiday shall be in accordance with the applicable Schedule A agreement. Non-worked recognized holidays shall be paid as per Schedule A except no benefits shall be paid on non-worked holidays.
- C. Exclusivity - No holidays other than those listed in Section 12.4 shall be recognized or observed in relation to holiday pay and benefits.

SECTION 12.5 REPORTING PAY

- A. When on a five-day work week, employees who report to the work location pursuant to a regular schedule and who are not provided with work for whatever reason, shall receive two (2) hours reporting pay, four (4) hours if work starts and eight (8) hours pay if work occurs after the 4th hour except in the case of inclement weather in which hours worked after the four hours shall be paid and when on a four-day work week with a 10-hour day, (3), (4), (5) and (10) shall apply as per the same terms above.
- B. When an employee who has completed his or her scheduled shift and has left the Project site is "called out" to perform special work of a casual, incidental, or irregular nature, the employee shall receive pay for actual hours worked at applicable straight time or overtime rates in accordance with this Agreement, but no less than a minimum guarantee of two (2) hours at the employee's straight time rate.
- C. When an employee leaves the job or work location of their own volition, is discharged for cause, or is not working as a result of the Contractor's invocation of Section 12.8 below, he or she shall be paid only for the actual time worked.
- D. There shall be no pay for time not actually worked except as specifically set forth in this Article 12 and where an applicable Schedule A agreement applies to Forepersons, Stewards and Lead Engineer in reference to pay.

SECTION 12.6 PAYMENT OF WAGES

- A. Payday: Payment shall be made by check, drawn on a New York bank with branches located within commuting distance of the job site. Paychecks shall be issued by the Contractor at the job site by 3:00 p.m. on Thursdays. In the event that the following Friday is a bank holiday, paychecks shall be issued on Wednesday of that week. Not more than one week's wages shall be held back in any pay period. Paycheck stubs shall contain the name and business address of the Contractor, together with an itemization of deductions from gross wages.
- B. Termination: Employees who are laid off or discharged for cause shall be paid in full for that which is due them at the time of termination. The Contractor shall

also provide the employee with a written statement setting forth the date of layoff or discharge.

SECTION 12.7 INJURY/DISABILITY

An employee who, after commencing Project Work, suffers a work-related injury or disability while performing Project Work duties, shall receive no less than eight (8) hours wages for that day. Further, the employee shall be rehired at such time as the employee is able to return to duties provided there is still Project Work available for which the employee is qualified and able to perform.

SECTION 12.8 EMERGENCY WORK SUSPENSION

A Contractor may, if considered necessary for the protection of life, property, and/or safety of employees or others, suspend all or a portion of Project Work. In such instances, employees shall be paid for actual time worked; provided however, that when a Contractor requests that employees remain at the job site available for Project Work, employees shall be paid for "stand- by" time at their hourly rate of pay.

XIII. ARTICLE 13 - APPRENTICESHIP & HELMETS TO HARDHATS

SECTION 13.1 APPRENTICE RATIOS

Recognizing the need to maintain continuing supportive programs designed to develop adequate numbers of competent workers in the construction industry and to provide craft entry opportunities for minorities, women, and economically-disadvantaged non-minority males, Contractors will employ apprentices in their respective crafts to perform such Project Work as is within their capabilities and that is customarily performed by the craft in which they are indentured. Contractors may utilize apprentices and such other appropriate classifications as are contained in the applicable Schedule A agreement in a ratio of not less than twenty-five percent (25%) of the work force by craft (without regard to whether a lesser ratio is set forth in the applicable Schedule A agreement), unless the applicable Schedule A agreement provides for a higher percentage. The first person assigned to the job shall be a Journeyman. The second person assigned may be an apprentice. Subsequent assignments shall be Journeymen until the applicable ratio is achieved. This assignment shall be repeated until staffing needs are satisfied. Apprentices and such other classifications as are appropriate will be employed in a manner consistent with the provisions of the applicable Schedule A agreement.

SECTION 13.2 NYS DEPARTMENT OF LABOR- APPRENTICESHIP

To assist the Contractors in attaining a maximum effort on this Project, the Unions agree to work in close cooperation with, and accept monitoring by, the New York State Department of Labor to ensure that minorities and women are not denied discriminatorily opportunities to participate in apprenticeship programs that result in the placement of apprentices on this Project.

SECTION 13.3 NEW YORK HELMETS TO HARDHATS

The Contractors and the Unions desire to facilitate the entry into the building and construction trades of veterans who are interested in careers in the building and construction

industry. The Contractors and the Unions agree to utilize the services of the Center for Military Recruitment, Assessment and Veterans Employment (the "Center") and the Center's "New York Helmets to Hardhats" program as a resource for preliminary orientation and assessment of construction aptitude; referral to apprenticeship programs or hiring halls; counseling and mentoring; and support networks, employment opportunities, and other needs as identified by the parties.

The Unions and the Contractors agree to work with the Center to create and maintain an integrated database of veterans interested in working on the Project as well as information about apprenticeship and employment opportunities related to this Project. To the extent permitted by law, the Unions will give credit to such veterans for bona fide, provable past experience.

XIV. ARTICLE 14 - NO DISCRIMINATION

SECTION 14.1 COOPERATIVE EFFORTS

The Contractors and Unions agree that they shall not discriminate against any employee or applicant for employment because of race, color, religion, sex, national origin, marital status, age, Union or non-Union status, real or perceived sexual orientation or any other status protected by law, in any manner prohibited by law or regulation. It is recognized that special procedures may be established by Contractors and Local Unions and the New York State Department of Labor for the training and employment of persons who have not previously qualified to be employed on construction projects of the type covered by this Agreement. The parties to this Agreement shall assist in such programs and agree to use their best efforts to ensure that the goals for female and minority employment are met on this Project. Nothing in this section shall be grievable.

SECTION 14.2 LANGUAGE OF AGREEMENT

The use of the masculine or feminine gender in this Agreement shall be construed as including all genders.

XV. ARTICLE 15 - GENERAL TERMS SECTION 15.1 PROJECT RULES

SECTION 15.1 PROJECT RULES

- A. ARLINGTON CENTRAL SCHOOL DISTRICT, the Construction Manager and Contractors may establish from time to time such reasonable Project rules as are necessary for the good order of the Project. These rules shall be outlined at the pre-job conference with the Council, detailed in the contract documents, approved by the President of the Council, posted at the Project site, and may be amended thereafter as necessary.
- B. Security Protocols - The Construction Manager with Owner's approval and in their sole discretion, will determine security protocols for the entire Project Site. Strict compliance by all Contractors and subcontractors of all tiers and their

respective personnel with security procedures, protocols, and directives issued by these entities or its delegated, is required at all times.

All workers are required to provide a valid state issued I.D. to the ARLINGTON CENTRAL SCHOOL DISTRICT or the Construction Manager for security and/or background checks. The ARLINGTON CENTRAL SCHOOL DISTRICT or the Construction Manager shall have the exclusive right to deny access to any worker who does not comply with security standards through their "Raptor" security protocols.

SECTION 15.2 TOOLS OF THE TRADE

The welding/cutting torch and chain fall are tools of the trade having jurisdiction over the Project Work performed. Employees using these tools shall perform any of the Project Work of the trade. There shall be no restrictions on the emergency use of any tools or equipment by any qualified employee or on the use of any tools or equipment for the performance of Project Work within the employee's jurisdiction.

SECTION 15.3 SUPERVISION

Employees or other personnel shall work under the supervision of the craft foreperson or general foreperson for the applicable hiring or subcontracting Contractor

SECTION 15.4 FULL WORKDAY

- A. Employees shall be at their Project Work area at the starting time established by the Contractor.
- B. The signatories to this Agreement reaffirm their policy of a fair day's work for a fair day's wage.

XVI. ARTICLE 16 - SAFETY PROTECTION OF PERSON AND PROPERTY

SECTION 16.1 SAFETY REQUIREMENTS

Each Contractor will ensure that applicable OSHA and New York State mandated safety requirements are at all times maintained on the Project and the employees and Unions agree to cooperate fully with these efforts. Employees must perform their Project Work at all times in a safe manner and protect themselves and the property of the Contractor from injury or harm. Failure to do so may be grounds for discipline, including discharge. Prevention of accidents at the site is the responsibility of the Contractors, its employees, subcontractors and suppliers, persons, and entities at the Project Site. The Contractors shall establish their own safety programs implementing safety measures, policies, and standards conforming to those required or recommended by governmental and quasi-governmental authorities having jurisdiction.

The Construction Manager is not responsible for identifying unsafe practices, nor for failure to stop the Contractors' unsafe practices; and the Construction Manager's failure to stop the Contractors' unsafe practices shall not relieve the Contractors of the responsibility therefore.

SECTION 16.2 CONTRACTOR RULES

Employees covered by this Agreement shall at all times be bound by the reasonable safety, security, and visitor rules as established by the Owner. Such rules will be referenced in the Contract Documents and may be distributed to Contractors for further distribution to personnel and/or posted in conspicuous places throughout the Project.

SECTION 16.3 INSPECTIONS

The Contractors, Owner, Architect/Engineer, and Construction Manager retain the right to inspect incoming shipments of equipment, apparatus, machinery, and construction materials of every kind.

XVII. ARTICLE 17 - TEMPORARY SERVICES

Temporary light, power, cooling, ventilation and other services shall only be required on the specific request of a Contractor and when requested shall be assigned in accordance with the Contract Documents. Temporary coverage may be provided by the supplying Contractor's employees already working under this Agreement during regular work hours. The supplying Contractor will determine the need for temporary coverage requirements during non-work hours. For safety reasons, temporary light and power panels will only be accessed by employees of the Contractor responsible for supplying the temporary light and power panels. Coverage requirements shall not require a standby employee who is not performing Project Work. There shall be no stacking of trades on temporary services. In the event temporary services are claimed by multiple trades, the matter shall be resolved pursuant to Article 10.

XVIII. ARTICLE 18 - SAVINGS AND SEPARABILITY

SECTION 18.1 THIS AGREEMENT

In the event that the application of any provision of this Agreement is enjoined, on either an interlocutory or permanent basis, or is otherwise determined to be in violation of law, the provision involved (and/or its application to a particular part of the Project, as necessary) shall be rendered, temporarily or permanently, null and void, but the remainder of the Agreement shall remain in full force and effect to the extent allowed by law. In the event a court of competent jurisdiction finds any portion of the Agreement to be invalid, the parties will immediately enter into negotiations concerning the substance affected by such decision for the purpose of achieving conformity with the court determination and the intent of the parties hereto for contracts to be let in the future.

SECTION 18.2 NON-WAIVER

Nothing in this Agreement is intended to be or shall be construed as a waiver by any

Union(s) of any prevailing wage determination or schedule that is applicable to their trade for any public work that has been or may be performed in the future on any work outside the scope of this Agreement. Nothing contained in this Agreement is intended to be or shall be construed as a waiver by any Union(s) of any more favorable term or condition of employment that may be contained in any collective bargaining agreement applicable to work outside the scope of this Agreement.

XIX. ARTICLE 19 - FUTURE CHANGES IN SCHEDULE A AREA CONTRACTS

SECTION 19.1 CHANGES TO AREA CONTRACTS

Each Schedule A agreement incorporated by reference into this Agreement by Schedule A shall continue in full force and effect until the Contractor and/or Union parties to the area collective bargaining agreements which are the basis for the applicable Schedule A agreement, notify the Owner and Construction Manager in writing of the agreed upon changes in the Schedule A agreement which is applicable to the Project, and their effective dates. Such changes shall only be effective to the extent consistent with this Agreement. Any disagreement between signatories to this Agreement over the incorporation into Schedule A of provisions agreed upon in the renegotiation of area collective bargaining agreements shall be resolved in accordance with the procedure set forth in Article 9 of this Agreement.

SECTION 19.2 LABOR DISPUTES DURING AREA CONTRACT NEGOTIATIONS

The Unions agree that there shall be no strikes, work stoppages, sympathy actions, picketing, slowdowns or other disruptive activity or other violations of Article 7 affecting the Project by any Local Union involved in the renegotiation of area local collective bargaining agreements, nor shall there be any lock-out on this Project affecting a Local Union during the course of such renegotiations.

XX. ARTICLE 20 - PROJECT SPECIFIC

SECTION 20.3 CLEAN UP

A clean work site results in a safe and more productive job site. All cleanup during construction shall be performed by the trade having jurisdiction for cleanup in accordance with the Project Contract Documents. The Owner and Construction Manager will ensure a clean and safe workplace. Except for final cleanup by a specialty contractor, all general clean up shall be performed by members of LIUNA.

In preparation for turnover of a space and contractors have completed their final clean up per the contract documents, the Owner or Construction Manager may determine the space is not up to standards and may hire an outside professional cleaning service. All efforts will be made to utilize a professional cleaner within this PLA; however, depending on timing and availability, that may not be possible. In such cases the Owner shall have the flexibility to engage professional cleaners who shall be exempt from the PLA.

The Owner or Construction Manager may back charge Contractors accordingly if clean up becomes unsatisfactory.

Once construction is complete and a building, section or floor is turned over to a professional cleaning company for final cleaning, including but not limited to, windows and floor prep, up to 50% of the Employees may be a direct employee of the cleaning company. Those direct employees shall be exempt from this Agreement. [

SECTION 20.4 FURNITURE, FIXTURES AND EQUIPMENT (FFE) & EXCLUDED WORK

Project work related to furniture, fixtures, and equipment that is free standing and requires no onsite assembly and is not fastened, mounted, anchored, hardwired or hard piped to any part of the building structure or surface by glue, screws, nails, mechanical fastener or by any other means is excluded from this agreement. Accordingly, for avoidance of doubt, all unloading, handling, assembly, installation and clean up of all furniture, fixture, and equipment which requires fastening, mounting, anchoring, hardwiring or hard piped to any part of the building structure or surface by glue, nails, screws, mechanical fasteners, wire, pipe or by other means, or requires any onsite assembly shall be included project work under this agreement.

When the owner or construction manager directs or contracts excluded work under this Section (20.4) to be performed this Agreement shall apply.

IN WITNESS WHEREOF the parties have caused this Agreement to be executed and effective as of the _____ day of ~~December 2025.~~ May, 2026.

FOR THE HUDSON VALLEY BUILDING AND CONSTRUCTION TRADES COUNCIL:

By: _____

L. Todd Diorio, President

ARLINGTON CENTRAL SCHOOL DISTRICT:

By: Phil Benante

Name: Phil Benante Title: Superintendent of Schools

FOR CONSTRUCTION MANAGER:

By: [Signature]

Name: Luis Rodriguez Title: President

FOR LOCAL UNIONS:

International Union of Bricklayers and Allied Craftworkers Local NO. 1:

Signed: _____ Title: _____

Email: _____ Phone: _____

International Brotherhood of Boilermakers, Iron Ships Builders, Blacksmiths, Forgers Helpers District NO. 5:

Signed: _____ Title: _____

Email: _____ Phone: _____

Bricklayers and Allied Crafts, Tile, Marble & Terrazzo Union of New York & New Jersey Local NO. 7:

Signed: _____ Title: _____

Email: _____ Phone: _____

Bricklayers Untied Union of Roofers, Waterproofers and Allied Workers Local NO. 8:

Signed: _____ Title: _____

Email: _____ Phone: _____

District Council NO. 9, International Unio. of Painters and Allied Trades, A.F.L.-C.I.O.:

Signed: _____ Title: _____

Email: _____ Phone: _____

Laborers International Union of N.A. Local 17:

Signed: _____ Title: _____

Email: _____ Phone: _____

**International Association of Sheet Metal, Air, Rail and Transportation Workers (SMART)
Local NO. 38:**

Signed: _____ Title: _____

Email: _____ Phone: _____

International Association of HBAT and Frost Insulators and Allied Workers Local NO. 91:

Signed: _____ Title: _____

Email: _____ Phone: _____

International Union of Elevators (IUEC) Local NO. 138:

Signed: _____ Title: _____

Email: _____ Phone: _____

O.P.C.M.I.A. Plasters Union Local NO. 262:

Signed: _____ Title: _____

Email: _____ Phone: _____

North Atlantic States Regional Council of Carpenters Local NO. 279:

Signed: _____ Title: _____

Email: _____ Phone: _____

International Brotherhood of Electrical Workers Local NO. 363:

Signed: _____ Title: _____

Email: _____ Phone: _____

Plumbers, Steamfitters & Service Technicians Local NO. 373:

Signed: _____ Title: _____

Email: _____ Phone: _____

International Association of Bridge, Structural, Ornamental and Reinforcing Iron Workers Local NO. 417:

Signed: _____ Title: _____

Email: _____ Phone: _____

International Brotherhood of Teamsters Local Union NO. 445:

Signed: _____ Title: _____

Email: _____ Phone: _____

Road Sprinkler Fitters Union Local NO. 669:

Signed: _____ Title: _____

Email: _____ Phone: _____

New York City District Carpenters Local NO. 740 & Local NO. 2287:

Signed: _____ Title: _____

Email: _____ Phone: _____

United Cement Masons Local NO. 780:

Signed: _____ Title: _____

Email: _____ Phone: _____

International Union of Operating Engineers Local NO. 825:

Signed: _____ Title: _____

Email: _____ Phone: _____



Kathy Hochul, Governor

Roberta Reardon, Commissioner

Arlington Central School Dist

Pamela Hamel
Tetra Tech Archs & Engs
10 Brown Road
Ithaca NY 14850

Schedule Year 2025 through 2026
Date Requested 12/10/2025
PRC# 2025014895

Location 110 Stringham Road
Project ID# 136396-24002.1
Project Type Additions and Alterations to LaGrange Middle School

PREVAILING WAGE SCHEDULE FOR ARTICLE 8 PUBLIC WORK PROJECT

Attached is the current schedule(s) of the prevailing wage rates and prevailing hourly supplements for the project referenced above. A unique Prevailing Rate Case Number (PRC#) has been assigned to the schedule(s) for your project.

The schedule is effective from July 2025 through June 2026. All updates, corrections, posted on the 1st business day of each month, and future copies of the annual determination are available on the Department's website www.labor.ny.gov. Updated PDF copies of your schedule can be accessed by entering your assigned PRC# at the proper location on the website.

It is the responsibility of the contracting agency or its agent to annex and make part, the attached schedule, to the specifications for this project, when it is advertised for bids and /or to forward said schedules to the successful bidder(s), immediately upon receipt, in order to insure the proper payment of wages.

Please refer to the "General Provisions of Laws Covering Workers on Public Work Contracts" provided with this schedule, for the specific details relating to other responsibilities of the Department of Jurisdiction.

Upon completion or cancellation of this project, enter the required information and mail **OR** fax this form to the office shown at the bottom of this notice, **OR** fill out the electronic version via the NYSDOL website.

NOTICE OF COMPLETION / CANCELLATION OF PROJECT

Date Completed: _____ Date Cancelled: _____

Name & Title of Representative: _____

Phone: (518) 457-5589 Fax: (518) 485-1870
W. Averell Harriman State Office Campus, Bldg. 12, Room 130, Albany, NY 12240

General Provisions of Laws Covering Workers on Article 8 Public Work Contracts

Introduction

The Labor Law requires public work contractors and subcontractors to pay laborers, workers, or mechanics employed in the performance of a public work contract not less than the prevailing rate of wage and supplements (fringe benefits) in the locality where the work is performed.

Contractor Registry

Effective December 30, 2024 all contractors and subcontractors submitting bids or performing construction work on public work projects, or private projects covered by Article 8 of the Labor Law, are required to register with the New York State Department of Labor (NYSDOL) under Labor Law Section 220-i. To register, contractors and subcontractors must submit an application through NYSDOL's Contractor Registry portal which is available through the agency's Management System for Protecting Worker Rights (MPWR) <https://mpwr-public.labor.ny.gov/en/login>.

For additional information, please visit [online](#).

Responsibilities of the Department of Jurisdiction

A Department of Jurisdiction (Contracting Agency) includes a state department, agency, board or commission; a county, city, town or village; a school district, board of education or board of cooperative educational services; a sewer, water, fire, improvement and other district corporation; a public benefit corporation; and a public authority awarding a public work contract.

The Department of Jurisdiction (Contracting Agency) awarding a public work contract MUST obtain a Prevailing Rate Schedule listing the hourly rates of wages and supplements due the workers to be employed on a public work project. This schedule may be obtained by completing and forwarding a "Request for wage and Supplement Information" form (PW 39) to the Bureau of Public Work. The Prevailing Rate Schedule MUST be included in the specifications for the contract to be awarded and is deemed part of the public work contract.

Upon the awarding of the contract, the law requires that the Department of Jurisdiction (Contracting Agency) furnish the following information to the Bureau: the name and address of the contractor, the date the contract was let and the approximate dollar value of the contract. To facilitate compliance with this provision of the Labor Law, a copy of the Department's "Notice of Contract Award" form (PW 16) is provided with the original Prevailing Rate Schedule.

The Department of Jurisdiction (Contracting Agency) is required to notify the Bureau of the completion or cancellation of any public work project. The Department's PW 200 form is provided for that purpose.

Both the PW 16 and PW 200 forms are available for completion [online](#).

Hours

No laborer, worker, or mechanic in the employ of a contractor or subcontractor engaged in the performance of any public work project shall be permitted to work more than eight hours in any day or more than five days in any week, except in cases of extraordinary emergency. The contractor and the Department of Jurisdiction (Contracting Agency) may apply to the Bureau of Public Work for a dispensation permitting workers to work additional hours or days per week on a particular public work project.

Wages and Supplements

The wages and supplements to be paid and/or provided to laborers, workers, and mechanics employed on a public work project shall be not less than those listed in the current Prevailing Rate Schedule for the locality where the work is performed. If a prime contractor on a public work project has not been provided with a Prevailing Rate Schedule, the contractor must notify the Department of Jurisdiction (Contracting Agency) who in turn must request an original Prevailing Rate Schedule form the Bureau of Public Work. Requests may be submitted by: mail to NYSDOL, Bureau of Public Work, State Office Bldg. Campus, Bldg. 12, Rm. 130, Albany, NY 12226; Fax to Bureau of Public Work (518) 485-1870; or electronically at the NYSDOL website www.labor.ny.gov.

Upon receiving the original schedule, the Department of Jurisdiction (Contracting Agency) is REQUIRED to provide complete copies to all prime contractors who in turn MUST, by law, provide copies of all applicable county schedules to each subcontractor and obtain from each subcontractor, an affidavit certifying such schedules were received. If the original schedule expired, the contractor may obtain a copy of the new annual determination from the NYSDOL website www.labor.ny.gov.

The Commissioner of Labor makes an annual determination of the prevailing rates. This determination is in effect from July 1st through June 30th of the following year. The annual determination is available on the NYSDOL website

Payrolls and Payroll Records

Every contractor and subcontractor MUST keep original payrolls or transcripts subscribed and affirmed as true under penalty of perjury. As per Article 6 of the Labor law, contractors and subcontractors are required to establish, maintain, and preserve for not less than six (6) years, contemporaneous, true, and accurate payroll records. At a minimum, payrolls must show the following information for each person employed on a public work project: Name, Address, Last 4 Digits of Social Security Number, Classification(s) in which the worker was employed, Hourly wage rate(s) paid, Supplements paid or provided, and Daily and weekly number of hours worked in each classification.

The filing of payrolls to the Department of Jurisdiction is a condition of payment. Every contractor and subcontractor shall submit to the Department of Jurisdiction (Contracting Agency), within thirty (30) days after issuance of its first payroll and every thirty (30) days thereafter, a transcript of the original payrolls, subscribed and affirmed as true under penalty of perjury. The Department of Jurisdiction (Contracting Agency) shall collect, review for facial validity, and maintain such payrolls.

In addition, the Commissioner of Labor may require contractors to furnish, with ten (10) days of a request, payroll records sworn to as their validity and accuracy for public work and private work. Payroll records include, but are not limited to time cards, work description sheets, proof that supplements were provided, cancelled payroll checks and payrolls. Failure to provide the requested information within the allotted ten (10) days will result in the withholding of up to 25% of the contract, not to exceed \$100,000.00. If the contractor or subcontractor does not maintain a place of business in New York State and the amount of the contract exceeds \$25,000.00, payroll records and certifications must be kept on the project worksite.

The prime contractor is responsible for any underpayments of prevailing wages or supplements by any subcontractor.

All contractors or their subcontractors shall provide to their subcontractors a copy of the Prevailing Rate Schedule specified in the public work contract as well as any subsequently issued schedules. A failure to provide these schedules by a contractor or subcontractor is a violation of Article 8, Section 220-a of the Labor Law.

All subcontractors engaged by a public work project contractor or its subcontractor, upon receipt of the original schedule and any subsequently issued schedules, shall provide to such contractor a verified statement attesting that the subcontractor has received the Prevailing Rate Schedule and will pay or provide the applicable rates of wages and supplements specified therein. (See NYS Labor Laws, Article 8 . Section 220-a).

Determination of Prevailing Wage and Supplement Rate Updates Applicable to All Counties

The wages and supplements contained in the annual determination become effective July 1st whether or not the new determination has been received by a given contractor. Care should be taken to review the rates for obvious errors. Any corrections should be brought to the Department's attention immediately. It is the responsibility of the public work contractor to use the proper rates. If there is a question on the proper classification to be used, please call the district office located nearest the project. Any errors in the annual determination will be corrected and posted to the NYSDOL website on the first business day of each month. Contractors are responsible for paying these updated rates as well, retroactive to July 1st.

When you review the schedule for a particular occupation, your attention should be directed to the dates above the column of rates. These are the dates for which a given set of rates is effective. To the extent possible, the Department posts rates in its possession that cover periods of time beyond the July 1st to June 30th time frame covered by a particular annual determination. Rates that extend beyond that instant time period are informational ONLY and may be updated in future annual determinations that actually cover the then appropriate July 1st to June 30th time period.

Withholding of Payments

When a complaint is filed with the Commissioner of Labor alleging the failure of a contractor or subcontractor to pay or provide the prevailing wages or supplements, or when the Commissioner of Labor believes that unpaid wages or supplements may be due, payments on the public work contract shall be withheld from the prime contractor in a sufficient amount to satisfy the alleged unpaid wages and supplements, including interest and civil penalty, pending a final determination.

When the Bureau of Public Work finds that a contractor or subcontractor on a public work project failed to pay or provide the requisite prevailing wages or supplements, the Bureau is authorized by Sections 220-b and 235.2 of the Labor Law to so notify the financial officer of the Department of Jurisdiction (Contracting Agency) that awarded the public work contract. Such officer MUST then withhold or cause to be withheld from any payment due the prime contractor on account of such contract the amount indicated by the Bureau as sufficient to satisfy the unpaid wages and supplements, including interest and any civil penalty that may be assessed by the Commissioner of Labor. The withholding continues until there is a final determination of the underpayment by the Commissioner of Labor or by the court in the event a legal proceeding is instituted for review of the determination of the Commissioner of Labor.

The Department of Jurisdiction (Contracting Agency) shall comply with this order of the Commissioner of Labor or of the court with respect to the release of the funds so withheld.

Summary of Notice Posting Requirements

The current Prevailing Rate Schedule must be posted in a prominent and accessible place on the site of the public work project. The prevailing wage schedule must be encased in, or constructed of, materials capable of withstanding adverse weather conditions and be titled "PREVAILING RATE OF WAGES" in letters no smaller than two (2) inches by two (2) inches.

The "[Public Work Project](#)" notice must be posted at the beginning of the performance of every public work contract, on each job site.

Every employer providing workers' compensation insurance and disability benefits must post notices of such coverage in the format prescribed by the Workers' Compensation Board in a conspicuous place on the jobsite.

Every employer subject to the NYS Human Rights Law must conspicuously post at its offices, places of employment, or employment training centers, notices furnished by the State Division of Human Rights.

Employers liable for contributions under the Unemployment Insurance Law must conspicuously post on the jobsite notices furnished by the NYS Department of Labor.

Apprentices

Employees cannot be paid apprentice rates unless they are individually registered in a program registered with the NYS Commissioner of Labor. The allowable ratio of apprentices to journeyworkers in any craft classification can be no greater than the statewide building trade ratios promulgated by the Department of Labor and included with the Prevailing Rate Schedule. An employee listed on a payroll as an apprentice who is not registered as above or is performing work outside the classification of work for which the apprentice is indentured, must be paid the prevailing journeyworker's wage rate for the classification of work the employee is actually performing.

NYSDOL Labor Law, Article 8, Section 220-3, require that only apprentices individually registered with the NYS Department of Labor may be paid apprenticeship rates on a public work project. No other Federal or State Agency of office registers apprentices in New York State.

Persons wishing to verify the apprentice registration of any person must do so in writing by mail, to the NYSDOL Office of Employability Development / Apprenticeship Training, State Office Bldg. Campus, Bldg. 12, Albany, NY 12226 or by Fax to NYSDOL Apprenticeship Training (518) 457-7154. All requests for verification must include the name and social security number of the person for whom the information is requested.

The only conclusive proof of individual apprentice registration is written verification from the NYSDOL Apprenticeship Training Albany Central office. Neither Federal nor State Apprenticeship Training offices outside of Albany can provide conclusive registration information.

It should be noted that the existence of a registered apprenticeship program is not conclusive proof that any person is registered in that program. Furthermore, the existence or possession of wallet cards, identification cards, or copies of state forms is not conclusive proof of the registration of any person as an apprentice.

Interest and Penalties

In the event that an underpayment of wages and/or supplements is found:

- Interest shall be assessed at the rate then in effect as prescribed by the Superintendent of Banks pursuant to section 14-a of the Banking Law, per annum from the date of underpayment to the date restitution is made.
- A Civil Penalty may also be assessed, not to exceed 25% of the total of wages, supplements, and interest due.

Debarment

Any contractor or subcontractor and/or its successor shall be ineligible to submit a bid on or be awarded any public work contract or subcontract with any state, municipal corporation or public body for a period of five (5) years when:

- Two (2) willful determinations have been rendered against that contractor or subcontractor and/or its successor within any consecutive six (6) year period.
- There is any willful determination that involves the falsification of payroll records or the kickback of wages or supplements.

Criminal Sanctions

Willful violations of the Prevailing Wage Law (Article 8 of the Labor Law) may be a felony punishable by fine or imprisonment of up to 15 years, or both.

Discrimination

No employee or applicant for employment may be discriminated against on account of age, race, creed, color, national origin, sex, disability or marital status.

No contractor, subcontractor nor any person acting on its behalf, shall by reason of race, creed, color, disability, sex or national origin discriminate against any citizen of the State of New York who is qualified and available to perform the work to which the employment relates (NYS Labor Law, Article 8, Section 220-e(a)).

No contractor, subcontractor, nor any person acting on its behalf, shall in any manner, discriminate against or intimidate any employee on account of race, creed, color, disability, sex, or national origin (NYS Labor Law, Article 8, Section 220-e(b)).

The Human Rights Law also prohibits discrimination in employment because of age, marital status, or religion.

There may be deducted from the amount payable to the contractor under the contract a penalty of \$50.00 for each calendar day during which such person was discriminated against or intimidated in violation of the provision of the contract (NYS Labor Law, Article 8, Section 220-e(c)).

The contract may be cancelled or terminated by the State or municipality. All monies due or to become due thereunder may be forfeited for a second or any subsequent violation of the terms or conditions of the anti-discrimination sections of the contract (NYS Labor Law, Article 8, Section 220-e(d)).

Every employer subject to the New York State Human Rights Law must conspicuously post at its offices, places of employment, or employment training centers notices furnished by the State Division of Human Rights.

Workers' Compensation

In accordance with Section 142 of the State Finance Law, the contractor shall maintain coverage during the life of the contract for the benefit of such employees as required by the provisions of the New York State Workers' Compensation Law.

A contractor who is awarded a public work contract must provide proof of workers' compensation coverage prior to being allowed to begin work.

The insurance policy must be issued by a company authorized to provide workers' compensation coverage in New York State. Proof of coverage must be on form C-105.2 (Certificate of Workers' Compensation Insurance) and must name this agency as a certificate holder.

If New York State coverage is added to an existing out-of-state policy, it can only be added to a policy from a company authorized to write workers' compensation coverage in this state. The coverage must be listed under item 3A of the information page.

The contractor must maintain proof that subcontractors doing work covered under this contract secured and maintained a workers' compensation policy for all employees working in New York State.

Every employer providing worker's compensation insurance and disability benefits must post notices of such coverage in the format prescribed by the Workers' Compensation Board in a conspicuous place on the jobsite.

Unemployment Insurance

Employers liable for contributions under the Unemployment Insurance Law must conspicuously post on the jobsite notices furnished by the New York State Department of Labor.



Kathy Hochul, Governor

Roberta Reardon, Commissioner

Arlington Central School Dist

Pamela Hamel
Tetra Tech Archs & Engs
10 Brown Road
Ithaca NY 14850

Schedule Year 2025 through 2026
Date Requested 12/10/2025
PRC# 2025014895

Location 110 Stringham Road
Project ID# 136396-24002.1
Project Type Additions and Alterations to LaGrange Middle School

Notice of Contract Award

New York State Labor Law, Article 8, Section 220.3a requires that certain information regarding the awarding of public work contracts, be furnished to the Commissioner of Labor. One "Notice of Contract Award" (PW 16, which may be photocopied), **MUST** be completed for **EACH** prime contractor on the above referenced project.

Upon notifying the successful bidder(s) of this contract, enter the required information and mail **OR** fax this form to the office shown at the bottom of this notice, **OR** fill out the electronic version via the NYSDOL website.

Contractor Information

All information must be supplied

Federal Employer Identification Number: _____		
Name: _____		
Address: _____ _____		
City: _____	State: _____	Zip: _____
Amount of Contract: \$ _____	Contract Type:	
Approximate Starting Date: ____/____/____	☐ (01) General Construction	
Approximate Completion Date: ____/____/____	☐ (02) Heating/Ventilation	
	☐ (03) Electrical	
	☐ (04) Plumbing	
	☐ (05) Other : _____	

Phone: (518) 457-5589 Fax: (518) 485-1870
W. Averell Harriman State Office Campus, Bldg. 12, Room 130, Albany, NY 12226

Social Security Numbers on Certified Payrolls:

The Department of Labor is cognizant of the concerns of the potential for misuse or inadvertent disclosure of social security numbers. Identity theft is a growing problem and we are sympathetic to contractors' concern regarding inclusion of this information on payrolls if another identifier will suffice.

For these reasons, the substitution of the use of the last four digits of the social security number on certified payrolls submitted to contracting agencies on public work projects is now acceptable to the Department of Labor. This change does not affect the Department's ability to request and receive the entire social security number from employers during its public work/ prevailing wage investigations.

Construction Industry Fair Play Act: Required Posting for Labor Law Article 25-B § 861-d

Construction industry employers must post the "Construction Industry Fair Play Act" notice in a prominent and accessible place on the job site. Failure to post the notice can result in penalties of up to \$1,500 for a first offense and up to \$5,000 for a second offense. The posting is included as part of this wage schedule. Additional copies may be obtained from the NYS DOL website, <https://dol.ny.gov/public-work-and-prevailing-wage>

If you have any questions concerning the Fair Play Act, please call the State Labor Department toll-free at 1-866-435-1499 or email us at: dol.misclassified@labor.ny.gov.

Worker Notification: (Labor Law §220, paragraph a of subdivision 3-a)

Effective June 23, 2020

This provision is an addition to the existing wage rate law, Labor Law §220, paragraph a of subdivision 3-a. It requires contractors and subcontractors to provide written notice to all laborers, workers or mechanics of the *prevailing wage and supplement rate* for their particular job classification *on each pay stub**. It also requires contractors and subcontractors to *post a notice* at the beginning of the performance of every public work contract *on each job site* that includes the telephone number and address for the Department of Labor and a statement informing laborers, workers or mechanics of their right to contact the Department of Labor if he/she is not receiving the proper prevailing rate of wages and/or supplements for his/her job classification. The required notification will be provided with each wage schedule, may be downloaded from our website www.labor.ny.gov or be made available upon request by contacting the Bureau of Public Work at 518-457-5589. *In the event the required information will not fit on the pay stub, an accompanying sheet or attachment of the information will suffice.

**To all State Departments, Agency Heads and Public Benefit Corporations
IMPORTANT NOTICE REGARDING PUBLIC WORK ENFORCEMENT FUND**

Budget Policy & Reporting Manual

B-610

Public Work Enforcement Fund

effective date December 7, 2005

1. Purpose and Scope:

This Item describes the Public Work Enforcement Fund (the Fund, PWEF) and its relevance to State agencies and public benefit corporations engaged in construction or reconstruction contracts, maintenance and repair, and announces the recently-enacted increase to the percentage of the dollar value of such contracts that must be deposited into the Fund. This item also describes the roles of the following entities with respect to the Fund:

- New York State Department of Labor (DOL),
- The Office of the State of Comptroller (OSC), and
- State agencies and public benefit corporations.

2. Background and Statutory References:

DOL uses the Fund to enforce the State's Labor Law as it relates to contracts for construction or reconstruction, maintenance and repair, as defined in subdivision two of Section 220 of the Labor Law. State agencies and public benefit corporations participating in such contracts are required to make payments to the Fund.

Chapter 511 of the Laws of 1995 (as amended by Chapter 513 of the Laws of 1997, Chapter 655 of the Laws of 1999, Chapter 376 of the Laws of 2003 and Chapter 407 of the Laws of 2005) established the Fund.

3. Procedures and Agency Responsibilities:

The Fund is supported by transfers and deposits based on the value of contracts for construction and reconstruction, maintenance and repair, as defined in subdivision two of Section 220 of the Labor Law, into which all State agencies and public benefit corporations enter.

Chapter 407 of the Laws of 2005 increased the amount required to be provided to this fund to .10 of one-percent of the total cost of each such contract, to be calculated at the time agencies or public benefit corporations enter into a new contract or if a contract is amended. The provisions of this bill became effective August 2, 2005.

To all State Departments, Agency Heads and Public Benefit Corporations
IMPORTANT NOTICE REGARDING PUBLIC WORK ENFORCEMENT FUND

OSC will report to DOL on all construction-related ("D") contracts approved during the month, including contract amendments, and then DOL will bill agencies the appropriate assessment monthly. An agency may then make a determination if any of the billed contracts are exempt and so note on the bill submitted back to DOL. For any instance where an agency is unsure if a contract is or is not exempt, they can call the Bureau of Public Work at the number noted below for a determination. Payment by check or journal voucher is due to DOL within thirty days from the date of the billing. DOL will verify the amounts and forward them to OSC for processing.

For those contracts which are not approved or administered by the Comptroller, monthly reports and payments for deposit into the Public Work Enforcement Fund must be provided to the Administrative Finance Bureau at the DOL within 30 days of the end of each month or on a payment schedule mutually agreed upon with DOL.

Reports should contain the following information:

- Name and billing address of State agency or public benefit corporation;
- State agency or public benefit corporation contact and phone number;
- Name and address of contractor receiving the award;
- Contract number and effective dates;
- Contract amount and PWEF assessment charge (if contract amount has been amended, reflect increase or decrease to original contract and the adjustment in the PWEF charge); and
- Brief description of the work to be performed under each contract.

Checks and Journal Vouchers, payable to the "New York State Department of Labor" should be sent to:

Department of Labor
Administrative Finance Bureau-PWEF Unit
Building 12, Room 464
State Office Campus
Albany, NY 12226

Any questions regarding billing should be directed to NYSDOL's Administrative Finance Bureau-PWEF Unit at (518) 457-3624 and any questions regarding Public Work Contracts should be directed to the Bureau of Public Work at (518) 457-5589.



Required Notice under Article 25-B of the Labor Law

Attention All Employees, Contractors and Subcontractors: You are Covered by the Construction Industry Fair Play Act

The law says that you are an employee unless:

- You are free from direction and control in performing your job, **and**
- You perform work that is not part of the usual work done by the business that hired you, **and**
- You have an independently established business.

Your employer cannot consider you to be an independent contractor unless all three of these facts apply to your work.

It is against the law for an employer to misclassify employees as independent contractors or pay employees off the books.

Employee Rights: If you are an employee, you are entitled to state and federal worker protections. These include:

- Unemployment Insurance benefits, if you are unemployed through no fault of your own, able to work, and otherwise qualified,
- Workers' compensation benefits for on-the-job injuries,
- Payment for wages earned, minimum wage, and overtime (under certain conditions),
- Prevailing wages on public work projects,
- The provisions of the National Labor Relations Act, and
- A safe work environment.

It is a violation of this law for employers to retaliate against anyone who asserts their rights under the law. Retaliation subjects an employer to civil penalties, a private lawsuit or both.

Independent Contractors: If you are an independent contractor, **you must pay all taxes and Unemployment Insurance contributions required by New York State and Federal Law.**

Penalties for paying workers off the books or improperly treating employees as independent contractors:

- **Civil Penalty**
 - First offense: Up to \$2,500 per employee
 - Subsequent offense(s): Up to \$5,000 per employee
- **Criminal Penalty**
 - First offense: Misdemeanor - up to 30 days in jail, up to a \$25,000 fine and debarment from performing public work for up to one year.
 - Subsequent offense(s): Misdemeanor - up to 60 days in jail or up to a \$50,000 fine and debarment from performing public work for up to 5 years.

If you have questions about your employment status or believe that your employer may have violated your rights and you want to file a complaint, call the Department of Labor at (866) 435-1499 or send an email to dol.misclassified@labor.ny.gov. All complaints of fraud and violations are taken seriously. You can remain anonymous.

Employer Name:

IA 999 (09/16)



Attention Employees

THIS IS A: **PUBLIC WORK PROJECT**

If you are employed on this project as a **worker, laborer, or mechanic** you are entitled to receive the **prevailing wage and supplements rate** for the classification at which you are working.

Your pay stub and wage notice received upon hire must clearly state your wage rate and supplement rate.

Chapter 629 of
the Labor Laws
of 2007:

These wages are set by law and must be posted at the work site. They can also be found at:
<https://dol.ny.gov/bureau-public-work>



If you feel that you have not received proper wages or benefits,
please call our nearest office.*

Albany	(518) 457-2744	Patchogue	(631) 687-4882
Binghamton	(607) 721-8005	Rochester	(585) 258-4505
Buffalo	(716) 847-7159	Syracuse	(315) 428-4056
Garden City	(516) 228-3915	Utica	(315) 793-2314
New York City	(212) 932-2419	White Plains	(914) 997-9507
Newburgh	(845) 568-5287		

* For New York City government agency construction projects, please
contact the Office of the NYC Comptroller at (212) 669-4443, or
www.comptroller.nyc.gov – click on Bureau of Labor Law.

Contractor Name: _____

Project Location: _____

Requirements for OSHA 10 Compliance

Article 8 §220-h requires that when the advertised specifications, for every contract for public work, is \$250,000.00 or more the contract must contain a provision requiring that every worker employed in the performance of a public work contract shall be certified as having completed an OSHA 10 safety training course. The clear intent of this provision is to require that all employees of public work contractors, required to be paid prevailing rates, receive such training "prior to the performing any work on the project."

The Bureau will enforce the statute as follows:

All contractors and sub contractors must attach a copy of proof of completion of the OSHA 10 course to the first certified payroll submitted to the contracting agency and on each succeeding payroll where any new or additional employee is first listed.

Proof of completion may include but is not limited to:

- Copies of bona fide course completion card (*Note: Completion cards do not have an expiration date.*)
- Training roster, attendance record or other documentation from the certified trainer pending the issuance of the card.
- Other valid proof

**A certification by the employer attesting that all employees have completed such a course is not sufficient proof that the course has been completed.

Any questions regarding this statute may be directed to the New York State Department of Labor, Bureau of Public Work at 518-457-5589.

WICKS

Public work projects are subject to the Wicks Law requiring separate specifications and bidding for the plumbing, heating and electrical work, when the total project's threshold is \$3 million in Bronx, Kings, New York, Queens and, Richmond counties; \$1.5 million in Nassau, Suffolk and Westchester counties; and \$500,000 in all other counties.

For projects below the monetary threshold, bidders must submit a sealed list naming each subcontractor for the plumbing, HVAC and electrical and the amount to be paid to each. The list may not be changed unless the public owner finds a legitimate construction need, including a change in specifications or costs or the use of a Project Labor Agreement (PLA), and must be open to public inspection.

Allows the state and local agencies and authorities to waive the Wicks Law and use a PLA if it will provide the best work at the lowest possible price. If a PLA is used, all contractors shall participate in apprentice training programs in the trades of work it employs that have been approved by the Department of Labor (DOL) for not less than three years. They shall also have at least one graduate in the last three years and use affirmative efforts to retain minority apprentices. PLA's would be exempt from Wicks, but deemed to be public work subject to prevailing wage enforcement.

The Commissioner of Labor shall have the power to enforce separate specification requirements on projects, and may issue stop-bid orders against public owners for non-compliance.

Other new monetary thresholds, and similar sealed bidding for non-Wicks projects, would apply to certain public authorities including municipal housing authorities, NYC Construction Fund, Yonkers Educational Construction Fund, NYC Municipal Water Finance Authority, Buffalo Municipal Water Finance Authority, Westchester County Health Care Association, Nassau County Health Care Corp., Clifton-Fine Health Care Corp., Erie County Medical Center Corp., NYC Solid Waste Management Facilities, and the Dormitory Authority.

Contractors must pay subcontractors within a 7 days period.

(07.19)

Introduction to the Prevailing Rate Schedule

Information About Prevailing Rate Schedule

This information is provided to assist you in the interpretation of particular requirements for each classification of worker contained in the attached Schedule of Prevailing Rates.

Classification

It is the duty of the Commissioner of Labor to make the proper classification of workers taking into account whether the work is heavy and highway, building, sewer and water, tunnel work, or residential, and to make a determination of wages and supplements to be paid or provided. It is the responsibility of the public work contractor to use the proper rate. If there is a question on the proper classification to be used, please call the district office located nearest the project. District office locations and phone numbers are listed below. Prevailing Wage Schedules are issued separately for "General Construction Projects" and "Residential Construction Projects" on a county-by-county basis.

General Construction Rates apply to projects such as: Buildings, Heavy & Highway, and Tunnel and Water & Sewer rates. Residential Construction Rates generally apply to construction, reconstruction, repair, alteration, or demolition of one family, two family, row housing, or rental type units intended for residential use. Some rates listed in the Residential Construction Rate Schedule have a very limited applicability listed along with the rate. Rates for occupations or locations not shown on the residential schedule must be obtained from the General Construction Rate Schedule. Please contact the local Bureau of Public Work office before using Residential Rate Schedules, to ensure that the project meets the required criteria.

*Contractor Registry (LL 220-I): Effective December 30th, 2024

Labor Law Section 220-i(6) prohibits contractors from bidding on public work and prohibits both contractors and subcontractors from commencing work on private and public projects subject to prevailing wage requirements. This section requires contractors to submit their Certificate of Registration with their bid materials. Each Certificate of Registration will have a unique registration number. Failure to provide proof of registration, as required by Labor Law Section 220-i, as a minimum qualification will result in the bidder being deemed non-responsive. There is a public database of registered contractors and subcontractors available online at data.ny.gov to confirm registration validity. For additional information on how to register and the requirements, visit <https://dol.ny.gov/public-work-contractor-and-subcontractor-registry-landing>

*Electronic Certified Payroll (LL 220-J): Effective December 31st, 2025

Effective December 31, 2025, all contractors and subcontractors who perform public work, or covered private work subject to the prevailing wage, will be required to submit certified payrolls electronically to the Bureau of Public Work and Prevailing Wage Enforcement. Additional information about the electronic certified payroll submission system will be made available on the Department's Website at <https://dol.ny.gov/Electronic-Payroll>

Payrolls and Payroll Records

Every contractor and subcontractor MUST keep original payrolls or transcripts subscribed and affirmed as true under penalty of perjury. Payrolls must be maintained for at least three (3) years from the projects date of completion. Additionally, as per Article 6 of the Labor Law, contractors and subcontractors are required to establish, maintain, and preserve for not less than six (6) years, contemporaneous, true, and accurate payroll records.

At a minimum, payrolls must show the following information for each person employed on a public work project: Name; Address, Last 4 Digits of Social Security number, Classification(s) in which the worker was employed, Hourly wage rate(s) paid, Supplements paid or provided, and Daily and weekly number of hours worked in each classification.

Payroll records and transcripts are required to be kept on site during all the time that work under that contract is being performed.

NOTE: For more detailed information regarding Article 9 prevailing wage contracts, please refer to "General Provisions of Laws Covering Workers on Article 9 Public Work Building Service Contracts".

If you have any questions concerning the attached schedule or would like additional information, please write to:

New York State Department of Labor
Bureau of Public Work
State Office Campus, Bldg. 12
Albany, NY 12240

OR

Contact the nearest BUREAU of PUBLIC WORK District Office

District Office Locations:	Telephone #	FAX #
Bureau of Public Work - Albany	518-457-2744	518-485-0240
Bureau of Public Work - Binghamton	607-721-8005	607-721-8004

Bureau of Public Work - Buffalo	716-847-7159	716-847-7650
Bureau of Public Work - Garden City	516-228-3915	516-794-3518
Bureau of Public Work - Newburgh	845-568-5287	845-568-5332
Bureau of Public Work - New York City	212-932-2419	212-775-3579
Bureau of Public Work - Patchogue	631-687-4882	631-687-4902
Bureau of Public Work - Rochester	585-258-4505	585-258-4708
Bureau of Public Work - Syracuse	315-428-4056	315-428-4671
Bureau of Public Work - Utica	315-793-2314	315-793-2514
Bureau of Public Work - White Plains	914-997-9507	914-997-9523
Bureau of Public Work - Central Office	518-457-5589	518-485-1870

Paid Holidays

Paid Holidays are days for which an eligible employee receives a regular day's pay, but is not required to perform work. If an employee works on a day listed as a paid holiday, this remuneration is in addition to payment of the required prevailing rate for the work actually performed.

Overtime

At a minimum, all work performed on a public work project in excess of eight hours in any one day or more than five days in any workweek is overtime. However, the specific overtime requirements for each trade or occupation on a public work project may differ. Specific overtime requirements for each trade or occupation are contained in the prevailing rate schedules.

Overtime holiday pay is the premium pay that is required for work performed on specified holidays. It is only required where the employee actually performs work on such holidays.

The applicable holidays are listed under HOLIDAYS: OVERTIME. The required rate of pay for these covered holidays can be found in the OVERTIME PAY section listings for each classification.

Supplemental Benefits

Particular attention should be given to the supplemental benefit requirements. Although in most cases the payment or provision of supplements is straight time for all hours worked, some classifications require the payment or provision of supplements, or a portion of the supplements, to be paid or provided at a premium rate for premium hours worked. Supplements may also be required to be paid or provided on paid holidays, regardless of whether the day is worked. The Overtime Codes and Notes listed on the particular wage classification will indicate these conditions as required.

Effective Dates

When you review the schedule for a particular occupation, your attention should be directed to the dates above the column of rates. These are the dates for which a given set of rates is effective. The rate listed is valid until the next effective rate change or until the new annual determination which takes effect on July 1 of each year.

All contractors and subcontractors are required to pay the current prevailing rates of wages and supplements. If you have any questions please contact the Bureau of Public Work or visit the New York State Department of Labor website (www.labor.ny.gov) for current wage rate information.

Shift Work

If the timeline of the contract requires shift work be performed to meet deadlines, the BPWE will enforce the shift work rate as the required rate on the project whether or not shift work is specifically addressed in the contract.

Paid Prenatal Leave

Every employer shall be required to provide to its employees twenty hours of paid prenatal personal leave during any fifty-two week calendar period. Paid prenatal personal leave shall mean leave taken for the health care services received by an employee during their pregnancy or related to such pregnancy, including physical examinations, medical procedures, monitoring and testing, and discussions with a healthcare provider related to the pregnancy. Paid prenatal personal leave may be taken in hourly increments. Benefits for paid prenatal personal leave shall be paid in hourly installments. Employees shall receive compensation at the employee's regular rate of pay, or the applicable minimum wage established by the labor law, whichever is greater, for the use of Paid Prenatal leave.

Apprentice Training Ratios

The following are the allowable ratios of registered Apprentices to Journey-workers.

For example, the ratio 1:1,1:3 indicates the allowable initial ratio is one Apprentice to one Journeyworker. The Journeyworker must be in place on the project before an Apprentice is allowed. Then three additional Journeyworkers are needed before a second Apprentice is allowed. The last ratio repeats indefinitely. Therefore, three more Journeyworkers must be present before a third Apprentice can be hired, and so on.

Please call Apprentice Training Central Office at (518) 457-6820 if you have any questions.

Title (Trade)	Ratio
Boilermaker (Construction)	1:1,1:4
Boilermaker (Shop)	1:1,1:3
Carpenter (Bldg.,H&H, Pile Driver/Dockbuilder)	1:1,1:4
Carpenter (Residential)	1:1,1:3
Electrical (Outside) Lineman	1:1,1:2
Electrician (Inside)	1:1,1:3
Elevator/Escalator Construction & Modernizer	1:1,1:2
Glazier	1:1,1:3
Insulation & Asbestos Worker	1:1,1:3
Iron Worker	1:1,1:4
Laborer	1:1,1:3
Mason	1:1,1:4
Millwright	1:1,1:4
Op Engineer	1:1,1:5
Painter	1:1,1:3
Plumber & Steamfitter	1:1,1:3
Roofer	1:1,1:2
Sheet Metal Worker	1:1,1:3
Sprinkler Fitter	1:1,1:2

If you have any questions concerning the attached schedule or would like additional information, please contact the nearest BUREAU of PUBLIC WORK District Office or write to:

New York State Department of Labor
 Bureau of Public Work
 State Office Campus, Bldg. 12
 Albany, NY 12226

District Office Locations:	Telephone #	FAX #
Bureau of Public Work - Albany	518-457-2744	518-485-0240
Bureau of Public Work - Binghamton	607-721-8005	607-721-8004
Bureau of Public Work - Buffalo	716-847-7159	716-847-7650
Bureau of Public Work - Garden City	516-228-3915	516-794-3518
Bureau of Public Work - Newburgh	845-568-5287	845-568-5332
Bureau of Public Work - New York City	212-932-2419	212-775-3579
Bureau of Public Work - Patchogue	631-687-4882	631-687-4902
Bureau of Public Work - Rochester	585-258-4505	585-258-4708
Bureau of Public Work - Syracuse	315-428-4056	315-428-4671
Bureau of Public Work - Utica	315-793-2314	315-793-2514
Bureau of Public Work - White Plains	914-997-9507	914-997-9523
Bureau of Public Work - Central Office	518-457-5589	518-485-1870

Dutchess County General Construction

Boilermaker

12/01/2025

JOB DESCRIPTION Boilermaker

DISTRICT 4

ENTIRE COUNTIES

Bronx, Dutchess, Kings, Nassau, New York, Orange, Putnam, Queens, Richmond, Rockland, Suffolk, Sullivan, Ulster, Westchester

WAGES

Per Hour: 07/01/2025 01/01/2026

Boilermaker \$ 68.88 \$ 70.38

Repairs & Renovations 68.88 70.38

Repairs & Renovation: Includes Repairing, Renovating and Replacement of parts to an existing unit(s).

SUPPLEMENTAL BENEFITS

Per Hour:

Boilermaker 33.5% of Hourly
Repair & Renovations Wage Paid
+ \$26.85

NOTE: "Hourly Wage Paid" shall include any and all premium(s) pay.

OVERTIME PAY

See (*B, O, **U) on OVERTIME PAGE

Note:* Includes 9th & 10th hours, double for 11th or more.

** Labor Day ONLY, if worked.

Repairs & Renovation see (B,E,Q) on OT Page

HOLIDAY

Paid: See (1) on HOLIDAY PAGE

Overtime: See (5, 6, 11, 12, 15, 25, 26, 29) on HOLIDAY PAGE

REGISTERED APPRENTICES

(1/2) Year Terms at the following percentage of Boilermaker's wage per hour:

1st	2nd	3rd	4th	5th	6th	7th
65%	70%	75%	80%	85%	90%	95%

SUPPLEMENTAL BENEFITS:

33.5% of Hourly Wage Paid Plus Amount Below:

1st	2nd	3rd	4th	5th	6th	7th
\$20.36	21.28	22.22	23.12	24.07	25.00	25.93

NOTE: "Hourly Wage Paid" shall include any and all premium(s)

4-5

Broadband

12/01/2025

JOB DESCRIPTION Broadband

DISTRICT 4

ENTIRE COUNTIES

Albany, Allegany, Broome, Cattaraugus, Cayuga, Chautauqua, Chemung, Chenango, Clinton, Columbia, Cortland, Delaware, Dutchess, Erie, Essex, Franklin, Fulton, Genesee, Greene, Hamilton, Herkimer, Jefferson, Lewis, Livingston, Madison, Monroe, Montgomery, Niagara, Oneida, Onondaga, Ontario, Orleans, Oswego, Otsego, Rensselaer, Saratoga, Schenectady, Schoharie, Schuyler, Seneca, St. Lawrence, Steuben, Sullivan, Tioga, Tompkins, Ulster, Warren, Washington, Wayne, Wyoming, Yates

PARTIAL COUNTIES

Orange: Only in the Village of Greenwood Lake, Village of Highland Falls, Town of Tuxedo, and Town of Patterson

WAGES

NOTE: Applies to all public work and covered private projects, including those receiving ConnectAll funding subject to New York State Labor Law §224-E, solicited on or after July 1,2025. For all other projects solicited prior to July 1,2025 please see LINEMAN ELECTRICIAN-TELEDATA

Per Hour: 07/01/2025 08/04/2025

Field Tech \$ 51.31 \$ 52.85

Install/Repair

For outside work (excluding installation on building construction/alteration/renovation projects), stopping at first point of attachment (demarcation), installing/maintaining/repairing broadband internet service.

"Broadband", "Broadband Service", or "Broadband Internet" means mass-market retail service by wire or radio that provides the capability to transmit data to and receive data from all or substantially all internet endpoints, including any capabilities that are incidental to and enable the operation of the communications service, but excluding dial-up internet access service.

Note: EXCLUDES work within ten (10) feet of High Voltage (600 Volts and over) transmission lines for this work, please see LINEMAN

SUPPLEMENTAL BENEFITS

Per Hour:

\$ 23.24

OVERTIME PAY

See (B, K, *R) on OVERTIME PAGE

* Two and one half times the hourly rate after the 8th hour

HOLIDAY

Paid: See (5, 6, 7, 11, 12) on HOLIDAY PAGE

Overtime: See (5, 6, 7, 11, 12) on HOLIDAY PAGE

4-CWA-Dist2

Carpenter

12/01/2025

JOB DESCRIPTION Carpenter

DISTRICT 8

ENTIRE COUNTIES

Dutchess, Orange

WAGES

Per hour: 07/01/2025

Building:

Millwright \$ 47.83
+ 8.44*

*This portion of the benefit is NOT subject to the SAME PREMIUM as shown for overtime.

SUPPLEMENTAL BENEFITS

Per hour:

Journeyman \$ 35.39

OVERTIME PAY

See (B, E, E2, Q) on OVERTIME PAGE

HOLIDAY

Paid: See (18, 19) on HOLIDAY PAGE

Paid: See (5,6,11,13,16,18,19,25) for 1st & 2nd yr. Apprentices

Overtime: See (5,6,11,13,16,18,19,25) on HOLIDAY PAGE.

REGISTERED APPRENTICES

Wages per hour:

One (1) year terms:

1st	2nd	3rd	4th
\$ 28.76	\$ 31.29	\$ 35.82	\$ 44.88
+ 4.40*	+ 5.19*	+ 5.94*	+ 7.44*

*This portion of the benefit is NOT subject to the SAME PREMIUM as shown for overtime.

Supplemental benefits per hour:

1st	2nd	3rd	4th
\$ 23.45	\$ 25.24	\$ 27.35	\$ 30.08

8-740.2

Carpenter

12/01/2025

JOB DESCRIPTION Carpenter

DISTRICT 8

ENTIRE COUNTIES

Dutchess

PARTIAL COUNTIES

Orange: : The territory west demarcated by a line drawn from the Bear Mountain Bridge continuing east to the Bear Mountain Circle. The territory south demarcated by a line continuing north on 9W to the town of Cornwall where County Road 107 (also known as Quaker Rd) crosses under 9W to the centerline of Route 32, The territories south and east heading north on Route 32 to Orrs Mills Rd, then west on Orrs Mills Rd to Route 94, continue west and south on Route 94 to the Town of Chester, to the intersection of Kings Highway, continue south on Kings Highway to Bellvale Rd, west on Bellvale Rd to Bellvale Lakes Rd, then south on Bellvale Lakes Rd to Kain Rd, southeast on Kain Rd to Route 17A, then north and southeast along Route 17A to Route 210, then follow Route 210 to NJ Border.

WAGES

Per hour: 07/01/2025

Carpet/Resilient

Floor Coverer \$ 36.78
+ 3.48*

*This portion of the benefit is NOT subject to the SAME PREMIUM as shown for overtime.

INCLUDES HANDLING & INSTALLATION OF ARTIFICIAL TURF AND SIMILAR TURF INDOORS/OUTDOORS.

SUPPLEMENTAL BENEFITS

Per hour: \$ 29.09

OVERTIME PAY

See (B, E, Q) on OVERTIME PAGE

HOLIDAY

Paid: See (18, 19) on HOLIDAY PAGE

Paid for 1st & 2nd yr.

Apprentices: See (5, 6, 11, 13, 16, 18, 19, 25)

Overtime: See (5, 6, 11, 13, 16, 18, 19, 25) on HOLIDAY PAGE.

REGISTERED APPRENTICES

Wage per hour - (1) year terms:

1st	2nd	3rd	4th
\$17.04	\$20.32	\$25.22	\$30.14
+ 2.54*	+ 2.54*	+ 2.54*	+ 2.54*

*This portion of the benefit is NOT subject to the SAME PREMIUM as shown for overtime.

Supplemental Benefits per hour - All apprentice terms:

\$ 21.47

8-2287D&O

Carpenter

12/01/2025

JOB DESCRIPTION Carpenter

DISTRICT 8

ENTIRE COUNTIES

Bronx, Dutchess, Kings, Nassau, New York, Orange, Putnam, Queens, Richmond, Rockland, Suffolk, Westchester

WAGES

Per Hour: 07/01/2025

Marine Construction:

Marine Diver \$ 76.46
+ 10.16*

Marine Tender \$ 56.00
+ 10.16*

*This portion of the benefit is NOT subject to the SAME PREMIUM as shown for overtime

SUPPLEMENTAL BENEFITS

Per Hour:

Journeyworker \$ 46.48

OVERTIME PAY

See (B, E, E2, Q) on OVERTIME PAGE

HOLIDAY

Paid: See (18, 19) on HOLIDAY PAGE
Overtime: See (5, 6, 11, 13, 16, 18, 19, 25) on HOLIDAY PAGE

REGISTERED APPRENTICES

Wages per hour:
One (1) year terms.

1st year	\$ 27.98 + 5.66*
2nd year	33.58 + 5.66*
3rd year	41.96 + 5.66*
4th year	50.35 + 5.66*

*This portion of the benefit is NOT subject to the SAME PREMIUM as shown for overtime.

Supplemental Benefits
Per Hour:

All terms \$ 33.03

8-1456MC

Carpenter - Building / Heavy&Highway

12/01/2025

JOB DESCRIPTION Carpenter - Building / Heavy&Highway

DISTRICT 11

ENTIRE COUNTIES

Columbia, Dutchess, Orange, Sullivan, Ulster

WAGES

WAGES (per hour)

Applies to Carpenter (Building/Heavy & Highway/Tunnel), Dockbuilder, Piledriver, Dive Tender, and Diver (Dry):

	07/01/2025	07/01/2026
Base Wage	\$ 38.34 + 6.38*	Additional \$ 2.30**

Applies to Diver (Wet):

Base Wage	\$ 50.00 + 6.38*

*For all hours paid straight or premium.

**To be allocated at a later date.

SHIFT WORK

SHIFT DIFFERENTIAL: When mandated by a Government Agency irregular or off shift can be worked. The Carpenter shall receive an additional fifteen percent (15%) of the base wage.

SUPPLEMENTAL BENEFITS

Per hour:

Journeyworker \$ 31.66

OVERTIME PAY

See (B, E, Q) on OVERTIME PAGE

HOLIDAY

BUILDING:

Paid: See (1) on HOLIDAY PAGE.
Overtime: See (5, 6, 16, 25) on HOLIDAY PAGE.
- Holidays that fall on Sunday will be observed Monday.

HEAVY&HIGHWAY/TUNNEL:

Paid: See (5, 6, 25) on HOLIDAY PAGE
Overtime: See (5, 6) on HOLIDAY PAGE
- Holidays that fall on Sunday will be observed Monday

- Must be employed during the five (5) work days immediately preceding a holiday or during the five (5) work days following the paid holiday to receive holiday pay
- If Employee is entitled to a paid holiday, the Employee is paid the Holiday wage and supplemental benefits whether they work or not. If Employee works the Holiday, the Employee will receive holiday pay (including supplemental benefits), plus the applicable premium wage for working the Holiday. If Employee works in excess of 8 hours on Holiday, then benefits will be paid for any hours in excess of 8 hours.

REGISTERED APPRENTICES

1 Year terms at the following wage rates.

1st	2nd	3rd	4th
\$ 19.17	\$ 23.00	\$ 26.84	\$ 30.67
+3.09*	+3.09*	+3.09*	+3.09*

*For all hours paid straight or premium

SUPPLEMENTAL BENEFITS per hour:

All Terms \$ 16.81

11-279.2B/H&H

Electrician

12/01/2025

JOB DESCRIPTION Electrician

DISTRICT 11

ENTIRE COUNTIES

Orange, Putnam, Rockland

PARTIAL COUNTIES

Dutchess: Towns of Fishkill, East Fishkill, and Beacon.

WAGES

Per hour:

	07/01/2025
Electrician Wireman/Technician	\$ 51.50
	+ 10.00*

*For all hours paid straight or premium, not to be included in 3% calculation for supplemental benefits.

NOTE ADDITIONAL AMOUNTS PAID FOR THE FOLLOWING WORK LISTED BELOW (subject to overtime premiums):

- On jobs where employees are required to work from boatswain chairs, swinging scaffolds, etc., forty (40) feet or more above the ground, or under compressed air, using Scottair packs, or gas masks, they shall receive an additional \$2.00 per hour above the regular straight time rate.
- Journeyman Wireman working in Shafts, Tunnels or on Barges: \$5.00 above the Journeyman Wireman rate of pay
- Journeyman Wireman when performing welding or cable splicing: \$3.00 above the Journeyman Wireman rate of pay
- Journeyman Wireman required to have a NYS Asbestos Certificate: \$3.00 above the Journeyman Wireman rate of pay
- Journeyman Wireman required to have a CDL: \$3.00 above the Journeyman Wireman rate of pay.

SHIFT WORK

SHIFT DIFFERENTIAL: On Public Work in New York State when shift work is mandated either in the job specifications or by the contracting agency, the following rates apply when shift is worked:

Between 4:30pm & 12:30am	\$ 60.43
	+ 10.00*
Between 12:30am & 8:30am	\$ 67.69
	+ 10.00*

SUPPLEMENTAL BENEFITS

Per hour:

Journeyman	07/01/2025
	\$ 30.69 plus
	3% of straight
	or premium wage

OVERTIME PAY

See (B, E, Q) on OVERTIME PAGE

HOLIDAY

Paid: See (1) on HOLIDAY PAGE
Overtime: See (5, 6, 13, 15, 16, 25) on HOLIDAY PAGE

When the holiday falls on a Saturday it is observed the Friday before. When the holiday falls on a Sunday it is observed on the Monday after.

REGISTERED APPRENTICES

WAGES:

(1)year terms at the following rates

07/01/2025	1st	2nd	3rd	4th	5th	6th
1st Shift	\$ 17.00	\$ 20.60	\$ 25.75	\$ 30.90	\$ 36.05	\$ 38.63
	+1.00*	+1.00*	+1.00*	+2.00*	+2.50*	+2.50*

2nd Shift	19.94	24.17	30.22	36.26	42.30	45.32
	+1.00*	+1.00*	+1.00*	+2.00*	+2.50*	+2.50*
3rd Shift	22.34	27.08	33.85	40.01	47.38	50.77
	+1.00*	+1.00*	+1.00*	+2.00*	+2.50*	+2.50*

*For all hours paid straight or premium, not to be included in 3% calculation for supplemental benefits.

SUPPLEMENTAL BENEFITS per hour:

07/01/2025

1st term	\$ 16.28 plus 3% of straight or premium wage
2nd term	\$ 17.78 plus 3% of straight or premium wage
3rd term	\$ 18.78 plus 3% of straight or premium wage
4th term	\$ 19.78 plus 3% of straight or premium wage
5th term	\$ 21.28 plus 3% of straight or premium wage
6th term	\$ 21.28 plus 3% of straight or premium wage

11-363/1

Electrician

12/01/2025

JOB DESCRIPTION Electrician

DISTRICT 11

ENTIRE COUNTIES

Sullivan, Ulster

PARTIAL COUNTIES

Delaware: Only in the Townships of Andes, Harpersfield, Kortwright, Stamford, Bovina, Roxbury, Middletown and those portions of Colchester and Hancock south of the East Branch of the Delaware River.

Dutchess: All of the county except for the towns of Fishkill, East Fishkill, and Beacon.

Greene: That portion of the county south of a line following the south limits of the city of Catskill in a Westerly direction from the Hudson River to Highway 23A along 23A to the road following the Little Westkill and continuing along this road to Delaware County.

WAGES

Per hour:

Electrician Wireman/ Technician	07/01/2025
Electrical/Technician Projects	
under \$ 250,000.00	\$ 47.50
	+ 10.00*
over \$ 250,000.00	\$ 51.50
	+ 10.00*

*For all hours paid straight or premium, not to be included in 3% calculation for supplemental benefits.

NOTE ADDITIONAL AMOUNTS PAID FOR THE FOLLOWING WORK LISTED BELOW (subject to overtime premiums):

- On jobs where employees are required to work from boatswain chairs, swinging scaffolds, etc., forty (40) feet or more above the ground, or under compressed air, using Scottair packs, or gas masks, they shall receive an additional \$2.00 per hour above the regular straight time rate.
- Journeyman Wireman working in Shafts, Tunnels or on Barges: \$5.00 above the Journeyman Wireman rate of pay
- Journeyman Wireman when performing welding or cable splicing: \$3.00 above the Journeyman Wireman rate of pay
- Journeyman Wireman required to have a NYS Asbestos Certificate: \$3.00 above the Journeyman Wireman rate of pay
- Journeyman Wireman required to have a CDL: \$3.00 above the Journeyman Wireman rate of pay.

SHIFT WORK

SHIFT DIFFERENTIAL: On Public Work in New York State when shift work is mandated either in the job specifications or by the contracting agency, the following rates apply:

Shift worked between 4:30pm & 12:30am

Electrical/Technician Projects	
under \$ 250,000.00	\$ 55.73
	+ 10.00*
over \$ 250,000.00	\$ 60.43
	+ 10.00*

Shift worked between 12:30am & 8:30am

Electrical/Technician Projects	
under \$ 250,000.00	\$ 62.43
	+ 10.00*
over \$ 250,000.00	\$ 67.69
	+ 10.00*

SUPPLEMENTAL BENEFITS

Per hour: 07/01/2025
Journeyman \$ 30.69 plus
3% of straight
or premium wage

OVERTIME PAY

See (B, E, Q) on OVERTIME PAGE

HOLIDAY

Paid: See (1) on HOLIDAY PAGE
Overtime: See (5, 6, 13, 15, 16, 25) on HOLIDAY PAGE

When the holiday falls on a Saturday it is observed the Friday before. When the holiday falls on a Sunday it is observed on the Monday after.

REGISTERED APPRENTICES

WAGES:

(1)year terms at the following rates

07/01/2025	1st	2nd	3rd	4th	5th	6th
1st Shift	\$ 17.00	\$ 20.60	\$ 25.75	\$ 30.90	\$ 36.05	\$ 38.63
	+1.00*	+1.00*	+1.00*	+2.00*	+2.50*	+2.50*
2nd Shift	19.94	24.17	30.22	36.26	42.30	45.32
	+1.00*	+1.00*	+1.00*	+2.00*	+2.50*	+2.50*
3rd Shift	22.34	27.08	33.85	40.61	47.38	50.77
	+1.00*	+1.00*	+1.00*	+2.00*	+2.50*	+2.50*

*For all hours paid straight or premium, not to be included in 3% calculation for supplemental benefits.

SUPPLEMENTAL BENEFITS per hour:

07/01/2025	
1st term	\$ 16.28 plus 3% of straight or premium wage
2nd term	\$ 17.78 plus 3% of straight or premium wage
3rd term	\$ 18.78 plus 3% of straight or premium wage
4th term	\$ 19.78 plus 3% of straight or premium wage
5th term	\$ 21.28 plus 3% of straight or premium wage
6th term	\$ 21.28 plus 3% of straight or premium wage

11-363/2

Elevator Constructor

12/01/2025

JOB DESCRIPTION Elevator Constructor

DISTRICT 1

ENTIRE COUNTIES

Columbia, Dutchess, Greene, Orange, Putnam, Sullivan, Ulster

PARTIAL COUNTIES

Delaware: Towns of Andes, Bovina, Colchester, Davenport, Delhi, Harpersfield, Hemdon, Kortright, Meredith, Middletown, Roxbury, Hancock & Stamford

Rockland: Only the Township of Stony Point.

Westchester: Only the Townships of Bedford, Lewisboro, Cortland, Mt. Kisco, North Salem, Pound Ridge, Somers and Yorktown.

WAGES

Per Hour	07/01/2025	01/01/2026
Mechanic	\$ 73.07	\$ 76.12
Helper	70% of Mechanic Wage Rate	70% of Mechanic Wage Rate

SUPPLEMENTAL BENEFITS

Per hour	07/01/2025	01/01/2026
Journeyworker/Helper	\$ 38.435*	\$ 38.985*

(*)Plus 6% of regular hourly if less than 5 years of service. Plus 8% of regular hourly rate if more than 5 years of service.

OVERTIME PAY

See (D, O) on OVERTIME PAGE

HOLIDAY

Paid: See (5, 6, 15, 16) on HOLIDAY PAGE
Overtime: See (5, 6, 15, 16) on HOLIDAY PAGE

Note: When a paid holiday falls on Saturday, it shall be observed on Friday. When a paid holiday falls on Sunday, it shall be observed on Monday.

REGISTERED APPRENTICES

Wages per hour:

0-6 mo*	6-12 mo	2nd yr	3rd yr	4th yr
50 %	55 %	65 %	70 %	80 %

(*)Plus 6% of the hourly rate, no additional supplemental benefits.

Supplemental Benefits per hour worked:

Same as Journeyperson/Helper

1-138

Glazier

12/01/2025

JOB DESCRIPTION Glazier

DISTRICT 8

ENTIRE COUNTIES

Bronx, Dutchess, Kings, Nassau, New York, Orange, Putnam, Queens, Richmond, Rockland, Suffolk, Sullivan, Ulster, Westchester

WAGES

Per hour:

	07/01/2025	11/01/2025
Glazier, Glass Tinting and Window Film	\$ 64.23	\$ 65.23
Scaffolding, including swing scaffold	69.23	70.23
*Mechanical Equipment	65.23	66.23
**Repair & Maintenance	31.71	32.44

*Mechanical equipment, scissor jacks, man lifts, booms & buckets 30' or more, but not pipe scaffolding.

**Repair & Maintenance- All repair & maintenance work on a particular building whenever performed, where the total cumulative Repair & Maintenance contract value is under \$193,000.

SUPPLEMENTAL BENEFITS

Per hour:

Glazier, Glass Tinting and Window Film, Scaffolding and Mechanical Equipment	\$ 43.03	\$ 43.88
Repair & Maintenance	25.12	25.37

OVERTIME PAY

See (B, E, Q, V) on OVERTIME PAGE

For 'Repair & Maintenance' see (B, B2, I, S) on overtime page.

HOLIDAY

Paid: See (5, 6, 16, 25) on HOLIDAY PAGE

Overtime: See (5, 6, 16, 25) on HOLIDAY PAGE

For 'Repair & Maintenance'

Paid: See(5, 6, 16, 25)

Overtime: See(5, 6, 16, 25)

REGISTERED APPRENTICES

Wage per hour:

(1) year terms at the following wage rates:

	07/01/2025	11/01/2025
1st term	\$ 22.79	\$ 23.29
2nd term	31.15	31.71
3rd term	41.53	42.23
4th term	50.90	51.70

Supplemental Benefits:

(Per hour)

1st term	\$ 19.56	\$ 19.80

2nd term	27.85	28.31
3rd term	33.49	34.09
4th term	36.73	37.41

8-1087 (DC9 NYC)

Insulator - Heat & Frost

12/01/2025

JOB DESCRIPTION Insulator - Heat & Frost

DISTRICT 8

ENTIRE COUNTIES

Dutchess, Orange, Putnam, Rockland, Westchester

WAGES

Per hour: 07/01/2025

Insulator/Fire Stop Work* \$ 62.42

Discomfort & Additional Training** 65.48

* Applies on all exclusive Fire Stop Work (When contract is for Fire Stop work only). No apprentices on these contracts only.

**Applies to work requiring: garb or equipment worn against the body not customarily worn by insulators; psychological evaluation ;special training, including but not limited to "Yellow Badge" radiation training

Note: Additional \$10 a day for work 30 feet or more above floor or ground level.

SUPPLEMENTAL BENEFITS

Per hour:

Insulator/Fire Stop Journeyworker: \$ 38.90

Discomfort & Additional Training: \$ 40.94

OVERTIME PAY

See (B, E, E2, Q) on OVERTIME PAGE

HOLIDAY

Paid: See (1) on HOLIDAY PAGE

Note: Last working day preceding Christmas and New Years day, workers shall work no later than 12:00 noon and shall receive 8 hrs pay.

Overtime: See (2*, 4, 6, 16, 25) on HOLIDAY PAGE.

*Note: Labor Day triple time if worked.

REGISTERED APPRENTICES

(1) year terms:

Insulator Apprentices:

1st	2nd	3rd	4th
\$ 33.91	\$ 39.61	\$ 45.31	\$ 51.02

Discomfort & Additional Training Apprentices:

1st	2nd	3rd	4th
\$ 35.44	\$ 41.44	\$ 47.45	\$ 53.47

Supplemental Benefits paid per hour:

Insulator Apprentices:

1st term	\$ 19.81
2nd term	23.62
3rd term	27.44
4th term	31.26

Discomfort & Additional Training Apprentices:

1st term	\$ 20.82
2nd term	24.85
3rd term	28.88
4th term	32.91

Ironworker**12/01/2025**

JOB DESCRIPTION Ironworker**DISTRICT** 11**ENTIRE COUNTIES**

Dutchess, Orange, Putnam, Rockland, Sullivan, Ulster

WAGES

Per hour:

	07/01/2025	07/01/2026 Additional
Structural	\$ 52.88	\$ 2.00*
Reinforcing	52.88	2.00*
Ornamental	52.88	2.00*
Chain Link Fence	52.88	2.00*

(*) To be allocated at a later date.

NOTE: For Reinforcing classification ONLY, Ironworker 4-46Reinf rates apply in Rockland County's southern section (south of Convent Road and east of Blue Hills Road).

SHIFT WORK

On Government Mandated Irregular Workdays or Shift Work, the following wage will be paid:

1st Shift	\$ 52.88
2nd Shift	57.94
3rd Shift	63.04

Note- Any shift that works past 12:00 midnight shall receive the 3rd shift differential.

SUPPLEMENTAL BENEFITS

Per hour:

Journeyman	\$ 47.33

OVERTIME PAY

See (B1, Q, V) on OVERTIME PAGE

HOLIDAY

Paid: See (1) on HOLIDAY PAGE

Overtime: See (5, 6, 16) on HOLIDAY PAGE

If a holiday falls on Saturday, it will be observed Friday. If a holiday falls on Sunday, it will be observed Monday.

REGISTERED APPRENTICES

Wages:

(1) year terms at the following wage:

	1st yr	2nd yr	3rd yr	4th yr
1st Shift	\$ 26.45	\$ 31.73	\$ 37.03	\$ 42.31
2nd Shift	31.75	36.98	42.23	47.47
3rd Shift	35.22	40.78	46.36	51.92

Supplemental Benefits per hour:

	07/01/2025
1st year	\$ 41.21
2nd year	42.43
3rd year	43.66
4th year	44.88

11-417

Laborer - Building**12/01/2025**

JOB DESCRIPTION Laborer - Building**DISTRICT** 11**ENTIRE COUNTIES**

Dutchess

PARTIAL COUNTIES

Columbia: Only the Townships of Greenport, Claverack, Philmont, Clermont, Germantown, Livingston, Hillsdale, Gallatin, Copake, Ancram, Taghkanic and the City of Hudson.

WAGES

ALL WORK RELATED WITH TOXIC OR ANY ASBESTOS OR HAZARDOUS MATERIAL

WAGES: (per hour)

	07/01/2025	06/01/2026 Additional
Class 4	\$ 51.45	\$ 2.99*

*To be allocated at a later date.

These rates will cover all work within five feet of the building foundation line.

SHIFT WORK

Shift Differential: On all Governmental mandated irregular or off shift work, an additional 25% of wage is required. The 25% shift differential will be paid on public works contract for shifts or irregular workdays outside the normal working hours for 2nd and 3rd shifts or irregular workday or when mandated or required by state, federal, county, local or other governmental agency contracts.

SUPPLEMENTAL BENEFITS

Per hour:

Journeyman	\$ 33.95
Shift	\$ 41.29

OVERTIME PAY

See (B, *E, E5, **Q) on OVERTIME PAGE

*For first 8 hours on Saturday

**When an employee is required to work on a holiday which falls on a Sunday the employee shall be paid three (3) times the hourly rate and one (1) hour benefits for every hour worked. When an employee is required to work on a holiday which falls on a Saturday the employee shall be paid two and a half (2.5) times the hourly rate and one hour benefits for every hour worked.

HOLIDAY

Paid: See (1) on HOLIDAY PAGE

Overtime: See (5, 6, 16, 25) on HOLIDAY PAGE

Holidays that fall on Saturday shall be observed on Friday, when holidays fall on Sunday they shall be observed on Monday.

REGISTERED APPRENTICES

(1000) hour terms at the following wages.

	07/01/2025
1st term	\$ 29.50
2nd term	34.05
3rd term	38.60
4th term	43.15

Supplemental Benefits per hour:

All Terms Regular	\$ 30.35
All Terms Shift Rate	36.75

11-17tox B

Laborer - Building

12/01/2025

JOB DESCRIPTION Laborer - Building

DISTRICT 8

ENTIRE COUNTIES

Dutchess

PARTIAL COUNTIES

Columbia: Only the Townships of Ancram, Claverack, Clermont, Copake, Gallatin, Germantown, Greenport, Hillsdale, Hudson, Livingston, Philmont and Taconic.

WAGES

GROUP # 1:

All Laborers except those listed in Group 2

GROUP # 2:

Blaster, Laser Beam Oper., Asphalt Rakers, & Drilling Equipment Only Where a Separate Air Compressor Unit Supplies Power

WAGES per hour: 07/01/2025

GROUP # 1	\$ 41.10*
GROUP # 2	43.45*

*Subtract \$ 4.50 to calculate overtime premium

Note: Any job requiring Hazwopper Certification will pay \$1.00 above job classification wage rate.

SUPPLEMENTAL BENEFITS

Per hour:

Journeyman	\$ 31.50

OVERTIME PAY

See (B, F, R) on OVERTIME PAGE

HOLIDAY

Paid: See (1) on HOLIDAY PAGE

Overtime: See (5, 6) on HOLIDAY PAGE

Note: Whenever a holidays falls on Sunday, it will be observed on the following Monday.

REGISTERED APPRENTICES

Wages per hour: 07/01/2025

1000 Hour terms

1st term	\$ 29.50
2nd term	34.05
3rd term	38.60
4th term	40.00

Note: Any job requiring Hazwopper Certification will pay \$1.00 above job classification wage rate.

Supplemental Benefits per hour:

All terms \$ 24.60

8-235

Laborer - Heavy&Highway

12/01/2025

JOB DESCRIPTION Laborer - Heavy&Highway

DISTRICT 8

ENTIRE COUNTIES

Dutchess

PARTIAL COUNTIES

Columbia: Only the Townships of Ancram, Claverack, Clermont, Copake, Gallatin, Germantown, Greenport, Hillsdale, Hudson, Livingston, Philmont and Taconic.

WAGES

GROUP I: Blaster, Asphalt Screedman, ACI Certified Flatwork Finisher, Pipe Jacking and Boring Operations, Operator Qualified Dead Condition Pipe Fuser (B Mechanic)

GROUP II: Burner, Drill Operator, Jumbo Driller, Wagon Driller, Air Track Driller, Hydraulic Driller, Self Contained Rotary Drill Operator, Pneumatic Dowel Driller, Concrete Form Aligner, Concrete Form and Curb Form Highway, Concrete Finisher, Asphalt Raker, Pipe Fusion, Wrecking "Bar Person", Operator Qualified Peer Checker.

GROUP III: Asphalt Curb Machine Operator, Jeepers Operator, Pavement Breaker Operator, Power Saw Operator, Jack Hammer Drill, all types Pneumatic Tool and Gasoline Drill, Concrete Saw, Gunning, Railroad, Spike Puller, Sandblasting, Shoring, Pipe Layer, Deck Winches on Scows, Power Buggy and Operator, Power Wheelbarrow Operator, Laser Beam and X-Ray Operator, Pipe Religner, Underpinning, Chain Saw, Tree Cutter, Jack Leg Driller, Hydraulic Rock Splitter, certified, Certified Scaffold Erector, Remote Controlled Demolition Robot, Wrecking "Bar Person" Helper, Utility Per Diem Laborer, Compressed air-lance, Water jet lance

Group IV: General Concrete Laborers - anything pertaining to concrete, aggregate or concrete material handling, Puddlers, Asphalt Worker, Crack Router Operator, Rock Scalers, Vibrator Operator, Bit Grinder, Concrete Grinder, Remote Walk Behind Roller (Wacker, Rammax, etc), Air Tampers and All Tampers not covered by any other classification, Form Pin Pullers, Pumps and their operation, Service of Air Power, Epoxy and Waterproofing Worker, Fine Grade person between forms, Barco Rammer, Guard Rail Installation and Demolition Link Fence, Steel Kings, Wire Mesh, Setting of all Paving Blocks, Brick Paver and Rubber Pavers, Rip Rap and Dry Stone Layer Wall, Stone Work and Pointing, Cement Spray Men, Gabion Basket Assembler, Installation of Noise Barrier, Jersey Barrier and Joints, Pre-Cast Manholes, and Pre-cast and Pre-cast Catch Basins, Crib Retaining Walls

Group V: All Driller Helpers(including Hydraulic Wagon Air Track). Common Laborers, Certified Fire Watch Laborers, All AFL/CIO Trades, Signal Person Truck Spotters, Power Person, Landscaping and Nursery Person, Artificial Turf, Placing Fabric on Landfill, Sign Installer, Temporary and Interim Pavement Line Striping, String Line Automation Grades, Lock Level, Certified Traffic Safety and Control (Pattern)

Group V (A): Flagperson

Group VI: Confined Space Laborer

Group VII: Operator Qualified Gas Mechanic

WAGES per hour 07/01/2025

Group I: \$ 51.40

Group II:	49.99
Group III:	49.58
Group IV:	49.21
Group V:	48.85
Group V(A):	42.25
Group VI:	50.93
Group VII:	61.80

Note: All employees working on a project that requires Hazwopper Certification will receive \$1.00 per hour over job classification rate of pay.

SHIFT WORK

Supplemental Benefits: \$ 41.60*

*Applies for contracting agency mandated irregular shift work

All employees who work an irregular work day that starts after 9:00 AM on a governmental mandated schedule shall be paid an additional 15% per hour.

SUPPLEMENTAL BENEFITS

Per hour:	07/01/2025
Journeyman	\$ 30.60

OVERTIME PAY

See (B, E, E2, Q) on OVERTIME PAGE

HOLIDAY

Paid:	See (5, 6, 15, 25) on HOLIDAY PAGE
Overtime:	See (5, 6, 15, 25) on HOLIDAY PAGE

Note: Whenever a holidays falls on Sunday, it will be observed on the following Monday.

REGISTERED APPRENTICES

Wages per hour
1000 hour year terms

1st Term	\$ 29.50
2nd Term	34.05
3rd Term	38.60
4th Term	40.00

Note: All employees working on a project that requires Hazwopper Certification will receive \$1.00 per hour over job classification rate of pay.

Supplemental Benefits per hour:	
All Terms	\$ 24.60

8-235h

Laborer - Heavy&Highway

12/01/2025

JOB DESCRIPTION Laborer - Heavy&Highway

DISTRICT 11

ENTIRE COUNTIES

Dutchess

PARTIAL COUNTIES

Columbia: Only the Townships of Claverack, Clermont, Greenport, Philmont, Germantown,Livingston, Hillsdale, Taghkanic, Gallatin, Copake, Ancram, City of Hudson.

WAGES

ALL WORK RELATED WITH TOXIC OR ANY ASBESTOS OR HAZARDOUS MATERIAL, BIOREMEDIATION AND PHYTO REMEDIATION(Five feet or more outside of building foundation line)

WAGES:(per hour)	07/01/2025	06/01/2026
Class 3	\$ 54.00	\$ 56.05

SHIFT WORK

SHIFT DIFFERENTIAL: Night work and irregular shift require 20% increase on wages for all Government mandated night and irregular shift work.

SUPPLEMENTAL BENEFITS

Per hour:		
Journeyman	\$ 34.03	\$ 35.28
Shift	39.60	41.37

OVERTIME PAY

See (B, E, P, *R, **S, ***T, X) on OVERTIME PAGE

*For Mon-Fri Holidays, Double Benefits to be paid for all hours worked.

**For Saturday Holidays or Friday recognized, Double Benefits for all hours worked.

***For Sunday Holidays or Monday recognized, Double Benefits for all hours worked.

HOLIDAY

Paid: See (5, 6, 15, 25) on HOLIDAY PAGE

Overtime: See (5, 6, 15, 25) on HOLIDAY PAGE

To be eligible for a paid holiday, an employee must work at least two (2) days in the calendar week or payroll week in which the holiday falls.

REGISTERED APPRENTICES

(1000) hour terms at the following wages.

	07/01/2025
1st term	\$ 29.50
2nd term	34.05
3rd term	38.60
4th term	43.15

Supplemental Benefits per hour:

All Terms Regular	\$ 30.35
All Terms Shift Rate	35.27

11-17tox HH

Laborer - Tunnel

12/01/2025

JOB DESCRIPTION Laborer - Tunnel

DISTRICT 11

ENTIRE COUNTIES

Columbia, Dutchess, Greene, Orange, Otsego, Putnam, Rockland, Sullivan, Ulster, Westchester

PARTIAL COUNTIES

Chenango: Townships of Columbus, Sherburne and New Berlin.

Delaware: Townships of Andes, Bovina, Middletown, Roxbury, Franklin, Hamden, Stamford, Delhi, Kortright, Harpersfield, Merideth and Davenport.

WAGES

Class 1: All support laborers/sandhogs working above the shaft or tunnel.

Class 2: All laborers/sandhogs working in the shaft or tunnel.

Class 4: Safety Miners

Class 5: Site work related to Shaft/Tunnel

WAGES: (per hour)

	07/01/2025	06/01/2026 Additional
Class 1	\$ 58.55	\$ 2.75*
Class 2	60.70	2.75*
Class 4	67.10	2.75*
Class 5	51.40	2.75*

*To be allocated at a later date

Toxic and hazardous waste, lead abatement and asbestos abatement work will be paid an additional \$ 3.00 an hour.

SUPPLEMENTAL BENEFITS

Per hour:

Benefit 1	\$ 37.88
Benefit 2	54.01
Benefit 3	70.12

Benefit 1 applies to straight time hours, paid holidays not worked.

Benefit 2 applies to over 8 hours in a day (M-F) and Saturday hours worked.

Benefit 3 applies to Sunday and Holiday hours worked.

OVERTIME PAY

See (B, E, Q, X) on OVERTIME PAGE

HOLIDAY

Paid: See (5, 6, 15, 25) on HOLIDAY PAGE

Overtime: See (5, 6, 15, 16, 25) on HOLIDAY PAGE

When a recognized Holidays falls on Saturday or Sunday, holidays falling on Saturday shall be recognized or observed on Friday and holidays falling on Sunday shall be recognized or observed on Monday. Employees ordered to work on the Saturday or Sunday of the holiday or on the recognized or the observed Friday or Monday for those holidays falling on Saturday or Sunday shall receive double time the established rate and benefits for the holiday.

REGISTERED APPRENTICES

FOR APPRENTICE RATES, refer to the appropriate Laborer Heavy & Highway wage rate contained in the wage schedule for the County and location where the work is to be performed.

11-17/60/235/754Tun

Lineman Electrician

12/01/2025

JOB DESCRIPTION Lineman Electrician

DISTRICT 6

ENTIRE COUNTIES

Albany, Allegany, Broome, Cattaraugus, Cayuga, Chautauqua, Chemung, Chenango, Clinton, Columbia, Cortland, Delaware, Dutchess, Erie, Essex, Franklin, Fulton, Genesee, Greene, Hamilton, Herkimer, Jefferson, Lewis, Livingston, Madison, Monroe, Montgomery, Niagara, Oneida, Onondaga, Ontario, Orange, Orleans, Oswego, Otsego, Putnam, Rensselaer, Rockland, Saratoga, Schenectady, Schoharie, Schuyler, Seneca, St. Lawrence, Steuben, Sullivan, Tioga, Tompkins, Ulster, Warren, Washington, Wayne, Wyoming, Yates

WAGES

A Lineman/Technician shall perform all overhead aerial work. A Lineman/Technician on the ground will install all electrical panels, connect all grounds, install and connect all electrical conductors, assembly of all electrical materials, conduit, pipe, or raceway; placing of fish wire; pulling of cables, wires or fiber optic cable through such raceways; splicing of conductors; dismantling of such structures, lines or equipment.

Crane Operators: Operation of any type of crane on line projects.

Crawler Backhoe: Operation of tracked excavator/crawler backhoe with 1/2 yard bucket or larger on line projects.

Digging Machine Operator: All other digging equipment and augering on line projects.

A Groundman/Truck Driver shall: Build and set concrete forms, handle steel mesh, set footer cages, transport concrete in a wheelbarrow, hand or machine concrete vibrator, finish concrete footers, mix mortar, grout pole bases, cover and maintain footers while curing in cold weather, operate jack hammer, operate hand pavement breaker, tamper, concrete and other motorized saws, as a drill helper, operate and maintain generators, water pumps, chainsaws, sand blasting, operate mulching and seeding machine, air tools, electric tools, gas tools, load and unload materials, hand shovel and/or broom, prepare and pour mastic and other fillers, assist digger operator/equipment operator in ground excavation and restoration, landscape work and painting. Only when assisting a lineman technician, a groundman/truck driver may assist in installing conduit, pipe, cables and equipment.

NOTE: Includes Teledata Work within ten (10) feet of High Voltage Transmission Lines. Also includes digging of holes for poles, anchors, footer, and foundations for electrical equipment.

-----Below rates applicable on all overhead and underground distribution and maintenance work, and all overhead and underground transmission line work and the installation of fiber optic cable where no other construction trades are or have been involved. Includes access matting for line work.

Per hour:	07/01/2025	05/04/2026	05/03/2027	05/01/2028
Group A:				
Lineman, Technician	\$ 61.56	\$ 64.37	\$ 66.84	\$ 69.47
Crane, Crawler Backhoe	61.56	64.37	66.84	69.47
Welder, Cable Splicer	61.56	64.37	66.84	69.47
Group B:				
Digging Mach. Operator	\$ 55.40	\$ 57.93	\$ 60.16	\$ 62.52
Group C:				
Tractor Trailer Driver	\$ 52.33	\$ 54.71	\$ 56.81	\$ 59.05
Groundman, Truck Driver	49.25	51.50	53.47	55.58
Equipment Mechanic	49.25	51.50	53.47	55.58
Group D:				
Flagger	\$ 33.86	\$ 35.40	\$ 36.76	\$ 38.21

Additional 3% per hour above regular rate for entire crew when a helicopter is used. This will increase to 5% on May 03, 2027.

-----Below rates applicable on all electrical sub-stations, switching structures, fiber optic cable and all other work not defined as "Utility outside electrical work." Includes access matting for line work.

Group A:				
Lineman, Technician	\$ 61.56	\$ 64.37	\$ 66.84	\$ 69.47
Crane, Crawler Backhoe	61.56	64.37	66.84	69.47

Cable Splicer	67.72	70.81	73.52	76.42
Certified Welder, Pipe Type Cable	\$ 64.64	\$ 67.59	\$ 70.18	\$ 72.94
Group B: Digging Mach. Operator	\$ 55.40	\$ 57.93	\$ 60.16	\$ 62.52
Group C: Tractor Trailer Driver	\$ 52.33	\$ 54.71	\$ 56.81	\$ 59.05
Groundman, Truck Driver	49.25	51.50	53.47	55.58
Equipment Mechanic	49.25	51.50	53.47	55.58
Group D: Flagger	\$ 33.86	\$ 35.40	\$ 36.76	\$ 38.12

Additional 3% per hour above regular rate for entire crew when a helicopter is used. This will increase to 5% on May 03, 2027.

-----Below rates applicable on all switching structures, maintenance projects, railroad catenary install/maintenance third rail installation, bonding of rails and pipe type cable and installation of fiber optic cable. Includes access matting for line work.

Group A: Lineman, Tech, Welder	\$ 62.94	\$ 65.81	\$ 68.34	\$ 71.03
Crane, Crawler Backhoe	62.94	65.81	68.34	71.03
Cable Splicer	69.23	72.39	75.17	78.13
Certified Welder, Pipe Type Cable	66.09	69.10	71.76	74.58
Group B: Digging Mach. Operator	\$ 56.65	\$ 59.23	\$ 61.51	\$ 63.93
Group C: Tractor Trailer Driver	\$ 53.50	\$ 55.94	\$ 58.09	\$ 60.38
Groundman, Truck Driver	50.35	52.65	54.67	56.82
Equipment Mechanic	50.35	52.65	54.67	56.82
Group D: Flagger	\$ 34.62	\$ 36.20	\$ 37.59	\$ 39.07

Additional 3% per hour above regular rate for entire crew when a helicopter is used. This will increase to 5% on May 03, 2027.

-----Below rates applicable on all overhead and underground transmission line work & fiber optic cable where other construction trades are or have been involved. This applies to transmission line work only, not other construction. Includes access matting for line work.

Group A: Lineman, Tech, Welder	\$ 64.18	\$ 67.10	\$ 69.68	\$ 72.43
Crane, Crawler Backhoe	64.18	67.10	69.68	72.43
Group B: Digging Mach. Operator	\$ 57.76	\$ 60.39	\$ 62.71	\$ 65.19
Group C: Tractor Trailer Driver	\$ 54.55	\$ 57.04	\$ 59.23	\$ 61.57
Groundman, Truck Driver	51.34	53.68	55.74	57.94
Equipment Mechanic	51.34	53.68	55.74	57.94
Group D: Flagger	\$ 35.30	\$ 36.91	\$ 38.32	\$ 39.84

Additional 3% per hour above regular rate for entire crew when a helicopter is used. This will increase to 5% on May 03, 2027.

SHIFT WORK

THE FOLLOWING RATES WILL APPLY ON ALL CONTRACTING AGENCY MANDATED MULTIPLE SHIFTS OF AT LEAST FIVE (5) DAYS DURATION WORKED BETWEEN THE HOURS LISTED BELOW:

1ST SHIFT	8:00 AM to 4:30 PM REGULAR RATE
2ND SHIFT	4:30 PM to 1:00 AM REGULAR RATE PLUS 17.3 %
3RD SHIFT	12:30 AM to 9:00 AM REGULAR RATE PLUS 31.4 %

SUPPLEMENTAL BENEFITS

Per hour:	07/01/2025	05/04/2026	05/03/2027	05/01/2028
Group A	\$ 31.90*	\$ 32.90*	\$ 34.40*	\$ 35.90*
Group B	\$ 27.90*	\$ 28.90*	\$ 30.40*	\$ 31.90*
Group C	\$ 27.70*	\$ 28.50*	\$ 29.70*	\$ 30.90*
Group D	\$ 27.65*	\$ 28.40*	\$ 29.53*	\$ 30.66*

*Plus 7 % of the hourly wage paid. The 7% is based on straight time or premium time.

OVERTIME PAY

See (B, E, Q, X) on OVERTIME PAGE. NOTE: Double time for all emergency work designated by the Dept. of Jurisdiction.

WAGE CAP - Double the straight time hourly base wage shall be the maximum hourly wage compensation for any hour worked. Contractor is still responsible to pay the hourly benefit amount for each hour worked.

HOLIDAY

Paid See (5, 6, 8, 15, 25) on HOLIDAY PAGE

Overtime See (5, 6, 8, 15, 25) on HOLIDAY PAGE

NOTE: All paid holidays falling on Saturday shall be observed on the preceding Friday. All paid holidays falling on Sunday shall be observed on the following Monday. Supplements for holidays paid at straight time.

REGISTERED APPRENTICES

WAGES per hour: 1000 hour terms at the following percentage of the applicable Journeyworker's Lineman wage.

1st	2nd	3rd	4th	5th	6th	7th
60%	65%	70%	75%	80%	85%	90%

SUPPLEMENTAL BENEFITS per hour:	07/01/2025	05/04/2026	05/03/2027	05/01/2028
All terms:	\$ 27.65*	\$ 28.40*	\$ 29.53*	\$ 30.66*

*Plus 7% of the hourly wage paid. The 7% is based on straight time or premium time.

6-1249a

Lineman Electrician - Teledata	12/01/2025

JOB DESCRIPTION Lineman Electrician - Teledata

DISTRICT 6

ENTIRE COUNTIES

Albany, Allegany, Broome, Cattaraugus, Cayuga, Chautauqua, Chemung, Chenango, Clinton, Columbia, Cortland, Delaware, Dutchess, Erie, Essex, Franklin, Fulton, Genesee, Greene, Hamilton, Herkimer, Jefferson, Lewis, Livingston, Madison, Monroe, Montgomery, Niagara, Oneida, Onondaga, Ontario, Orange, Orleans, Oswego, Otsego, Putnam, Rensselaer, Rockland, Saratoga, Schenectady, Schoharie, Schuyler, Seneca, St. Lawrence, Steuben, Sullivan, Tioga, Tompkins, Ulster, Warren, Washington, Wayne, Westchester, Wyoming, Yates

WAGES

NOTE: Applies to all public work and covered private projects, including those receiving ConnectAll funding subject to LL 224-E, solicited prior to July 1, 2025. For all projects, excluding dial-up internet access service, solicited on or after July 1, 2025, please see BROADBAND

Per hour:	07/01/2025
Cable Splicer	\$ 40.81
Installer, Repairman	\$ 38.73
Teledata Lineman	\$ 38.73
Tech., Equip. Operator	\$ 38.73
Groundman/Flagger	\$ 20.53

For outside work, stopping at first point of attachment (demarcation).

NOTE: EXCLUDES Teledata work within ten (10) feet of High Voltage (600 volts and over) transmission lines. For this work, please see LINEMAN.

SHIFT WORK

THE FOLLOWING RATES APPLY WHEN THE CONTRACTING AGENCY MANDATES MULTIPLE SHIFTS OF AT LEAST FIVE (5) DAYS DURATION ARE WORKED. WHEN TWO (2) OR THREE (3) SHIFTS ARE WORKED THE FOLLOWING RATES APPLY:

1ST SHIFT	REGULAR RATE
2ND SHIFT	REGULAR RATE PLUS 10%
3RD SHIFT	REGULAR RATE PLUS 15%

SUPPLEMENTAL BENEFITS

Per hour:

Journeyworker \$ 5.77
*plus 3% of
the hour
wage paid

*The 3% is based on the hourly wage paid, straight time rate or premium rate.

OVERTIME PAY

See (B, E, Q) on OVERTIME PAGE

WAGE CAP - Double the straight time hourly base wage shall be the maximum hourly wage compensation for any hour worked. Contractor is still responsible to pay the hourly benefit amount for each hour worked.

HOLIDAY

Paid: See (1) on HOLIDAY PAGE
Overtime: See (5, 6, 16) on HOLIDAY PAGE

6-1249LT - Teledata

Lineman Electrician - Traffic Signal, Lighting

12/01/2025

JOB DESCRIPTION Lineman Electrician - Traffic Signal, Lighting

DISTRICT 6

ENTIRE COUNTIES

Columbia, Dutchess, Orange, Putnam, Rockland, Ulster

WAGES

Lineman/Technician shall perform all overhead aerial work. A Lineman/Technician on the ground will install all electrical panels, connect all grounds, install and connect all electrical conductors which includes, but is not limited to road loop wires; conduit and plastic or other type pipes that carry conductors, flex cables and connectors, and to oversee the encasement or burial of such conduits or pipes.

Crane Operators: Operation of any type of crane on Traffic Signal/Lighting projects.

Crawler Backhoe: Operation of tracked excavator/crawler backhoe with 1/2 yard bucket or larger on Traffic Signal/Lighting projects.

Digging Machine Operator: All other digging equipment and augering on Traffic Signal/Lighting projects.

A Groundman/Truck Driver shall: Build and set concrete forms, handle steel mesh, set footer cages, transport concrete in a wheelbarrow, hand or machine concrete vibrator, finish concrete footers, mix mortar, grout pole bases, cover and maintain footers while curing in cold weather, operate jack hammer, operate hand pavement breaker, tamper, concrete and other motorized saws, as a drill helper, operate and maintain generators, water pumps, chainsaws, sand blasting, operate mulching and seeding machine, air tools, electric tools, gas tools, load and unload materials, hand shovel and/or broom, prepare and pour mastic and other fillers, assist digger operator/equipment operator in ground excavation and restoration, landscape work and painting. Only when assisting a lineman technician, a groundman/truck driver may assist in installing conduit, pipe, cables and equipment.

A flagger's duties shall consist of traffic control only.

Per hour:	07/01/2025	05/04/2026	05/03/2027	05/01/2028
Group A:				
Lineman, Technician	\$ 54.19	\$ 56.70	\$ 58.85	\$ 61.15
Crane, Crawler Backhoe	54.19	56.70	58.85	61.15
Certified Welder	56.90	59.54	61.79	64.21
Group B:				
Digging Machine	\$ 48.77	\$ 51.03	\$ 52.97	\$ 55.04
Group C:				
Tractor Trailer Driver	\$ 46.06	\$ 48.20	\$ 50.02	\$ 51.98
Groundman, Truck Driver	43.35	45.36	47.08	48.92
Equipment Mechanic	43.35	45.36	47.08	48.92
Group D:				
Flagger	\$ 32.51	\$ 34.02	\$ 35.31	\$ 36.69

Above rates are applicable for installation, testing, operation, maintenance and repair on all Traffic Control (Signal) and Illumination (Lighting) projects, Traffic Monitoring Systems, and Road Weather Information Systems. Includes digging of holes for poles, anchors, footer foundations for electrical equipment; assembly of all electrical materials or raceway; placing of fish wire; pulling of cables, wires or fiber optic cable through such raceways; splicing of conductors; dismantling of such structures, lines or equipment.

SHIFT WORK

THE FOLLOWING RATES WILL APPLY ON ALL CONTRACTING AGENCY MANDATED MULTIPLE SHIFTS OF AT LEAST FIVE (5) DAYS DURATION WORKED BETWEEN THE HOURS LISTED BELOW:

1ST SHIFT	8:00 AM TO 4:30 PM REGULAR RATE
2ND SHIFT	4:30 PM TO 1:00 AM REGULAR RATE PLUS 17.3%
3RD SHIFT	12:30 AM TO 9:00 AM REGULAR RATE PLUS 31.4%

SUPPLEMENTAL BENEFITS

Per hour worked:

	07/01/2025	05/04/2026	05/03/2027	05/01/2028
Group A	\$ 31.90*	\$ 32.90*	\$ 34.40*	\$ 35.90*
Group B	\$ 27.90*	\$ 28.90*	\$ 30.40*	\$ 31.90*
Group C	\$ 27.70*	\$ 28.50*	\$ 29.70*	\$ 30.90*
Group D	\$ 27.65*	\$ 28.40*	\$ 29.53*	\$ 30.66*

* Plus 7% of the hourly wage paid. The 7% is based on straight time or premium time.

OVERTIME PAY

See (B, E, Q, X) on OVERTIME PAGE. NOTE: Double time for all emergency work designated by the Dept. of Jurisdiction.

WAGE CAP - Double the straight time hourly base wage shall be the maximum hourly wage compensation for any hour worked. Contractor is still responsible to pay the hourly benefit amount for each hour worked.

HOLIDAY

Paid: See (5, 6, 8, 15, 25) on HOLIDAY PAGE

Overtime: See (5, 6, 8, 15, 25) on HOLIDAY PAGE

NOTE: All paid holidays falling on Saturday shall be observed on the preceding Friday. All paid holidays falling on Sunday shall be observed on the following Monday. Supplements for holidays paid at straight time.

REGISTERED APPRENTICES

WAGES per hour: 1000 hour terms at the following percentage of the applicable Journeyworker's Lineman wage.

1st	2nd	3rd	4th	5th	6th	7th
60%	65%	70%	75%	80%	85%	90%

SUPPLEMENTAL BENEFITS per hour:

	07/01/2025	05/04/2026	05/03/2027	05/01/2028
All terms:	\$ 27.65*	\$ 28.40*	\$ 29.53*	\$ 30.66*

* Plus 7% of the hourly wage paid. The 7% is based on straight time or premium time.

6-1249aReg8LT

Lineman Electrician - Tree Trimmer

12/01/2025

JOB DESCRIPTION Lineman Electrician - Tree Trimmer

DISTRICT 6

ENTIRE COUNTIES

Albany, Allegany, Broome, Cattaraugus, Cayuga, Chautauqua, Chemung, Chenango, Clinton, Columbia, Cortland, Delaware, Dutchess, Erie, Essex, Franklin, Fulton, Genesee, Greene, Hamilton, Herkimer, Jefferson, Lewis, Livingston, Madison, Monroe, Montgomery, Niagara, Oneida, Onondaga, Ontario, Orange, Orleans, Oswego, Otsego, Putnam, Rensselaer, Rockland, Saratoga, Schenectady, Schoharie, Schuyler, Seneca, St. Lawrence, Steuben, Sullivan, Tioga, Tompkins, Ulster, Warren, Washington, Wayne, Wyoming, Yates

WAGES

Applies to line clearance, tree work and right-of-way preparation on all new or existing energized overhead or underground electrical, telephone and CATV lines. This also includes stump removal near underground energized electrical lines including telephone and CATV lines.

Per hour:	07/01/2025	01/01/2026	01/04/2026	01/03/2027
Tree Trimmer	\$ 33.18	\$ 33.18	\$ 34.67	\$ 36.23
Equipment Operator	29.35	29.35	30.67	32.05
Equipment Mechanic	29.35	29.35	30.67	32.05
Truck Driver	23.85	23.85	24.93	26.05
Groundman	19.64	19.64	20.53	21.45
Flagger	15.50	16.00	16.20	16.93

SUPPLEMENTAL BENEFITS

Per hour:

Journeyworker	\$ 10.98*	\$ 10.98*	\$ 11.23*	\$ 11.48*

* Plus 4.5% of the hourly wage paid. The 4.5% is based on straight time rate or premium rate.

OVERTIME PAY

See (B, E, Q, X) on OVERTIME PAGE

WAGE CAP - Double the straight time hourly base wage shall be the maximum hourly wage compensation for any hour worked. Contractor is still responsible to pay the hourly benefit amount for each hour worked.

HOLIDAY

Paid: See (5, 6, 8, 15, 16, 25) on HOLIDAY PAGE

Overtime: See (5, 6, 8, 15, 16, 25) on HOLIDAY PAGE

NOTE: All paid holidays falling on a Saturday shall be observed on the preceding Friday. All paid holidays falling on a Sunday shall be observed on the following Monday.

6-1249TT

Mason - Building

12/01/2025

JOB DESCRIPTION Mason - Building

DISTRICT 9

ENTIRE COUNTIES

Bronx, Dutchess, Kings, Nassau, New York, Orange, Putnam, Queens, Richmond, Rockland, Suffolk, Sullivan, Ulster, Westchester

WAGES

Per Hour:

	07/01/2025	07/07/2025	01/05/2026 Additional
Marble Cutters & Setters	\$ 64.21	\$ 64.66	\$ 0.75

SUPPLEMENTAL BENEFITS

Per Hour:

Journeyworker	\$ 40.51	\$ 40.82

OVERTIME PAY

See (B, E, Q, V) on OVERTIME PAGE

HOLIDAY

Paid: See (1) on HOLIDAY PAGE

Overtime: See (5, 6, 8, 11, 15, 16, 25) on HOLIDAY PAGE

REGISTERED APPRENTICES

Wage Per Hour:

750 hour terms at the following wage

1st	2nd	3rd	4th	5th	6th	7th	8th
0- 3000	3001- 3750	3751- 4500	4501- 5250	5251- 6000	6001- 6750	6751- 7500	7500+
07/01/2025 \$27.24	\$40.84	\$44.25	\$47.63	\$51.05	\$54.58	\$60.99	\$64.21
07/07/2025 \$27.60	\$41.50	\$44.98	\$48.45	\$51.94	\$54.81	\$64.66	\$64.66

Supplemental Benefits per hour:

1st	2nd	3rd	4th	5th	6th	7th	8th
07/01/2025 \$26.88	\$30.14	\$30.95	\$31.78	\$32.59	\$38.07	\$39.71	\$40.51
07/07/2025 \$26.95	\$30.02	\$30.78	\$31.55	\$32.32	\$38.53	\$40.82	\$40.82

9-7/4

Mason - Building

12/01/2025

JOB DESCRIPTION Mason - Building

DISTRICT 11

ENTIRE COUNTIES

Dutchess, Sullivan, Ulster

PARTIAL COUNTIES

Orange: Entire county except the Township of Tuxedo.

WAGES

Per hour:

07/01/2025

Bricklayer	\$ 47.96
Cement Mason	47.96
Plasterer/Stone Mason	47.96
Pointer/Caulker	47.96

Additional \$1.00 per hour for power saw work

Additional \$0.50 per hour for swing scaffold or staging work

SHIFT WORK

SHIFT WORK: When shift work or an irregular workday is mandated or required by state, federal, county, local or other governmental agency contracts, the following premiums apply:

Irregular workday requires 15% premium

Second shift an additional 15% of wage plus benefits to be paid

Third shift an additional 25% of wage plus benefits to be paid

SUPPLEMENTAL BENEFITS

Per hour:

Journeyman	\$ 38.61

OVERTIME PAY

Cement Mason See (B, E, Q, W) on OVERTIME PAGE.

All Others See (B, E, Q) on OVERTIME PAGE.

HOLIDAY

Paid: See (1) on HOLIDAY PAGE

Overtime: See (5, 6, 16, 25) on HOLIDAY PAGE

Whenever any of the above holidays fall on Sunday, they will be observed on Monday. Whenever any of the above holidays fall on Saturday, they will be observed on Friday.

REGISTERED APPRENTICES

Wages per hour:

750 hour terms at the following percentage of Journeyman's wage

1st	2nd	3rd	4th	5th	6th	7th	8th
50%	55%	60%	65%	70%	75%	80%	85%

Supplemental Benefits per hour

750 hour terms at the following percentage of journeyman supplements

1st	2nd	3rd	4th	5th	6th	7th	8th
50%	55%	60%	65%	70%	75%	80%	85%

11-5du-b

Mason - Building

12/01/2025

JOB DESCRIPTION Mason - Building

DISTRICT 9

ENTIRE COUNTIES

Dutchess, Orange, Putnam, Sullivan, Ulster

WAGES

Per hour:	07/01/2025	12/01/2025	06/01/2026 Additional
Tile, Marble,& Terrazzo Mechanic/Setter	\$ 58.52	\$ 58.91	\$ 1.12

SUPPLEMENTAL BENEFITS

Per Hour:

Journeyworker:	\$ 26.16* +6.16	\$ 26.66* +6.17

* This portion of benefits subject to same premium rate as shown for overtime wages.

OVERTIME PAY

See (B, E, Q) on OVERTIME PAGE

Double time rate applies after 10 hours

HOLIDAY

Paid: See (1) on HOLIDAY PAGE
Overtime: See (5, 6, 11, 15, 16, 25) on HOLIDAY PAGE

REGISTERED APPRENTICES

Wage per hour:

(Counties of Orange & Putnam)

750 hour terms at the following wage rate:

1st	2nd	3rd	4th	5th	6th	7th	8th	9th	10th
1-750	751-1500	1501-2250	2251-3000	3001-3750	3751-4500	4501-5250	5251-6000	6001-6750	6751-7500
07/01/2025									
\$22.34	\$27.46	\$34.56	\$39.66	\$43.35	\$46.96	\$50.69	\$55.79	\$58.36	\$65.03
12/01/2025									
\$22.70	\$27.86	\$35.07	\$40.22	\$43.96	\$47.61	\$51.39	\$56.55	\$59.16	\$65.54

Supplemental Benefits per hour:

(Counties of Orange & Putnam)

1st	2nd	3rd	4th	5th	6th	7th	8th	9th	10th
1-750	751-1500	1501-2250	2251-3000	3001-3750	3751-4500	4501-5250	5251-6000	6001-6750	6751-7500
07/01/2025									
\$13.00* + 0.76	\$13.00* + 0.81	\$16.11* + 0.92	\$16.11* + 0.97	\$17.11* + 1.44	\$18.61* + 1.49	\$19.61* + 1.92	\$19.61* + 1.97	\$19.61* + 4.57	\$29.61* + 8.53
12/01/2025									
\$13.00* + 0.76	\$13.00* + 0.82	\$16.11* + 0.92	\$16.11* + 0.97	\$17.11* + 1.44	\$18.61* + 1.50	\$19.61* + 1.93	\$19.61* + 1.98	\$19.61* + 4.58	\$30.11* + 8.54

Wages per hour:

(Counties of Dutchess, Sullivan, Ulster)

750 hour terms at the following wage rate:

1st	2nd	3rd	4th	5th	6th	7th	8th	9th	10th
1-750	751-1500	1501-2250	2251-3000	3001-3750	3751-4500	4501-5250	5251-6000	6001-6750	6751-7500
07/01/2025									
\$21.31	\$25.76	\$27.62	\$32.09	\$35.13	\$39.09	\$42.67	\$46.14	\$47.59	\$51.76
12/01/2025									
\$22.31	\$26.76	\$28.62	\$33.09	\$36.13	\$39.59	\$42.67	\$47.14	\$48.59	\$51.31

Supplemental Benefits per hour:

(Counties of Dutchess, Sullivan, Ulster)

1st	2nd	3rd	4th	5th	6th	7th	8th	9th	10th
1-750	751-1500	1501-2250	2251-3000	3001-3750	3751-4500	4501-5250	5251-6000	6001-6750	6751-7500
07/01/2025									
\$14.00* + 0.76	\$14.00* + 0.81	\$16.61* + 0.85	\$16.61* + 0.90	\$17.61* + 1.36	\$18.11* + 1.41	\$18.61* + 1.83	\$19.61* + 1.88	\$19.61* + 4.94	\$24.36* + 5.03
12/01/2025									
\$13.00* + 0.76	\$13.00* + 0.81	\$15.61* + 0.85	\$15.61* + 0.90	\$16.61* + 1.36	\$17.61* + 1.41	\$18.61* + 1.83	\$18.61* + 1.88	\$18.61* + 4.94	\$31.36* + 7.50

* This portion of benefits subject to same premium rate as shown for overtime wages.

9-7/52B

Mason - Building

12/01/2025

JOB DESCRIPTION Mason - Building

DISTRICT 9

ENTIRE COUNTIES

Dutchess, Orange, Putnam, Sullivan, Ulster

WAGES

Per hour:	07/01/2025	12/01/2025	06/01/2026 Additional
Building Tile, Marble, & Terrazzo Finisher	\$ 48.18	\$ 48.39	\$ 0.95*

*To be allocated at a later date.

SUPPLEMENTAL BENEFITS

Journeyworker:

Per Hour	\$ 22.96* + 6.02	\$ 23.51* + 6.03

*This portion of benefits subject to same premium rate as shown for overtime wages

OVERTIME PAY

See (A, *E, Q) on OVERTIME PAGE

Double time rate applies after 10 hours on Saturdays.

HOLIDAY

Paid: See (1) on HOLIDAY PAGE
Overtime: See (5, 6, 11, 15, 16, 25) on HOLIDAY PAGE

9-7/88B-tf

Mason - Heavy&Highway

12/01/2025

JOB DESCRIPTION Mason - Heavy&Highway

DISTRICT 11

ENTIRE COUNTIES

Dutchess, Sullivan, Ulster

PARTIAL COUNTIES

Orange: Entire county except the Township of Tuxedo.

WAGES

Per hour:	07/01/2025

Bricklayer	\$ 48.46
Cement Mason	48.46
Marble/Stone Mason	48.46
Plasterer	48.46
Pointer/Caulker	48.46

Additional \$1.00 per hour for power saw work

Additional \$0.50 per hour for swing scaffold or staging work

SHIFT WORK

When shift work or an irregular workday is mandated or required by state, federal, county, local or other governmental contracts, the following rates apply:

Irregular workday requires 15% premium

Second shift an additional 15% of wage plus benefits to be paid

Third shift an additional 25% of wage plus benefits to be paid

SUPPLEMENTAL BENEFITS

Per hour:	
Journeyman	\$ 38.61

OVERTIME PAY

Cement Mason	See (B, E, Q, W)
All Others	See (B, E, Q)

HOLIDAY

Paid: See (5, 6, 16, 25) on HOLIDAY PAGE
Overtime: See (5, 6, 16, 25) on HOLIDAY PAGE

- Whenever any of the above holidays fall on Sunday, they will be observed on Monday. Whenever any of the above holidays fall on Saturday, they will be observed on Friday.

- Supplemental Benefits are not paid for paid Holiday

- If Holiday is worked, Supplemental Benefits are paid for hours worked.

- Whenever an Employee works within three (3) calendar days before a holiday, the Employee shall be paid for the Holiday.

REGISTERED APPRENTICES

Wages per hour:

750 hour terms at the following percentage of Journeyman's wage

1st	2nd	3rd	4th	5th	6th	7th	8th
50%	55%	60%	65%	70%	75%	80%	85%

Supplemental Benefits per hour

750 hour terms at the following percentage of journeyman supplements

1st	2nd	3rd	4th	5th	6th	7th	8th
50%	55%	60%	65%	70%	75%	80%	85%

11-5du-H/H

Operating Engineer - Building**12/01/2025**

JOB DESCRIPTION Operating Engineer - Building

DISTRICT 9

ENTIRE COUNTIES

Bronx, Kings, New York, Putnam, Queens, Richmond, Westchester

PARTIAL COUNTIES

Dutchess: that part of Dutchess County lying south of the North City Line of the City of Poughkeepsie.

WAGES

NOTE: Construction surveying

Party Chief--One who directs a survey party

Instrument Man--One who runs the instrument and assists Party Chief.

Rodman--One who holds the rod and assists the Survey Crew

Wages:(Per Hour) 07/01/2025

Building Construction:

Party Chief	\$ 81.94
Instrument Man	60.49
Rodman	40.63

Steel Erection:

Party Chief	\$ 84.04
Instrument Man	63.19
Rodman	43.31

Heavy Construction-NYC counties only:
(Foundation, Excavation.)

Party Chief	\$ 88.97
Instrument man	66.04
Rodman	55.85

SUPPLEMENTAL BENEFITS

Per Hour: 07/01/2025

Building Construction	\$ 29.45* + 7.65
Steel Erection	31.25* + 7.65
Heavy Construction	32.06* + 7.64

* This portion subject to SAME premium as wages

Non-Worked Holiday Supplemental Benefit:

\$ 22.48

OVERTIME PAY

See (A, B, E, Q) on OVERTIME PAGE

Code "A" applies to Building Construction and has double the rate after 7 hours on Saturdays.

Code "B" applies to Heavy Construction and Steel Erection and has double the rate after 8 hours on Saturdays.

HOLIDAY

Paid: See (5, 6, 9, 11, 15, 16, 25) on HOLIDAY PAGE

Overtime: See (5, 6, 9, 11, 15, 16, 25) on HOLIDAY PAGE

Operating Engineer - Building

12/01/2025

JOB DESCRIPTION Operating Engineer - Building

DISTRICT 8

ENTIRE COUNTIES

Putnam, Westchester

PARTIAL COUNTIES

Dutchess: All the counties of Westchester and Putnam and the southern part of Dutchess County defined by the northern boundary line of the City of Poughkeepsie, then due east to Route 115, then north along Route 115 to Bedell Road, then east along Bedell Road to Van Wagner Road, then north along Van Wagner Road to Bower Road, then east along Bower Road to Route 44 and along Route 44 east to Route 343, then along Route 343 east to the northern boundary of Town of Dover Plains and east along the northern boundary of Town of Dover Plains to the border line of the State of Connecticut and bordered on the west by the middle of the Hudson River.

WAGES

GROUP I:

Cranes (All Types up to 49 tons), Boom Trucks, Cherry Pickers (All Types), Clamshell Crane, Derrick (Stone and Steel), Dragline, Franki Pile Rig or similar, High Lift (Lull or similar) with crane attachment and winch used for hoisting or lifting, Hydraulic Cranes, Pile Drivers, Potain and similar.

Cranes (All types 50-99 tons), Drill Rig Casa Grande (CAT or similar), Franki Pile Rig or similar, Hydraulic Cranes (All types including Crawler Cranes- No specific boom length).

Cranes (All types 100 tons and over), All Tower Cranes, All Climbing Cranes irrespective of manufacturer and regardless of how the same is rigged, Franki Pile Rig or similar, Conventional Cranes (All types including Crawler Cranes-No specific boom length), Hydraulic Cranes.

GROUP I-A: Barber Green Loader-Euclid Loader, Bulldozer, Carrier-Trailer Horse, Concrete Cleaning Decontamination Machine Operator, Concrete-Portable Hoist, Conway or Similar Mucking Machines, Elevator & Cage, Excavators all types, Front End Loaders, Gradall, Shovel, Backhoe, etc.(Crawler or Truck), Heavy Equipment Robotics Operator/Mechanic, Hoist Engineer-Material, Hoist Portable Mobile Unit, Hoist(Single, Double or Triple Drum), Horizontal Directional Drill Locator, Horizontal Directional Drill Operator and Jersey Spreader, Letourneau or Tournapull(Scrapers over 20 yards Struck), Lift Slab Console, etc., Lull HiLift or Similar, Master Environmental Maintenance Mechanics, Mucking Machines Operator/Mechanic or Similar Type, Overhead Crane, Pavement Breaker(Air Ram), Paver(Concrete), Post Hole Digger, Power House Plant, Road Boring Machine, Road Mix Machine, Ross Carrier and Similar Machines, Rubber tire double end backhoes and similar machines, Scoopmobile Tractor-Shovel Over 1.5 yards, Shovel (Tunnels), Spreader (Asphalt) Telephie(Cableway), Tractor Type Demolition Equipment, Trenching Machines-Vermeer Concrete Saw Trencher and Similar, Ultra High Pressure Waterjet Cutting Tool System, Vacuum Blasting Machine operator/mechanic, Winch Truck A Frame.

GROUP I-B: Compressor (Steel Erection), Mechanic (Outside All Types), Negative Air Machine (Asbestos Removal), Push Button (Buzz Box) Elevator.

GROUP II: Compactor Self-Propelled, Concrete Pump, Crane Operator in Training (Over 100 Tons), Grader, Machines Pulling Sheep's Foot Roller, Roller (4 ton and over), Scrapers (20 yards Struck and Under), Vibratory Rollers, Welder.

GROUP III-A: Asphalt Plant, Concrete Mixing Plants, Forklift (All power sources), Joy Drill or similar, Tractor Drilling Machine, Loader (1 1/2 yards and under), Portable Asphalt Plant, Portable Batch Plant, Portable Crusher, Skid Steer (Bobcat or similar), Stone Crusher, Well Drilling Machine, Well Point System.

GROUP III-B: Compressor Over 125 cu. Feet, Conveyor Belt Machine regardless of size, Compressor Plant, Ladder Hoist, Stud Machine.

GROUP IV-A: Batch Plant, Concrete Breaker, Concrete Spreader, Curb Cutter Machine, Finishing Machine-Concrete, Fine Grading Machine, Hepa Vac Clean Air Machine, Material Hopper(sand, stone, cement), Mulching Grass Spreader, Pump Gypsum etc, Pump-Plaster-Grout-Fireproofing. Roller(Under 4 Ton),Spreading and Fine Grading Machine, Steel Cutting Machine, Siphon Pump, Tar Joint Machine, Television Cameras for Water, Sewer, Gas etc. Turbo Jet Burner or Similar Equipment, Vibrator (1 to 5).

GROUP IV-B: Compressor (all types), Heater (All Types), Fire Watchman, Lighting Unit (Portable & Generator) Pump, Pump Station(Water, Sewer, Portable, Temporary), Welding Machine (Steel Erection & Excavation).

GROUP V: Mechanics Helper, Motorized Roller (walk behind), Stock Attendant, Welder's Helper, Maintenance Engineer Crane(75 ton and over).

Group VI-A: Welder Certified

GROUP VI-B: Utility Man, Warehouse Man.

WAGES: (per hour)

07/01/2025

03/02/2026

GROUP I

Cranes- up to 49 tons

\$ 69.25

\$ 71.19

Cranes- 50 tons to 99 tons	71.67	73.69
Cranes- 100 tons and over	81.89	84.27
GROUP I-A	60.56	62.20
GROUP I-B	55.77	57.24
GROUP II	58.42	59.98
GROUP III-A	56.26	57.75
GROUP III-B	53.54	54.93
GROUP IV-A	55.69	57.16
GROUP IV-B	47.01	48.17
GROUP V	50.72	52.01
Group VI-A	59.54	61.05
GROUP VI-B		
Utility Man	48.10	49.30
Warehouse Man	50.44	51.72

An additional 20% to wage when required to wear protective equipment on hazardous/toxic waste projects.
Engineers operating cranes with booms 100 feet but less than 149 feet in length will be paid an additional \$2.00 per hour.
Engineers operating cranes with booms 149 feet or over in length will be paid an additional \$3.00 per hour.
Loader operators over 5 cubic yard capacity additional .50 per hour.
Shovel operators over 4 cubic yard capacity additional \$1.00 per hour.

SUPPLEMENTAL BENEFITS

Per hour:

Journeyworker	\$ 32.92	34.52

OVERTIME PAY

See (B, E, Q, V) on OVERTIME PAGE

HOLIDAY

Paid: See (5, 6, 8, 15, 25, 26) on HOLIDAY PAGE

Overtime: See (5, 6, 8, 15, 25, 26, 28) on HOLIDAY PAGE

8-137B

Operating Engineer - Building

12/01/2025

JOB DESCRIPTION Operating Engineer - Building

DISTRICT 1

ENTIRE COUNTIES

Albany, Clinton, Columbia, Essex, Franklin, Fulton, Greene, Hamilton, Herkimer, Montgomery, Otsego, Rensselaer, Saratoga, Schenectady, Schoharie, Warren, Washington

PARTIAL COUNTIES

Dutchess: Defined as north of the northern boundary line of City of Poughkeepsie then due east to Route 115 to Bedell Road then east along Bedell Road to VanWagner Road then north along VanWagner Road to Bower Road then east along Bower Road to Rte. 44 east to Route 343 then along Route 343 east to the northern boundary of Town of Dover Plains and east along the northern boundary of Town of Dover Plains to Connecticut.

WAGES

NOTE:

-- In the event that equipment listed below is operated by robotic control, the classification covering the operation will be the same as if manually operated.

-- If a second employee is required by the employer for operation of any covered machine, they shall be an Engineer Class C

CLASS A1*: All cranes that require A NYS crane license, tower cranes**(including self erecting), hydraulic cranes, locomotive crane, piledriver, cableway, derricks, whirlies, dragline, boom trucks, cherry pickers, overhead cranes (gantry or saddle type), truck cranes

CLASS A:

Shovel, Excavators 18,001 lbs. and above(including rubber tire full swing), Gradalls, power road grader, all CMI equipment, front-end rubber tire loader, tractor-mounted drill (quarry master), mucking machine, concrete central mix plant, concrete pump, belcrete system, automated asphalt concrete plant, and tractor road paver, boom trucks 5 tons and under, maintenance engineer, self-contained crawler drill-hydraulic rock drill, Profiler/Milling machine.

CLASS B:

Excavators 18,000 lbs. and under, Backhoes (rubber tired backhoe/loader combination), bulldozer, pushcat, tractor, traxcavator, scraper, LeTourneau grader, form fine grader, self-propelled soil compactor (fill roller), asphalt roller, blacktop spreader, power brooms, sweepers, trenching machine, Barber Green loader, side booms, hydro hammer, concrete spreader, concrete finishing machine, one drum hoist, power hoisting (single drum), hoist two drum or more, three drum engine, power hoisting (two drum and over), two drum and swinging engine, three drum swinging engine, hod hoist, A-L frame winches, core and well drillers (one drum), post hole digger, model CHB Vibro-Tamp or similar machine, batch bin and plant operator, dinky locomotive, skid steer loader, track excavator 5/8 cubic yard or smaller, front end rubber tired loader under four cubic yards, vacuum machine (mounted or towed).

CLASS C:

Fork lift, high lift, all terrain fork lift: or similar, oiler, fireman and heavy-duty greaser, boilers and steam generators, pump, vibrator, motor mixer, air compressor, dust collector, welding machine, well point, mechanical heater, generators, temporary light plants, electric submersible pumps 4" and over, murphy type diesel generator, conveyor, elevators, concrete mixer, beltcrete power pack (belcrete system), seeding, and mulching machines, pumps, rotating telehandler (that does not require NYS crane license).

WAGES per hour

07/01/2025

Class A1*	\$ 55.42
Class A	\$ 54.93
Class B	\$ 53.91
Class C	\$ 51.01

(*) TONNAGE RATING PREMIUMS:

Note: Additional value subject to same premiums as shown for OT

All cranes 1000 tons and over, A1 rate plus \$7.00

All cranes 800-999 tons, A1 rate plus \$6.00

All cranes 600-799 tons, A1 rate plus \$5.00

All cranes 400-599 tons, A1 rate plus \$4.00

All cranes 200-399 tons, A1 rate plus \$3.00

All cranes 111-199 tons, A1 rate plus \$2.25

All cranes 110 tons and under, A1 rate only

(**)Additional \$0.50 per hr on A1 rate for Tower Cranes (no tonnage premiums apply)

Additional \$2.50 per hr over B rate for Nuclear Leader work.

Additional \$2.50 per hour if work requires Personal Protective Equipment for hazardous waste site activities with a level C or over rating.

SUPPLEMENTAL BENEFITS

Per hour

07/01/2025

Journeyworker	\$ 33.50

OVERTIME PAY

See (B, E, Q) on OVERTIME PAGE

HOLIDAY

Paid: See (1) on HOLIDAY PAGE

Overtime: See (5, 6) on HOLIDAY PAGE

NOTE: All hours worked on designated holidays shall be paid a double the hourly rate of pay plus 8 hours of straight time.

NOTE: If a holiday falls on Sunday, it will be celebrated on Monday. If the holiday falls on Saturday, it will be celebrated on Friday.

REGISTERED APPRENTICES

Wages per hour

1000 hours terms at the following percentage of Journeyworker's wage Class B

1st	2nd	3rd	4th
60%	70%	80%	90%

Supplemental Benefits per hour worked

07/01/2025

All terms	\$ 28.80

1-158 Alb

Operating Engineer - Building

12/01/2025

JOB DESCRIPTION Operating Engineer - Building

DISTRICT 1

ENTIRE COUNTIES

Broome, Chenango, Tioga

PARTIAL COUNTIES

Dutchess: Defined as north of the northern boundary line of City of Poughkeepsie then due east to Route 115 to Bedell Road then east along Bedell Road to VanWagner Road then north along VanWagner Road to Bower Road then east along Bower Road to Rte. 44 east to Route 343 then along Route 343 east to the northern boundary of Town of Dover Plains and east along the northern boundary of Town of Dover Plains to Connecticut.

WAGES

NOTE:

--In the event that equipment listed below is operated by robotic control, the classification covering the operation will be the same as if manually operated.

--If a second employee is required by the employer for operation of any covered machine, they shall be an Engineer Class C

CLASS A1*: All cranes that require NYS crane license, tower cranes** (including self erecting), hydraulic cranes, locomotive crane, piledriver, cableway, derricks, whirlies, dragline, boom trucks, cherry pickers, overhead cranes (gantry or saddle type), truck cranes

CLASS A:

Shovel, Excavators 18,001 lbs. and above (including rubber tire full swing), Gradalls, power road grader, all CMI equipment, front-end rubber tire loader, tractor-mounted drill (quarry master), mucking machine, concrete central mix plant, concrete pump, belcrete system, automated asphalt concrete plant, and tractor road paver, boom trucks 5 tons and under, maintenance engineer, self-contained crawler drill-hydraulic rock drill, Profiler/Milling machine.

CLASS B:

Excavators 18,000 lbs. and under, Backhoes (rubber tired backhoe/loader combination), bulldozer, pushcat, tractor, traxcavator, scraper, LeTourneau grader, form fine grader, self-propelled soil compactor (fill roller), asphalt roller, blacktop spreader, power brooms, sweepers, trenching machine, Barber Green loader, side booms, hydro hammer, concrete spreader, concrete finishing machine, one drum hoist, power hoisting (single drum), hoist two drum or more, three drum engine, power hoisting (two drum and over), two drum and swinging engine, three drum swinging engine, hod hoist, A-L frame winches, core and well drillers (one drum), post hole digger, model CHB Vibro-Tamp or similar machine, batch bin and plant operator, dinky locomotive, skid steer loader, track excavator 5/8 cubic yard or smaller, front end rubber tired loader under four cubic yards, vacuum machine (mounted or towed).

CLASS C:

Fork lift, high lift, all terrain fork lift: or similar, oiler, fireman and heavy-duty greaser, boilers and steam generators, pump, vibrator, motor mixer, air compressor, dust collector, welding machine, well point, mechanical heater, generators, temporary light plants, electric submersible pumps 4" and over, murphy type diesel generator, conveyor, elevators, concrete mixer, beltcrete power pack (belcrete system), seeding, and mulching machines, pumps, rotating telehandler (that does not require NYS crane license).

WAGES per hour

07/01/2025

Class A1*	\$ 51.71
Class A	\$ 49.31
Class B	\$ 48.85
Class C	\$ 46.54

(*) TONNAGE RATING PREMIUMS:

Note: Additional value subject to same premiums as shown for OT

All cranes 1000 tons and over, A1 rate plus \$7.00

All cranes 800-999 tons, A1 rate plus \$6.00

All cranes 600-799 tons, A1 rate plus \$5.00

All cranes 400-599 tons, A1 rate plus \$4.00

All cranes 200-399 tons, A1 rate plus \$3.00

All cranes 111-199 tons, A1 rate plus \$2.25

All cranes 110 tons and under, A1 rate only

(**) Additional \$0.50 per hr over A1 rate for Tower Cranes (no tonnage premium applies)

Additional \$2.50 per hr over B rate for Nuclear Leader work.

Additional \$2.50 per hour if work requires Personal Protective Equipment for hazardous waste site activities with a level C or over rating.

SUPPLEMENTAL BENEFITS

Per hour

07/01/2025

Journeyworker	\$ 32.95

OVERTIME PAY

See (B, E, Q) on OVERTIME PAGE

HOLIDAY

Paid: See (1) on HOLIDAY PAGE

Overtime: See (5, 6) on HOLIDAY PAGE

NOTE: All hours worked on designated holidays shall be paid a double the hourly rate of pay plus 8 hours of straight time.

NOTE: If a holiday falls on Sunday, it will be celebrated on Monday. If the holiday falls on Saturday, it will be celebrated on Friday.

REGISTERED APPRENTICES

Wages per hour

1000 hours terms at the following percentage of Journeyworker's wage Class B:

1st	2nd	3rd	4th

1-158 BCT

12/01/2025

Cranes of 100 Tons	80.08	82.61
Hoist Engineer(Steel)	72.41	74.67
Engineer(Pile Driver)	77.30	79.73
Jersey Spreader, Pavement Breaker (Air Ram)Post Hole Digger	60.80	62.66

Engineers operating cranes with booms 100 feet but less than 149 feet in length will be paid an additional \$2.00 per hour over the rate listed in the Wage Schedule. Engineers operating cranes with booms 149 feet or over in length will be paid an additional \$3.00 per hour over the rate listed in the Wage Schedule. Loader and Excavator Operators: over 5 cubic yards capacity \$0.50 per hour over the rate listed in the Wage Schedule. Shovel Operators: over 4 cubic yards capacity \$1.00 per hour over the rate listed in the Wage Schedule.

SHIFT WORK

A 15% premium on all hours paid, including overtime hours for 2nd, 3rd shifts on all government mandated off-shift work

SUPPLEMENTAL BENEFITS

Per hour:

Journeyworker:	\$ 36.48 up to 40 Hours	\$ 38.08 up to 40 hours
	After 40 hours \$ 26.58* PLUS \$ 1.40 on all hours worked	After 40 hours \$ 27.63* PLUS \$ 1.45 on all hours worked

*This amount is subject to premium

OVERTIME PAY

See (B, E, P, *R, **U) on OVERTIME PAGE

HOLIDAY

Paid: See (5, 6, 8, 15, 25, 26, 28) on HOLIDAY PAGE

Overtime..... See (5, 6, 8, 15, 25, 26) on OVERTIME PAGE

* For Holiday codes 8,15,25,26 code R applies

** For Holiday codes 5 & 6 code U applies

Note: If employees are required to work on Easter Sunday they shall be paid at the rate of triple time.

REGISTERED APPRENTICES

(1)year terms at the following rate.

1st term	\$ 37.24	\$ 38.38
2nd term	43.45	44.78
3rd term	49.66	51.18
4th term	55.86	57.57

Supplemental Benefits per hour:

\$ 27.98	\$ 29.08

8-137HH

Operating Engineer - Heavy&Highway

12/01/2025

JOB DESCRIPTION Operating Engineer - Heavy&Highway

DISTRICT 1

ENTIRE COUNTIES

Albany, Broome, Chenango, Clinton, Columbia, Essex, Franklin, Fulton, Greene, Hamilton, Herkimer, Montgomery, Otsego, Rensselaer, Saratoga, Schenectady, Schoharie, Tioga, Warren, Washington

PARTIAL COUNTIES

Dutchess: Defined as north of the northern boundary line of City of Poughkeepsie then due east to Route 115 to Bedell Road then east along Bedell Road to VanWagner Road then north along VanWagner Road to Bower Road then east along Bower Road to Rte. 44 east to Route 343 then along Route 343 east to the northern boundary of Town of Dover Plains and east along the northern boundary of Town of Dover Plains to Connecticut.

WAGES

NOTE:

--- In the event that equipment listed below is operated by robotic control, the classification covering the operation will be the same as if manually operated.

--- If a second employee is required by the employer for operation of any covered machine, they shall be an Engineer Class C

CLASSIFICATION A1*: All Cranes that require a NYS Crane License; tower cranes(including self erecting)**; hydraulic cranes, locomotive crane, piledriver, cableway, derricks, whirlies, dragline, boom trucks, cherry pickers, overhead cranes (gantry or saddle type), truck cranes

CLASSIFICATION A:

Asphalt Curb Machine (Self Propelled, Slipform), Asphalt Paver, Automated Concrete Spreader (CMI Type), Automatic Fine Grader, Backhoe (Except Tractor Mounted, Rubber Tired), Backhoe Excavator Full Swing (CAT 212 or similar type), Back Filling Machine, Belt Placer (CMI Type), Blacktop Plant (Automated), Blacktop Roller, Boom truck, GPS operated Bull Dozer, Cableway, Caisson Auger, Central Mix Concrete Plant (Automated), Concrete Curb Machine (Self Propelled, Slipform), Concrete Pump, Crane, Cherry Picker, Derricks (steel erection), Dragline, Overhead Crane (Gantry or Straddle type), Pile Driver, Truck Crane, Directional Drilling Machine, Dredge, Dual Drum Paver, Excavator (All Purpose Hydraulically Operated) (Gradall or Similar), Front End Loader (4 cu. yd. and Over), Head Tower (Sauerman or Equal), Hoist (Two or Three Drum), Holland Loader, Maintenance Engineer, Mine Hoist, Mucking Machine or Mole, PB-4 and similar type, Power Grader, Profiler/Milling Machine (over 105 H.P.), Quad 9, Quarry Master (or equivalent), Rotating Telehandler, Scraper (Including Challenger Type), Shovel, Side Boom, Slip Form Paver (If a second man is needed, he shall be an Oiler), Tractor Drawn BeltType Loader, Truck or Trailer Mounted Log Chipper (Self Feeder), Tug Operator (Manned Rented Equipment Excluded), Tunnel Shovel

CLASSIFICATION B:

Backhoe (Tractor Mounted, Rubber Tired), Bituminous Recycler Machine, Bituminous Spreader and Mixer, Blacktop Plant (Non-Automated), Blast or Rotary Drill (Truck or Tractor Mounted), Brokk, Boring Machine, Cage Hoist, Central Mix Plant [(Non-Automated) and All Concrete Batching Plants], Concrete Paver (Over 16S), Crawler Drill (Self-contained), Crusher, Diesel Power Unit, Drill Rigs, Tractor Mounted, Front End Loader (Under 4 cu. yd.), Greaseman/Lubrication Engineer, Hi Pressure Boiler (15 lbs. and over), Hoist (One Drum), Hydro-Axe, Kolman Plant Loader and Similar Type Loaders (If Employer requires another man to clean the screen or to maintain the equipment, he shall be an Oiler), L.C.M. Work Boat Operator, Locomotive, Material handling knuckle boom, Mini Excavator (under 18,000 lbs.), Mixer (for stabilized base self-propelled), Monorail Machine, Plant Engineer, Prentice Loader, Profiler/Milling Machine (105 H.P. and under), Pug Mill, Pump Crete, Ready Mix Concrete Plant, Refrigeration Equipment (for soil stabilization), Road Widener, Roller (all above subgrade), Sea Mule, Self-contained Ride-on Rock Drill(Excluding Air-Track Type Drill), Skidder, Tractor with Dozer and/or Pusher, Trencher, Tugger Hoist, Vacuum machine (mounted or towed), Vermeer saw (ride on, any size or type), Welder, Winch, Winch Cat

CLASSIFICATION C:

A Frame Winch Hoist on Truck, Articulated Heavy Hauler, Aggregate Plant, Asphalt or Concrete Grooving Machine (ride on), Ballast Regulator(Ride-on), Boiler (used in conjunction with production), Bituminous Heater (self-propelled), Boat (powered), Cement and Bin Operator, Concrete Pavement Spreader and Finisher Concrete Paver or Mixer (16' and under), Concrete Saw (self-propelled), Conveyor, Deck Hand, Directional Drill Machine Locator, Drill (Core and Well), Farm Tractor with accessories, Fine Grade Machine, Fireman, Fork Lift, Form Tamper, Grout Pump, Guniting Machine, Hammers (Hydraulic self-propelled), Hydra-Spiker (ride-on), Hydraulic Pump (jacking system), Hydro-Blaster (Water), Mulching Machine, Oiler, Parapet Concrete or Pavement Grinder, Post Hole Digger and Post Driver, Power Broom (towed), Power Heaterman, Power Sweeper, Revinus Widener, Roller (Grade and Fill), Scarifier (ride-on), Shell Winder, Skid steer loader (Bobcat or similar; including all attachments), Span-Saw (ride-on), Steam Cleaner, Tamper (ride-on), Tie Extractor (ride-on), Tie Handler (ride-on), Tie Insertor (ride-on), Tie Spacer (ride-on), Tire Repair, Track Liner (ride-on), Tractor, Tractor (with towed accessories), Vibratory Compactor, Vibro Tamp, Well Point, and the following hands-off equipment: Compressors, Dust Collectors, Generators, Pumps, Welding Machines, Light Plants and Heaters

WAGES per hour

07/01/2025

Class A1*	\$ 60.30
Class A	57.30
Class B	56.39
Class C	53.82

(*) TONNAGE RATING PREMIUMS:

Cranes over 1000 tons, A1 rate plus \$7.00
Cranes from 800-999 tons, A1 rate plus \$6.00
Cranes from 600-799 tons, A1 rate plus \$5.00
Cranes from 400-599 tons, A1 rate plus \$4.00
Cranes from 200-399 tons, A1 rate plus \$3.00
Cranes from 111-199 tons, A1 rate plus \$2.00
Cranes from 65-110 tons, A1 rate plus \$1.50
Cranes from 0-64 Tons, A1 rate only

NOTE: Additional value subject to same premiums as shown for OT

(**) Tower Cranes, A1 rate plus \$3.00 (no tonnage premiums apply)

-- Cranes in Luffer Configuration, A1 rate plus \$5.00

-- Cranes with external ballast (tray or wagon), A1 rate plus \$5.00

NOTE: Additional value subject to same premiums as shown for OT

Additional \$2.50 per hr. for hazardous waste removal work on State and/or Federally designated waste site which require employees to wear Level C or above forms of personal protection.

SHIFT WORK

Additional \$2.50 per hour for All Employees who work a single irregular work shift, of at least 5 consecutive days, starting from 5:00 PM to 1:00 AM that is mandated by the Contracting Agency.

SUPPLEMENTAL BENEFITS

Per hour

07/01/2025

Journeyworker

\$ 33.70

OVERTIME PAY

See (B, E, Q) on OVERTIME PAGE

HOLIDAY

Paid: See (5, 6) on HOLIDAY PAGE

Overtime: See (5, 6) on HOLIDAY PAGE

Note: If the holiday falls on Sunday, it will be observed on Monday. If the observed Monday Holiday is worked, pay shall be double time plus Holiday pay for time worked. If the Holiday falls on a Saturday and is worked pay shall be double time plus Holiday pay for time worked. If the Holiday falls on a Saturday employer can choose to observe the paid holiday Saturday or give Friday off with holiday pay.

REGISTERED APPRENTICES

Wages per hour

1000 hours terms at the following percentage of Journeyworker's wage Class B

1st	2nd	3rd	4th
60%	70%	80%	90%

Supplemental Benefits per hour worked

07/01/2025

All Terms

\$ 28.30

1-158H/H Alb

Operating Engineer - Heavy&Highway

12/01/2025

JOB DESCRIPTION Operating Engineer - Heavy&Highway

DISTRICT 9

ENTIRE COUNTIES

Putnam, Westchester

PARTIAL COUNTIES

Dutchess: South of the North city line of Poughkeepsie

WAGES

Party Chief - One who directs a survey party

Instrument Man - One who runs the instrument and assists Party Chief

Rodman - One who holds the rod and in general, assists the Survey Crew

Categories cover GPS & Underground Surveying

Per Hour:

07/01/2025

Party Chief

\$ 85.77

Instrument Man

63.48

Rodman

53.53

SUPPLEMENTAL BENEFITS

Per Hour:

07/01/2025

All Categories

Straight Time:

\$ 32.06* + \$7.64

Premium:

Time & 1/2

\$ 48.09* + \$7.64

Double Time

\$ 64.12* + \$7.64

*This portion is subject to the SAME premium as wages.

Non-Worked Holiday Supplemental Benefits:

\$ 22.47

OVERTIME PAY

See (B, *E, Q) on OVERTIME PAGE

* Doubletime paid on all hours in excess of 8 hours on Saturday

HOLIDAY

Paid: See (5, 6, 7, 11, 12) on HOLIDAY PAGE

Overtime: See (5, 6, 7, 11, 12) on HOLIDAY PAGE

9-15Dh

Operating Engineer - Heavy&Highway - Tunnel

12/01/2025

JOB DESCRIPTION Operating Engineer - Heavy&Highway - Tunnel

DISTRICT 8

ENTIRE COUNTIES

Putnam, Westchester

PARTIAL COUNTIES

Dutchess: All the counties of Westchester and Putnam and the southern part of Dutchess County defined by the northern boundary line of the City of Poughkeepsie, then due east to Route 115, then north along Route 115 to Bedell Road, then east along Bedell Road to Van Wagner Road, then north along Van Wagner Road to Bower Road, then east along Bower Road to Route 44 and along Route 44 east to Route 343, then along Route 343 east to the northern boundary of Town of Dover Plains and east along the northern boundary of Town of Dover Plains to the border line of the State of Connecticut and bordered on the west by the middle of the Hudson River.

WAGES

GROUP I: Boom Truck, Cherry Picker, Clamshell, Crane(Crawler, Truck), Dragline, Drill Rig Casa Grande(Cat or Similar), Floating Crane(Crane on Barge-Under 100 Tons), Hoist Engineer(Concrete/Crane-Derrick-Mine Hoist), Knuckle Boom Crane, Rough Terrain Crane.

GROUP I-A: Auger(Truck or Truck Mounted), Boat Captain, Bull Dozer-all sizes, Central Mix Plant Operator, Chipper-all types, Close Circuit T.V., Combination Loader/Backhoe, Compactor with Blade, Concrete Finishing Machine, Gradall, Grader(Motor Grader), Elevator & Cage(Materials or Passengers), Excavator(and all attachments), Front End Loaders(1 1/2 yards and over), High Lift Lull, Hoist(Single, Double, Triple Drum), Hoist Portable Mobile Unit, Hoist Engineer(Material), Jack and Bore Machine, Log Skidder, Milling Machine, Moveable Concrete Barrier Transfer & Transport Vehicle, Mucking Machines. Overhead Crane, Paver(Concrete), Post Pounder of any type, Push Cats, Road Reclaimer, Robot Hammer(Brokk or similar), Robotic Equipment(Scope of Engineer Schedule), Ross Carrier and similar machines, Scrapers(20 yards struck and over), Side Boom, Slip Form Machine, Spreader(Asphalt), Trenching Machines, Telephies-Vermeer Concrete Saw, Tractor type demolition equipment, Vacuum Truck, Vibratory Roller (Riding) used in mainline paving operations.

GROUP I-B: Asphalt Mobile Conveyor/Transfer Machine, Road Paver(Asphalt).

GROUP II-A: Ballast Regulators, Compactor(Self-propelled), Fusion Machine, Rail Anchor Machines, Roller(4 ton and over), Scrapers(20 yard struck and under).

GROUP II-B: Mechanic(outside)all types, Shop Mechanic.

GROUP III: Air Tractor Drill, Asphalt Plant, Batch Plant, Boiler(High Pressure), Concrete Breaker(Track or Rubber Tire), Concrete Pump, Concrete Spreader, Excavator Drill, Farm Tractor, Forklift(all types of power), Gas Tapping(Live), Hydroseeder, Loader(1 1/2 yards and under), Locomotive(all sizes), Machine Pulling Sheeps Foot Roller, Portable Asphalt Plant, Portable Batch Plant, Portable Crusher(Apprentice), Powerhouse Plant, Roller(under 4 ton), Sheer Excavator, Skidsteer/Bobcat, Stone Crusher, Sweeper(with seat), Well Drilling Machine.

GROUP IV-A: Service Person(Grease Truck), Deckhand.

GROUP IV-B: Conveyor Belt Machine(Truck Mounted), Heater(all types), Lighting Unit(Portable), Maintenance Engineer(for Crane only), Mechanics Helper, Pump(Fireproofing), Pumps-Pump Station/Water/Sewer/Gypsum/Plaster, etc., Pump Truck(Sewer Jet or similar), Welding Machine(Steel Erection), Welders Helper.

GROUP V-A: Engineer(all Tower Cranes, all Climbing Cranes & all Cranes of 100 ton capacity or greater),Hoist Engineer(Steel-Sub Structure), Engineer-Pile Driver, Jersey-Spreader, Pavement breaker, Post Hole Digger

WAGES: (per hour)

	07/01/2025	03/02/2026
GROUP I	\$ 70.57	\$ 72.77
GROUP I-A	62.07	63.97
GROUP I-B	65.47	67.49
GROUP II-A	59.40	61.21
GROUP II-B	61.30	63.17
GROUP III	58.34	60.12
GROUP IV-A	52.91	54.49
GROUP IV-B	45.28	46.59

GROUP V-A		
Engineer-Cranes	80.08	82.61
Engineer-Pile Driver	77.30	79.73
Hoist Engineer	72.41	74.67
Jersey Spreader/Post Hole Digger	60.80	62.66

An additional 20% to wage when required to wear protective equipment on hazardous/toxic waste projects. Operators required to use two buckets pouring concrete on other than road pavement shall receive \$0.50 per hour over scale. Engineers operating cranes with booms 100 feet but less than 149 feet in length will be paid an additional \$2.00 per hour. Engineers operating cranes with booms 149 feet or over in length will be paid an additional \$3.00 per hour. Operators of shovels with a capacity over (4) cubic yards shall be paid an additional \$1.00 per hour. Operators of loaders with a capacity over (5) cubic yards shall be paid an additional \$0.50 per hour.

SHIFT WORK

A 15% premium on all hours paid, including overtime hours for 2nd, 3rd shifts
on all government mandated off-shift work

SUPPLEMENTAL BENEFITS

Per hour:

Journeyworker:

\$ 36.48 up to 40 hours	\$ 38.08 up to 40 hours
After 40 hours \$26.58 plus \$1.40 on all hours worked	After 40 hours \$27.63 plus \$1.45 on all hours worked

OVERTIME PAY

See (D, O, *U, V) on OVERTIME PAGE

HOLIDAY

Paid: See (5, 6, 8, 15, 25, 26) on HOLIDAY PAGE

Overtime: See (5, 6, 8, 15, 25, 26) on HOLIDAY PAGE

* Note: For Holiday codes 5 & 6, code U applies.

For Holiday codes 8, 15, 25, 26, code R applies.

Note: If employees are required to work on Easter Sunday, they shall be paid at the rate of triple time.

REGISTERED APPRENTICES

(1)year terms at the following rates:

1st term	\$ 37.24	\$ 38.38
2nd term	43.45	44.78
3rd term	49.66	51.18
4th term	55.86	57.57

Supplemental Benefits per hour:

All terms	\$ 27.98	\$ 29.08

8-137Tun

Operating Engineer - Marine Dredging

12/01/2025

JOB DESCRIPTION Operating Engineer - Marine Dredging

DISTRICT 4

ENTIRE COUNTIES

Albany, Bronx, Cayuga, Clinton, Columbia, Dutchess, Essex, Franklin, Greene, Jefferson, Kings, Monroe, Nassau, New York, Orange, Oswego, Putnam, Queens, Rensselaer, Richmond, Rockland, St. Lawrence, Suffolk, Ulster, Washington, Wayne, Westchester

WAGES

These wage rates do not apply to Operating Engineers on land-based construction projects. For those projects, refer to the Operating Engineers Heavy/Highway rates. The wage rates listed below apply specifically to all equipment and operators involved in marine dredging work within navigable waters located in the counties listed above.

Per Hour:	07/01/2025	10/01/2025
CLASS A1	\$ 47.07	\$ 48.48
Deck Captain, Leverman,		

Mechanical Dredge Operator,
Licensed Tug Operator with MOTV

CLASS A2	41.94	43.20
Crane Operator (360 swing)		

CLASS B	To conform to Operating Engineer	
Dozer, Front Loader	Prevailing Wage in locality where work	
Operator (On Land)	is being performed including benefits.	

CLASS B1	40.71	41.93
Derrick Operator (180 swing),		
Spider/Spill Barge Operator I/II,		
Fill Placer, Engineer, Chief Mate,		
Electrician, Chief Welder, Maintenance Engineer,		
Licensed Boat, Crew Boat Operator		

CLASS B2	38.31	39.46
Certified Welder		

CLASS C1	37.26	38.38
Drag Barge Operator,		
Steward, Mate,		
Assistant Fill Placer		

CLASS C2	36.07	37.15
Boat Operator		

CLASS D	29.96	30.86
Shoreman, Deckhand, Oiler,		
Rodman, Scowman, Cook,		
Messman, Porter/Janitor		

SUPPLEMENTAL BENEFITS

Per Hour:

THE FOLLOWING SUPPLEMENTAL BENEFITS APPLY TO ALL CATEGORIES

All Classes: 7% of Hourly Straight time wage + \$12.00.

Additional \$0.63 per hour for Overtime hours

OVERTIME PAY

See (B2, F, R) on OVERTIME PAGE

HOLIDAY

Paid: See (1) on HOLIDAY PAGE

Overtime: See (5, 6, 8, 15, 26) on HOLIDAY PAGE

4-25a-MarDredge

Operating Engineer - Survey Crew

12/01/2025

JOB DESCRIPTION Operating Engineer - Survey Crew

DISTRICT 12

ENTIRE COUNTIES

Albany, Allegany, Broome, Cayuga, Chemung, Chenango, Clinton, Columbia, Cortland, Essex, Franklin, Fulton, Greene, Hamilton, Herkimer, Jefferson, Lewis, Livingston, Madison, Monroe, Montgomery, Oneida, Onondaga, Ontario, Oswego, Otsego, Rensselaer, Saratoga, Schenectady, Schoharie, Schuyler, Seneca, St. Lawrence, Steuben, Tioga, Tompkins, Warren, Washington, Wayne, Yates

PARTIAL COUNTIES

Dutchess: The northern portion of the county from the northern boundary line of the City of Poughkeepsie, north.

Genesee: Only the portion of the county that lies east of a line down the center of Route 98 to include all area that lies within the City of Batavia.

WAGES

These rates apply to Building, Tunnel and Heavy Highway.

Per hour:

SURVEY CLASSIFICATIONS:

Party Chief - One who directs a survey party.

Instrument Person - One who operates the surveying instruments.

Rod Person - One who holds the rods and assists the Instrument Person.

07/01/2025

Party Chief \$ 52.91
Instrument Person 48.67
Rod Person 36.29
Additional \$3.00/hr. for Tunnel Work
Additional \$2.50/hr. for Hazardous Work Site

SUPPLEMENTAL BENEFITS

Per hour worked:

Journeyman \$ 30.10

OVERTIME PAY

See (B, E, P, *X) on OVERTIME PAGE

*Note: \$25.10/Hr. Only for "ALL" premium hours paid when worked.

HOLIDAY

Paid: See (5, 6) on HOLIDAY PAGE

Overtime: See (5, 6) on HOLIDAY PAGE

REGISTERED APPRENTICES

WAGES: 1000 hour terms based on the Percentage of Rod Persons Wage:

07/01/2025

0-1000 60%
1001-2000 70%
2001-3000 80%

SUPPLEMENTAL BENEFIT per hour worked:

0-1000 \$ 21.88 / PHP \$18.03
1001-2000 24.90 / " 20.45
2001-3000 27.93/ " 22.93

NOTE: PHP is premium hours paid when worked.

12-158-545 D.H.H.

Operating Engineer - Survey Crew - Consulting Engineer

12/01/2025

JOB DESCRIPTION Operating Engineer - Survey Crew - Consulting Engineer

DISTRICT 12

ENTIRE COUNTIES

Albany, Allegany, Broome, Cayuga, Chemung, Chenango, Clinton, Columbia, Cortland, Essex, Franklin, Fulton, Greene, Hamilton, Herkimer, Jefferson, Lewis, Livingston, Madison, Monroe, Montgomery, Oneida, Onondaga, Ontario, Oswego, Otsego, Rensselaer, Saratoga, Schenectady, Schoharie, Schuyler, Seneca, St. Lawrence, Steuben, Tioga, Tompkins, Warren, Washington, Wayne, Yates

PARTIAL COUNTIES

Dutchess: The northern portion of the county from the northern boundary line of the City of Poughkeepsie, north.

Genesee: Only the portion of the county that lies east of a line down the center of Route 98 to include all area that lies within the City of Batavia.

WAGES

These rates apply to feasibility and preliminary design surveying, line and grade surveying for inspection or supervision of construction when performed under a Consulting Engineer Agreement.

Per hour:

SURVEY CLASSIFICATIONS:

Party Chief - One who directs a survey party.

Instrument Person - One who operates the surveying instruments.

Rod Person - One who holds the rods and assists the Instrument Person.

07/01/2025

Party Chief \$ 52.91
Instrument Person 48.67
Rod Person 36.29

Additional \$3.00/hr. for Tunnel Work.

Additional \$2.50/hr. for EPA or DEC certified toxic or hazardous waste work.

SUPPLEMENTAL BENEFITS

Per hour worked:

Journeyman \$ 30.10

OVERTIME PAY

See (B, E, Q, *X) on OVERTIME PAGE

*Note: \$25.10/Hr. Only for "ALL" premium hours paid when worked.

HOLIDAY

Paid: See (1) on HOLIDAY PAGE

Overtime: See (5, 6) on HOLIDAY PAGE

REGISTERED APPRENTICES

WAGES: 1000 hour terms based on percentage of Rod Persons Wage:

07/01/2025

0-1000	60%
1001-2000	70%
2001-3000	80%

SUPPLEMENTAL BENEFIT per hour worked:

0-1000	\$ 21.88 / PHP \$18.03
1001-2000	\$ 24.90 / " 20.45
2001-3000	\$ 27.93 / " 22.93

NOTE: PHP is premium hours paid when worked.

12-158-545 DCE

Operating Engineer - Survey Crew - Consulting Engineer

12/01/2025

JOB DESCRIPTION Operating Engineer - Survey Crew - Consulting Engineer

DISTRICT 9

ENTIRE COUNTIES

Bronx, Kings, Nassau, New York, Putnam, Queens, Richmond, Suffolk, Westchester

PARTIAL COUNTIES

Dutchess: That part in Dutchess County lying South of the North City line of Poughkeepsie.

WAGES

Feasibility and preliminary design surveying, any line and grade surveying for inspection or supervision of construction.

Per hour: 07/01/2025

Survey Classifications

Party Chief	\$ 51.16
Instrument Man	42.44
Rodman	36.92

SUPPLEMENTAL BENEFITS

Per Hour:

All Crew Members: \$ 24.53

OVERTIME PAY

OVERTIME:.... See (B, E*, Q, V) ON OVERTIME PAGE.

*Double-time paid on the 9th hour on Saturday.

HOLIDAY

Paid: See (5, 6, 7, 11, 16) on HOLIDAY PAGE

Overtime: See (5, 6, 7, 11, 16) on HOLIDAY PAGE

9-15dconsult

Operating Engineer - Tunnel

12/01/2025

JOB DESCRIPTION Operating Engineer - Tunnel

DISTRICT 7

ENTIRE COUNTIES

Albany, Allegany, Broome, Cayuga, Chemung, Chenango, Clinton, Columbia, Cortland, Essex, Franklin, Fulton, Greene, Hamilton, Herkimer, Jefferson, Lewis, Livingston, Madison, Monroe, Montgomery, Oneida, Onondaga, Ontario, Oswego, Otsego, Rensselaer, Saratoga, Schenectady, Schoharie, Schuyler, Seneca, St. Lawrence, Steuben, Tioga, Tompkins, Warren, Washington, Wayne, Yates

PARTIAL COUNTIES

Dutchess: Northern part of Dutchess, to the northern boundary line of the City of Poughkeepsie, then due east to Route 115 to Bedell Road, then east along Bedell Road to VanWagner Road, then north along VanWagner Road to Bower Road, then east along Bower Road to Rte. 44 east to Rte. 343, then along Rte. 343 east to the northern boundary of the Town of Dover Plains and east along the northern boundary of the Town of Dover Plains, to the borderline of the State of Connecticut.

Genesee: Only that portion of the county that lies east of a line drawn down the center of Route 98 and the entirety of the City of Batavia.

WAGES

CLASS A: Automatic Concrete Spreader (CMI Type); Automatic Fine Grader; Backhoe (except tractor mounted, rubber tired); Belt Placer (CMI Type); Blacktop Plant (automated); Cableway; Caisson Auger; Central Mix Concrete Plant (automated); Concrete Curb Machine (self-propelled slipform); Concrete Pump (8" or over); Dredge; Dual Drum Paver; Excavator; Front End Loader (4 cu. yd & over); Gradall; Head Tower (Sauerman or Equal); Hoist (shaft); Hoist (two or three Drum); Log Chipper/Loader (self-feeder); Maintenance Engineer (shaft and tunnel); any Mechanical Shaft Drill; Mine Hoist; Mining Machine (Mole and similar types); Mucking Machine or Mole; Overhead Crane (Gantry or Straddle Type); Pile Driver; Power Grader; Remote Controlled Mole or Tunnel Machine; Scraper; Shovel; Side Boom; Slip Form Paver (If a second man is needed, they shall be an Oiler); Tripper/Maintenance Engineer (shaft & tunnel); Tractor Drawn Belt-Type Loader; Tug Operator (manned rented equipment excluded); Tunnel Shovel.

CLASS B: Automated Central Mix Concrete Plant; Backhoe (topside); Backhoe (track mounted, rubber tired); Backhoe (topside); Bituminous Spreader and Mixer, Blacktop Plant (non-automated); Blast or Rotary Drill (truck or tractor mounted); Boring Machine; Cage Hoist; Central Mix Plant (non-automated); all Concrete Batching Plants; Compressors (4 or less exceeding 2,000 c.f.m. combined capacity); Concrete Pump; Crusher; Diesel Power Unit; Drill Rigs (tractor mounted); Front End Loader (under 4 cu. yd.); Grayco Epoxy Machine; Hoist (One Drum); Hoist (2 or 3 drum topside); Knuckle Boom material handler; Kolman Plant Loader & similar type Loaders (if employer requires another person to clean the screen or to maintain the equipment, they shall be an Oiler); L.C.M. Work Boat Operator; Locomotive; Maintenance Engineer (topside); Maintenance Grease Man; Mixer (for stabilized base-self-propelled); Monorail Machine; Plant Engineer; Personnel Hoist; Pump Crete; Ready Mix Concrete Plant; Refrigeration Equipment (for soil stabilization); Road Widener; Roller (all above sub-grade); Sea Mule; Shotcrete Machine; Shovel (topside); Tractor with Dozer and/or Pusher; Trencher; Tugger Hoist; Tunnel Locomotive; Vacuum Machine (mounted or towed); Welder; Winch; Winch Cat.

CLASS C: A Frame Truck; All Terrain Telescoping Material Handler; Ballast Regulator (ride-on); Compressors (4 not to exceed 2,000 c.f.m. combined capacity; or 3 or less with more than 1200 c.f.m. but not to exceed 2,000 c.f.m.); Compressors ((any size, but subject to other provisions for compressors), Dust Collectors, Generators, Pumps, Welding Machines, Light Plants (4 or any type combination)); Concrete Pavement Spreaders and Finishers; Conveyor; Drill (core); Drill (well); Electric Pump used in conjunction with Well Point System; Farm Tractor with Accessories; Fine Grade Machine; Fork Lift; Grout Pump (over 5 cu. ft.); Guniting Machine; Hammers (hydraulic-self-propelled); Hydra-Spiker (ride-on); Hydra-Blaster (water); Hydro-Blaster; Motorized Form Carrier; Post Hole Digger and Post Driver; Power Sweeper; Roller grade & fill); Scarifier (ride-on); Span-Saw (ride-on); Submersible Electric Pump (when used in lieu of well points); Tamper (ride-on); Tie-Extractor (ride-on), Tie Handler (ride-on), Tie Insertor (ride-on), Tie Spacer (ride-on); Track Liner (ride-on); Tractor with towed accessories; Vibratory Compactor; Vibro Tamp, Well Point.

CLASS D: Aggregate Plant; Cement & Bin Operator; Compressors (3 or less not to exceed 1,200 c.f.m. combined capacity); Compressors ((any size, but subject to other provisions for compressors), Dust Collectors, Generators, Pumps, Welding Machines, Light Plants (3 or less or any type or combination)); Concrete Saw (self-propelled); Form Tamper; Greaseman; Hydraulic Pump (jacking system); Junior Engineer; Light Plants; Mulching Machine; Oiler; Parapet Concrete or Pavement Grinder; Power Broom (towed); Power Heaterman (when used for production); Reviniis Widener; Shell Winder; Steam Cleaner; Tractor.

Per hour: 07/01/2025

CLASS A	\$ 58.44
CLASS B	57.22
CLASS C	54.43
CLASS D	51.42

Additional \$5.00 per hour for Hazardous Waste Work on a state or federally designated hazardous waste site where the Operating Engineer is in direct contact with hazardous material and when personal protective equipment is required for respiratory, skin and eye protection.

CRANES:

Crane 1: All cranes, including self-erecting.

Crane 2: All Lattice Boom Cranes and all cranes with a manufacturer's rating of fifty (50) ton and over.

Crane 3: All hydraulic cranes and derricks with a manufacturer's rating of forty nine (49) ton and below, including boom trucks.

Crane 1	\$ 62.44
Crane 2	61.44
Crane 3	60.44

SUPPLEMENTAL BENEFITS

Per hour:
\$ 25.90
+ 10.10*

* This portion of the benefits subject to SAME PREMIUM as shown for overtime wages.

OVERTIME PAY

See (B, B2, E, Q, X) on OVERTIME PAGE

HOLIDAY

Paid: See (5, 6) on HOLIDAY PAGE
Overtime: See (5, 6) on HOLIDAY PAGE

NOTE: If a holiday falls on Sunday, it shall be observed on Monday.

REGISTERED APPRENTICES

WAGES:(1000) hours terms at the following percentage of Journeyworker's Class B wage.

1st term	60%
2nd term	65%
3rd term	70%
4th term	75%

SUPPLEMENTAL BENEFITS per hour: Same as Journeyworker

7-158-832TL.

Painter

12/01/2025

JOB DESCRIPTION Painter

DISTRICT 1

ENTIRE COUNTIES

Columbia, Dutchess, Greene, Orange, Sullivan, Ulster

WAGES

Per hour

07/01/2025

Brush/Paper Hanger	\$ 40.45
Dry Wall Finisher	40.45
Lead Abatement	40.45
Sandblaster-Painter	40.45
Spray Rate	41.45

See Bridge Painting rates for the following work:

Structural Steel, all work performed on tanks, ALL BRIDGES, towers, smoke stacks, flag poles. Rate shall apply to all of said areas from the ground up.

SUPPLEMENTAL BENEFITS

Per hour

Journeyworker \$ 27.72

OVERTIME PAY

See (B, E, E2, Q) on OVERTIME PAGE

HOLIDAY

Paid: See (1) on HOLIDAY PAGE

Overtime: See (5, 6) on HOLIDAY PAGE

REGISTERED APPRENTICES

Wages per hour

Six (6) month terms at the following percentage of Journeyperson's wage

1st	2nd	3rd	4th	5th	6th
50%	55%	65%	75%	85%	95%

Supplemental Benefits per hour worked

1st term	\$ 11.64
All others	27.72

1-155

Painter - Bridge & Structural Steel

12/01/2025

JOB DESCRIPTION Painter - Bridge & Structural Steel

DISTRICT 8

ENTIRE COUNTIES

Albany, Bronx, Clinton, Columbia, Dutchess, Essex, Franklin, Fulton, Greene, Hamilton, Kings, Montgomery, Nassau, New York, Orange, Putnam, Queens, Rensselaer, Richmond, Rockland, Saratoga, Schenectady, Schoharie, Suffolk, Sullivan, Ulster, Warren, Washington, Westchester

WAGES

Per Hour:

STEEL:

Bridge Painting:	07/01/2025	10/01/2025
	\$ 56.25	\$ 57.00
	+ 11.10*	+ 12.10*

ADDITIONAL \$7.00 per hour for POWER TOOL/SPRAY, whether straight time or overtime.

NOTE: All premium wages are to be calculated on base rate per hour only.

* For the period of May 1st to November 15th, this amount is payable up to 40 hours. For the period of Nov 16th to April 30th, this amount is payable up to 50 hours. EXCEPTION: First and last week of employment, and for the weeks of Memorial Day, Independence Day and Labor Day, where the amount is paid for the actual number of hours worked (50 hour cap).

** To be allocated a later date

NOTE: Generally, for Bridge Painting Contracts, ALL WORKERS on and off the bridge (including Flagmen) are to be paid Painter's Rate; the contract must be ONLY for Bridge Painting.

SHIFT WORK

When directly specified in public agency or authority contract documents for an employer to work a second shift and works the second shift with employees other than from the first shift, all employees who work the second shift will be paid 10% of the base wage shift differential in lieu of overtime for the first eight (8) hours worked after which the employees shall be paid at time and one half of the regular wage rate. When a single irregular work shift is mandated in the job specifications or by the contracting agency, wages shall be paid at time and one half for single shifts between the hours of 3pm-11pm or 11pm-7am.

SUPPLEMENTAL BENEFITS

Per Hour:

Journeyworker:	\$ 13.33	\$ 13.49
	+ 30.76*	+ 31.27*

* For the period of May 1st to November 15th, this amount is payable up to 40 hours. For the period of Nov 16th to April 30th, this amount is payable up to 50 hours. EXCEPTION: First and last week of employment, and for the weeks of Memorial Day, Independence Day and Labor Day, where the amount is paid for the actual number of hours worked (50 hour cap).

OVERTIME PAY

See (B, F, R) on OVERTIME PAGE

HOLIDAY

Paid: See (1) on HOLIDAY PAGE
Overtime: See (4, 6) on HOLIDAY PAGE

REGISTERED APPRENTICES

Wage - Per hour:

Apprentices: (1) year terms.	07/01/2025	10/01/2025
1st year	\$ 22.50	\$ 22.80
	+ 4.44	+ 4.54*
2nd year	\$ 33.75	\$ 34.20
	+ 6.63	+ 7.26*
3rd year	\$ 45.00	\$ 45.60
	+ 8.88	+ 10.60*
Supplemental Benefits - Per hour:		
1st year	\$ 1.52	\$ 18.63*
	+ 12.51	
2nd year	\$ 8.00	\$ 8.09
	+ 18.47	+ 19.04*
3rd year	\$ 10.66	\$ 10.79
	+ 24.62	+ 25.39*

NOTE: All premium wages are to be calculated on base rate per hour only.

8-DC-9/806/155-BrSS

JOB DESCRIPTION Painter - Line Striping

DISTRICT 8

ENTIRE COUNTIES

Albany, Clinton, Columbia, Dutchess, Essex, Franklin, Fulton, Greene, Hamilton, Montgomery, Nassau, Orange, Putnam, Rensselaer, Rockland, Saratoga, Schenectady, Schoharie, Suffolk, Sullivan, Ulster, Warren, Washington, Westchester

WAGES

Per hour:

Painter (Striping-Highway):	07/01/2025	04/01/2026
Striping-Machine Operator*	\$ 35.49	\$ 36.93
Linerman Thermoplastic	42.74	44.44

Note: * Includes but is not limited to: Positioning of cones and directing of traffic using hand held devices. Excludes the Driver/Operator of equipment used in the maintenance and protection of traffic safety.

SHIFT WORK

When directly specified in public agency or authority contract documents there shall be a 30% night shift premium pay differential for all work performed after 9:00pm and before 5:00am.

SUPPLEMENTAL BENEFITS

Per hour paid:

Journeyworker:

Striping Machine Operator:	\$24.30	\$ 24.95
Linerman Thermoplastic:	24.30	24.95

OVERTIME PAY

See (B, B2, E2, F, S) on OVERTIME PAGE

HOLIDAY

Paid: See (5, 20) on HOLIDAY PAGE

Overtime: See (5, 20) on HOLIDAY PAGE

REGISTERED APPRENTICES

One (1) year terms at the following wage rates:

	07/01/2025	01/01/2026	04/01/2026
1st Term:	\$ 16.50	\$ 17.00	\$ 17.00
2nd Term:	21.29	20.47	22.16
3rd Term:	28.39	27.30	29.54

Supplemental Benefits per hour:

All terms:	\$ 24.30	\$ 24.30	\$ 24.95

8-1456-LS

Painter - Metal Polisher

12/01/2025

JOB DESCRIPTION Painter - Metal Polisher

DISTRICT 8

ENTIRE COUNTIES

Albany, Allegany, Bronx, Broome, Cattaraugus, Cayuga, Chautauqua, Chemung, Chenango, Clinton, Columbia, Cortland, Delaware, Dutchess, Erie, Essex, Franklin, Fulton, Genesee, Greene, Hamilton, Herkimer, Jefferson, Kings, Lewis, Livingston, Madison, Monroe, Montgomery, Nassau, New York, Niagara, Oneida, Onondaga, Ontario, Orange, Orleans, Oswego, Otsego, Putnam, Queens, Rensselaer, Richmond, Rockland, Saratoga, Schenectady, Schoharie, Schuyler, Seneca, St. Lawrence, Steuben, Suffolk, Sullivan, Tioga, Tompkins, Ulster, Warren, Washington, Wayne, Westchester, Wyoming, Yates

WAGES

	07/01/2025
Metal Polisher	\$ 40.33
Metal Polisher*	41.43
Metal Polisher**	44.33

*Note: Applies on New Construction & complete renovation

** Note: Applies when working on scaffolds over 34 feet.

SUPPLEMENTAL BENEFITS

Per Hour: 07/01/2025

Journeyworker:

All classification \$ 13.44

OVERTIME PAY

See (B, E, P, T) on OVERTIME PAGE

HOLIDAY

Paid: See (5, 6, 11, 15, 16, 25, 26) on HOLIDAY PAGE
Overtime: See (5, 6, 11, 15, 16, 25, 26) on HOLIDAY PAGE

REGISTERED APPRENTICES

Wages per hour:

One (1) year term at the following wage rates:

07/01/2025

1st year	\$ 20.17
2nd year	22.18
3rd year	24.20

1st year*	\$ 20.56
2nd year*	22.62
3rd year*	24.74

1st year**	\$ 22.67
2nd year**	24.68
3rd year**	26.70

*Note: Applies on New Construction & complete renovation

** Note: Applies when working on scaffolds over 34 feet.

Supplemental benefits:

Per hour:

1st year	\$ 8.94
2nd year	8.94
3rd year	8.94

8-8A/28A-MP

Plumber

12/01/2025

JOB DESCRIPTION Plumber

DISTRICT 8

ENTIRE COUNTIES

Dutchess

PARTIAL COUNTIES

Delaware: Only the Townships of Middletown and Roxbury.

Ulster: Entire county (including Wallkill and Shawangunk Prisons in Town of Shawangunk) EXCEPT for remainder of Town of Shawangunk, and Towns of Plattekill, Marlboro, and Wawarsing.

WAGES

Per hour: 07/01/2025

Plumber & Steamfitter	\$ 60.66

SHIFT WORK

SHIFT WORK:

When directly specified in public agency or authority contract documents, shift work outside the regular hours of work shall be comprised of eight (8) hours per shift not including Saturday, Sundays and holidays. One half (1/2) hour shall be allowed for lunch after the first four (4) hours of each shift. Wage and Fringes for shift work shall be straight time plus a shift premium of twenty-five (25%) percent. A minimum of five days Monday through Friday must be worked to establish shift work.

SUPPLEMENTAL BENEFITS

Per hour:

Journeyworker:	\$ 45.35

OVERTIME PAY

See (B, E, E2, Q, V) on OVERTIME PAGE

HOLIDAY

Paid: See (1) on HOLIDAY PAGE
Overtime: See (5, 6, 8, 16, 25) on HOLIDAY PAGE

REGISTERED APPRENTICES

(1)year terms at the following rates:

07/01/2025

1st year	\$ 23.24
2nd year	32.02
3rd year	37.15
4th year	44.51
5th year	51.20

Supplemental Benefits per hour:

1st year	\$ 19.15
2nd year	24.55
3rd year	28.50
4th year	32.99
5th year	36.44

8-21.2-SF

Plumber - HVAC / Service

12/01/2025

JOB DESCRIPTION Plumber - HVAC / Service

DISTRICT 8

ENTIRE COUNTIES

Dutchess, Putnam, Westchester

PARTIAL COUNTIES

Delaware: Only the townships of Middletown and Roxbury

Ulster: Entire County(including Wallkill and Shawangunk Prisons) except for remainder of Town of Shawangunk and Towns of Plattekill, Marlboro, and Wawarsing.

WAGES

Per hour: 07/01/2025

HVAC Service \$ 44.43
+ \$ 4.52*

*This portion of the benefit is NOT subject to the SAME PREMIUM as shown for overtime.

SUPPLEMENTAL BENEFITS

Per hour:

Journeyworker HVAC Service
\$ 31.84

OVERTIME PAY

See (B, F, R) on OVERTIME PAGE

HOLIDAY

Paid: See (5, 6, 16, 25) on HOLIDAY PAGE

Overtime: See (5, 6, 16, 25) on HOLIDAY PAGE

REGISTERED APPRENTICES

HVAC SERVICE

(1)year terms at the following wages:

1st yr.	2nd yr.	3rd yr.	4th yr.	5th yr.
\$ 20.11	\$ 23.87	\$ 29.70	\$ 36.53	\$ 39.73
+\$2.45*	+\$2.79*	+\$3.34*	+\$4.00*	+\$4.26*

*This portion of the benefit is NOT subject to the SAME PREMIUM as shown for overtime.

Supplemental Benefits per hour:

Apprentices 07/01/2025

1st term	\$ 22.13
2nd term	23.85
3rd term	25.71
4th term	28.29
5th term	30.11

8-21.1&2-SF/Re/AC

Plumber - Jobbing & Alterations

12/01/2025

JOB DESCRIPTION Plumber - Jobbing & Alterations

DISTRICT 8

ENTIRE COUNTIES

Dutchess, Putnam, Westchester

PARTIAL COUNTIES

Ulster: Entire county (including Wallkill and Shawangunk Prisons in Town of Shawangunk) EXCEPT for remainder of Town of Shawangunk, and Towns of Plattekill, Marlboro, and Wawarsing.

WAGES

Per hour: 07/01/2025
Journeyworker: \$ 50.68

Repairs, replacements and alteration work is any repair or replacement of a present plumbing system that does not change existing roughing or water supply lines.

SHIFT WORK

When directly specified in public agency or authority contract documents, shift work outside the regular hours of work shall be comprised of eight (8) hours per shift not including Saturday, Sundays and holidays. One half (1/2) hour shall be allowed for lunch after the first four (4) hours of each shift. Wage and Fringes for shift work shall be straight time plus a shift premium of twenty-five (25%) percent. A minimum of five days Monday through Friday must be worked to establish shift work.

SUPPLEMENTAL BENEFITS

Per hour:
Journeyworker
\$ 37.83

OVERTIME PAY

See (B, *E, E2, Q, V) on OVERTIME PAGE

*When used as a make-up day, hours after 8 on Saturday shall be paid at time and one half.

HOLIDAY

Paid: See (1) on HOLIDAY PAGE
Overtime: See (5, 6, 8, 16, 25) on HOLIDAY PAGE

REGISTERED APPRENTICES

(1) year terms at the following wages:

1st year	\$ 21.76
2nd year	24.20
3rd year	26.41
4th year	37.03
5th year	39.14

Supplemental Benefits per hour:

1st year	\$ 12.65
2nd year	14.82
3rd year	19.10
4th year	25.85
5th year	28.01

8-21.3-J&A

Roofer

12/01/2025

JOB DESCRIPTION Roofer

DISTRICT 9

ENTIRE COUNTIES

Bronx, Dutchess, Kings, New York, Orange, Putnam, Queens, Richmond, Rockland, Sullivan, Ulster, Westchester

WAGES

Per Hour:	07/01/2025	05/01/2026
		Additional
Roofer/Waterproofers	\$ 50.25	+ \$ 2.75
	+ \$ 7.00*	

* This portion is not subjected to overtime premiums.

Note: Abatement/Removal of Asbestos containing roofs and roofing material is classified as Roofer.

SUPPLEMENTAL BENEFITS

Per Hour: \$ 32.62

OVERTIME PAY

See (B, H) on OVERTIME PAGE

Note: An observed holiday that falls on a Sunday will be observed the following Monday.

HOLIDAY

Overtime: See (5, 6) on HOLIDAY PAGE

REGISTERED APPRENTICES

(1) year term apprentices indentured prior to 01/01/2023

1st	2nd	3rd	4th
\$ 17.59	\$ 25.13	\$ 30.15	\$ 37.69
	+ 3.50*	+ 4.20*	+ 5.26*

Supplements:

1st	2nd	3rd	4th
\$ 4.22	\$ 16.69	\$ 19.87	\$ 24.65

* This portion is not subjected to overtime premiums.

(1) year term apprentices indentured after 01/01/2023

1st	2nd	3rd	4th	5th
\$ 19.10	\$ 22.61	\$ 25.13	\$ 30.15	\$ 37.69
	+ 3.16*	+ 3.50*	+ 4.20*	+ 5.26*

Supplements:

1st	2nd	3rd	4th	5th
\$ 7.95	\$ 15.09	\$ 16.69	\$ 19.87	\$ 24.65

* This portion is not subjected to overtime premiums.

9-8R

Sheetmetal Worker

12/01/2025

JOB DESCRIPTION Sheetmetal Worker

DISTRICT 8

ENTIRE COUNTIES

Dutchess, Orange, Putnam, Rockland, Sullivan, Ulster, Westchester

WAGES

	07/01/2025
SheetMetal Worker	\$ 51.48
	+ 3.81*

*This portion of the benefit is NOT subject to the SAME PREMIUM as shown for overtime.

SHIFT WORK

For all NYS D.O.T. and other Governmental mandated off-shift work:
12% increase for additional shifts for a minimum of five (5) days

SUPPLEMENTAL BENEFITS

Journeyworker \$ 47.43

OVERTIME PAY

OVERTIME:.. See (B, E, Q,) on OVERTIME PAGE.

HOLIDAY

Paid: See (1) on HOLIDAY PAGE

Overtime: See (5, 6, 8, 15, 16, 23) on HOLIDAY PAGE

REGISTERED APPRENTICES

1st	2nd	3rd	4th	5th	6th	7th	8th
\$ 21.00	\$ 21.71	\$ 24.12	\$ 26.51	\$ 28.93	\$ 31.37	\$ 34.25	\$ 37.11
+ 1.52*	+ 1.71*	+ 1.91*	+ 2.10*	+ 2.29*	+ 2.48*	+ 2.67*	+ 2.86*

*This portion of the benefit is NOT subject to the SAME PREMIUM as shown for overtime.

Supplemental Benefits per hour:

Apprentices

1st term	\$ 18.57
2nd term	22.80
3rd term	25.34
4th term	27.88
5th term	30.40
6th term	32.92
7th term	34.99
8th term	37.08

8-38

Sprinkler Fitter

12/01/2025

JOB DESCRIPTION Sprinkler Fitter

DISTRICT 1

ENTIRE COUNTIES

Dutchess, Orange, Putnam, Rockland, Sullivan, Ulster, Westchester

WAGES

Per hour 07/01/2025

Sprinkler \$ 57.20
Fitter

SUPPLEMENTAL BENEFITS

Per hour

Journeyworker \$ 31.36

OVERTIME PAY

See (B, E, Q) on OVERTIME PAGE

HOLIDAY

Paid: See (1) on HOLIDAY PAGE

Overtime: See (5, 6) on HOLIDAY PAGE

Note: When a holiday falls on Sunday, the following Monday shall be considered a holiday and all work performed on either day shall be at the double time rate. When a holiday falls on Saturday, the preceding Friday shall be considered a holiday and all work performed on either day shall be at the double time rate.

REGISTERED APPRENTICES

Wages per hour

One Half Year terms at the following wage.

1st	2nd	3rd	4th	5th	6th	7th	8th	9th	10th
\$ 29.33	\$ 32.75	\$ 35.47	\$ 38.20	\$ 40.25	\$ 43.66	\$ 46.39	\$ 49.12	\$ 51.85	\$ 54.58

Supplemental Benefits per hour

1st	2nd	3rd	4th	5th	6th	7th	8th	9th	10th
\$ 9.57	\$ 9.57	\$ 21.49	\$ 21.49	\$ 21.74	\$ 21.74	\$ 21.74	\$ 21.74	\$ 21.74	\$ 21.74
									1-669.2

Teamster - Building / Heavy&Highway

12/01/2025

JOB DESCRIPTION Teamster - Building / Heavy&Highway

DISTRICT 11

ENTIRE COUNTIES

Dutchess, Orange, Rockland, Sullivan, Ulster

WAGES

GROUP I: LeTourneau Tractors, Double Barrel Euclids, Athney Wagons and similar equipment (except when hooked to scrapers), I-Beam and Pole Trailers, Tire Trucks, Tractor and Trailers with 5 axles and over, Articulated Back Dumps and Road Oil Distributors, Articulated Water Trucks and Fuel Trucks/Trailers, positions requiring a HAZMAT CDL endorsement.

GROUP II: Drivers on detachable Gooseneck Low Bed Trailers rated over 35 tons.

GROUP III: All equipment 25 yards and up to and including 30-yard bodies and cable Dump Trailers and Powder and Dynamite Trucks.

GROUP IV: All Equipment up to and including 24-yard bodies, Mixer Trucks, Dump Crete Trucks and similar types of equipment, Fuel Trucks, Batch Trucks and all other Tractor Trailers, Hi-Rail Truck.

GROUP V: Tri-Axles, Ten Wheelers, Grease Trucks, Tillerman, Pattern Trucks, Attenuator Trucks, Water Trucks, Bus.

GROUP VI: Straight Trucks.

GROUP VII: Pick-up Trucks for hauling materials and parts, and Escort Man over-the-road.

WAGES: (per hour) 07/01/2025 05/01/2026

GROUP I	\$ 37.91	\$ 39.51
GROUP II	39.03	40.63
GROUP III	37.35	38.95
GROUP IV	37.13	38.73
GROUP V	37.02	38.62
GROUP VI	36.90	38.50

GROUP VII	36.90	38.50

NOTE ADDITIONAL PREMIUMS:

- Employees engaged in hazardous/toxic waste removal, on a State or Federally designated hazardous/toxic waste site, where the employee comes in contact with hazardous/toxic waste material and when personal protective equipment is required for respiratory, skin, or eye protection, the employee shall receive an additional 20% premium above the hourly wage.

SHIFT WORK

- On projects requiring an irregular shift a premium of 10% will be paid on wages. The premium will be paid for off-shift or irregular shift work when mandated by Governmental Agency.

SUPPLEMENTAL BENEFITS

Per hour:

First 40 hours	\$ 46.37	\$ 47.68
Over 40 hours	38.37	39.68

OVERTIME PAY

See (*B, E, **E2, ***P, X) on OVERTIME PAGE

*Holidays worked Monday through Friday receive Double Time (2x) after 8 hours.

**Makeup day limited to the employees who were working on the site that week.

***Sunday Holidays are paid at a rate of double time and one half (2.5x) for all hours worked.

HOLIDAY

Paid: See (5, 6, 15, 25) on HOLIDAY PAGE

Overtime: See (*1) on HOLIDAY PAGE

- Any employee working two (2) days in any calendar week during which a holiday occurs shall receive a days pay for each holiday occurring during said week. This provision shall also apply if a holiday falls on a Saturday or Sunday.

*See OVERTIME PAY section for when additional premium is applicable on Holiday hours worked.

11-445B/HH

Teamster - Delivery - Building / Heavy&Highway

12/01/2025

JOB DESCRIPTION Teamster - Delivery - Building / Heavy&Highway

DISTRICT 11

ENTIRE COUNTIES

Dutchess, Orange, Rockland, Sullivan, Ulster

WAGES

THESE RATES ARE ONLY TO BE USED FOR DELIVERY OF AGGREGATE MATERIALS TO THE JOB SITE. FOR ALL ONSITE WORK AND HAULING OF SPOILS SEE THE TEAMSTER BUILDING/HEAVY & HIGHWAY RATES.

Group 1	Tractor Trailer Drivers
Group 2	Tri- Axle

Wages:	07/01/2025	05/01/2026
Group 1	\$ 37.35	\$ 38.95
Group 2	37.02	38.62

Hazardous/Toxic Waste Removal additional 20% when personal protective equipment is required.

SUPPLEMENTAL BENEFITS

Per hour paid:

First 40 hours	\$ 46.37	\$ 47.68
Over 40 hours	0.00	0.00

OVERTIME PAY

See (B, E, Q, X) on OVERTIME PAGE

HOLIDAY

Paid: See (5, 13, 15, 16, 20, 22, 25, 26) on HOLIDAY PAGE

Overtime: See (5, 13, 15, 16, 20, 22, 25, 26) on HOLIDAY PAGE

- Employee must work either the scheduled day of work before or the scheduled day of work after the holiday in the workweek.

- Any employee working one (1) day in the calendar week during which a holiday occurs shall receive a day's pay for each holiday occurring during said week. This provision shall also apply if a holiday falls on a Saturday.

- When any of the recognized holidays occur on Sunday and are celebrated any day before or after the holiday Sunday, such days shall be considered as the holiday and paid for as such.

11-445 B/HH Delivery

Welder

12/01/2025

JOB DESCRIPTION Welder

DISTRICT 1

ENTIRE COUNTIES

Albany, Allegany, Bronx, Broome, Cattaraugus, Cayuga, Chautauqua, Chemung, Chenango, Clinton, Columbia, Cortland, Delaware, Dutchess, Erie, Essex, Franklin, Fulton, Genesee, Greene, Hamilton, Herkimer, Jefferson, Kings, Lewis, Livingston, Madison, Monroe, Montgomery, Nassau, New York, Niagara, Oneida, Onondaga, Ontario, Orange, Orleans, Oswego, Otsego, Putnam, Queens, Rensselaer, Richmond, Rockland, Saratoga, Schenectady, Schoharie, Schuyler, Seneca, St. Lawrence, Steuben, Suffolk, Sullivan, Tioga, Tompkins, Ulster, Warren, Washington, Wayne, Westchester, Wyoming, Yates

WAGES

Per hour 07/01/2025

Welder: To be paid the same rate of the mechanic performing the work.*

*EXCEPTION: If a specific welder certification is required, then the 'Certified Welder' rate in that trade tag will be paid.

OVERTIME PAY

HOLIDAY

1-As Per Trade

Overtime Codes

Following is an explanation of the code(s) listed in the OVERTIME section of each classification contained in the attached schedule. Additional requirements may also be listed in the HOLIDAY section.

NOTE: Supplemental Benefits are 'Per hour worked' (for each hour worked) unless otherwise noted

- (AA) Time and one half of the hourly rate after 7 and one half hours per day
- (A) Time and one half of the hourly rate after 7 hours per day
- (B) Time and one half of the hourly rate after 8 hours per day
- (B1) Time and one half of the hourly rate for the 9th & 10th hours week days and the 1st 8 hours on Saturday.
Double the hourly rate for all additional hours
- (B2) Time and one half of the hourly rate after 40 hours per week
- (B3) Time and one half of the hourly rate after 40 straight hours per week
- (C) Double the hourly rate after 7 hours per day
- (C1) Double the hourly rate after 7 and one half hours per day
- (D) Double the hourly rate after 8 hours per day
- (D1) Double the hourly rate after 9 hours per day
- (E) Time and one half of the hourly rate on Saturday
- (E1) Time and one half 1st 4 hours on Saturday; Double the hourly rate all additional Saturday hours
- (E2) Saturday may be used as a make-up day at straight time when a day is lost during that week due to inclement weather
- (E3) Between November 1st and March 3rd Saturday may be used as a make-up day at straight time when a day is lost during that week due to inclement weather, provided a given employee has worked between 16 and 32 hours that week
- (E4) Sunday may be used as a make-up day at straight time when a day is lost during that week due to inclement weather
- (E5) Double time after 8 hours on Saturdays
- (F) Time and one half of the hourly rate on Saturday and Sunday
- (G) Time and one half of the hourly rate on Saturday and Holidays
- (H) Time and one half of the hourly rate on Saturday, Sunday, and Holidays
- (I) Time and one half of the hourly rate on Sunday
- (J) Time and one half of the hourly rate on Sunday and Holidays
- (K) Time and one half of the hourly rate on Holidays
- (L) Double the hourly rate on Saturday
- (M) Double the hourly rate on Saturday and Sunday
- (N) Double the hourly rate on Saturday and Holidays
- (O) Double the hourly rate on Saturday, Sunday, and Holidays
- (P) Double the hourly rate on Sunday
- (Q) Double the hourly rate on Sunday and Holidays
- (R) Double the hourly rate on Holidays

- (S) Two and one half times the hourly rate for Holidays
- (S1) Two and one half times the hourly rate the first 8 hours on Sunday or Holidays One and one half times the hourly rate all additional hours.
- (T) Triple the hourly rate for Holidays
- (U) Four times the hourly rate for Holidays
- (V) Including benefits at SAME PREMIUM as shown for overtime
- (W) Time and one half for benefits on all overtime hours.
- (X) Benefits payable on Paid Holiday at straight time. If worked, additional benefit amount will be required for worked hours. (Refer to other codes listed.)

Holiday Codes

PAID Holidays:

Paid Holidays are days for which an eligible employee receives a regular day's pay, but is not required to perform work. If an employee works on a day listed as a paid holiday, this remuneration is in addition to payment of the required prevailing rate for the work actually performed.

OVERTIME Holiday Pay:

Overtime holiday pay is the premium pay that is required for work performed on specified holidays. It is only required where the employee actually performs work on such holidays. The applicable holidays are listed under HOLIDAYS: OVERTIME. The required rate of pay for these covered holidays can be found in the OVERTIME PAY section listings for each classification.

Following is an explanation of the code(s) listed in the HOLIDAY section of each classification contained in the attached schedule. The Holidays as listed below are to be paid at the wage rates at which the employee is normally classified.

- (1) None
- (2) Labor Day
- (3) Memorial Day and Labor Day
- (4) Memorial Day and July 4th
- (5) Memorial Day, July 4th, and Labor Day
- (6) New Year's, Thanksgiving, and Christmas
- (7) Lincoln's Birthday, Washington's Birthday, and Veterans Day
- (8) Good Friday
- (9) Lincoln's Birthday
- (10) Washington's Birthday
- (11) Columbus Day
- (12) Election Day
- (13) Presidential Election Day
- (14) 1/2 Day on Presidential Election Day
- (15) Veterans Day
- (16) Day after Thanksgiving
- (17) July 4th
- (18) 1/2 Day before Christmas
- (19) 1/2 Day before New Years
- (20) Thanksgiving
- (21) New Year's Day
- (22) Christmas
- (23) Day before Christmas
- (24) Day before New Year's
- (25) Presidents' Day
- (26) Martin Luther King, Jr. Day
- (27) Memorial Day
- (28) Easter Sunday

(29) Juneteenth

New York State Department of Labor - Bureau of Public Work
State Office Building Campus
Building 12 - Room 130
Albany, New York 12226

REQUEST FOR WAGE AND SUPPLEMENT INFORMATION

As Required by Articles 8 and 9 of the NYS Labor Law

Fax (518) 485-1870 or mail this form for new schedules or for determination for additional occupations.

This Form Must Be Typed

Submitted By:

(Check Only One)

☐

Contracting Agency

☐

Architect or Engineering Firm

☐

Public Work District Office

Date:

A. Public Work Contract to be let by: (Enter Data Pertaining to Contracting/Public Agency)

1. Name and complete address ☐ (Check if new or change)

Telephone

Fax

E-Mail:

2. NY State Units (see Item 5).

☐ 01 DOT

☐ 02 OGS

☐ 03 Dormitory Authority

☐ 04 State University
Construction Fund

☐ 05 Mental Hygiene
Facilities Corp.

☐ 06 OTHER N.Y. STATE UNIT

☐ 07 City

☐ 08 Local School District

☐ 09 Special Local District, i.e.,
Fire, Sewer, Water District

☐ 10 Village

☐ 11 Town

☐ 12 County

☐ 13 Other Non-N.Y. State
(Describe)

3. SEND REPLY TO ☐ (check if new or change)
Name and complete address:

Telephone

Fax

E-Mail:

4. SERVICE REQUIRED. Check appropriate box and provide project information.

☐ New Schedule of Wages and Supplements.

APPROXIMATE BID DATE :

☐ Additional Occupation and/or Redetermination

PRC NUMBER ISSUED PREVIOUSLY FOR
THIS PROJECT :

OFFICE USE ONLY

B. PROJECT PARTICULARS

5. Project Title

Description of Work

Contract Identification Number

Note: For NYS units, the OSC Contract No.

6. Location of Project:
Location on Site

Route No/Street Address

Village or City

Town

County

7. Nature of Project - Check One:

☐

1. New Building

☐

2. Addition to Existing Structure

☐

3. Heavy and Highway Construction (New and Repair)

☐

4. New Sewer or Waterline

☐

5. Other New Construction (Explain)

☐

6. Other Reconstruction, Maintenance, Repair or Alteration

☐

7. Demolition

☐

8. Building Service Contract

8. OCCUPATION FOR PROJECT :

☐ Construction (Building, Heavy
Highway/Sewer/Water)

☐ Tunnel

☐ Residential

☐ Landscape Maintenance

☐ Elevator maintenance

☐ Exterminators, Fumigators

☐ Fire Safety Director, NYC Only

☐ Fuel Delivery

☐ Guards, Watchmen

☐ Janitors, Porters, Cleaners,
Elevator Operators

☐ Moving furniture and
equipment

☐ Trash and refuse removal

☐ Window cleaners

☐ Other (Describe)

9. Does this project comply with the Wicks Law involving separate bidding? YES ☐ NO ☐

10. Name and Title of Requester

Signature



NEW YORK STATE DEPARTMENT OF LABOR
Bureau of Public Work - Debarment List

**LIST OF EMPLOYERS INELIGIBLE TO BID ON OR BE
AWARDED ANY PUBLIC WORK CONTRACT**

Under Article 8 and Article 9 of the NYS Labor Law, a contractor, sub-contractor and/or its successor shall be debarred and ineligible to submit a bid on or be awarded any public work or public building service contract/sub-contract with the state, any municipal corporation or public body for a period of five (5) years from the date of debarment when:

- Two (2) final determinations have been rendered within any consecutive six-year (6) period determining that such contractor, sub-contractor and/or its successor has WILLFULLY failed to pay the prevailing wage and/or supplements;
- One (1) final determination involves falsification of payroll records or the kickback of wages and/or supplements.

The agency issuing the determination and providing the information, is denoted under the heading 'Fiscal Officer'. DOL = New York State Department of Labor; NYC = New York City Comptroller's Office; AG = New York State Attorney General's Office; DA = County District Attorney's Office.

Debarment Database: To search for contractors, sub-contractors and/or their successors debarred from bidding or being awarded any public work contract or subcontract under NYS Labor Law Articles 8 and 9, or under NYS Workers' Compensation Law Section 141-b, access the database at this link: <https://apps.labor.ny.gov/EDList/searchPage.do>

For inquiries please call 518-457-5589.

NYSDOL Bureau of Public Work Debarment List 12/05/2025

Article 8

AGENCY	Fiscal Officer	FEIN	EMPLOYER NAME	EMPLOYER DBA NAME	ADDRESS	DEBARMENT START DATE	DEBARMENT END DATE
DOL	DOL	*****5754	0369 CONTRACTORS, LLC		515 WEST AVE UNIT PH 13NORWALK CT 06850	05/12/2021	05/12/2026
DOL	DOL	*****5784	A.J.M. TRUCKING, INC.		PO BOX 2064 MONROE NY 10950	02/12/2024	02/12/2029
DOL	DOL		AKHLAQ OULAKH		4307 28TH AVE ASTORIA NY 11103	10/11/2024	10/11/2029
DOL	DOL		ALEXANDER DELISA		411 THEODORE FREMND SUITE 206RYE NY 10580	09/03/2025	09/03/2030
DOL	NYC		ALL COUNTY SEWER & DRAIN, INC.		7 GREENFIELD DR WARWICK NY 10990	03/25/2022	03/25/2027
DOL	DOL	*****8387	AMERICAN PAVING & MASONRY, CORP.		8 FOREST AVE GLEN COVE NY 11542	05/24/2024	05/24/2029
DOL	DOL	*****8654	AMERICAN PAVING, INC.		8 FORREST AVE. GLEN COVE NY 11542	05/24/2024	05/24/2029
DOL	NYC		AMJED PARVEZ		401 HANOVER AVENUE STATEN ISLAND NY 10304	01/11/2021	01/11/2026
DOL	DOL		ANGELO GARCIA		515 WEST AVE UNIT PH 13NORWALK CT 06850	05/12/2021	05/12/2026
DOL	DOL		ANGELO STANCO		8 FOREST AVE. GLEN COVE NY 11542	05/24/2024	05/24/2029
DOL	DOL		ANGELO TONDO		449 WEST MOMBSHA ROAD MONROE NY 10950	06/06/2022	06/06/2027
DOL	DOL	*****4231	ANKER'S ELECTRIC SERVICE, INC.		10 SOUTH 5TH ST LOCUST VALLEY NY 11560	09/26/2022	09/26/2027
DOL	DOL		ANTHONY CASALE		20 HEATHER RIDGE ROAD TROY NY 12180	05/20/2025	05/20/2030
DOL	DOL		ANTHONY MONGELLI		PO BOX 2064 MONROE NY 10950	02/12/2024	02/12/2029
DOL	DOL	*****8421	B & B DRYWALL, INC		206 WARREN AVE APT 1WHITE PLAINS NY 10603	12/14/2021	12/14/2026
DOL	NYC	*****2113	BHW CONTRACTING, INC.		401 HANOVER AVENUE STATEN ISLAND NY 10304	01/11/2021	01/11/2026
DOL	DA	*****2404	BJA RENOVATION, CORP		33 DOLLARD DR NORTH BABYLON NY 11703	03/19/2025	03/19/2030
DOL	DOL	*****5078	BLACK RIVER TREE REMOVAL, LLC		29807 ANDREWS ROAD BLACK RIVER NY 13032	10/17/2023	10/17/2028
DOL	DOL		C.M.C CONTRACTORS, INC.		500 WEST PUTNAM AVE SUITE 400GREENWICH CT 06830	09/03/2025	09/03/2030
DOL	DOL	*****5161	CALADRI DEVELOPMENT CORP.		1223 PARK ST. PEEKSKILL NY 10566	05/17/2021	05/17/2026
DOL	DOL	*****3391	CALI ENTERPRISES, INC.		1223 PARK STREET PEEKSKILL NY 10566	05/17/2021	05/17/2026
DOL	DOL		CARLOS F. ESCOBAR		411 THEODORE FREMND AVE SUITE 206RYE NY 10580	09/03/2025	09/03/2030
DOL	DOL		CARLOS FIGUEROA		411 THEODORE FREMND AVE SUITE 206RYE NY 10580	09/03/2025	09/03/2030
DOL	DOL	*****4155	CASA BUILDERS, INC.	FRIEDLANDER CONSTRUCTI ON	64 N PUTT CONNERS ROAD NEW PALTZ NY 12561	05/10/2023	05/10/2028
DOL	AG	*****7247	CENTURY CONCRETE CORP		2375 RAYNOR ST RONKONKOMA NY 11779	08/04/2021	08/04/2026
DOL	DOL	*****2292	CHAMPION MAINTENANCE CONTRACTORS, INC.		211 SOUTH RIDGE STREET RYE BROOK NY 10573	09/03/2025	09/03/2030
DOL	NYC	*****2117	CHARAN ELECTRICAL ENTERPRISES		9-11 40TH AVENUE LONG ISLAND CITY NY 11101	09/26/2023	09/26/2028
DOL	DOL		CHARLES CASALE		55 MAIN AVENUE WYNANTSKILL NY 12198	05/20/2025	05/20/2030
DOL	DOL		CHARLES CASALE		55 MAIN AVENUE WYNANTSKILL NY 12198	05/20/2025	05/20/2030
DOL	DOL		CHRISTOPHER GRECO		26 NORTH MYRTLE AVENUE SPRING VALLEY NY 10956	02/18/2021	02/18/2026
DOL	DOL		CHRISTOPHER PEROSI		5507 NESCONSET HIGHWAY MT. SINAI NY 11766	07/17/2025	07/17/2030
DOL	DOL	*****2281	CORRAO TRUCKING, INC.		PO BOX 393 NANUET NY 10954	09/17/2024	09/17/2029
DOL	DOL		CRAIG JOHANSEN		10 SOUTH 5TH ST LOCUST VALLEY NY 11560	09/26/2022	09/26/2027
DOL	DOL	*****3228	CROSS-COUNTY LANDSCAPING AND TREE SERVICE, INC.	ROCKLAND TREE SERVICE	26 NORTH MYRTLE AVENUE SPRING VALLEY NY 10956	02/18/2021	02/18/2026

NYSDOL Bureau of Public Work Debarment List 12/05/2025

Article 8

DOL	DOL	****7619	DANCO CONSTRUCTION UNLIMITED INC.		485 RAFT AVENUE HOLBROOK NY 11741	10/19/2021	10/19/2026
DOL	DOL		DANIEL DELISA		211 SOUTH RIDGE STREET RYE BROOK NY 10573	09/03/2025	09/03/2030
DOL	DOL		DANIEL ROBERT MCNALLY		7 GREENFIELD DRIVE WARWICK NY 10990	03/25/2022	03/25/2027
DOL	DOL		DARWIN PEGUESE		6400 BALTIMORE NATIONAL SUITE 602CANTONSVILLE NY 21228	10/24/2024	10/24/2029
DOL	DOL		DAVID FRIEDLANDER		64 NORTH PUTT CORNERS RD NEW PALTZ NY 12561	05/10/2023	05/10/2028
DOL	DOL		DENISE NAGLE		36 OAKWOOD TRAIL S AL MONROE NY 10950	10/29/2025	10/29/2030
DOL	DOL		DINA TAYLOR		64 N PUTT CONNERS RD NEW PALTZ NY 12561	05/10/2023	05/10/2028
DOL	AG		EDWIN HUTZLER		23 NORTH HOWELLS RD BELLPORT NY 11713	08/04/2021	08/04/2026
DOL	DA		EDWIN HUTZLER		2375 RAYNOR STREET RONKONKOMA NY 11779	08/04/2021	08/04/2026
DOL	DOL	****2337	EGL DRAINAGE SOLUTION & REPAIRS LLC		5507 NESCONSET HIGHWAY MT. SINAI NY 11766	07/17/2025	07/17/2030
DOL	DOL	****0780	EMES HEATING & PLUMBING CONTR		5 EMES LANE MONSEY NY 10952	01/20/2002	01/20/3002
DOL	DOL		EMIL KISZKO		84 DIAMOND ST BROOKLYN NY 11222	07/18/2024	07/18/2029
DOL	DOL	****3298	EMJACK CONSTRUCTION CORP.		84 DIAMOND ST BROOKLYN NY 11222	07/18/2024	07/18/2029
DOL	DOL	****3298	EMJACK CONSTRUCTION LLC		4192 SIR ANDREW CIRCLE DOYLESTOWN PA 18902	07/18/2024	07/18/2029
DOL	DOL		EUGENIUSZ "GINO" KUCHAR		195 KINGSLAND AVE BROOKLYN NY 11222	12/22/2023	12/22/2028
DOL	DA		FREDERICK HUTZLER		2375 RAYNOR STREET RONKONKOMA NY 11779	08/04/2021	08/04/2026
DOL	DOL	****2998	G.E.M. AMERICAN CONSTRUCTION CORP.		195 KINGSLAND AVE BROOKLYN NY 11222	12/22/2023	12/22/2028
DOL	DA		GEORGE LUCEY		150 KINGS STREET BROOKLYN NY 11231	01/19/1998	01/19/2998
DOL	DA		GIOVANNA TRAVAJA		3735 9TH ST LONG ISLAND CITY NY 11101	01/05/2023	01/05/2028
DOL	DA		GIOVANNI NAPOLITANO		2501 BAYVIEW AVENUE WANTAGH NY 11793	02/21/2024	02/21/2029
DOL	DA	****0213	GORILLA CONTRACTING GROUP, LLC		505 MANHATTAN AVE WEST BABYLON NY 11704	10/05/2023	10/05/2028
DOL	DA	****4760	GTX CONSTRUCTION ASSOCIATES, CORP		2501 BAYVIEW AVE WANTAGH NY 11793	02/21/2024	02/21/2029
DOL	DOL		HENRY WICKE A/K/A HENRY WICKE, JR.		36 OAKWOOD TRAIL S AL MONROE NY 10950	10/29/2025	10/29/2030
DOL	DOL		HERBERT CLEMEN		42 FOWLER AVENUE CORTLAND MANOR NY 10567	01/24/2023	01/24/2028
DOL	DOL		HERBERT CLEMEN		42 FOWLER AVENUE CORTLAND MANOR NY 10567	10/25/2022	10/25/2027
DOL	DOL	****6961	HUNTER ELEVATOR COMPANY, INC.		36 OAKWOOD TRAIL S AL MONROE NY 10950	10/29/2025	10/29/2030
DOL	DOL	****2397	ISLAND BREEZE MARINE, INC.		6400 BALTIMORE NATIONAL CANTONSVILLE MD 21228	10/24/2024	10/24/2029
DOL	DOL	****5010	J. LINDSLEY ENTERPRISE, LLC		1002 STATE ROUTE 176 FULTON NY 13069	07/30/2025	07/30/2030
DOL	DOL	****0241	J. LINDSLEY ROOFING, LLC		211 NORTH 2ND STREET FULTON NY 13069	07/30/2025	07/30/2030
DOL	DOL	****9211	J. WASE CONSTRUCTION CORP.		8545 RT 9W ATHENS NY 12015	03/09/2021	03/09/2026
DOL	DOL		J.M.J CONSTRUCTION		151 OSTRANDER AVENUE SYRACUSE NY 13205	11/21/2022	11/21/2027
DOL	DOL		J.R. NELSON CONSTRUCTION		531 THIRD STREET ALBANY NY 12206	11/07/2023	11/07/2028
DOL	DOL		J.R. NELSON CONSTRUCTION		531 THIRD STREET ALBANY NY 12206	12/22/2022	12/22/2027
DOL	DOL		J.R. NELSON CONSTRUCTION		531 THIRD STREET ALBANY NY 12206	10/25/2022	10/25/2027
DOL	DOL		J.R. NELSON, LLC		531 THIRD STREET ALBANY NY 12206	12/22/2022	12/22/2027
DOL	DOL		J.R. NELSON, LLC		531 THIRD STREET ALBANY NY 12206	11/07/2023	11/07/2028
DOL	DOL		J.R. NELSON, LLC		531 THIRD STREET ALBANY NY 12206	10/25/2022	10/25/2027

NYSDOL Bureau of Public Work Debarment List 12/05/2025

Article 8

DOL	DOL		J.R.N COMPANIES, LLC		531 THIRD STREET ALBANY NY 12206	12/12/2022	12/12/2027
DOL	DOL		J.R.N COMPANIES, LLC		531 THIRD STREET ALBANY NY 12206	11/07/2023	11/07/2028
DOL	DOL		J.R.N COMPANIES, LLC		531 THIRD STREET ALBANY NY 12206	10/25/2022	10/25/2027
DOL	DOL	*****1147	J.R.N. CONSTRUCTION, LLC		531 THIRD ST ALBANY NY 12206	11/07/2023	11/07/2028
DOL	DOL	*****1147	J.R.N. CONSTRUCTION, LLC		531 THIRD ST ALBANY NY 12206	12/22/2022	12/22/2027
DOL	DOL	*****1147	J.R.N. CONSTRUCTION, LLC		531 THIRD ST ALBANY NY 12206	10/25/2022	10/25/2027
DOL	DOL		JAMES J. BAKER		7901 GEE ROAD CANASTOTA NY 13032	08/17/2021	08/17/2026
DOL	DOL		JAMES LINDSLEY		211 NORTH 2ND STREET FULTON NY 13069	07/30/2025	07/30/2030
DOL	DOL		JASON P. RACE		3469 STATE RT. 69 PERISH NY 13131	09/29/2021	09/29/2026
DOL	DOL		JASON P. RACE		3469 STATE RT. 69 PERISH NY 13131	02/09/2022	02/09/2027
DOL	DOL		JASON P. RACE		3469 STATE RT. 69 PERISH NY 13131	11/15/2022	11/15/2027
DOL	DOL		JASON P. RACE		3469 STATE RT. 69 PERISH NY 13131	03/01/2022	03/01/2027
DOL	DOL	*****7993	JBS DIRT, INC.		7901 GEE ROAD CANASTOTA NY 13032	08/17/2021	08/17/2026
DOL	DOL	*****2435	JEFFEL D. JOHNSON	JMJ7 AND SON	5553 CAIRNSTRAIL CLAY NY 13041	11/21/2022	11/21/2027
DOL	DOL		JEFFEL JOHNSON ELITE CARPENTER REMODEL AND CONSTRUCTION		C2 EVERGREEN CIRCLE LIVERPOOL NY 13090	11/21/2022	11/21/2027
DOL	DOL	*****2435	JEFFREY M. JOHNSON	JMJ7 AND SON	5553 CAIRNS TRAIL CLAY NY 13041	11/21/2022	11/21/2027
DOL	DOL		JENNIFER LINDSLEY		211 NORTH 2ND STREET FULTON NY 13069	07/30/2025	07/30/2030
DOL	DOL		JERRY DASTON		36 OAKWOOD TRAIL S AL MONROE NY 10950	10/29/2025	10/29/2030
DOL	DOL		JIM PLAUGHER		17613 SANTE FE LINE ROAD WAYNEFIELD OH 45896	07/16/2021	07/16/2026
DOL	DOL		JMJ7 & SON CONSTRUCTION, LLC		5553 CAIRNS TRAIL LIVERPOOL NY 13041	11/21/2022	11/21/2027
DOL	DOL		JMJ7 AND SONS CONTRACTORS		5553 CAIRNS TRAIL CLAY NY 13041	11/21/2022	11/21/2027
DOL	DOL		JMJ7 CONTRACTORS		7014 13TH AVENUE BROOKLYN NY 11228	11/21/2022	11/21/2027
DOL	DOL		JMJ7 CONTRACTORS AND SONS		5553 CAIRNS TRAIL CLAY NY 13041	11/21/2022	11/21/2027
DOL	DOL		JMJ7 CONTRACTORS, LLC		5553 CAIRNS TRAIL CLAY NY 13041	11/21/2022	11/21/2027
DOL	DOL		JOHN MARKOVIC		47 MANDON TERRACE HAWTHORN NJ 07506	03/29/2021	03/29/2026
DOL	DOL		JOHN NAGLE A/K/A JOHN NAGLE, JR.		36 OAKWOOD TRAIL S AL MONROE NY 10950	10/29/2025	10/29/2030
DOL	DOL		JOHN WASE		8545 RT 9W ATHENS NY 12015	03/09/2021	03/09/2026
DOL	DOL		JONATHAN DELISA		411 THEODORE FREMND AVE SUITE 206 RYE NY 10580	09/03/2025	09/03/2030
DOL	DOL		JORGE FIGUEROA		411 THEODORE FRMND AVE SUITE 206 RYE NY 10580	09/03/2025	09/03/2030
DOL	DOL		JORGE RAMOS		8970 MIKE GARCIA DR MANASSAS VA 20109	07/16/2021	07/16/2026
DOL	DA		JOSEPH DEMASCO		33 DOLLARD DRIVE NORTH BABYLON NY 11703	03/19/2025	03/19/2030
DOL	DOL		JOSEPH HALL		937 US ROUTE 11 CENTRAL SQUARE NY 13036	10/21/2024	10/21/2029
DOL	DOL	*****2271	JOSEPH HALL COMPANIES LLC		937 US ROUTE 11 CENTRAL SQUARE NY 13036	10/21/2024	10/21/2029
DOL	DOL		JOSEPH K. SALERNO		1010 TILDEN AVE UTICA NY 13501	07/24/2023	07/24/2028
DOL	DOL		JOSEPH K. SALERNO II		1010 TILDEN AVE UTICA NY 13501	07/24/2023	07/24/2028
DOL	DOL	*****5116	JP RACE PAINTING, INC. T/A RACE PAINTING		3469 STATE RT. 69 PERISH NY 13131	02/09/2022	02/09/2027
DOL	DOL	*****5116	JP RACE PAINTING, INC. T/A RACE PAINTING		3469 STATE RT. 69 PERISH NY 13131	11/15/2022	11/15/2027

NYSDOL Bureau of Public Work Debarment List 12/05/2025

Article 8

DOL	DOL	*****5116	JP RACE PAINTING, INC. T/A RACE PAINTING		3469 STATE RT. 69 PERISH NY 13131	09/29/2021	09/29/2026
DOL	DOL	*****5116	JP RACE PAINTING, INC. T/A RACE PAINTING		3469 STATE RT. 69 PERISH NY 13131	03/01/2022	03/01/2027
DOL	DOL	*****5116	JP RACE PAINTING, INC. T/A RACE PAINTING		3469 STATE RT. 69 PERISH NY 13131	03/01/2022	03/01/2027
DOL	DOL		JRN CONSTRUCTION CO, LLC		1024 BROADWAY ALBANY NY 12204	11/07/2023	11/07/2028
DOL	DOL	*****1147	JRN CONSTRUCTION, LLC		531 THIRD STREET ALBANY NY 12206	10/25/2022	10/25/2027
DOL	DOL	*****1147	JRN CONSTRUCTION, LLC		531 THIRD STREET ALBANY NY 12206	12/22/2022	12/22/2027
DOL	DOL	*****1147	JRN CONSTRUCTION, LLC		531 THIRD STREET ALBANY NY 12206	11/07/2023	11/07/2028
DOL	DOL		JRN PAVING, LLC		531 THIRD STREET ALBANY NY 12206	10/25/2022	10/25/2027
DOL	DOL		JRN PAVING, LLC		531 THIRD STREET ALBANY NY 12206	12/22/2022	12/22/2027
DOL	DOL		JRN PAVING, LLC		531 THIRD STREET ALBANY NY 12206	11/07/2023	11/07/2028
DOL	DOL		JULIUS AND GITA BEHREND		5 EMES LANE MONSEY NY 10952	11/20/2002	11/20/3002
DOL	DOL		KATE E. CONNOR		7088 INTERSTATE ISLAND RD SYRACUSE NY 13209	03/31/2021	03/31/2026
DOL	DOL		KEAN INDUSTRIES, LLC		2345 RT. 52 SUITE 2NHOPEWELL JUNCTION NY 12533	12/18/2023	12/18/2028
DOL	DOL	*****2959	KELC DEVELOPMENT, INC		7088 INTERSTATE ISLAND RD SYRACUSE NY 13209	03/31/2021	03/31/2026
DOL	DOL		KEVIN FUNEZ URBINA A/K/A KEVIN FUNEZ		1009 LYNDALE AVE TRENTON NJ 08629	12/16/2024	12/16/2029
DOL	DOL		KIMBERLY F. BAKER		7901 GEE ROAD CANASTOTA NY 13032	08/17/2021	08/17/2026
DOL	DOL	*****8760	KJ&J CONSTRUCTION, LLC		1009 LYNDALE AVE TRENTON NJ 08629	12/16/2024	12/16/2029
DOL	DOL		KMA GROUP II, INC.		29-10 38TH AVENUE LONG ISLAND CITY NY 11101	10/11/2023	10/11/2028
DOL	DOL	*****1833	KMA GROUP INC.		29-10 38TH AVENUE LONG ISLAND CITY NY 11101	10/11/2023	10/11/2028
DOL	DOL		KMA INSULATION, INC.		29-10 38TH AVENUE LONG ISLAND CITY NY 11101	10/11/2023	10/11/2028
DOL	DOL		KRIN HEINEMANN		2345 ROUTE 52, SUITE 2N HOPEWELL JUNCTION NY 12533	12/18/2023	12/18/2028
DOL	NYC		KULWANT S. DEOL		9-11 40TH AVENUE LONG ISLAND CITY NY 11101	09/26/2023	09/26/2028
DOL	DA	*****8816	LAKE CONSTRUCTION AND DEVELOPMENT CORPORATION		150 KINGS STREET BROOKLYN NY 11231	08/19/1998	08/19/2998
DOL	DOL		LEROY E. NELSON JR		531 THIRD ST ALBANY NY 12206	10/25/2022	10/25/2027
DOL	DOL		LEROY E. NELSON JR		531 THIRD ST ALBANY NY 12206	12/22/2022	12/22/2027
DOL	DOL		LEROY E. NELSON JR		531 THIRD ST ALBANY NY 12206	11/07/2023	11/07/2028
DOL	DOL	*****3716	LIGHTNIN ELECTRIC INC.		3418 NORTHERN BLVD SUITE 5-27LONG ISLAND CITY NY 11101	12/13/2024	12/13/2029
DOL	AG	*****3291	LINTECH ELECTRIC, INC.		3006 TILDEN AVE BROOKLYN NY 11226	02/16/2022	02/16/2027
DOL	DOL		LIZETTE PONCE		411 THEODORE FREMND AVE SUITE 206RYE NY 10580	09/03/2025	09/03/2030
DOL	DOL		LOUIS A. CALICCHIA		1223 PARK ST. PEEKSKILL NY 10566	05/17/2021	05/17/2026
DOL	DOL	*****2196	MAINSTREAM SPECIALTIES, INC.		11 OLD TOWN RD SELKIRK NY 12158	02/02/2021	02/02/2026
DOL	DA		MANUEL P TOBIO		150 KINGS STREET BROOKLYN NY 14444	08/19/1998	08/19/2998
DOL	DA		MANUEL TOBIO		150 KINGS STREET BROOKLYN NY 11231	08/19/1998	08/19/2998
DOL	DOL	*****1320	MJC MASON CONTRACTING, INC.		42 FOWLER AVENUE CORTLAND MANOR NY 10567	10/25/2022	10/25/2027
DOL	DOL	*****1320	MJC MASON CONTRACTING, INC.		42 FOWLER AVENUE CORTLAND MANOR NY 10567	01/24/2023	01/24/2028

NYSDOL Bureau of Public Work Debarment List 12/05/2025

Article 8

DOL	DOL		MOHAMMAD MIAN		8269 21ST ST BELLEROSE NY 11426	12/22/2022	12/22/2027
DOL	NYC		NASEER CHAUDHRY		2349 BRAGG STREET BROOKLYN NY 11229	04/22/2025	04/22/2030
DOL	DOL	****7790	NATIONAL BUILDING & RESTORATION CORP		1010 TILDEN AVE UTICA NY 13501	07/24/2023	07/24/2028
DOL	DOL	****1797	NATIONAL CONSTRUCTION SERVICES, INC		1010 TILDEN AVE UTICA NY 13501	07/24/2023	07/24/2028
DOL	NYC		NAVIT SINGH		402 JERICHO TURNPIKE NEW HYDE PARK NY 11040	08/10/2022	08/10/2027
DOL	DOL		NELCO CONTRACTING, LLC		1024 BROADWAY ALBANY NY 12204	11/07/2023	11/07/2028
DOL	DA		NICHOLAS BARNETT		33 DOLLARD DR BABYLON NY 11703	03/04/2025	03/04/2030
DOL	DOL		NICHOLAS RAO		411 THEODORE FREMND AVE SUITE 206RYE NY 10580	09/03/2025	09/03/2030
DOL	DA		NICHOLAS T. ANALITIS		505 MANHATTAN AVE WEST BABYLON NY 11704	10/05/2023	10/05/2028
DOL	DOL		NICHOLE E. FRASER A/K/A NICHOLE RACE		3469 STATE RT. 69 PERISH NY 13131	03/01/2022	03/01/2027
DOL	DOL		NICHOLE E. FRASER A/K/A NICHOLE RACE		3469 STATE RT. 69 PERISH NY 13131	11/15/2022	11/15/2027
DOL	DOL		NICHOLE E. FRASER A/K/A NICHOLE RACE		3469 STATE RT. 69 PERISH NY 13131	09/29/2021	09/29/2026
DOL	DOL		NICHOLE E. FRASER A/K/A NICHOLE RACE		3469 STATE RT. 69 PERISH NY 13131	02/09/2022	02/09/2027
DOL	DOL		NIKOLA NTONI		3418 NORTHERN BLVD SUITE 5-27LONG ISLAND CITY NY 11101	12/13/2024	12/13/2029
DOL	NYC	****6971	NN CONSTRUCTION, INC.		2349 BRAGG STREET BROOKLYN NY 11229	04/22/2025	04/22/2030
DOL	NYC	****5643	NYC LINE CONTRACTORS, INC.		402 JERICHO TURNPIKE NEW HYDE PARK NY 11040	08/10/2022	08/10/2027
DOL	DOL		PATRICK PENNACCHIO		2345 RT. 52 SUITE 2NHOPEWELL JUNCTION NY 12533	12/18/2023	12/18/2028
DOL	DOL		PATRICK PENNACCHIO		2345 RT. 52 SUITE 2NHOPEWELL JUNCTION NY 12533	12/18/2023	12/18/2028
DOL	DOL		PAULINE CHAHALES		935 S LAKE BLVD MAHOPAC NY 10541	03/02/2021	03/02/2026
DOL	DOL		PETER STEVENS		11 OLD TOWN ROAD SELKIRK NY 12158	02/02/2021	02/02/2026
DOL	DOL	****4168	PHANTOM CONSTRUCTION CORP.		95-27 116TH STREET QUEENS NY 11419	07/12/2024	07/12/2029
DOL	DOL	****4168	PHANTOM CONSTRUCTION CORP.		95-27 116TH STREET QUEENS NY 11419	05/28/2024	05/28/2029
DOL	DOL	****4772	R.W. LOBDELL CONSTRUCTION LLC		635 WEST DRYDEN ROAD FREEVILLE NY 13068	01/31/2025	01/31/2030
DOL	DOL	****2633	RAW POWER ELECTRIC CORP.		3 PARK CIRCLE MIDDLETOWN NY 10940	07/11/2022	07/11/2027
DOL	DOL		ROBBYE BISSEsar		89-51 SPRINGFIELD BLVD QUEENS VILLAGE NY 11427	01/11/2003	01/11/3003
DOL	DOL		ROMEO WARREN		161 ROBYN RD MONROE NY 10950	07/11/2022	07/11/2027
DOL	DOL		ROSA GARCIA		411 THEODORE FRMND AVE SUITE 206RYE NY 10580	09/03/2025	09/03/2030
DOL	DOL	****7172	RZ & AL INC.		198 RIDGE AVENUE VALLEY STREAM NY 11581	06/06/2022	06/06/2027
DOL	DOL		SAL FRESINA MASONRY CONTRACTORS, INC.		1935 TEALL AVENUE SYRACUSE NY 13206	07/16/2021	07/16/2026
DOL	DOL		SAL MASONRY CONTRACTORS, INC.		(SEE COMMENTS) SYRACUSE NY 13202	07/16/2021	07/16/2026
DOL	DOL	****9874	SALFREE ENTERPRISES INC		P.O BOX 14 2821 GARDNER RDPOMPEI NY 13138	07/16/2021	07/16/2026
DOL	DOL		SALVATORE A FRESINA A/K/A SAM FRESINA		107 FACTORY AVE P.O BOX 11070SYRACUSE NY 13218	07/16/2021	07/16/2026
DOL	DOL		SAM FRESINA		107 FACTORY AVE P.O BOX 11070SYRACUSE NY 13218	07/16/2021	07/16/2026
DOL	DA	****0476	SAMCO ELECTRIC CORP.		3735 9TH ST LONG ISLAND CITY NY 11101	01/05/2023	01/05/2028
DOL	DA		SILVANO TRAVAJA		3735 9TH ST LONG ISLAND CITY NY 11101	01/05/2023	01/05/2028

NYSDOL Bureau of Public Work Debarment List 12/05/2025

Article 8

DOL	DOL	****0440	SOLAR GUYS INC.		8970 MIKE GARCIA DR MANASSAS VA 20109	07/16/2021	07/16/2026
DOL	NYC	****3661	SPANIER BUILDING MAINTENANCE CORP		200 OAK DRIVE SYOSSET NY 11791	03/14/2022	03/14/2027
DOL	DOL		STANADOS KALOGELAS		485 RAFT AVENUE HOLBROOK NY 11741	10/19/2021	10/19/2026
DOL	DOL	****3496	STAR INTERNATIONAL INC		89-51 SPRINGFIELD BLVD QUEENS VILLAGE NY 11427	08/11/2003	08/11/3003
DOL	DOL	****9528	STEEL-IT, LLC.		17613 SANTE FE LINE ROAD WAYNESFIELD OH 45896	07/16/2021	07/16/2026
DOL	DOL		STEVEN DELISA		411 THEODORE FREMND AVE SUITE 206RYE NY 10580	09/03/2025	09/03/2030
DOL	DOL	****3800	SUBURBAN RESTORATION CO. INC.		5-10 BANTA PLACE FAIR LAWN PLACE NJ 07410	03/29/2021	03/29/2026
DOL	DOL	****9150	SURGE INC.		8269 21ST STREET BELLEROSE NY 11426	12/22/2022	12/22/2027
DOL	DOL		SYED MUHAMMAD S. JAFRI A/K/A SHARRUKH JAFRI		4307 28TH AVE ASTORIA NY 11103	10/11/2024	10/11/2029
DOL	DOL		SYED RAZA		198 RIDGE AVENUE NY 11581	06/06/2022	06/06/2027
DOL	DOL		TARLOK SINGH		95-27 116TH STREET QUEENS NY 11419	05/28/2024	05/28/2029
DOL	DOL		TARLOK SINGH		95-27 116TH STREET QUEENS NY 11419	07/12/2024	07/12/2029
DOL	DOL	****4855	TECH INDUSTRIES LLC		20 HEATHER RIDGE ROAD TROY NY 12180	05/20/2025	05/20/2030
DOL	DOL	****9733	TERSAL CONSTRUCTION SERVICES INC		107 FACTORY AVE P.O BOX 11070SYRACUSE NY 13208	07/16/2021	07/16/2026
DOL	DOL		TERSAL CONTRACTORS, INC.		221 GARDNER RD P.O BOX 14POMPEI NY 13138	07/16/2021	07/16/2026
DOL	DOL		TERSAL DEVELOPMENT CORP.		1935 TEALL AVENUE SYRACUSE NY 13206	07/16/2021	07/16/2026
DOL	DOL	****2426	THE MATRUKH GROUP, INC.		4307 28TH AVE PO BOX 9082ASTORIA NY 11103	10/11/2024	10/11/2029
DOL	DOL		THOMAS LOBDELL		635 WEST DRYDEN ROAD FREEVILLE NY 13068	01/31/2025	01/31/2030
DOL	DOL		TIMOTHY PERCY		29807 ANDREWS ROAD BLACK RIVER NY 13612	10/17/2023	10/17/2028
DOL	DA	****1050	TRI STATE CONSTRUCTION OF NY CORP.		50-39 175TH PLACE FRESH MEADOWS NY 11365	03/28/2022	03/28/2027
DOL	DA	****4106	TRIPLE H CONCRETE CORP		2375 RAYNOR STREET RONKONKOMA NY 11779	08/04/2021	08/04/2026
DOL	DOL	****8210	UPSTATE CONCRETE & MASONRY CONTRACTING CO INC		449 WEST MOMBSHA ROAD MONROE NY 10950	06/06/2022	06/06/2027
DOL	DOL		VINCENT CORRAO		PO BOX 393 NANUET NY 10954	09/17/2024	09/17/2029
DOL	DOL	****8266	WILLIAM CHRIS MCCLENDON	MCCLENDON ASPHALT PAVING	1646 FALLS STREET NIAGARA FALLS NY 14303	05/01/2023	05/01/2028
DOL	DOL		WILLIAM CHRIS MCCLENDON		1646 FALLS STREET NIAGARA FALLS NY 14303	05/01/2023	05/01/2028
DOL	DOL		WILLIAM G. PROERFRIEDT		85 SPRUCEWOOD ROAD WEST BABYLON NY 11704	01/19/2021	01/19/2026
DOL	DOL	****5924	WILLIAM G. PROPHY, LLC	WGP CONTRACTIN G, INC.	54 PENTAQUIT AVE BAYSHORE NY 11706	01/19/2021	01/19/2026
DOL	DOL		WILLIAM SCRIVENS		4192 SIR ANDREW CIRCLE DOYELSTOWN PA 18902	07/18/2024	07/18/2029
DOL	DOL	****9494	WND CONSTRUCTION LLC		411 THEODORE FREMD AVENUE SUITE 206RYE NY 10580	09/03/2025	09/03/2030
DOL	DOL		XENOFON EFTHIMIADIS		29-10 38TH AVENUE LONG ISLAND CITY NY 11101	10/11/2023	10/11/2028

SECTION 01 08 00 - GENERAL COMMISSIONING REQUIREMENTS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and other Division 01 Specification Sections, apply to this Section.
- B. Owner's Project Requirements and Basis-of-Design documentation are included by reference for information only.

1.2 SUMMARY

A. Section Includes:

- 1. General requirements for coordinating and scheduling commissioning.
- 2. Commissioning meetings.
- 3. Commissioning reports.
- 4. Test equipment, instrumentation, and tools (including, but not limited to, proprietary test equipment, instrumentation, and tools) required to perform tests.
- 5. Use of test equipment, instrumentation, and tools for commissioning.
- 6. Construction checklist requirements, including, but not limited to, installation checks, startup, performance tests, and performance test demonstration.
- 7. Commissioning tests and commissioning test demonstration.
- 8. Adjusting, verifying, and documenting identified systems and assemblies.
- 9. Work to correct commissioning issues.
- 10. Work to repeat tests when equipment and systems fail acceptance criteria.

B. Related Requirements:

- 1. Section 01 33 00 "Submittal Procedures" for submittal procedures requirements for commissioning.
- 2. Section 01 77 00 "Closeout Procedures" for certificate of Construction Phase Commissioning Completion submittal requirements.
- 3. Section 01 78 23 "Operation and Maintenance Data" for preliminary operation and maintenance data submittal.
- 4. Section 23 08 00 "Commissioning of HVAC" for technical commissioning requirements for HVAC systems.
- 5. Section 26 08 00 "Commissioning of Electrical" for technical commissioning requirements for Electrical systems.
- 6. Individual Technical Specifications and Drawings: Equipment and systems design and installation, startup, field quality-control testing, and additional requirements indicated in the Contract Documents.

1.3 DEFINITIONS

- A. Acceptance Criteria: Threshold of acceptable work quality or performance specified for a commissioning activity, including, but not limited to, construction checklists, performance tests, performance test demonstrations, commissioning tests and commissioning test demonstrations.
- B. Basis-of-Design Document: A document prepared by Owner, Architect, or Commissioning Authority that records concepts, calculations, decisions, and product selections used to comply with Owner's Project Requirements and to suit applicable regulatory requirements, standards, and guidelines.
- C. Commissioning Authority: An entity engaged by Owner, and identified in Section 011000 "Summary," to evaluate Commissioning-Process Work.
- D. Commissioning Plan: A document, prepared by Commissioning Authority, that outlines the organization, schedule, allocation of resources, and documentation requirements of commissioning.
- E. Commissioning: A quality-focused process for verifying and documenting that the facility and all of its systems and assemblies are planned, designed, installed, and tested to comply with Owner's Project Requirements. The requirements specified here are limited to the construction phase commissioning activities. The scope of commissioning is defined in Section 011000 "Contract Summary."
- F. Construction Phase Commissioning Completion: The stage of completion and acceptance of commissioning when resolution of deficient conditions and issues discovered during commissioning and retesting until acceptable results are obtained has been accomplished. Owner will establish in writing the date Construction Phase Commissioning Completion is achieved. See Section 017700 "Closeout Procedures" for certificate of Construction Phase Commissioning Completion submittal requirements.
 - 1. Commissioning is complete when the work specified in this Section and related Sections has been completed and accepted, including, but not limited to, the following:
 - a. Completion of tests and acceptance of test results.
 - b. Resolution of issues, as verified by retests performed and documented with acceptance of retest results.
 - c. Comply with requirements in Section 017900 "Demonstration and Training."
 - d. Completion and acceptance of submittals and reports.
- G. Owner's Project Requirements: A document written by Owner, Architect, or Commissioning Authority that details the functional requirements of a project and the expectations of how it will be used and operated, including Project goals, measurable performance criteria, cost considerations, benchmarks, success criteria, and supporting information.
- H. Owner's Witness: Commissioning Authority, Owner's Project Manager, or Architect-designated witness authorized to authenticate test demonstration data and to sign completed test data forms.

- I. "Systems," "Assemblies," "Subsystems," "Equipment," and "Components": Where these terms are used together or separately, they shall mean "as-built" systems, assemblies, subsystems, equipment, and components.
- J. Test: Performance tests, performance test demonstrations, commissioning tests, and commissioning test demonstrations.
- K. Sampling Procedures and Tables for Inspection by Attributes: As defined in ASQ Z1.4.

1.4 COMPENSATION

- A. Should Architect, Commissioning Authority, other Owner's witness, or Owner's staff perform additional services or incur additional expenses due to actions of Contractor listed below, compensate Owner for such additional services and expenses.
 - 1. Failure to provide timely notice of commissioning activities schedule changes.
 - 2. Failure to meet acceptance criteria for test demonstrations.
- B. Contractor shall compensate Owner for such additional services and expenses at the rate of \$175.00 per labor hour plus the current per mile rate for personnel travelling plus per diem allowances for meals and lodging according to current U.S. General Services Administration (GSA) Per Diem Rates.

1.5 COMMISSIONING TEAM

- A. Members Appointed by Contractor(s):
 - 1. Commissioning Coordinator: A person or entity employed by Contractor to manage, schedule, and coordinate commissioning.
 - 2. Project superintendent and other employees that Contractor may deem appropriate for a particular portion of the commissioning.
 - 3. Subcontractors, installers, suppliers, and specialists that Contractor may deem appropriate for a particular portion of the commissioning.
 - 4. Appointed team members shall have the authority to act on behalf of the entity they represent.
- B. Members Appointed by Owner:
 - 1. Commissioning Authority, plus consultants that Commissioning Authority may deem appropriate for a particular portion of the commissioning.
 - 2. Owner representative(s), facility operations and maintenance personnel, plus other employees, separate contractors, and consultants that Owner may deem appropriate for a particular portion of the commissioning.
 - 3. Architect / Engineer, plus employees and consultants that Architect may deem appropriate for a particular portion of the commissioning.

1.6 SUBMITTALS

- A. Comply with requirements in Section 013300 "Submittal Procedures" for submittal procedures general requirements for commissioning.
- B. Commissioning Plan Information:
 - 1. List of Contractor-appointed commissioning team members to include specific personnel and subcontractors to the performance of the various commissioning requirements.
 - 2. Schedule of commissioning activities, integrated with the construction schedule. Comply with requirements in Section 013200 "Construction Progress Documentation" for construction schedule general requirements for commissioning.
 - 3. Contractor personnel and subcontractors to participate in each test.
 - 4. List of instrumentation required for each test to include identification of parties that will provide instrumentation for each test.
- C. Commissioning Coordinator Letter of Authority:
 - 1. Within 10 days after approval of Commissioning Coordinator qualifications, submit a letter of authority for Commissioning Coordinator, signed by a principal of Contractor's firm. Letter shall authorize Commissioning Coordinator to do the following:
 - a. Make inspections required for commissioning.
 - b. Coordinate, schedule, and manage commissioning of Contractor, subcontractors, and suppliers.
 - c. Obtain documentation required for commissioning from Contractor, subcontractors, and suppliers.
 - d. Report issues, delayed resolution of issues, schedule conflicts, and lack of cooperation or expertise on the part of members of the commissioning team.
- D. Commissioning Coordinator Qualification Data: For entity coordinating Contractor's commissioning activities to demonstrate their capabilities and experience.
 - 1. Experienced: When used with an entity or individual, "experienced" means having successfully completed a minimum of five previous projects similar in nature, size, and extent to this Project; being familiar with special requirements indicated; and having complied with requirements of authorities having jurisdiction.
- E. Commissioning schedule.
- F. Two-week look-ahead schedules.

G. List test instrumentation, equipment, and monitoring devices. Include the following information:

1. Make, model, serial number, and application for each instrument, equipment, and monitoring device.
2. Brief description of intended use.
3. Calibration record showing the following:
 - a. Calibration agency, including name and contact information.
 - b. Last date of calibration.
 - c. Range of values for which calibration is valid.
 - d. Certification of accuracy.
 - e. N.I.S.T. traceability certification for calibration equipment.
 - f. Due date of the next calibration.

H. Construction Checklists:

1. Material checks.
2. Installation checks.
3. Startup procedures, where required.

I. Test Reports:

1. Pre-Startup Report: Prior to start up of equipment or a system, submit signed, completed construction checklists.
2. Test Data Reports: At the end of each day in which tests are conducted, submit test data for tests performed.
3. Commissioning Issues Reports: Daily, at the end of each day in which tests are conducted, submit commissioning issue reports for tests for which acceptable results were not achieved.
4. Weekly Progress Report: Weekly, at the end of each week in which tests are conducted, submit a progress report.
5. Data Trend Logs: Submit data trend logs at the end of the trend log period.
6. System Alarm Logs: Daily, at the start of days following a day in which tests were performed, submit print-out of log of alarms that occurred since the last log was printed.

1.7 CLOSEOUT SUBMITTALS

A. Commissioning Report:

1. At Construction Phase Commissioning Completion, include the following:
 - a. Pre-startup reports.

- b. Approved test procedures.
 - c. Test data forms, completed and signed.
 - d. Progress reports.
 - e. Commissioning issues report log.
 - f. Commissioning issues reports showing resolution of issues.
 - g. Correspondence or other documents related to resolution of issues.
 - h. Other reports required by commissioning.
 - i. List unresolved issues and reasons they remain unresolved and should be exempted from the requirements for Construction Phase Commissioning Completion.
 - j. Report shall include commissioning work of Contractor.
- B. Request for Certificate of Construction Phase Commissioning Completion.
 - C. Operation and Maintenance Data: For proprietary test equipment, instrumentation, and tools to include in operation and maintenance manuals.

1.8 QUALITY ASSURANCE

- A. Commissioning Coordinator Qualifications:
 - 1. Certification of commissioning process expertise. The following certifications are acceptable upon receipt of information demonstrating that certification is current and in good standing. Owner reserves the right to accept or reject other certifications as evidence of qualification.
 - a. Certified Commissioning Professional, by Building Commissioning Association.
 - b. Certified Building Commissioning Professional, by Association of Energy Engineers.
 - c. Existing Building Commissioning Professional, by Association of Energy Engineers.
 - d. Commissioning Process Management Professional, by American Society of Heating, Refrigerating and Air-Conditioning Engineers.
 - e. Accredited Commissioning Process Authority Professional, by University of Wisconsin.
 - f. Accredited Commissioning Process Manager, by University of Wisconsin.
 - g. Accredited Green Commissioning Process Provider, by University of Wisconsin.
 - 2. Absent one of the certifications above, provide documented experience on at least three projects of similar scope and complexity commissioning systems of similar complexity to those contained in these documents. Provide written references from the lead Commissioning Authority of each project attesting to applicant experience, responsibilities, and proven capabilities in regards to commissioning being equal to those required to gain one of the listed certifications. Each reference must be certified in accordance with the above requirements.
- B. Calibration Agency Qualifications: Certified by The American Association of Laboratory Accreditation that the calibration agency complies with minimum requirements of ISO/IEC 17025.

1.9 COMMISSIONING AUTHORITY'S RESPONSIBILITIES

- A. Commissioning Authority Responsibilities: Comply with requirements in Section 011000 "Contract Summary."

PART 2 - PRODUCTS

2.1 TEST EQUIPMENT, INSTRUMENTATION, AND TOOLS

- A. Test equipment and instrumentation required to perform the commissioning shall remain the property of Contractor unless otherwise indicated.
- B. Test equipment and instrumentation required to perform commissioning shall comply with the following criteria:
 - 1. Be manufactured for the purpose of testing and measuring tests for which they are being used and have an accuracy to test and measure system performance within the tolerances required to determine acceptable performance.
 - 2. Calibrated and certified.
 - a. Calibration performed and documented by a qualified calibration agency according to national standards applicable to the tools and instrumentation being calibrated. Calibration shall be current according to national standards or within test equipment and instrumentation manufacturer's recommended intervals, whichever is more frequent, but not less than within six months of initial use on Project. Calibration tags permanently affixed.
 - b. Repair and recalibrate test equipment and instrumentation if dismantled, dropped, or damaged since last calibrated.
 - 3. Maintain test equipment and instrumentation.
 - 4. Use test equipment and instrumentation only for testing or monitoring Work for which they are designed.

2.2 PROPRIETARY TEST EQUIPMENT, INSTRUMENTATION, AND TOOLS

- A. Proprietary test equipment, instrumentation, and tools are those manufactured or prescribed by tested equipment manufacturer and required for work on its equipment as a condition of equipment warranty, or as otherwise required to service, repair, adjust, calibrate, or perform work on its equipment.
 - 1. Identify proprietary test equipment, instrumentation, and tools required in the test equipment identification list submittal.
 - 2. Proprietary test equipment, instrumentation, and tools shall become the property of Owner at Substantial Completion.

2.3 REPORT FORMAT AND ORGANIZATION

A. General Format and Organization:

1. Record report on compact disk.
2. Electronic Data: Portable document format (PDF); a single file with outline-organized bookmarks for major and minor tabs and tab contents itemized for specific reports.

B. Commissioning Report:

1. Include a table of contents and an index to each test.
2. Include major tabs for each Specification Section.
3. Include minor tabs for each test.
4. Within each minor tab, include the following:
 - a. Test specification.
 - b. Pre-startup reports.
 - c. Approved test procedures.
 - d. Test data forms, completed and signed.
 - e. Commissioning issue reports, showing resolution of issues, and documentation related to resolution of issues pertaining to a single test. Group data forms, commissioning issue reports showing resolution of issues, and documentation related to resolution of issues for each test repetition together within the minor tab, in reverse chronological order (most recent on top).

PART 3 - EXECUTION

3.1 PREPARATION

- A. Review preliminary construction checklists and preliminary test procedures and data forms.

3.2 CONSTRUCTION CHECKLISTS

- A. Construction checklists cannot modify or conflict with the Contract Documents.
- B. Create construction checklists based on actual systems and equipment to be included in Project.
- C. Material Checks: Compare specified characteristics and approved submittals with materials as received. Include factory tests and other evaluations, adjustments, and tests performed prior to shipment, if applicable.

1. Services connection requirements, including configuration, size, location, and other pertinent characteristics.
 2. Included optional features.
 3. Delivery Receipt Check: Inspect and record physical condition of materials and equipment on delivery to Project site, including agreement with approved submittals, cleanliness and lack of damage.
- D. Installation Checklists: must in general document that equipment and systems are installed and started in accordance with the contract document requirements. See attachment #1 for sample checklists for a small group of representative equipment. Develop checklists in similar format with line items required designed to insure proper installation by installers:
1. Location according to Drawings and approved Shop Drawings.
 2. Configuration.
 3. Compliance with manufacturers' written installation instructions.
 4. Attachment to structure.
 5. Access clearance to allow for maintenance, service, repair, removal, and replacement without the need to disassemble or remove other equipment or building elements. Access coordinated with other building elements and equipment, including, but not limited to, ceiling and wall access panels, in a manner consistent with OSHA fall-protection regulations and safe work practices.
 6. Utility connections are of the correct characteristics, as applicable.
 7. Correct labeling and identification.
- E. Startup Checks: Verify readiness of equipment to be energized. Include manufacturer's standard startup procedures and forms.
- F. Startup: Perform and document initial operation of equipment to prove that it is installed properly and operates as intended according to manufacturer's standard startup procedures, minimum.
- G. Performance Tests:
1. Static Tests: As specified elsewhere, including, but not limited to, duct and pipe leakage tests, insulation-resistance tests, and water-penetration tests.
 2. Component Performance Tests: Tests evaluate the performance of an input or output of components under a full range of operating conditions.
 3. Equipment and Assembly Performance Tests: Test and evaluate performance of equipment and assemblies under a full range of operating conditions and loads.
 4. System Performance Tests: Test and evaluate performance of systems under a full range of operating conditions and loads.
 5. Intersystem Performance Tests: Test and evaluate the interface of different systems under a full range of operating conditions and loads.

- H. Deferred Construction Checklists: Obtain Owner approval of proposed deferral of construction checklists, including proposed schedule of completion of each deferred construction checklist, before submitting request for Certificate of Construction Phase Commissioning Completion. When approved, deferred construction checklists may be completed after date of Construction Phase Commissioning Completion. Include the following in request for Certificate of Construction Phase Commissioning Completion:
 - 1. Identify deferred construction checklists by number and title.
 - 2. Provide a target schedule for completion of deferred construction checklists.
 - 3. Written approval of proposed deferred construction checklists, including approved schedule of completion of each deferred construction checklist.
- I. Delayed Construction Checklists: Obtain Owner approval of proposed delayed construction checklists, including proposed schedule of completion of each delayed construction checklist, before submitting request for Certificate of Construction Phase Commissioning Completion. When approved, delayed construction checklists may be completed after date of Construction Phase Commissioning Completion. Include the following in request for Certificate of Construction Phase Commissioning Completion:
 - 1. Identify delayed construction checklist by construction checklist number and title.
 - 2. Provide a target schedule for completion of delayed construction checklists.
 - 3. Written approval of proposed delayed construction checklists, including approved schedule of completion of each delayed construction checklist.

3.3 GENERAL EXECUTION REQUIREMENTS

- A. Schedule and coordinate commissioning with the construction schedule.
- B. Perform activities identified in construction checklists, including tests, and document results of actions as construction proceeds.
- C. Perform test demonstrations for Owner's witness. Unless otherwise indicated in specific testing requirements, demonstrate tests for 100 percent of work to which the test applies.
- D. Report test data and commissioning issue resolutions.
- E. Schedule personnel to participate in and perform Commissioning-Process Work.
- F. Installing contractors' commissioning responsibilities include, but are not limited to, the following:
 - 1. Operating the equipment and systems they install during tests.
 - 2. In addition, installing contractors may be required to assist in tests of equipment and systems with which their work interfaces.

3.4 COMMISSIONING COORDINATOR RESPONSIBILITIES

- A. Management and Coordination: Manage, schedule, and coordinate commissioning, including, but not limited to, the following:
1. Coordinate with subcontractors on their commissioning responsibilities and activities.
 2. Obtain, assemble, and submit commissioning documentation.
 3. Attend periodic on-site commissioning meetings. Comply with requirements in Section 01 31 00 "Project Management and Coordination."
 4. Develop and maintain the commissioning schedule. Integrate commissioning schedule into the construction schedule. Update schedule at specified intervals.
 5. Review and comment on preliminary test procedures and data forms.
 6. Report inconsistencies and issues in system operations.
 7. Verify that tests have been completed and results comply with acceptance criteria, and that equipment and systems are ready before scheduling test demonstrations.
 8. Direct and coordinate test demonstrations.
 9. Coordinate witnessing of test demonstrations by Owner's witness.
 10. Coordinate and manage training. Be present during training sessions to direct video recording, present training and direct the training presentations of others. Comply with requirements in Section 017900 "Demonstration and Training."
 11. Prepare and submit specified commissioning reports.
 12. Track commissioning issues until resolution and retesting is successfully completed.
 13. Retain original records of Commissioning-Process Work, organized as required for the commissioning report. Provide Owner's representative access to these records on request.
 14. Assemble and submit commissioning report.

3.5 COMMISSIONING TESTING

- A. Quality Control: Construction checklists, including tests, are quality-control tools designed to improve the functional quality of Project. Test demonstrations evaluate the effectiveness of Contractor's quality-control process.
- B. Owner's witness will be present to witness commissioning work requiring the signature of an owner's witness, including, but not limited to, test demonstrations. Owner's project manager will coordinate attendance by Owner's witness with Contractor's published commissioning schedule. Owner's witness will provide no labor or materials in the commissioning work. The only function of Owner's witness will be to observe and comment on the progress, completion, and results of commissioning.

C. Construction Checklists:

1. Complete construction checklists as Work is completed.
2. Distribute construction checklists to installers before they start work.
3. Installers:
 - a. Verify installation using approved construction checklists as Work proceeds.
 - b. Complete and sign construction checklists daily for work performed during the preceding day.
4. Provide Commissioning Authority access to construction checklists.

D. Installation Compliance Issues: Record as an installation compliance issue Work found to be incomplete, inaccessible, at variance with the Contract Documents, nonfunctional, or that does not comply with construction checklists. Record installation compliance issues on the construction checklist at the time they are identified. Record corrective action and how future Work should be modified before signing off the construction checklist.

E. Pre-Startup Audit: Prior to executing startup procedures, review completed installation checks to determine readiness for startup and operation. Report conditions, which, if left uncorrected, adversely impact the ability of systems or equipment to operate satisfactorily or to comply with acceptance criteria. Prepare pre-startup report for each system.

F. Test Procedures and Test Data Forms:

1. Test procedures shall define the step-by-step procedures to be used to execute tests and test demonstrations.
2. Test procedures shall be specific to the make, model, and application of the equipment and systems being tested.
3. Completed test data forms are the official records of the results of tests.
4. Commissioning Authority will provide to Contractor preliminary test procedures and test data forms for performance tests and commissioning tests after approval of Product Data, Shop Drawings, and preliminary operation and maintenance manual. Test procedures will in general be designed to demonstrate that operating characteristics conform to any or all required and / or approved performance characteristics.
5. Review preliminary test procedures and test data forms and provide comments within 14 days of receipt from Commissioning Authority. Review shall address the following:
 - a. Equipment protection and warranty issues, including, but not limited to, manufacturers' installation and startup recommendations, and operation and maintenance instructions.

- b. Applicability of the procedure to the specific software, equipment, and systems approved for installation.
 6. After Contractor has reviewed and commented on the preliminary test procedures and test data forms, Commissioning Authority will revise and reissue the approved revised test procedures and test data forms marked "Approved for Testing."
 7. Use only approved test procedures and test data forms marked "Approved for Testing" to perform and document tests and test demonstrations.
- G. Performance of Tests:
1. The sampling rate for tests is 100 percent. The sampling rate for test demonstrations is 100 percent unless otherwise indicated.
 2. Perform and complete each step of the approved test procedures in the order listed.
 3. Record data observed during performance of tests on approved data forms at the time of test performance and when the results are observed.
 4. Record test results that are not within the range of acceptable results on commissioning issue report forms in addition to recording the results on approved test procedures and data forms according to the "Commissioning Compliance Issues" Paragraph in this Article.
 5. On completion of a test, sign the completed test procedure and data form. Tests for which test procedures and data forms are incomplete, not signed, or which indicate performance that does not comply with acceptance criteria will be rejected. Tests for which test procedures and data forms are rejected shall be repeated and results resubmitted.
- H. Performance of Test Demonstration:
1. Perform test demonstrations on a sample of tests after test data submittals are approved. The sampling rate for test demonstrations shall be 100 percent of components which are not typical of at least 10, and shall be 25% of components which are typical of at least 10, unless otherwise indicated in the individual test specification.
 2. Notify Owner's witness at least seven days in advance of each test demonstration.
 3. Perform and complete each step of the approved test procedures in the order listed.
 4. Record data observed during performance of test demonstrations on approved data forms at the time of demonstration and when the results are observed.
 5. Provide full access to Owner's witness to directly observe the performance of all aspects of system response during the test demonstration. On completion of a test demonstration, sign the completed data form and obtain signature of Owner's witness at the time of the test to authenticate the reported results.

6. Test demonstration data forms not signed by Contractor and Owner's witness at the time of the completion of the procedure will be rejected. Test demonstrations for which data forms are rejected shall be repeated and results shall be resubmitted.
 - a. Exception for Failure of Owner's Witness to Attend: Failure of Owner's witness to be present for agreed-on schedule of test demonstration shall not delay Contractor. If Owner's witness fails to attend a scheduled test, Contractor shall proceed with the scheduled test. On completion, Contractor shall sign the data form for Contractor and for Owner's witness, and shall note the absence of Owner's witness at the scheduled time and place.
7. False load test requirements are specified in related sections.
 - a. Where false load testing is specified, provide temporary equipment, power, controls, wiring, piping, valves, and other necessary equipment and connections required to apply the specified load to the system. False load system shall be capable of steady-state operation and modulation at the level of load specified. Equipment and systems permanently installed in this work shall not be used to create the false load without Architect's written approval.

I. Deferred Tests:

1. Deferred Tests List: Identify, in the request for Certificate of Construction Phase Commissioning Completion, proposed deferred tests or other tests approved for deferral until specified seasonal or other conditions are available. When approved, deferred tests may be completed after the date of Construction Phase Commissioning Completion. Identify proposed deferred tests in the request for Certificate of Construction Phase Commissioning Completion as follows:
 - a. Identify deferred tests by number and title.
 - b. Provide a target schedule for completion of deferred tests.
2. Schedule and coordinate deferred tests. Schedule deferred tests when specified conditions are available. Notify Architect and Commissioning Authority at least seven calendar days (minimum) in advance of tests.
3. Where deferred tests are specified, coordinate participation of necessary personnel and of Architect, Commissioning Authority, and Owner's witness. Schedule deferred tests to minimize occupant and facility impact. Obtain Architect's approval of the proposed schedule.

J. Delayed Tests:

1. Delayed Tests List: Identify, in the request for Certificate of Construction Phase Commissioning Completion, proposed delayed tests. Obtain Owner approval of proposed delayed tests, including proposed schedule of completion of each delayed test, before submitting request for Certificate of Construction Phase Commissioning Completion. Include the following in the request for Certificate of Construction Phase Commissioning Completion:

- a. Identify delayed tests by test number and title.
 - b. Written approval of proposed delayed tests, including approved schedule of completion of delayed tests.
2. Schedule and coordinate delayed tests. Schedule delayed tests when conditions that caused the delay have been rectified. Notify Architect and Commissioning Authority at least seven calendar days (minimum) in advance of tests.
3. Where delayed tests are approved, coordinate participation of necessary personnel and of Architect, Commissioning Authority, and Owner's witness. Schedule delayed tests to minimize occupant and facility impact. Obtain Architect's approval of the proposed schedule.

K. Commissioning Compliance Issues:

1. Test results that are not within the range of acceptable results are commissioning compliance issues.
2. Track and report commissioning compliance issues until resolution and retesting are successfully completed.
3. If a test demonstration fails, determine the cause of failure. Direct timely resolution of issue and then repeat the demonstration. If a test demonstration must be repeated due to failure caused by Contractor work or materials, reimburse Owner for billed costs for the participation in the repeated demonstration.
4. Test Results: If a test demonstration fails to meet the acceptance criteria, perform the following:
 - a. Complete a commissioning compliance issue report form promptly on discovery of test results that do not comply with acceptance criteria.
 - b. Submit commissioning compliance issue report form within 24 hours of the test.
 - c. Determine the cause of the failure.
 - d. Establish responsibility for corrective action if the failure is due to conditions found to be Contractor's responsibility.
5. Commissioning Compliance Issue Report: Provide a commissioning compliance issue report for each issue. Do not report multiple issues on the same commissioning compliance issue report.
 - a. Exception: If an entire class of devices is determined to exhibit the identical issue, they may be reported on a single commissioning compliance issue report. (For example, if all return-air damper actuators that are specified to fail to the open position are found to fail to the closed position, they may be reported on a single commissioning issue report. If a single commissioning issue report is used for multiple commissioning compliance issues, each device shall be identified in the report, and the total number of devices at issue shall be identified.
 - b. Complete and submit Part 1 of the commissioning compliance issue report immediately when the condition is observed.

- c. Record the commissioning compliance issue report number and describe the deficient condition on the data form.
 - d. Resolve commissioning compliance issues promptly. Complete and submit Part 2 of the commissioning compliance issue report when issues are resolved.
- 6. Diagnose and correct failed test demonstrations as follows:
 - a. Perform diagnostic tests and activities required to determine the fundamental cause of issues observed.
 - b. Record each step of the diagnostic procedure prior to performing the procedure. Update written procedure as changes become necessary.
 - c. Record the results of each step of the diagnostic procedure.
 - d. Record the conclusion of the diagnostic procedure on the fundamental cause of the issue.
 - e. Determine and record corrective measures.
 - f. Include diagnosis of fundamental cause of issues in commissioning compliance issue report.
- 7. Retest:
 - a. Schedule and repeat the complete test procedure for each test demonstration for which acceptable results are not achieved. Obtain signature of Owner's witness on retest data forms. Repeat test demonstration until acceptable results are achieved. Except for issues that are determined to result from design errors or omissions, or other conditions beyond Contractor's responsibility, compensate Owner for direct costs incurred as the result of repeated test demonstrations to achieve acceptable results.
 - b. For each repeated test demonstration, submit a new test data form, marked "Retest."
- 8. Do not correct commissioning compliance issues during test demonstrations.
 - a. Exceptions will be allowed if the cause of the issue is obvious and resolution can be completed in less than five minutes. If corrections are made under this exception, note the deficient conditions on the test data form and issue a commissioning compliance issue report. A new test data form, marked "Retest," shall be initiated after the resolution has been completed.

3.6 COMMISSIONING MEETINGS

- A. Commissioning Authority will schedule and conduct commissioning meetings. Comply with requirements in Section 013100 "Project Management and Coordination."

3.7 SEQUENCING

- A. Sequencing of Commissioning Verification Activities: For a particular material, item of equipment, assembly, or system, perform the following in the order listed unless otherwise indicated:
 - 1. Construction Checklists:
 - a. Material checks.
 - b. Installation checks.
 - c. Start up, as appropriate. Some startup may depend on component performance. Such startup may follow component performance tests on which the startup depends.
 - d. Performance Tests:
 - 1) Static tests, as appropriate.
 - 2) Component performance tests. Some component performance tests may depend on completion of startup. Such component performance tests may follow startup.
 - 3) Equipment and assembly performance tests.
 - 4) System performance tests.
 - 5) Intersystem performance tests.
 - 2. Commissioning tests.
- B. Before performing commissioning tests, verify that materials, equipment, assemblies, and systems are delivered, installed, started, and adjusted to perform according to construction checklists.
- C. Verify readiness of materials, equipment, assemblies, and systems by performing tests prior to performing test demonstrations. Notify Architect if acceptable results cannot be achieved due to conditions beyond Contractor's control or responsibility.
- D. Commence tests as soon as installation checks for materials, equipment, assemblies, or systems are satisfactorily completed. Tests of a particular system may proceed prior to completion of other systems, provided the incomplete work does not interfere with successful execution of test.

3.8 SCHEDULING

- A. Commence commissioning as early in the construction period as possible.
- B. Commissioning Schedule: Integrate commissioning into Contractor's construction schedule. See Section 01 32 00 "Construction Progress Documentation."

1. Include detailed commissioning activities in monthly updated Contractor's construction schedule and short interval schedule submittals.
2. Schedule the start date and duration for the following commissioning activities:
 - a. Submittals.
 - b. Preliminary operation and maintenance manual submittals.
 - c. Installation checks.
 - d. Startup, where required.
 - e. Performance tests.
 - f. Performance test demonstrations.
 - g. Commissioning tests.
 - h. Commissioning test demonstrations.
3. Schedule shall include a line item for each installation check, startup, and test activity specific to the equipment or systems involved.
4. Determine milestones and prerequisites for commissioning. Show commissioning milestones, prerequisites, and dependencies in monthly updated critical-path-method construction schedule and short interval schedule submittals.

C. Two-Week Look-Ahead Commissioning Schedule:

1. Two weeks prior to the beginning of tests, submit a detailed two-week look-ahead schedule. Thereafter, submit updated two-week look-ahead schedules weekly for the duration of commissioning.
2. Two-week look-ahead schedules shall identify the date, time, beginning location, Contractor personnel required, and anticipated duration for each startup or test activity.
3. Use two-week look-ahead schedules to notify and coordinate participation of Owner's witnesses.

D. Owner's Witness Coordination:

1. Coordinate Owner's witness participation via Architect.
2. Notify Architect of commissioning schedule changes at least two work days in advance for activities requiring the participation of Owner's witness.

3.9 COMMISSIONING REPORTS

A. Test Reports:

1. Pre-startup reports include observations of the conditions of installation, organized into the following sections:
 - a. Equipment Model Verification: Compare contract requirements, approved submittals, and provided equipment. Note inconsistencies.

- b. Preinstallation Physical Condition Checks: Observe physical condition of equipment prior to installation. Note conditions including, but not limited to, physical damage, corrosion, water damage, or other contamination or dirt.
 - c. Preinstallation Component Verification Checks: Verify components supplied with the equipment, preinstalled or field installed, are correctly installed and functional. Verify external components required for proper operation of equipment correctly installed and functional. Note missing, improperly configured, improperly installed, or nonfunctional components.
 - d. Summary of Installation Compliance Issues and Corrective Actions: Identify installation compliance issues and the corrective actions for each. Verify that issues noted have been corrected.
 - e. Evaluation of System Readiness for Startup: For each item of equipment for each system for which startup is anticipated, document in summary form acceptable to Owner completion of equipment model verification, preinstallation physical condition checks, preinstallation component verification checks, and completion of corrective actions for installation compliance issues.
2. Test data reports include the following:
- a. "As-tested" system configuration. Complete record of conditions under which the test was performed, including, but not limited to, the status of equipment, systems, and assemblies; temporary adjustments and settings; and ambient conditions.
 - b. Data and observations, including, but not limited to, data trend logs, recorded during the tests.
 - c. Signatures of individuals performing and witnessing tests.
 - d. Data trend logs accumulated overnight from the previous day of testing.
3. Commissioning Compliance Issues Reports: Report as commissioning compliance issues results of tests and test demonstrations that do not comply with acceptance criteria. Report only one issue per commissioning compliance issue report. Use sequentially numbered facsimiles of commissioning compliance issue report form included in this Section, or other form approved by Owner. Distribute commissioning compliance issue reports to parties responsible for taking corrective action. Identify the following:
- a. Commissioning compliance issue report number. Assign unique, sequential numbers to individual commissioning compliance issue reports when they are created, to be used for tracking.
 - b. Action distribution list.
 - c. Report date.
 - d. Test number and description.
 - e. Equipment identification and location.

- f. Briefly describe observations about the performance associated with failure to achieve acceptable results. Identify the cause of failure if apparent.
 - g. Diagnostic procedure or plan to determine the cause (include in initial submittal).
 - h. Diagnosis of fundamental cause of issues as specified below (include in resubmittal).
 - i. Fundamental cause of unacceptable performance as determined by diagnostic tests and activities.
 - j. When issues have been resolved, update and resubmit the commissioning issue report forms by completing Part 2. Identify resolution taken and the dates and initials of the persons making the entries.
 - k. Schedule for retesting.
- 4. Weekly progress reports include information for tests conducted since the preceding report and the following:
 - a. Completed data forms.
 - b. Equipment or system tested, including test number, system or equipment tag number and location, and notation about the apparent acceptability of results.
 - c. Activities scheduled but not conducted per schedule.
 - d. Commissioning compliance issue report log.
 - e. Schedule changes for remaining Commissioning-Process Work, if any.
- 5. Data trend logs shall be initiated and running prior to the time scheduled for the test demonstration.
 - a. Trend log data format shall be multiple data series graphs. Where multiple data series are trend logged concurrently, present the data on a common horizontal time axis. Individual data series may be presented on a segmented vertical axis to avoid interference of one data series with another, and to accommodate different axis scale values. Graphs shall be sufficiently clear to interpret data within the accuracy required by the acceptance criteria.
 - b. Attach to the data form printed trend log data collected during the test or test demonstration.
 - c. Record, print out, and attach to the data form operator activity during the time the trend log is running. During the time the trend log is running, operator intervention not directed by the test procedure invalidates the test results.
- 6. System Alarm Logs: Record and print out a log of alarms that occurred since the last log was printed. Evaluate alarms to determine if the previous day's work resulted in any conditions that are not considered "normal operation."

- a. Conditions that are not considered "normal operation" shall be reported on a commissioning issue report attached to the alarm log. Resolve as necessary. The intent of this requirement is to discover control system points or sequences left in manual or disabled conditions, equipment left disconnected, set points left with abnormal values, or similar conditions that may have resulted from failure to fully restore systems to normal, automatic control after test completion.

3.10 CERTIFICATE OF CONSTRUCTION PHASE COMMISSIONING COMPLETION

- A. When Contractor considers that construction phase commissioning, or a portion thereof which Owner agrees to accept separately, is complete, Contractor shall prepare and submit to Owner and Commissioning Authority through Architect a comprehensive list of items to be completed or corrected. Failure to include an item on such list does not alter Contractor's responsibility to compete commissioning.
- B. On receipt of Contractor's list, Commissioning Authority will make an inspection to determine whether the construction phase commissioning or designated portion thereof is complete. If Commissioning Authority's inspection discloses items, whether or not included on Contractor's list, which are not sufficiently complete as defined in "Construction Phase Commissioning Completion" Paragraph in the "Definitions" Article, Contractor shall, before issuance of the Certificate of Construction Phase Completion, complete or correct such items on notification by Commissioning Authority. In such case, Contractor shall then submit a request for another inspection by Commissioning Authority to determine construction phase commissioning completion.
- C. Contractor shall promptly correct deficient conditions and issues discovered during commissioning. Costs of correcting such deficient conditions and issues, including additional testing and inspections, the cost of uncovering and replacement, and compensation for Architect's and Commissioning Authority's services and expenses made necessary thereby, shall be at Contractor's expense.
- D. When construction phase commissioning or designated portion is complete, Commissioning Authority will prepare a Certificate of Construction Phase Commissioning that shall establish the date of completion of construction phase commissioning. Certificate of Construction Phase Commissioning Completion shall be submitted prior to requesting inspection for determining date of Substantial Completion.

END OF SECTION 01 08 00

SECTION 01 11 00 – SUMMARY OF WORK

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the contract, including the General and Supplemental Conditions and Division 1 Specification Section, apply to this Section.

1.2 SUMMARY

- A. This Section Includes the following:

1. Project Information.
2. Schedule
3. Work covered by the Contract Documents.
4. Owner Provided Scope
5. Coordination

- B. Related Sections include the following:

1. Project Manual inclusive of all General Conditions and Provisions of the contract.
2. Divisional Specification Sections.
3. Project Drawings.

1.3 PROJECT INFORMATION

- A. Project Locations: 110 Stringham Rd, Lagrangeville, NY 12540
- B. Owner: Arlington Central School District: 144 Todd Hill Road, LaGrangeville, NY 12540
- C. Architect Identification: Tetra Tech Architects & Engineering: 10 Brown Road, Ithaca, NY 14850
- D. Construction Manager: The Palombo Group, 22 Noxon Street, Poughkeepsie, NY 12601
1. Construction Manager Representative: Luis Rodriguez, President.
 2. Construction Manager has been engaged for this Project to serve as an advisor to Owner and to aid in administering the Contract for Construction between Owner and each Contractor, according to a separate contract between Owner and Construction Manager.
- E. Project Identification: Additions and Alterations to Lagrange Middle School – Phase 1A
1. The complete set of contract documents does not necessarily apply in full to the Work included in this contract **Phase 1A**. Certain sheets and specification sections are provided for coordination or for use in future project Phase 1B yet to be bid and may be omitted from the scope of this contract. Refer to Construction Phasing and logistic drawings for specific requirements, clarifications, and delineation of work included in this bid package.
 - KG200 – Site 1A Phasing and Logistics
 - KG201 – First Floor 1A Construction Phasing
 - KG202 – Second Floor 1A Construction Phasing
 - KG203 – First Floor 1A Construction Temporary Egress
 - KG204 - Second Floor 1A Construction Temporary Egress

- F. Definitions:
1. The terms “Contractor”, “General” Contractor, “Plumbing” Contractor, “Mechanical” Contractor, “Electrical Contractor” shall be a direct reference to the General Construction Contract 1A.
 2. The term “work”, “the work”, “project work” or the like are all similar terms used to describe work related to the scope of the General Construction Contract 1A.
 3. Building Code in Effect for this Project: 2020 Building Code of New York State as adopted and the Energy Conservation Construction Code of New York State
 4. Comply with the following: New York State Energy Conservation Code and the building standards of the New York State Education Department.

1.4 SCHEDULE

- A. Schedule Narrative:
1. The Project will Start July 2026 and must be substantially completed April 2028.
 - a. See Construction Phasing Drawings KG201 & KG202 for timing and sequencing of work.
- B. The Contractor shall provide a comprehensive project schedule for all work in detail within **15 days form a “Notice of Award”**. This schedule shall indicate all particulars related to subcontracted and self-performed work in detail. It shall also indicate any long lead material items, or specialty materials needed to perform the work without delay.
1. Failure to provide a comprehensive project schedule may result in a reduction of funds from the Contractors lump sum proposal for not meeting requirements of the contract.
- C. The Contractor shall provide updated project schedules submitted with their monthly billings. An update will also be required if critical milestones are missed and the new project schedule shall indicate necessary recovery tasks to get back on track.
- D. To maintain project schedule, this project will require multiple crews, shifts, overtime or weekends. The contractor is responsible to provide adequate staffing furnishing crews with its own supervision, tools and other means necessary to maintain the project schedule.
- E. A Construction Manager Superintendent must always be on site when work is being performed. **If contractor fails to maintain progress as indicated by the project schedule by no other fault but its own (insufficient staffing) and requires overtime to recover the schedule; the contractor shall coordinate with the Construction Manager in advance and pay for a Construction Manager’s superintendent at \$125.00 per hour.**
- F. Detailed **2 week look ahead** schedule(s) are required to be submitted bi-weekly at the end of the week for work tasks planned for the following two weeks. These look ahead schedules are not to be a regurgitation of the project tasks pulled from the master construction schedule. They are to include specific work tasks including but not limited to material arrival on site, inspections

needed, crew size, work hours, coordinated tasks and any other task that directly affects the planned work.

- G. The Contractor shall submit a detailed Submittal Schedule within 10 days from a “**Notice of Award**”. This schedule shall include all required material submittals inclusive of subcontractors. The contractor should stress this to various subcontractors during the proposal phase, so all contractors involved have a clear understanding of the expectation for submittal requirements.
 - 1. Failure to provide a comprehensive submittal schedule may result in a reduction of funds from the Contractors lump sum proposal for not meeting requirements of the contract.
- H. Available working hours will be standard Monday through Friday 7:00AM to 3:30PM and can extend to 5:00PM as needed. Holiday and weekends may be available and will need to be scheduled with the Construction Manager at least 48 hours in advance. Second Shift hours will be from 3PM to 11PM.

1.5 WORK COVERED BY THE CONTRACT DOCUMENTS

- A. The Project will be constructed under a Project Labor Agreement utilizing Single Prime contracting arrangement with the Owner awarding and holding the Contract. The contractor shall furnish all labor, material, tools, equipment, access equipment, supervision, layout, delivery, trucking, material handling equipment, shop drawings, submittals, coordination, etc. necessary to complete the work as indicated by the Contract Documents .
- B. General Requirements:
 - 1. Each Contractor has been given the opportunity prior to submitting their Bid, to inspect the entire Project site for current conditions and agree to accept the project site as it exists on the date bids are due.
 - 2. The Prime Contractor and each of its Subcontractors must be registered with the New York State Department of Labor (DOL). The Prime Contractor and three (3) major subcontractors (Mechanical, Plumbing & Electrical) must provide a current DOL certification at time of bid. Remaining Subcontractors are to be submitted within **5 days following a Notice of Award**. The Prime Contractor must report to and gain approval from the Construction Manager of any subcontractor changes during construction immediately along with a copy of the replacement subcontractors current DOL certification prior to that subcontractor starting work on site.
 - 3. Except for the three (3) major subcontractors (Mechanical, Plumbing & Electrical) which will be provided with the bid, the Prime Contractor shall submit a list of all other proposed subcontractor and Suppliers at the Kick-off meeting following official Contract Award. This list shall be updated with any changes made during the Project. Additionally, both the Prime Contractor and its Subcontractors shall provide copies of OSHA cards for all employees in advance of working on site.
 - 4. The General Construction Contractor shall designate “**Non-Working**” full-time Field Superintendent(s) and Project Managers to coordinate and supervise the work who shall always be present on the job site when work is being performed. Designated personnel shall be familiar with the Project and be authorized to conclude matters relating to progress of work.

- a. The proposed Field Superintendent(s) & Project Manager shall have at least five years of experience in the proposed position.
 - b. The Contractor shall submit the Field Superintendent(s) and Project Manager resume to the Construction Manager for approval.
 - c. Should either the Superintendent(s) or Project Manager prove to be unqualified for the position at any point in the project, the Construction Manager shall issue a letter stating that the person is to be removed from involvement in the project. Action by the contractor must be made within seven working days of receipt of such letter.
 - d. The Field Superintendent(s) and Project Manager shall participate in providing Master scheduling information, Two Week Look Ahead Schedules, field coordination between all trade contractors and quality control procedures for all work performed under the contract.
 - e. The Field Superintendent(s) and Project Manager shall record and track daily activities, daily onsite personnel and document daily progress.
5. The Construction Manager or Owner may remove any individual working directly for or as a subcontractor to the Prime Contractor who conducts themselves in a manner that violates safety protocols, demonstrates insufficient professional/personal conduct, or behaviors deemed problematic or unprofessional on the Project.
 6. The Contractor shall maintain within its field office a complete and current set of Contract Documents (including any Addenda, Change Orders, and Modifications thereto), Contract Record Drawings, approved shop drawings, samples, color schedules and other data pertinent to the Project.
 7. The contractor is to provide **photo and video** documentation of **existing conditions** as indicated by the contract documents. Submit to the Construction Manager a list of damaged areas (i.e. plaster walls, woodwork, equipment etc.) prior to commencing work. Any damaged areas not identified prior to the work shall be the responsibility of the contractor(s) working in that area.
 8. Demolition activities must be done to ensure there is no interruption in utility service(s) or disruption to owners' daily program.
 - a. All Hazardous Materials removal work shall be completed in strict accordance with NYS Department of Labor and Code Rule 56.
 - b. Shutdowns for utility service work shall be coordinated with the owner and construction manager in advance prior to scheduling work.
 - c. Work tasks adjacent to occupied classrooms that create excessive noise such as rock hammering, drilling into existing foundations, powder actuated shots, running compaction equipment and the like, should be scheduled off hours prior to or after the normal school day.
 9. Floor, wall and Roof penetration work required for this project must be done in accordance with standard building code requirements to include structural reinforcement, fire stopping, sleeves etc. and any disturbed adjacent surfaces from either new work or work removed shall be restored to newly scheduled construction or existing "patch to match" condition. Contractor(s) is responsible for the removal and reinstallation of ceiling where work must be installed above a ceiling not scheduled for removal and or replacement.
 10. Provide access to concealed systems as required for system maintenance and repair via installation of access panels, doors, covers etc. The contractor shall confirm the type based on the location access is required which could include fire rated assemblies.

11. The contractor will be given a location to stage material and access the work area(s). The Contractor is responsible for properly scheduling and accepting deliveries inclusive of any necessary traffic control as well as properly storing delivered materials.
12. The Contractor shall provide Daily Debris Cleaning and disposal for interior and exterior work. If daily cleaning is deemed insufficient, the Construction Manager will provide the cleanup and the cost of which will be deducted from the contractor via a Deduct Change Order. A dirty or messy job site will NOT be tolerated. Upon completion of the project, the Contractor shall provide a Final Cleaning of all spaces, surfaces and windows in the building by a Professional Cleaning Service approved in advance by the Construction Manager prior to a final inspection. Maintain Final Clean conditions until space is turned over to the owner.
13. The Contractor shall include in their base bid, **Five (5) non-consecutive days of no work** allowed on site due to school testing. These testing days may happen at various times during the school year, and the contractor will be given at least 5 days' notice for each testing day.
14. This project will use Submittal Exchange software for submittals, RFI's and PCO information exchange.

C. Safety Requirements:

1. All personnel on site will be required to have their driver license or state issued identification run through the owners' security system and display photo ID on their person where visible. Those without will be removed from site at once.
2. The Contractor and its subcontractors must adhere to safe practice standards including but not limited to.
 - a. Adhere to all OSHA Safety Standards, NYS Department of Labor and NYS SED 155.5 Regulations.
 - b. Provide procedures for OSHA Lead Based Paint precautions.
 - c. Provide secure lockup of tools, materials, and equipment. Provide temporary enclosures/storage containers of materials as needed.
 - d. Provide construction aids and miscellaneous services and facilities necessary exclusively for its own construction activities.
 - e. Submit a site-specific safety plan and hazardous materials program, (maintained at the job site).
 - f. Submit Safety Meetings or "Toolbox Talks" weekly while actively working on site.
 - g. Material Safety Data Sheets (MSDS) shall be maintained on site for all materials utilized for construction.
 - h. All personnel working on site should have proper Personnel Protective Equipment or PPE as required for the work being performed. Minimum requirements for all construction personnel are hard hats, high visibility clothing, proper attire (no shorts or sleeveless shirts) and proper work boots when onsite.
 - i. Provide material lifting equipment complying with NYS Labor Laws, OSHA regulations, and other Federal, State, and local laws. All lifting operations (i.e. steel erection, rigging of rooftop equipment etc.) will require a **written lift plan** accompanied by equipment operator licenses to be submitted for record 2 weeks in advance of scheduled lift date.
 - j. Provide Fire Prevention materials and equipment for fire protection related to work performed. Fire extinguishers, fire blankets, and fire watch supervision during all "Hot Work" operations and as required by OSHA requirements.

- k. Active Smoke Detectors shall be temporarily covered and uncovered during the renovation work to ensure protection of the building when work is not active.
- l. Contractor should review districts Asbestos report to become familiar with areas identified as ACM containing as well as understanding what may not have been tested that could impede or delay planned work in any location. Any potential ACM containing materials encountered shall be immediately reported to the Construction Manager and work ceased in that location. The responsibility of following this procedure is with the General Construction Work Contractor.

D. Temporary Facilities:

- 1. In addition to specific responsibilities for temporary facilities and controls indicated in Division 1 Section 01 5000 "Temporary Facilities and Controls", the contractor shall provide various Temporary Facilities including but not limited to.
 - a. Installation, operation, maintenance, and removal of each temporary facility.
 - b. Review Logistics Plans in conjunction with Phasing plans for specific temporary measures needed to perform various portions of the work including signage, covered egress, installing temporary doors, site fencing (access to rescue windows), stair tower etc.
 - c. Install temporary dust protection when working within the existing building to mitigate the migration of dust throughout various areas of the building. This may be accomplished using zip walls, partition walls, ventilation fans, poly etc.
 - d. Temporary toilets for all workers. The owners' toilets shall not be used.
 - e. Provide dumpsters for removal and disposal of all construction debris.
 - f. Temporary electric panel(s) to provide OSHA required temporary lighting and sufficient power receptacles for work to be performed. Additionally, a 200Amp 240volt temporary power will be required for the Construction Managers trailer and whatever power the Contractor requires for their office(s).
 - g. Temporary Heating during construction to maintain 50 degrees within the working area(s). Additional temporary heating, cooling, ventilation or dehumidification may be required for specific tasks or materials.
 - h. Provide temporary fencing and protections indicated within "staging plan" and or as needed to perform work safely. Contractor should be aware these fence lines may need maintenance or adjustment in location as work progresses.
 - i. Provide access to the work site designated by the staging plan including snow and ice removal during construction. Cooperate with owner's personnel in maintaining and facilitating access to occupied areas by staff, students and owner's agents. The construction work cannot impede the owners' daily program.
- 2. The Contractor shall maintain access to all work, staging and laydown areas which includes clearing debris, snow or ice. Until building is weather tight, the contractor shall provide temporary enclosures to allow progression of work.
- 3. **Temporary winter conditions** shall be incorporated into the construction work activities from the month of November 2026 to March 2027. These conditions should include but not be limited to Temporary Heating, clearing snow and ice.

- E. Scope of Work: The General Construction Contractor will be responsible for work contained within the contract documents identified as Phase 1A including but not limited to General Construction, Site/Civil , Plumbing including Fire Protection, Mechanical and Electrical scope. Reference within the construction documents to any of these trade scopes shall mean the work of this contract. Please refer to **Section 1.6** below for specific work that is **NOT** part of this contract.

- F. Following are additional items which complement the contract documents and shall be included in the Contractors Bid Proposal. Work described shall be complete systems and /or assemblies, including products, components, accessories and installation required. The Contractor is to review ALL drawings and specifications for a complete understanding and working knowledge of the full scope of work to be performed.

1. All General Construction related work including but not limited too.

- a. Provide and maintain survey and layout markers as needed to complete work. Initial Survey work to establish control and baseline to layout building corners and work limits shall be completed by a NYS licensed surveyor.
- b. In addition to all required work to construct building addition(s) this contractor shall review Phasing Plans identifying additional scope within or to the existing building per the dates identified.
 - 1) Lead paint and Asbestos abatement activities will require multiple mobilizations to fit the phasing and scheduling needs of the project. It shall also be noted that abatement cannot occur during the school year unless over a break, holiday or weekend. Abatement for Phase 1A is in various locations as follows.
 - a) Boys Locker room and surrounding rooms 129, 129A, 126, 126A, 126C and partial adjacent corridor.
 - b) KN-J & KN-C on KH-100, in corridor adjacent to Gym & Stair 4 both levels.
 - c) KN-J in Chorus Room 153 and along the entire rear of the building where new addition is constructed directly adjacent to existing building. This includes partial ceiling abatement per KN-C in room 153 to install new temporary hung uninvent.
 - d) Corridor C10 to allow for new electrical feeders to new addition as well as various MEP connections and tie ins.
 - 2) Structural steel roof reinforcement within the Boys locker room, surrounding rooms and adjacent corridor as well as below slab existing Sanitary connection to accommodate new addition Sanitary piping.
 - 3) Coordinate temporary roofing and mechanical work to allow for new temporary hung uninvent installation in Chorus Room 152/153.
 - 4) Existing stairwell 4 removal and floor infill to connect to new addition.
 - 5) Partially converting Technology room into Mechanical Room 185 for new boilers that will serve the new additions. Work outside the limits of this new room 185 is not to be included unless required for MEP work needed for new addition(s) and as indicated below.
 - 6) New ceilings in locations where existing have been removed and or abated to accommodate new addition(s).
- c. Provide watertight connections where existing roofing is intersected by new construction and where new roofing meets existing construction.
- d. Contractor to install scheduled flooring on new and existing floor slabs inclusive of any grinding, moisture mitigation and self-leveling underlayment to achieve required warranties of scheduled flooring.

2. All site/civil related work including but not limited too.

- a. Provide work to install temporary parking lot and set up site access, staging area and contractor parking. Include **2,000 linear feet of temporary 8' post driven chain link fence, (1ea) 24' Swing Gate & (2ea) 4' personnel gates** to be used to segregate various work areas indicated on Site 1A Logistics and First Floor 1A Construction Temporary Egress & Logistics plans. Temporary fencing may require portions to be

adjusted, relocated and or removed to complete specific work tasks. Any short-term work areas (during construction of temporary parking lot) shall be enclosed with a minimum of 48" orange construction fence with proper safety caps on the top of posts. Localized excavation areas that are deeper than 2' should be secured and enclosed with 6' chain link fence panels.

- b. See Site 1A phasing and logistics plan for extent of site work that will be part of Phase 1A.
 - 1) All work shown on the North side of building area E Addition.
 - 2) Roadway & utilities behind the building to the east.
 - 3) Utility work beyond the proposed roadway east of the building as follows:
 - a) Storm to proposed DS-5
 - b) All Fire Protection main from point of connection to last hydrant.
 - c) Primary & Secondary power from riser pole to building.
 - c. Coordinate trenching for new electrical service from utility pole to building during summer 2027.
 - d. Provide Utility Mark out services using "811" as well as a Private Utility Locator and maintain all markings until work in each area is completed.
 - e. Sediment & Erosion control installation, maintenance and removal practices as indicated or required within disturbed areas inclusive but not limited to silt fence, inlet protection, tracking pad, concrete wash out and proper dust protection measures. Dust protection will include installation, maintenance and removal of exterior mounted filter media on existing Uni-Vent intake grilles on multiple levels adjacent to new addition construction. The Contractor shall figure a quantity of 15 locations as part of their bid.
 - f. Provide excavation, backfill, shoring, bracing, dewatering and below grade utilities as necessary to install proposed work.
 - g. Provide final grading, concrete and asphalt paving, topsoil and seed as indicated inclusive of any disturbed areas beyond the proposed work limits.
3. All Plumbing related work including but not limited too.
- a. Any required work within the existing building to facilitate the needs of the new addition(s) that falls outside of summer months must be coordinated and completed on second shift. Additionally, any "utility" connections back to a supply source within the existing building that will activate utilities in the new Addition(s) is considered part of the work of this contract.
 - b. Coordinate under-slab piping connection in building area D to existing Sanitary main within building corridor during off hours. Additionally, coordinate domestic water connections above ceiling in same area via installation of valves for each line.
 - c. Remove and cap portion of domestic water lines to existing sink in Tech II metal shop room to accommodate installation of proposed Mechanical Room 185. Additionally provide temporary ¾" make up water off the existing CW within the space. Final piping work will take place in a later phase of construction.
 - d. Install new 1" HW line to POC in corridor C7 adjacent to Janitors closet 156.
 - e. Install new domestic CW/HW/HWR lines within new addition corridor back to first POC in corridor C10.
 - f. Provide complete fire protection system inclusive of all materials, installation, delegated design and any ancillary items for a "turnkey" system.
4. All Mechanical related work including but not limited too.
- a. All Mechanical equipment is to be submitted within **45 Calander days following a Notice of Award** to ensure equipment is on site when required for installation.
 - b. Any required work within the existing building to facilitate the needs of the new addition(s) that falls outside of summer months must be coordinated and completed

on second shift. Additionally, any “utility” connections back to a supply source within the existing building that will activate utilities in the new Addition(s) is considered part of the work of this contract.

- c. All rooftop units shown on KM145 above new additions and proposed Mechanical room that will be required for new additions to have fully functional HVAC per SED 155.5. This will include RCU-15, RTH-1 and the 8” diameter boiler flue piping.
- d. Contractor to follow various applicable details for the installation of work that is part of this contract.
- e. Contractor to provide temporary ceiling hung unvented ducted up through the roof in room 152/153. Connect to existing HWS/R lines and existing BMS controls.
- f. Coordination with owners outside vendors, see Section 1.6 below for additional information. The Contractor will need to coordinate with this vendor from submittals, installation, start-up and commissioning.

5. All Electric related work including but not limited too.

- a. Submit a comprehensive and complete set of shop drawings for proposed 2,500Amp electrical Switchgear within **30 Calander days following a Notice of Award**. Failure to submit & release these items in a timely manner may have a negative monetary impact which the contractor will be responsible for.
- b. Spearhead coordination with Central Hudson Gas & Electric for proposed electrical service upgrade planned for summer 2027. Contractor will bear the responsibility to confirm switchgear, primary feeder, transformer vault and utility provided transformer are compatible and acceptable per Central Hudson standards.
- c. Provide a Generator sufficient in size to power IT related MDF/IDF closets, walk in refrigerator and freezer, boilers & circulation pumps as well as construction power during installation of new primary feeder, transformer and switchgear work as well as any additional power shut downs that may be needed.
- d. Confirm and verify equipment circuits with approved Mechanical shop drawings prior to pulling conduit and wire.
- e. Any required work within the existing building to facilitate the needs of the new addition(s) that falls outside of summer months must be coordinated and completed on second shift. Additionally, any “utility” connections back to a supply source within the existing building that will activate utilities in the new Addition(s) is considered part of the work of this contract.
- f. Panel SDP-E powering the new addition is to be installed and powered when the new addition requires occupancy. If new switchgear is not operational, the contractor shall temporarily connect the new feeder to the existing gear by either installing an 800 Amp 3 Phase breaker OR a Bus Tap with an 800 Amp 3 Phase disconnect switch. Additionally, relocate panel PH as indicated.
- g. The Electrical contract scope is to include all CAT6A and Multi-Mode (OM3) Fiber optic cabling as part of the work under this contract. All cabling is to be labeled, terminated and tested accompanied by a full test report of each cable.
- h. Coordination with owners outside vendors, see Section 1.6 below for additional information.

1.6 OWNER PROVIDED SCOPE

- A. The owner intends to procure certain items of work and materials through NYS OGS state contract or through certain purchasing cooperatives which are exempt from the Project Labor Agreement.
 - 1. The owner intends to replace the Fire Alarm System for the entire building which includes panels, wiring, devices, programming and testing for a complete “turnkey” system. The Owners Fire Alarm Vendor is “Open Systems Metro”.

- a. **In Building Area “E” Addition(s) ONLY**, Open Systems Metro will furnish devices for installation by the electrical contractor. The electrical contractor will also be responsible for running the conduit and / or raceway, sleeves and wire.
 - b. **IN ALL other building areas**, the owner’s vendor will complete all work and is exempt from the PLA.
2. Owner IT equipment and their Security vendor, A-Plus:
 - a. Procurement and connection of switches, cameras, wireless access points, lock down buttons, phones and related equipment will be performed by the owner or their security vendor. The capital project contractor will be responsible for providing terminated and tested cables from server rack to end point locations inclusive of any required raceway, conduit, sleeves and back boxes.
 - b. Related to electrified door hardware, the capital project contractor will be responsible for providing all work associated with the electrified hardware inclusive of raceway, wiring, connections to power supply push buttons etc. The Security vendor will be responsible for providing door status contacts, card readers and associated wiring from these devices to the security vendors controller. The security vendor will also be responsible for connecting / integrating these devices and any required programming.
 - c. Both the owner and their security vendor are exempt from the PLA Agreement.
3. Building Management System: The owner will procure Stark Tech for a complete turnkey HVAC control system. The capital project contractor will need to coordinate with this vendor from installation to start-up and commissioning.

1.7 COORDINATION:

A. SUMMARY

1. This Section includes preparation of coordination drawings for architectural, structural, mechanical, plumbing, fire protection, fire alarm, lighting, information technology, security, and electrical Work.

B. DEFINITION & INTENT

1. Coordination drawings are intended to show the relationship and integration of different construction elements that require coordination during fabrication or installation to fit in the space provided, to function as intended, and to present the intended final finished appearance.
2. The Contract Drawings are diagrammatic and are not intended to show the exact alignment, physical locations, or configurations of such Work. The Contractor is required to the extent consistent and reasonably inferable with the Contract Documents to produce the intended results. When possible, the Contractor shall take field measurements and verify field conditions to ensure accuracy of coordination efforts.
3. The Contractor shall manage the entire process using a qualified drafting agency to incorporate all required pertinent information by each trade or sub-contractor in a timely manner.
4. The Architect will provide CAD files with appropriately filled out Release forms to the contractor as requested.

C. SUBMITTALS

1. The contractor shall begin the coordination process immediately following but not later than **10 days after receipt of a Notice of Award**. Submit complete and comprehensive coordination drawings which will be signed off by each participant (trade) for review in advance of planned work. This shall include at a minimum the following coordination;
 - a. Foundation including under slab piping & conduit.
 - b. MEP & structural steel coordination.
 - c. Fixed Casework
2. Coordination Drawings are not a replacement for shop drawings specified in the technical specifications or the Record Drawings required in Division 01. Once the Coordination model is complete and all conflicts are resolved, the Contractor(s) are responsible for submitting Shop Drawings of their respective work for final approval. Circle and clearly note deviations from Contract Documents with reason for deviation stated. Contractor failure to identify deviations from the Contract Documents does not alleviate the Contractors responsibility to provide installations per the Contract Documents.
3. Prepare and submit a written Coordination Report generated from the Coordination Model(s) prior to fabrication, and installation of any facility element within the area represented within the Coordination Model(s). Develop Coordination Reports identifying outstanding issues after the development of the Coordination Model(s), including but not limited to;
 - a. Clashes
 - 1) Number of clashes
 - 2) Clash category
 - 3) Resolution of clashes
 - b. Design Changes
 - c. Differing site conditions
 - d. Hazardous Maintenance Accessibility or Safety related issues.
4. The report shall be organized by CSI Master Format 2016 specification section or by trade.
5. The issues identified within the Coordination Clash Detection Report are to be addressed by the **Contractor** in consultation with the Construction Manager and the Architect / Engineer prior to installation of facility elements. The Construction Manager may direct the Contractor to submit the issues in the Coordination Clash Detection Report as an RFI to the Architect/Engineer.
6. The Contractor is solely responsible for the cost of remedying any clashes that could have been discovered during the clash detection process.
7. Maintain marked up set of coordination drawings at Project site available for reference by Owner and Architect.
8. Failure to submit coordination drawings or indicate work to be installed on coordination drawings will result in no changes to contract sum for necessary corrections to uncoordinated work not shown in coordination drawings.

D. PREPERATION OF COORDINATION DRAWINGS

1. The intent of the Coordination Model(s) is to communicate the necessary information to construct the facility including size, location, and arrangement of both existing to remain and new elements and to incorporate the as-built conditions.
2. Develop Coordination Model(s) based upon Contract Documents, Design Intent Model(s), and verified existing conditions. Model(s) will include necessary elements with reference to column lines, heights above finished floor and lateral locations.
3. Coordination Model(s) are to have a consistent origin that can be referenced to a real-world datum or benchmark.
4. Prepare coordination drawings for Project using BIM: Revit or similar coordination documentation overlay drawings indicating coordination of the project.

END OF SECTION 01-11-00

Site Access
Temporary Staging
Area Contractor Parking
for Construction

1) No Deliveries between 7 & 8 AM or 2 & 3 PM.

2) Flag Person must be with each delivery in or out.

3) Access Gates must be closed at all times when not active.

Relocate 52 parking spots to temporary parking lot to allow for staging area during construction.


Office Trailers

Move Play area temporarily to existing tennis court(s).

Fenced in area represents active construction area

Storage Containers

Site 1A Logistics Plan

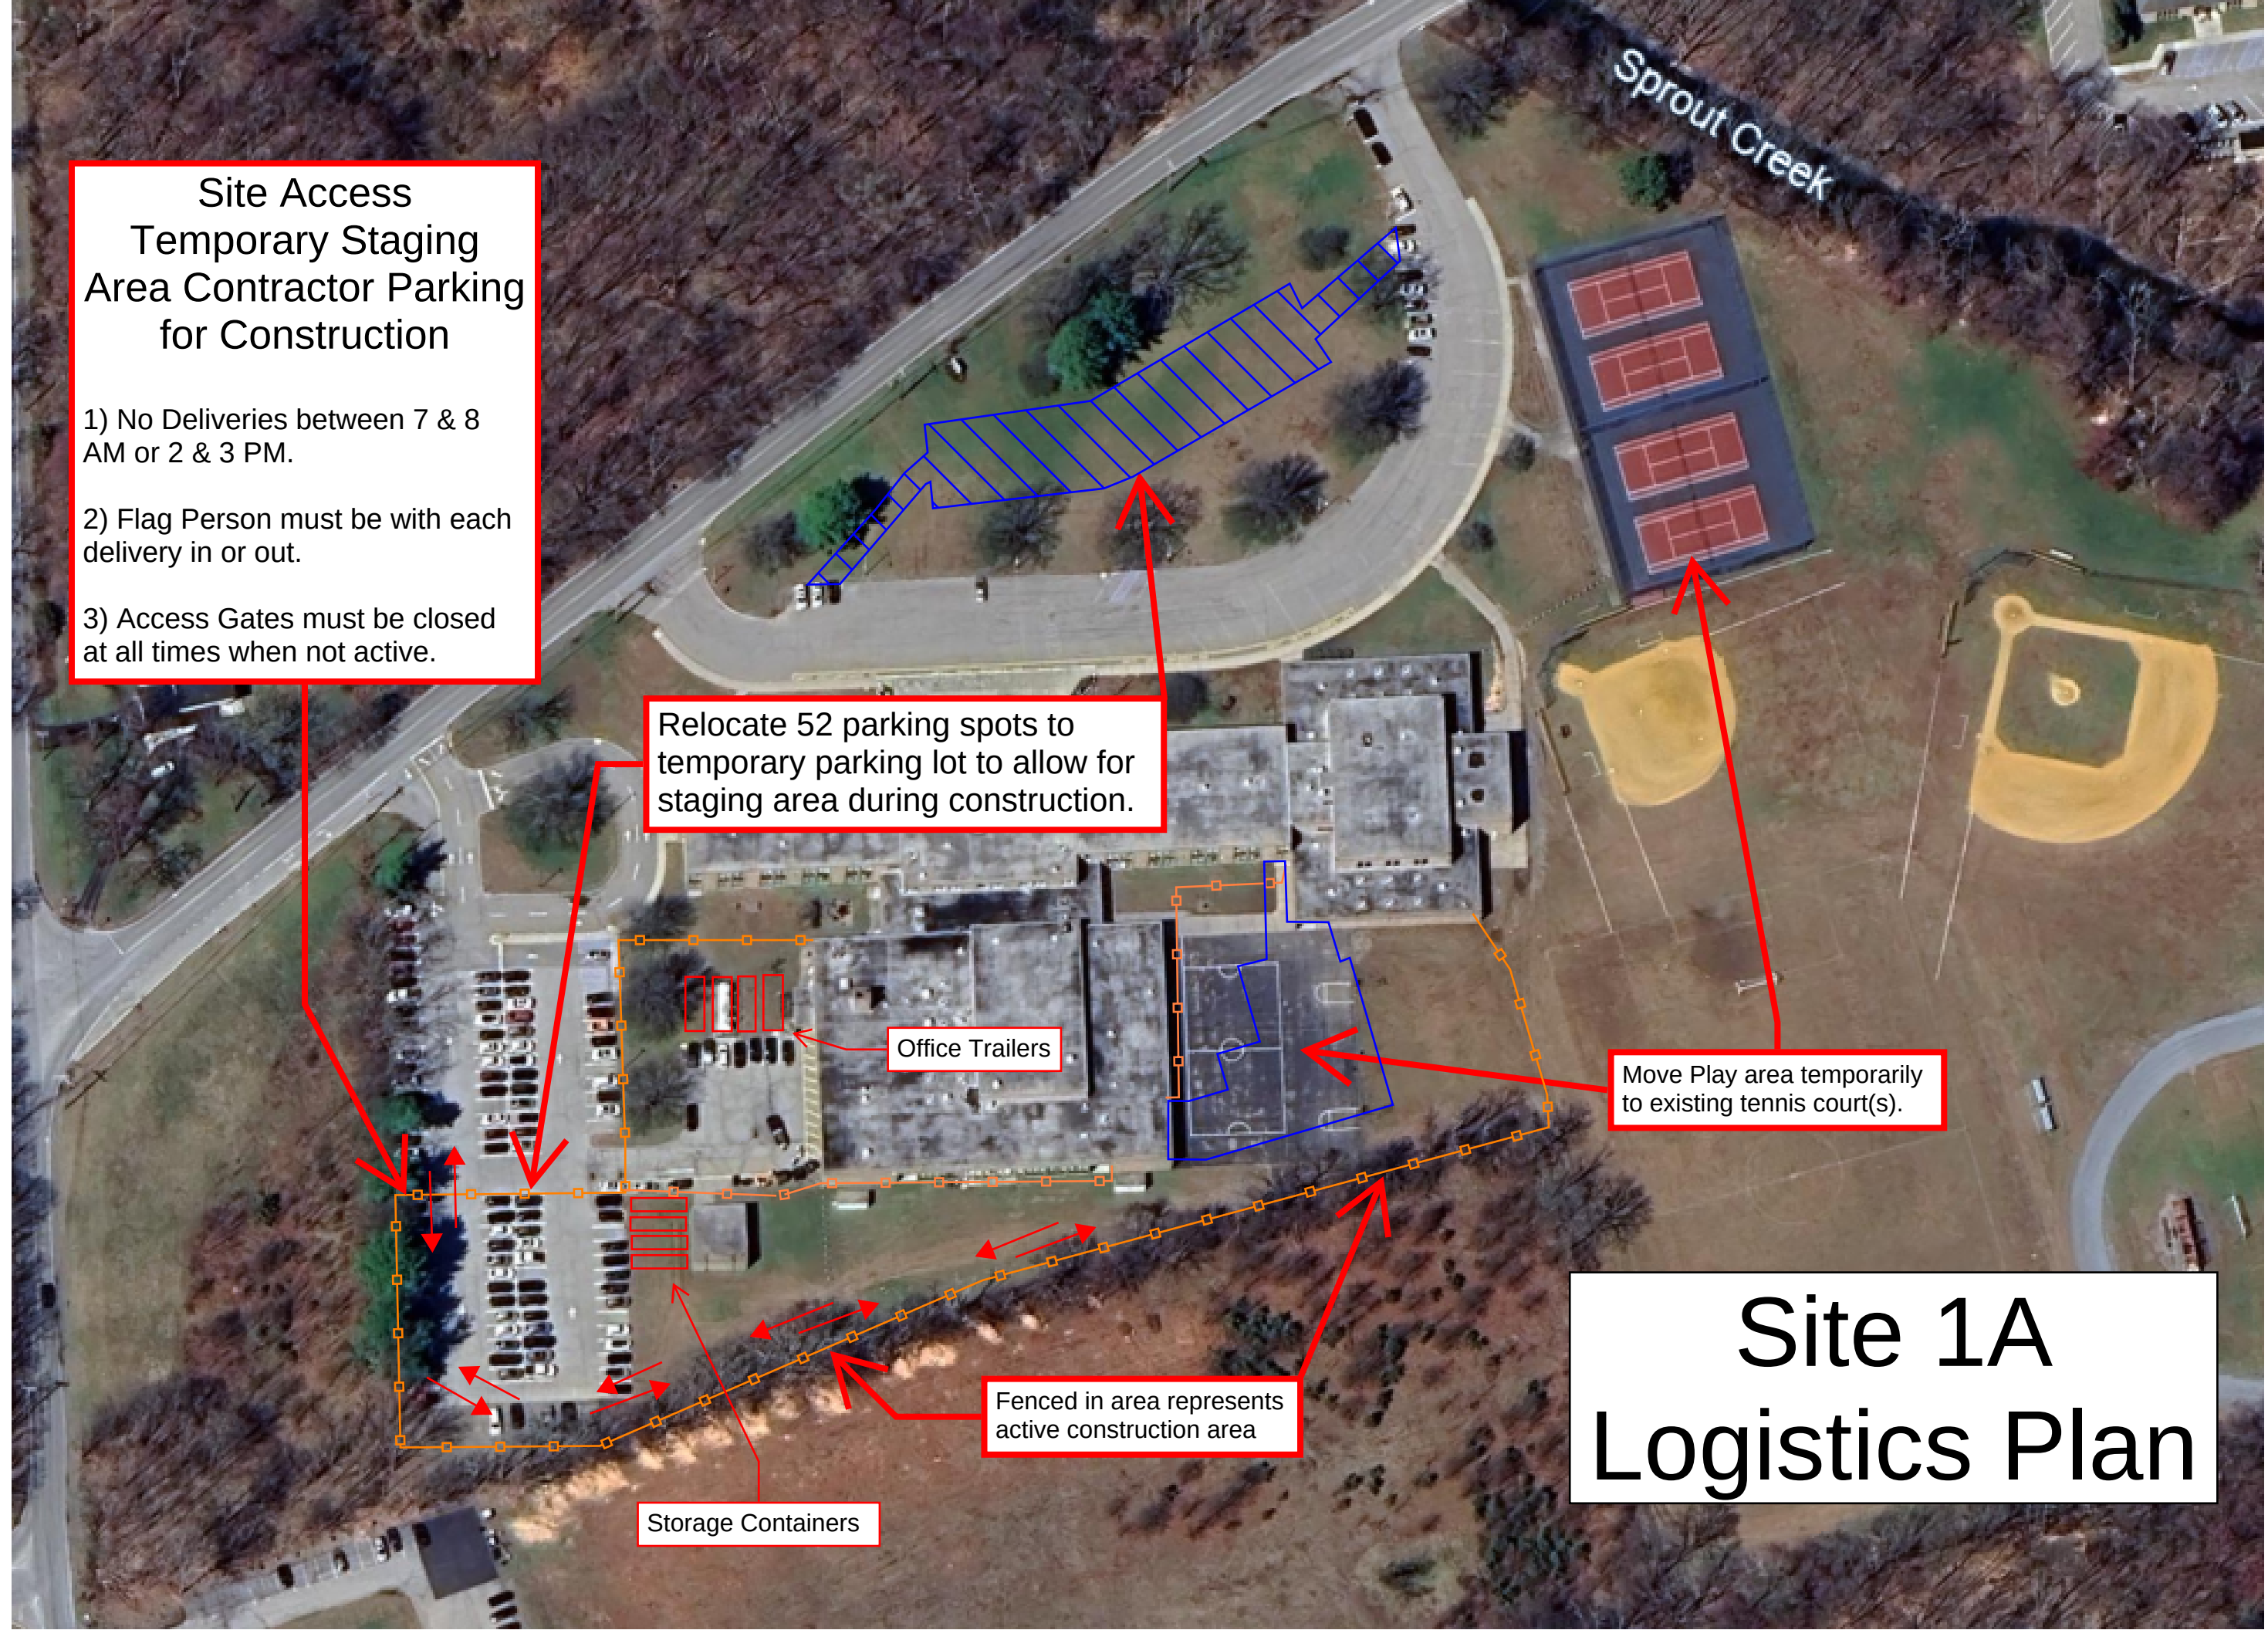

SECTION 01 21 00 - ALLOWANCES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes administrative and procedural requirements governing allowances.
- B. Types of allowances include the following:
 - 1. Contingency allowances.

1.3 ACTION SUBMITTALS

- A. Submit proposals for purchase of products or systems included in allowances.

1.4 INFORMATIONAL SUBMITTALS

- A. Submit invoices or delivery slips to show actual quantities of materials delivered to the site for use in fulfillment of each allowance.
- B. Submit time sheets and other documentation to show labor time and cost for installation of allowance items that include installation as part of the allowance.
- C. Coordinate and process submittals for allowance items in same manner as for other portions of the Work.

1.5 COORDINATION

- A. Coordinate allowance items with other portions of the Work.

1.6 CONTINGENCY ALLOWANCES

- A. Use the contingency allowance only as directed by Architect for Owner's purposes.
- B. Allowance shall include cost to Contractor of specific products and materials under allowance and shall include taxes, freight, and delivery to Project site. Contractor's costs for receiving and handling at Project site, labor, installation, and similar costs related to products and materials under allowance shall be included as part of the allowance.
- C. Overhead and profit related to the allowance shall be included as part of the Contract Sum and not part of the allowance.

1.7 ALLOWANCE PROCEDURES

- A. Authorization for use of allowances is documented through Allowance Access Authorization form provided in the Project Manual, accompanied by substantiating data.
- B. At Project closeout, unused amounts remaining in the allowances will be credited to Owner by Change Order.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION

3.1 PREPARATION

- A. Coordinate materials and their installation for each allowance with related materials and installations to ensure that each allowance item is completely integrated and interfaced with related work.

3.2 SCHEDULE OF ALLOWANCES – GENERAL CONSTRUCTION (GC) CONTRACT 1A

- A. Allowance No. 1A-1: Contingency Allowance: Include the sum of \$850,000 for use according to Owner's instructions.

Attachment: Allowance Access Authorization

END OF SECTION 01 21 00

ALLOWANCE ACCESS AUTHORIZATION:

Project: Additions and Alterations to LaGrange Middle School – Phase 1A

Architect: Tetra Tech Architects & Engineers

Project No. 136396-24002.1

Contractor:

AAA No.:

Initiation Date:

The Allowance is allocated as follows:

Total original Contract Allowance was:	\$
Amount of Contract Allowance Access previously authorized:	\$
Adjusted Contract Allowance prior to this authorization is:	\$
The amount of available Allowance will Decrease by this Access Authorization:	\$
The remaining Contract Allowance, after this Access Authorization will be:	\$

**Recommended by:
Architect**

**Recommended by:
Construction Manager [if applicable]**

By (Signature): _____

By (Signature): _____

Date: _____

Date: _____

**Accepted by:
Contractor**

**Approved by:
Owner**

By (Signature): _____

By (Signature): _____

Date: _____

Date: _____

SECTION 01 23 00 - ALTERNATES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes administrative and procedural requirements for alternates.

1.3 DEFINITIONS

- A. Alternate: An amount proposed by bidders and stated on the Bid Form for certain work defined in the bidding requirements that may be added to or deducted from the base bid amount if Owner decides to accept a corresponding change either in the amount of construction to be completed or in the products, materials, equipment, systems, or installation methods described in the Contract Documents.
 - 1. Alternates described in this Section are part of the Work only if enumerated in the Agreement.
 - 2. The cost or credit for each alternate is the net addition to or deduction from the Contract Sum to incorporate alternate into the Work. No other adjustments are made to the Contract Sum.

1.4 PROCEDURES

- A. Coordination: Revise or adjust affected adjacent work as necessary to completely integrate work of the alternate into Project.
 - 1. Include as part of each alternate, miscellaneous devices, accessory objects, and similar items incidental to or required for a complete installation whether or not indicated as part of alternate.
- B. Notification: Immediately following award of the Contract, notify each party involved, in writing, of the status of each alternate. Indicate if alternates have been accepted, rejected, or deferred for later consideration.
- C. Execute accepted alternates under the same conditions as other work of the Contract.
- D. Schedule: A schedule of alternates is included at the end of this Section. Specification Sections referenced in schedule contain requirements for materials necessary to achieve the work described under each alternate.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION

3.1 SCHEDULE OF ALTERNATES – PHASE 1A

A. Alternate No. 1A-1: 30 Year Total Roof System Warranty

1. In lieu of 20-year warranty as in Base Bid, provide manufacturer's 30-year total roofing system warranty as specified in Section "07 53 23 – EPDM Roofing" in all roofing areas and as otherwise specified in the Project Manual.

B. Alternate No. 1A-2: Terrazzo Flooring at Addition First and Second Floor Corridors and Vestibules

1. In lieu of LVT flooring and base materials as in Base Bid, provide all associated contract work for terrazzo flooring and base per the Drawings KA932 through KA934 and KA937, specified in Section 09 66 23 – Resinous Matrix Terrazzo Flooring, and as otherwise specified in the Project Manual.

END OF SECTION 01 23 00

SECTION 01 25 00 - SUBSTITUTION PROCEDURES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes administrative and procedural requirements for substitutions.

1.3 DEFINITIONS

- A. Substitutions: Changes in products, materials, equipment, and methods of construction from those required by the Contract Documents and proposed by Contractor,
 - 1. Substitutions for Cause: Changes proposed by Contractor that are required due to changed Project conditions, such as unavailability of product.
 - 2. Substitutions for Convenience: Changes proposed by Contractor or Owner that are not required in order to meet other Project requirements but may offer advantage to Owner.

1.4 ACTION SUBMITTALS

- A. Substitution Requests: Identify product or fabrication or installation method to be replaced. Include Specification Section number and title and Drawing numbers and titles.
 - 1. Substitution Request Form: Use the “Request for Substitution” form attached to this Specification Section. Complete all sections of the form.
 - 2. Documentation: Show compliance with requirements for substitutions and the following, as applicable:
 - a. Information to support identification of the proposed substitution as “for Cause” or “for Convenience”.
 - b. Statement indicating why specified product or fabrication or installation cannot be provided, if applicable.
 - c. Coordination information, including a list of changes or revisions needed to other parts of the Work and to construction performed by Owner and separate contractors, that will be necessary to accommodate proposed substitution.

- d. Detailed comparison of significant qualities of proposed substitution with those of the Work specified. Include annotated copy of applicable Specification Section. Significant qualities may include attributes such as performance, weight, size, durability, visual effect, sustainable design characteristics, warranties, and specific features and requirements indicated. Indicate deviations, if any, from the Work specified.
 - e. Product Data, including drawings and descriptions of products and fabrication and installation procedures.
 - f. Samples, where applicable or requested.
 - g. Certificates and qualification data, where applicable or requested.
 - h. List of similar installations for completed projects with project names and addresses and names and addresses of architects and owners.
 - i. Material test reports from a qualified testing agency indicating and interpreting test results for compliance with requirements indicated.
 - j. Evidence of compliance with building code in effect for Project.
 - k. Detailed comparison of Contractor's construction schedule using proposed substitution with products specified for the Work, including effect on the overall Contract Time. If specified product or method of construction cannot be provided within the Contract Time, include letter from manufacturer, on manufacturer's letterhead, stating date of receipt of purchase order, lack of availability, or delays in delivery.
 - l. Cost information, including a proposal of change, if any, in the Contract Sum.
 - m. Contractor's certification that proposed substitution complies with requirements in the Contract Documents except as indicated in substitution request, is compatible with related materials, and is appropriate for applications indicated.
 - n. Contractor's waiver of rights to additional payment or time that may subsequently become necessary because of failure of proposed substitution to produce indicated results.
3. Architect's Action: If necessary, Architect will request additional information or documentation for evaluation. Such additional information or documentation may include detailed side-by-side comparison charts of the specified product and the proposed substitution, and other data. Only one substitution request for each product will be considered. Architect will make final determination as to whether the substitution is "for Cause" or "for Convenience".
- a. Architect will notify Contractor through Construction Manager of acceptance or rejection of proposed substitution.
 - b. Forms of Acceptance: Change Order, Construction Change Directive, or Architect's Supplemental Instructions for minor changes in the Work.

1.5 QUALITY ASSURANCE

- A. Compatibility of Substitutions: Investigate and document compatibility of proposed substitution with related products and materials.

1.6 PROCEDURES

- A. Coordination: Revise or adjust affected work as necessary to integrate work of the approved substitutions.

PART 2 - PRODUCTS

2.1 SUBSTITUTIONS

- A. Substitutions for Cause: Submit requests for substitution immediately on discovery of need for change.
 - 1. Conditions: Architect will consider Contractor's request for substitution when the following conditions are satisfied. If the following conditions are not satisfied, Architect will return requests without action, except to record noncompliance with these requirements:
 - a. Requested substitution is consistent with the Contract Documents and will produce indicated results.
 - b. Substitution request is fully documented and properly submitted.
 - c. Requested substitution will not adversely affect Contractor's construction schedule.
 - d. Requested substitution is compatible with other portions of the Work.
 - e. Requested substitution has been coordinated with other portions of the Work.
 - f. Requested substitution provides specified warranty.
 - g. If requested substitution involves more than one contractor, requested substitution has been coordinated with other portions of the Work, is uniform and consistent, is compatible with other products, and is acceptable to all contractors involved.
- B. Substitutions for Convenience: Architect will consider requests for substitution if received within 15 days after the Notice of Award. Requests received after that time may be considered or rejected at discretion of Architect.
 - 1. Conditions: Architect will consider Contractor's request for substitution when the following conditions are satisfied. If the following conditions are not satisfied, Architect will return requests without action, except to record noncompliance with these requirements:

- a. Requested substitution offers Owner a substantial advantage in cost, time, energy conservation, or other considerations, after deducting additional responsibilities Owner must assume. Owner's additional responsibilities may include compensation to Architect for redesign and evaluation services, increased cost of other construction by Owner, and similar considerations.
- b. Requested substitution does not require extensive revisions to the Contract Documents.
- c. Requested substitution is consistent with the Contract Documents and will produce indicated results.
- d. Substitution request is fully documented and properly submitted.
- e. Requested substitution will not adversely affect Contractor's construction schedule.
- f. Requested substitution is compatible with other portions of the Work.
- g. Requested substitution has been coordinated with other portions of the Work.
- h. Requested substitution provides specified warranty.
- i. If requested substitution involves more than one contractor, requested substitution has been coordinated with other portions of the Work, is uniform and consistent, is compatible with other products, and is acceptable to all contractors involved.

PART 3 - EXECUTION (Not Used)

Attachment: Request for Substitution Form

END OF SECTION 01 25 00



Request for Substitution

This form must be completely filled in with all relevant data by the Prime Contractor and submitted to the Architect in accordance with Project Manual Requirements for consideration before any request to change the drawing or specification requirements will be considered.

REFERENCE DATA

Project name: _____ Date of Request: _____
Location: _____ Architect's Project No.: _____
Request by Contractor: _____
Address: _____
Contact person: _____ Phone: _____ Email: _____

SUBSTITUTION REQUEST DATA

(Provide statement indicating why specified product, fabrication or installation cannot be provided.)

SUBSTITUTION REQUESTED IS FOR: _____ Reason for request: _____

☐ Named product. _____

☐ Product type, material, finish or formulation. _____

☐ Fabrication or installation methods. _____

Note whether substitution is for cause or convenience: _____

PRODUCT / MATERIAL / METHOD FOR WHICH SUBSTITUTION IS REQUESTED IS SHOWN ON THE FOLLOWING DOCUMENTS:

Specification: Section No.: _____ Page(s): _____ Paragraph/Item No.: _____

Drawings: (List No's of all Drawings affected): _____

DETAILED COMPARISON

Detailed comparison of significant qualities of proposed substitution with those of the Work specified. Include annotated copy of applicable Specification Section. Significant qualities may include attributes such as performance, weight, size, durability, visual effect, sustainable design characteristics, warranties, and specific features and requirements indicated. Indicate deviations, if any, from the Work specified.

COST/BENEFIT ANALYSIS

Describe in detail any alteration to any other part of the Works required by use of the requested substitution, including work by other Prime Contractors:

If applicable total net cost of any such other project required alterations, including overhead and profit: \$ _____
(Indicate if cost is an "Add" or "Deduct" to contract sum.

Benefits to Owner other than financial: _____

Schedule impact (Note any impact on project schedule by proposed substitution): _____

ADDITIONAL INFORMATION REQUIRED

PRIME CONTRACTOR TO PROVIDE ADDITIONAL INFORMATION AS NECESSARY AND ATTACH THE FOLLOWING INFORMATION:

1. Manufacturer's technical data sheets on proposed products, including test results as applicable.
2. Manufacturer's standard form of warranty.
3. Letter on manufacturer's letterhead stating that manufacturer will warrant products as specified, if specification requires specific warranties not included in manufacturer's standard form of warranty.
4. Letter(s) from other Prime Contractor(s) responsible for works affected by proposed substitution which state the total cost(s) of all such work, if any alteration of other work is required. Prime Contractor submitting this Request for Substitution will be responsible to fully reimburse the Owner for all such additional costs; processed via a deduct Change Order.

CONTRACTOR'S CERTIFICATION

1. BY SUBMISSION OF THIS SUBSTITUTION REQUEST AND PER SIGNATURE BELOW, CONTRACTOR CERTIFIES THIS SUBSTITUTION REQUEST HAS BEEN REVIEWED AND APPROVED BY THE CONTRACTOR IN ACCORDANCE WITH THE PROJECT MANUAL REQUIREMENTS.
2. BY SUBMISSION OF THIS SUBSTITUTION REQUEST AND PER SIGNATURE BELOW CONTRACTOR CERTIFIES THE PROPOSED SUBSTITUTION COMPLIES WITH ALL APPLICABLE REQUIREMENTS OF THE CONTRACT DOCUMENTS AND REFERENCED CODES AND STANDARDS.
3. BY SUBMISSION OF THIS SUBSTITUTION REQUEST AND PER SIGNATURE BELOW CONTRACTOR HEREBY WAIVES ALL RIGHTS TO ADDITIONAL COMPENSATION OR TIME THAT MAY SUBSEQUENTLY BECOME NECESSARY BECAUSE OF FAILURE OF PROPOSED MATERIAL TO PRODUCE THE INDICATED AND REQUIRED RESULTS.

Name of Authorized Contractor Representative: _____

Signature of Authorized Contractor Representative: _____

Name of Contractor _____

Date _____

SECTION 01 26 00 - CONTRACT MODIFICATION PROCEDURES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes administrative and procedural requirements for handling and processing Contract modifications.

1.3 MINOR CHANGES IN THE WORK

- A. Architect will issue supplemental instructions authorizing minor changes in the Work, not involving adjustment to the Contract Sum or the Contract Time, via the electronic form procedures outlined in Division 01 Section "Project Management and Coordination" and during the preconstruction conference.

1.4 PROPOSAL REQUESTS

- A. Owner-Initiated Proposal Requests: Architect will issue a description of proposed changes in the Work that may require adjustment to the Contract Sum or the Contract Time, via the electronic form procedures outlined in Division 01 Section "Project Management and Coordination" and during preconstruction conference. If necessary, the description will include supplemental or revised Drawings and Specifications.
 - 1. Proposal Requests issued by Architect are not instructions either to stop work in progress or to execute the proposed change.
 - 2. Unless otherwise noted, within 14 days after receipt of Proposal Request, submit a quotation listing adjustments to the Contract Sum and the Contract Time necessary to execute the change.
 - a. Include a list of quantities of products required or eliminated and unit costs, with total amount of purchases and credits to be made. If requested, furnish survey data to substantiate quantities.
 - b. Indicate applicable taxes, delivery charges, equipment rental, and amounts of trade discounts.
 - c. Include costs of labor and supervision directly attributable to the change.

- d. Include an updated Contractor's construction schedule that indicates the effect of the change, including, but not limited to, changes in activity duration, start and finish times, and activity relationship. Use available total float before requesting an extension of the Contract Time.
 - e. Quotation Form: Use forms acceptable to Architect.
 - f. If contractor fails to provide all information as noted above, Architect will return the submitted quotation noting the corrections required. If subsequent quotation submittal by the Contractor fails to comply with the format and protocols outlined above, the Owner is entitled for reimbursement from the Contractor for amounts paid to the Architect for review of additional quotation submissions.
- B. Contractor-Initiated Proposals: If latent or changed conditions require modifications to the Contract, Contractor may submit a request for a change to the Architect through Construction Manager.
 - 1. Include a statement outlining reasons for the change and the effect of the change on the Work. Provide a complete description of the proposed change. Indicate the effect of the proposed change on the Contract Sum and the Contract Time.
 - 2. Include a list of quantities of products required or eliminated and unit costs, with total amount of purchases and credits to be made. If requested, furnish survey data to substantiate quantities.
 - 3. Indicate applicable taxes, delivery charges, equipment rental, and amounts of trade discounts.
 - 4. Include costs of labor and supervision directly attributable to the change.
 - 5. Include an updated Contractor's construction schedule that indicates the effect of the change, including, but not limited to, changes in activity duration, start and finish times, and activity relationship. Use available total float before requesting an extension of the Contract Time.
 - 6. Comply with requirements in Division 01 Section "Substitution Procedures" if the proposed change requires substitution of one product or system for product or system specified.
 - 7. Proposal Request Form: Use form acceptable to Architect.

1.5 ADMINISTRATIVE CHANGE ORDERS

- A. Allowance Adjustment: See Division 01 Section "Allowances" for administrative procedures for preparation of Change Order Proposal for adjusting the Contract Sum to reflect actual costs of allowances.

1.6 CHANGE ORDER PROCEDURES

- A. On Owner's approval of a Proposal Request response, Architect will issue a Change Order for signatures of Owner, Architect, Construction Manager and Contractor .

1.7 CONSTRUCTION CHANGE DIRECTIVE

- A. Construction Change Directive: Architect may issue a Construction Change Directive. Construction Change Directive instructs Contractor to proceed with a change in the Work, for subsequent inclusion in a Change Order.
 - 1. Construction Change Directive contains a description of change in the Work. It also designates method to be followed to determine change in the Contract Sum or the Contract Time.
- B. Documentation: Maintain detailed records on a time and material basis of work required by the Construction Change Directive.
 - 1. After completion of change, submit an itemized account and supporting data necessary to substantiate cost and time adjustments to the Contract.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 01 26 00

SECTION 01 29 00 - PAYMENT PROCEDURES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes administrative and procedural requirements necessary to prepare and process Applications for Payment.

1.3 DEFINITIONS

- A. Schedule of Values: A statement furnished by Contractor allocating portions of the Contract Sum to various portions of the Work and used as the basis for reviewing Contractor's Applications for Payment.
- B. AIA Document: Current, authorized editions of standard forms issued by the American Institute of Architects (AIA).
 - 1. Where AIA Documents are identified in this Section, the use of facsimiles of AIA documents or non-AIA documents is prohibited.

1.4 SCHEDULE OF VALUES

- A. Submit the schedule of values to Architect through Construction Manager at earliest possible date, but no later than thirty (30) days before the date scheduled for submittal of initial Applications for Payment.
- B. Format and Content:
 - 1. Use AIA Document G703 as form for schedule of values, with entries typewritten. Unless noted otherwise, provide the following:
 - a. Subschedules for Separate Elements of Work: Provide subschedules separately listing additions from alterations.
 - 1) List allowances on subschedules only where exclusively part of separate element of work.
 - b. Summary Schedule: Provide summary schedule listing each subschedule and its total and each allowance; total of all subschedules and allowances shall equal the Contract Sum.

2. Identification: Include the following Project identification on the schedule of values:
 - a. Project name and location.
 - b. Architect's project number.
 - c. Contractor's name and address.
 - d. Date of submittal.
3. Use the Project Manual table of contents as a guide to establish line items for the schedule of values. Provide line item(s) for each Specification Section.
4. Arrange the schedule of values to indicate the following for each item listed, completing columns A, B and C of AIA Document G703:
 - a. Column A: Indicate Specification Section number.
 - b. Column B: Indicate Specification Section title, and provide separate line items for labor and materials.
 - c. Column C: Provide separate line item dollar values for labor and materials. Round amounts to nearest whole dollar.
5. Provide a breakdown of the Contract Sum in enough detail to facilitate continued evaluation of Applications for Payment. In addition to line items for each applicable specification section, include the following:
 - a. Multiple line items for amounts in excess of five percent of Contract Sum, broken out to subcomponents equaling not greater than five percent each.
 - b. Project Startup:
 - 1) Include separate line items for project startup requirements, including the following separate line items:
 - a) Insurance, based on actual invoice amount.
 - b) Performance and payment bonds, based on actual invoice amount.
 - c) Mobilization.
 - d) Temporary facilities and controls.
 - c. Allowances: Provide a separate line item in the schedule of values for each allowance.
 - d. Submittals: Include a minimum of One percent of Contract Sum.
 - e. Supervision: Include a minimum of Three percent of Contract Sum.
 - f. Safety and Field Reports: Include a minimum of One percent of Contract Sum.
 - g. Coordination Drawings: Provide a separate line item in the schedule of values for Coordination Drawings. Include a minimum of three percent of the Contract Sum.
 - h. Meetings: Provide a separate line item in the schedule of values for Contractor attendance at meetings. Include a minimum of Two percentage of Contract Sum.

- i. Wood Blocking: Provide a separate line item in the schedule of values for wood blocking.
 - j. Punch List: Two percent of Contract Sum.
 - k. Project Closeout:
 - 1) Include separate line items for project closeout requirements, as follows:
 - a) Demobilization.
 - b) Warranties.
 - c) Final cleaning.
 - d) Operation and maintenance manuals.
 - e) Project record documents.
 - f) Demonstration and training.
 - 2) The total value of all project closeout line items shall equal to not less than the following:
 - a) Three percent of the Contract Sum.
6. Each item in the schedule of values shall be complete. Include total cost and proportionate share of general overhead and profit for each item.

1.5 APPLICATIONS FOR PAYMENT

- A. Each Application for Payment following the initial Application for Payment shall be consistent with previous applications as certified by Architect and Construction Manager.
- B. Payment Application Times: The date for each progress payment is indicated in the Agreement between Owner and Contractor. The period of construction work covered by each Application for Payment is the period indicated in the Agreement.
 - 1. Submit draft copy of Application for Payment **seven** days prior to due date for review by Construction Manager.
- C. Application for Payment Forms: Use AIA Document G732 and AIA Document G703 as form for Applications for Payment.
- D. Application Preparation: Complete every entry on form. Notarize and execute by a person authorized to sign legal documents on behalf of Contractor. Construction Manager will return incomplete applications without action.
 - 1. Entries shall match data on the schedule of values.
 - 2. Include amounts for work completed following previous Application for Payment, whether or not payment has been received.
 - 3. Include amounts of fully-executed Change Orders and Construction Change Directives issued before last day of construction period covered by application.

- E. **Stored Materials:** Include in Application for Payment amounts applied for materials or equipment purchased or fabricated and stored, but not yet installed. Differentiate between items stored on-site and items stored off-site.
1. Enter in column F (Materials Presently Stored) of AIA Document G703 the value of materials presently stored for which payment is sought. Recalculate the total of the column at the end of each pay period. This value covers both materials newly stored for which payment is sought and materials previously stored which are not yet incorporated into the Project. Payment by the Owner for stored materials does not result in a deduction from this column. Only as materials are incorporated into the Project is their value deducted from this column and incorporated into column E (Work Completed--This Period.).
 2. Provide certificate of insurance, evidence of transfer of title to Owner, and consent of surety to payment, for stored materials.
 3. Provide supporting documentation that verifies amount requested, such as paid invoices. Match amount requested with amounts indicated on documentation; do not include overhead and profit on stored materials.
- F. **Transmittal:** Submit three signed and notarized original copies of each Application for Payment to Construction Manager.
- G. **Initial Application for Payment:** Administrative actions and submittals that must precede or coincide with submittal of first Application for Payment include the following:
1. List of subcontractors.
 2. Schedule of values.
 3. Contractor's construction schedule.
 4. Certificates of insurance and insurance policies.
 5. Performance and payment bonds.
- H. **Final Payment Application:** Submit final Application for Payment with releases and supporting documentation not previously submitted and accepted, including, but not limited to, two originals and two copies each of the following:
1. AIA Document G706, "Contractor's Affidavit of Payment of Debts and Claims."
 2. AIA Document G706A, "Contractor's Affidavit of Release of Liens."
 3. AIA Document G707, "Consent of Surety to Final Payment."

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

Attachment: Stored Materials Invoicing Documentation

END OF SECTION 01 29 00



TETRA TECH
ARCHITECTS & ENGINEERS

Stored Materials Invoicing
Documentation

Project: _____

Project No.: _____ **Contract Type:** _____

Contractor: _____ **Subcontractor:** _____

Reason for Request:

Application for Payment No.: _____ **Date:** _____

1. Material Identification

Description:

Quantity:

_____	_____
_____	_____
_____	_____
_____	_____
_____	_____

Provide Specific Location of Materials Stored:

2. Material Value \$ _____

☐ Attach an Invoice or Quantified Statement of Value.

3. Certificate of Insurance

☐ Attach a Certificate of Insurance for the above specified materials. Certificate shall name _____
(Name of District)
as a loss payee with respect to the specified materials.

4. Transfer of Title

The Contractor hereby agrees to transfer complete ownership of all listed materials to _____
(Name of District)
at the time payment is made to Contractor for the above referenced Application for Payment. The Contractor remains responsible for all contractual requirements for the above listed materials including complete installation and providing all warranties.

Signed

Date

SECTION 01 31 00 - PROJECT MANAGEMENT AND COORDINATION

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes administrative provisions for coordinating construction operations on Project including, but not limited to, the following:
 - 1. General coordination procedures.
 - 2. Digital data files.
 - 3. Coordination drawings.
 - 4. Owner's Project Representative activities.
 - 5. Electronic form procedures.
 - 6. Requests for Information (RFIs).
 - 7. Project meetings.

1.3 COORDINATION PROCEDURES

- A. Coordination: Coordinate construction operations included in different Sections of the Specifications to ensure efficient and orderly installation of each part of the Work. Coordinate construction operations, included in different Sections, which depend on each other for proper installation, connection, and operation. Each contractor shall coordinate its construction operations with those of other contractors and entities to ensure efficient and orderly installation of each part of the Work.
 - 1. Schedule construction operations in sequence required to obtain the best results where installation of one part of the Work depends on installation of other components.
 - 2. Coordinate installation of different components with other contractors to ensure maximum performance and accessibility for required maintenance, service, and repair.
 - 3. Make adequate provisions to accommodate items scheduled for later installation.
- B. Administrative Procedures: Coordinate scheduling and timing of required administrative procedures with other construction activities and activities of other contractors to avoid conflicts and to ensure orderly progress of the Work. Such administrative activities include, but are not limited to, the following:
 - 1. Preparation of Contractor's construction schedule.
 - 2. Installation and removal of temporary facilities and controls.
 - 3. Project meetings.
 - 4. Project closeout activities.

- C. Conservation: Coordinate construction activities to ensure that operations are carried out with consideration given to conservation of energy, water, and materials. Coordinate use of temporary utilities to minimize waste.

1.4 DIGITAL DATA FILES

- A. Architect's Digital Data Files: Upon request, and at Architect's sole discretion, electronic copies of the Contract Drawings may be provided by Architect for Contractor's use in preparing submittals.
 - 1. Architect may furnish Contractor digital data drawing files of the Contract Drawings for use in preparing Shop Drawings.
 - a. Architect makes no representations as to the accuracy or completeness of digital data drawing files as they relate to the Contract Drawings.
 - b. Format: The Contract Drawings may be available in AutoCAD and .pdf formats.
 - 1) Architect's charge for drawings in AutoCAD format: \$50 per drawing.
 - 2) Architect's charge for drawings in .pdf format: \$50 per request.
 - c. Contractor shall fill out and submit a Request for Electronic Drawing Files form included in Project Manual for any drawing files.
 - d. Contractor shall also execute a Terms of Electronic File Transfer (TOFT) included in Project Manual for any drawing files furnished in AutoCAD format.
 - e. The following drawings may be furnished for the appropriate discipline:
 - 1) Site base file drawings.
 - 2) Floor plans.
 - 3) Reflected ceiling plans.

1.5 PHOTOS

- A. Photos submitted by the Contractor for any purpose related to the project must be submitted in JPEG format.

1.6 COORDINATION DRAWINGS

- A. Each Contractor:
 - 1. Participate in the Coordination Drawing process as required to ensure work is coordinated with associated Contractors to fulfill the scope and schedule of the project. Contractors with work in areas where more than one Contractor has Contract Work must participate in coordination process for that area of work.

2. Architect will furnish Contractor with digital media copies of architectural, structural, mechanical, plumbing, and electrical base information, not including drawing sheets or details, at no charge, upon providing Architect with a fully-executed indemnification agreement.
3. At an initial coordination meeting scheduled by the Construction Manager and Architect in accordance with schedule defined in Division 01 Section Single Prime Summary of Work coordinate the schedule of the creation and revision of Coordination Drawings with the Architect, Construction Manager, Owner, and involved Contractors as required to meet the construction schedule.
4. Revise Coordination Drawings identifying work of applicable Contract that requires coordination with building systems or that presents potential interference with existing construction or construction provided by another Contractor. Examples of these components and work include (but are not limited to):
 - a. Systems located above ceilings or integrated into ceiling system such as ducts, piping, lighting, cable trays, electrical conduits, joist cross bracing, structure, supports, fire protection systems, diffusers, grilles, access doors, etc.
 - b. Components of systems installed on roofs requiring roof penetrations, structural support, lightning protection, etc.
 - c. Components suspended or otherwise inside spaces such as gymnasium backstops, light fixtures, ducts, gymnasium dividers, web spaces of trusses with duct/pipe, etc.
 - d. Clearances required for service access or by codes. Show service access locations including brief note such as “service access to filters”.
 - e. Equipment located adjacent to building that may need coordination with landscaping such as dust collectors, transformers, gas metering stations, chillers and condensing units, pads, louvers, etc.
5. Resolution of Conflicts and Interferences:
 - a. Schedule additional coordination meetings through Construction Manager with Architect, Owner, and other Contractors and attend additional coordination meetings as required to fully resolve conflicts and complete process.
 - b. Review draft revisions of respective trades and Owner at subsequent coordination meetings with involved parties. Resolve conflicts and interferences at these meetings.
 - c. Reposition proposed locations of components and equipment in applicable Contracts as required to resolve conflicts and address Owner’s serviceability concerns after review of Coordination Drawings. For exposed work, adjust and coordinate configuration of components to achieve aesthetics consistent with the scope of the Project without increase in Contract Sum.

- d. Notify Construction Manager, Architect, Owner's Representative, and affected Contractors in case of unresolved interferences or conflicts prior to installation of construction. Schedule meetings and take other measures to resolve interferences or conflicts and revise applicable Coordination Drawings as required. Re-process revised Coordination Drawings in accordance with "Processing of Coordination Drawings" below to ensure all Contractors are aware of revisions in Coordination Drawings.
 - e. When all conflicts have been resolved on each complete Coordination Drawing, each applicable Contractor shall digitally sign and date the drawings, and deliver to the Mechanical Contractor for additional distribution. A copy of the signed originals will be stored in the Construction Manager's jobsite offices for reference for the duration of the construction.
 - f. Each Contractor will be provided with a copy of each coordination drawing and may transcribe additional information from the copies stored in the Construction Manager's jobsite offices.
6. Do not proceed with work in Contract in each area until agreement is reached with all Contractors and the Construction Manager, Architect and Owner on exact arrangements for each room or area, unless otherwise directed by the Construction Manager, Architect or Owner.
- a. If Contractor proceeds prior to resolving conflicts and receiving above agreement or direction and conflicts ensue as a result, Contractor must modify installed construction as required to permit other Contractors to proceed with coordinated installation at no change in Contract Sum.

B. Mechanical Scope:

- 1. In accordance with the Coordination Drawing creation schedule agreed to as described above, prepare and distribute Coordination Drawings as specified in the Division 23 Sections "Common Work Results for HVAC" and "Ductwork", for all areas with any construction work, additions and alterations, including indoor areas and rooms, roofs, and near building areas with mechanical equipment. Consider construction of other Contracts as shown in Contract Documents to avoid conflicts. Prepare and revise the Coordination Drawings in the order and within the schedule agreed upon.
- 2. Coordinate the scheduling of coordination meetings with the project schedule Construction Manager, Architect, Owner's representative, involved Contractors, and Owner. Schedule the meetings at the agreed upon schedule.
- 3. Deliver two prints and one electronic file in format as required elsewhere and as agreed to at the initial coordination meeting, of each Coordination Drawing simultaneously to Construction Manager, Architect, Owner, and each Contractor listed below and obtain written dated receipts from other contractors. Include additional print copy and electronic copy to Electrical Contractor, to become "Complete Coordination Drawing" for subsequent distribution and complete final coordination documentation as described below. Submit copy of receipts to Architect and Construction Manager.

4. Duplicate and deliver final complete drawings as required by Division 23 Section "Ductwork."

C. Other Scopes:

1. Obtain Coordination Drawings and prepare draft revisions to Coordination Drawings showing applicable work of respective Contract and indicating perceived conflicts, proposed resolution of conflicts with existing conditions and construction of other Contracts as shown in Coordination Drawings.
2. Revise the Coordination Drawings in the order and within the schedule agreed upon.
3. Obtain Complete Coordination Drawing prints and revise showing components and work of applicable Contract including resolution of conflicts with construction of other Contracts as agreed to and as shown on revised draft Coordination Drawings.
4. Processing of Coordination Drawings: Receive, revise, and deliver Complete Coordination Drawings initially prepared showing Mechanical Scope according to the following sequence as applicable to Project.
5. GC 1A Contractor: Obtain written dated receipt from subsequent recipient of Complete Coordination Drawings and submit copy of receipts to Architect and Construction Manager:

1.7 OWNER'S PROJECT REPRESENTATIVE ACTIVITIES

A. Project Representative shall:

1. Serve as liaison between Architect, Contractors and Owner.
2. Perform on-site observations of the progress and quality of the Work as may be reasonably necessary to assist the Architect determine, in general, if the Work is being performed in a manner indicating that the Work when completed will be in conformance with the Contract Documents. Notify the Architect if, in the Project Representative's opinion, Work does not conform to the Contract Documents or requires special inspection or testing.
3. Monitor the Contractor's construction schedules on an ongoing basis and alert the Architect to conditions that may lead to delays in completion of the Work.
4. Coordinate shared access to work areas.
5. Coordinate and issue written approvals for acceptable interruptions of utilities and potentially disruptive activities.
6. Receive and review suggestions proposed by the Contractor, and submit them, together with recommendations, to the Architect.
7. Attend all meetings and report to the Architect on the proceedings.

8. Notify Architect when tests required by the Contract Documents and inspections by authorities having jurisdiction will be performed. Observe tests required by the Contract Documents and inspections by authorities having jurisdiction. Record and report to the Architect on test procedures, inspections, and results. Verify testing is performed in accordance with specified requirements and at appropriate times.
9. Maintain records at the construction site in an orderly manner, including correspondence, Contract Documents, Change Orders, Construction Change Directives, reports of meetings, Shop Drawings, Product Data and similar submittals; supplementary drawings, color schedules and requests for payment; and names, addresses telephone numbers, and email addresses of the Contractors, Subcontractors and principal material suppliers.
10. Maintain a daily log of activities at the site, including weather conditions, nature and location of Work being performed, verbal instructions and interpretations given to the Contractor, and specific observations. Record any occurrence or Work that might result in a claim for a change in Contract Sum or Contract Time. Maintain a list of visitors, their titles, and time and purpose of their visit.
11. Notify the Architect if any portion of the Work requiring Shop Drawings, Product Data or Samples is commenced before such submittals have been approved by the Architect. Receive and log Samples required at the site, notify the Architect when they are ready for examination, record the Architect's action and maintain custody of approved Samples.
12. Review the Contractor's record copy of the Drawings, Specifications, Addenda, Change Orders and other Modifications at intervals appropriate to the stage of construction and notify the Architect of any apparent failure by the Contractor to maintain up-to-date records.
13. Review Applications for Payment and forward to the Architect with recommendations for disposition.
14. Assist the Architect in conducting inspections to determine the date or dates of Substantial Completion and the date of final completion.
15. Assist the Architect in receipt and transmittal to the Owner of documentation required of the Contractor at completion of the Work.

B. Project Representative shall not:

1. Authorize deviations from the Contract Documents.
2. Approve submittals or substitute materials or equipment.
3. Personally conduct or participate in tests or third-party inspections.
4. Assume any of the responsibilities of the Contractor's superintendent or of Subcontractors.
5. Expedite the Work for the Contractor.

6. Have control over or charge of or be responsible for construction means, methods, techniques, sequences or procedures, or for safety precautions and programs in connection with the Work.
7. Authorize or suggest that the Owner occupy the Project in whole or in part.

1.8 ELECTRONIC PROCEDURES

- A. Use Submittal Exchange for the following processes:
 1. Submittals, refer to Division 01 “Submittal Procedures”.
 2. Request for Information (RFI).
 3. Architect’s Supplemental Instruction (ASI), refer to Division 01 Section “Contract Modification Procedures”.
 4. Proposal Request (PR), refer to Division 01 Section “Contract Modification Procedures”.
 5. Change Order (CO), refer to Division 01 Section “Contract Modification Procedures”.
 6. Contractor Quotes, refer to Division 01 Section “Contract Modification Procedures”.
 7. Allowance Access Authorization (AAA), refer to Division 01 Section “Contract Modification Procedures”.
 8. Payment Applications, refer to Division 01 Section “Payment Procedures”.
 9. Inspection Reports.
- B. Contractor and other parties granted access by the Architect to Submittal Exchange shall follow instructions issued by the Architect during the preconstruction conference.

1.9 REQUESTS FOR INFORMATION (RFIs)

- A. General: Immediately on discovery of the need for additional information or interpretation of the Contract Documents, Contractor shall prepare and submit an RFI in the form specified, via the electronic form procedures outlined.
 1. Coordinate and submit RFIs in a prompt manner to avoid delays in Contractor's work or work of others.
- B. Content of the RFI: Include a detailed description of item needing information or interpretation and the following:
 1. Project number.
 2. RFI number.
 3. Contract number and title.
 4. Name of Contractor.
 5. Name of Contractor’s contact person.
 6. Email address of Contractor’s contact person.
 7. RFI subject.

8. Question: Fully describe question or information requested. Include:
 - a. Specification Section number and title and related paragraphs, as appropriate.
 - b. Drawing number and detail references, as appropriate.
 - c. Field dimensions and conditions, as appropriate.
 - d. Contractor's suggested resolution. If Contractor's solution impacts the Contract Time or the Contract Sum, Contractor shall state impact in the RFI.
9. Attachments: Include sketches, descriptions, measurements, photos, Product Data, Shop Drawings, coordination drawings, and other information necessary to fully describe items needing interpretation.
 - a. Include dimensions, thicknesses, structural grid references, and details of affected materials, assemblies, and attachments on attached sketches.
- C. Architect's Action: Architect will review each RFI, determine action required, and respond. Allow reasonable time for Architect's response for each RFI.
 1. The following RFIs will be returned without action:
 - a. Requests for approval of submittals.
 - b. Requests for approval of substitutions.
 - c. Requests for coordination information already indicated in the Contract Documents.
 - d. Requests for adjustments in the Contract Time or the Contract Sum.
 - e. Requests for interpretation of Architect's actions on submittals.
 - f. Incomplete RFIs or inaccurately prepared RFIs.
 2. Architect's action may include a request for additional information.
 3. Architect's action on RFIs that may result in a change to the Contract Time or the Contract Sum may be eligible for Contractor to submit Change Proposal according to Division 01 Section "Contract Modification Procedures."
 - a. If Contractor believes the RFI response warrants change in the Contract Time or the Contract Sum, notify Architect and Construction Manager in writing within seven days of receipt of the RFI response.
- D. On receipt of Architect's action, immediately distribute the RFI response to affected parties. Review response and notify Architect and Construction Manager within seven days if Contractor disagrees with response.
- E. Electronic RFI Log: Architect will maintain a tabular log of RFIs organized by RFI number.

1.10 PROJECT MEETINGS

- A. Preconstruction Conference: Construction Manager will schedule and conduct a preconstruction conference before starting construction, at a time convenient to Owner, and Architect, but no later than 15 days after date of Notice of Award.

1. Attendees: Authorized representatives of Owner, Commissioning Authority, Construction Manager, Architect, and their consultants; Contractor and its superintendent, Sub-Contractors; and other concerned parties shall attend the conference. Participants at the conference shall be familiar with Project and authorized to conclude matters relating to the Work.
 2. Agenda: Discuss items of significance that could affect progress, including the following:
 - a. Designation of key personnel and their duties.
 - b. Lines of communications.
 - c. Bonds and insurance.
 - d. Subcontract list.
 - e. Schedule of values.
 - f. Payment request estimate.
 - g. Applications for Payment.
 - h. Contractor's construction schedule.
 - i. Submittals.
 - j. Electronic form procedures (RFIs, ASIs, PRs).
 - k. Procedures for processing Change Orders and Construction Change Directives.
 - l. Quality control.
 - m. Adjoining properties.
 - n. Project schedule.
 - o. Contractor review of Contract Documents, including Drawings and Specifications.
 - p. Project meetings.
 - q. Project closeout procedures.
 - r. Electronic drawings.
 - s. AIA and Word documents.
 3. Report: Construction Manager will prepare and distribute meeting report.
- B. Site Preconstruction Conference: Construction Manager will schedule and conduct a site preconstruction conference, at a time convenient to Owner, and Architect.
1. Attendees: Authorized representatives of Owner, Owner's testing agency, Construction Manager, Architect, and their consultants; Geotechnical Engineer of Record; Contractor and its superintendent; and other concerned parties shall attend the conference. Participants at the conference shall be familiar with Project and authorized to conclude matters relating to the Work.
 2. Agenda: Discuss items of significance, including the following:
 - a. Designation of key personnel and their duties.
 - b. Lines of communication.
 - c. Electronic form procedures (RFIs, ASIs, PRs).
 - d. Submittal procedures.
 - e. Subcontracts.
 - f. Construction schedule.
 - g. Turtle Education and Encounter Plans.
 - h. Temporary facilities and controls.
 - i. Use of premises.

- j. Permits.
 - k. Soil erosion and sediment control.
 - l. Tree protection.
 - m. Procedures for testing and inspecting.
 - n. Roles and responsibilities of each party.
 - o. Topsoil.
 - p. Seeding/sodding.
 - q. Planting.
 - r. Concrete.
 - s. Railings.
 - t. Staging removal.
3. Report: Construction Manager will prepare and distribute meeting report.
- C. Structural Preconstruction Conference: Construction Manager will schedule and conduct a structural preconstruction conference, at a time convenient to Owner, and Architect.
- 1. Attendees: Authorized representatives of Owner, Owner's testing agency, Architect, and their consultants; Geotechnical Engineer of Record; Contractor and its superintendent; and other concerned parties shall attend the conference. Participants at the conference shall be familiar with Project and authorized to conclude matters relating to the Work.
 - 2. Agenda: Discuss items of significance, including the following:
 - a. Procedures for testing and inspecting.
 - b. Submittals.
 - c. Testing, placing, curing and finishing structural concrete.
 - d. Hot/cold weather concrete construction.
 - e. Fabrication and erection of structural steel.
 - f. Attaching metal floor and roof deck, as applicable.
 - g. Procedures for constructing composite slabs, as applicable.
 - h. Procedures for unit masonry control joints, grouting, and workmanship.
 - i. Hot/cold weather masonry construction.
 - j. Cold formed metal framing.
 - k. Roles of each party regarding the above work items.
 - 3. Report: Construction Manager will prepare and distribute meeting report.
- D. Preinstallation Conferences: Conduct a preinstallation conference at Project site before each construction activity that requires coordination with other construction.
- 1. Review each Specification Section for requirements for preinstallation conferences.
 - a. No later than 15 days after date of Notice of Award, submit to Architect complete listing of preinstallation conferences to be held.
 - 2. Attendees: Installer and representatives of manufacturers and fabricators involved in or affected by the installation and its coordination or integration with other materials and installations that have preceded or will follow, shall attend the meeting. Advise Architect, Construction Manager, Commissioning Authority of scheduled meeting dates.

3. Agenda: Review progress of other construction activities and preparations for the particular activity under consideration, including requirements for the following:
 - a. Contract Documents.
 - b. Deliveries.
 - c. Submittals.
 - d. Review of mockups.
 - e. Time schedules.
 - f. Weather limitations.
 - g. Manufacturer's written instructions.
 - h. Warranty requirements.
 - i. Compatibility of materials.
 - j. Acceptability of substrates.
 - k. Temporary facilities and controls.
 - l. Space and access limitations.
 - m. Testing and inspecting requirements.
 - n. Installation procedures.
 - o. Coordination with other work.
 - p. Required performance results.
 - q. Protection of adjacent work.
 4. Record significant conference discussions, agreements, and disagreements, including required corrective measures and actions.
 5. Reporting: Distribute report of the meeting to each party present and to other parties requiring information.
 6. Do not proceed with installation if the conference cannot be successfully concluded. Initiate whatever actions are necessary to resolve impediments to performance of the Work and reconvene the conference at earliest feasible date.
- E. Slab Pre-Pour Conference: Construction Manager will schedule and conduct a slab pre-pour conference, at a time convenient to Owner, Construction Manager and Architect, but no later than seven days before the first slab pour.
1. Attendees: Authorized representatives of Owner, Owner's testing agency, Construction Manager, Architect, and their consultants; Contractor and its superintendent; and other concerned parties shall attend the conference. Participants at the conference shall be familiar with Project and authorized to conclude matters relating to the Work.
 2. Agenda: Discuss items of significance, including the following:
 - a. Schedule.
 - b. Procedures for testing and inspecting.
 - c. Procedures for sub-base preparation.
 - d. Concrete mix designs.
 - e. Concrete delivery.
 - f. Placing, curing, finishing, and protecting concrete.
 - g. Slab joints.
 - h. Slab flatness and levelness.

3. Report: Construction Manager will prepare and distribute meeting report.
- F. Progress Meetings: Construction Manager will conduct progress meetings at biweekly intervals, unless otherwise necessitated.
1. Attendees: In addition to representatives of Owner, Commissioning Authority, Construction Manager, and Architect, each contractor, subcontractor, supplier, and other entity concerned with current progress or involved in planning, coordination, or performance of future activities shall be represented at these meetings. All participants at the meeting shall be familiar with Project and authorized to conclude matters relating to the Work.
 2. Agenda: Review report of previous progress meeting. Review other items of significance that could affect progress. Include topics for discussion as appropriate to status of Project.
 - a. Review present and future needs of each entity present, including the following:
 - 1) Report of progress since previous meeting.
 - 2) Architect/Engineer discussion items.
 - 3) Status of ASIs, PRs, Change Orders.
 - 4) Status of submittals.
 - 5) Contractor's Construction Schedule: Review progress since the last meeting. Determine whether each activity is on time, ahead of schedule, or behind schedule, in relation to Contractor's construction schedule.
 - a) Determine how construction behind schedule will be expedited; secure commitments from parties involved to do so. Discuss whether schedule revisions are required to ensure that current and subsequent activities will be completed within the Contract Time.
 - b) Review schedule for next period.
 - 6) Date of Substantial Completion.
 - 7) Status of RFIs.
 - 8) Owner discussion items.
 - 9) Discussion items for each Contract.
 - 10) General and administrative items, including such items as:
 - a) Project documentation.
 - b) Prohibitions.
 - c) Identification cards.
 - d) Separation.

- e) Egress.
- f) Conservation.

- 3. Report: Construction Manager will prepare and distribute the meeting report to each party present and to parties requiring information.

G. Health and Safety Committee Meetings: Owner will conduct health and safety committee meetings as needed, in accordance with requirements of Regulations of the Commissioner of Education, Part 155 (8 NYCRR 155), Section 155.5(c)(2).

- 1. Attendees: In addition to representatives of the Owner and Construction Manager, each contractor shall be represented at these meetings. All participants at the meeting shall be familiar with Project and authorized to conclude matters relating to the Work.
- 2. Agenda: Discuss items of significance, including the following:
 - a. Health and safety matters related to the construction project.
- 3. Report: Owner will prepare and distribute meeting report to each party present and to parties requiring information.

H. Project Closeout Conference: Construction Manager will schedule and conduct a project closeout conference, at a time convenient to Owner, and Architect, but no later than 90 days prior to each scheduled date of Substantial Completion.

- 1. Attendees: Authorized representatives of Owner, Commissioning Authority, Construction Manager, Architect, and their consultants; Contractor and its superintendent; and other concerned parties shall attend the meeting. Participants at the meeting shall be familiar with Project and authorized to conclude matters relating to the Work.
- 2. Agenda: Discuss items of significance that could affect or delay Project closeout, including the following:
 - a. Preparation of record documents.
 - b. Procedures required prior to inspection for Substantial Completion and for final inspection for acceptance.
 - c. Submittal of written warranties.
 - d. Requirements for preparing operations and maintenance data.
 - e. Requirements for delivery of material samples, attic stock, and spare parts.
 - f. Requirements for demonstration and training.
 - g. Owner's occupancy requirements.
 - h. Responsibility for removing temporary facilities and controls.
- 3. Report: Construction Manager will prepare and distribute meeting report.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

Attachment: Request for Electronic Drawing Files
Terms of Electronic File Transfer (TOFT)

END OF SECTION 01 31 00



TETRA TECH
ARCHITECTS & ENGINEERS

Cornell Business + Technology Park
10 Brown Road
Ithaca, New York 14850
Tel. (607) 277-7100
Fax (607) 277-1410

Request for Electronic Drawing Files – Business Office

Prime Contractor Name:

Prime Contractor Address:

Contact to Receive Invoice:

Project Name:

Project Number:

Project Manager:

Drawing Type: Some drawings may be only available as a PDF file and may NOT be available as an AutoCAD file.

☐ PDF Files (\$50 per request)

☐ AutoCAD type files (\$50 per file)

For PDF files:

List each Drawing # Requested – If requesting entire set note “All”.

For AutoCAD files:

Number of drawing files

List each Drawing # Requested

Contractor Signature _____



Cornell Business + Technology Park
10 Brown Road
Ithaca, New York 14850
Tel. (607) 277-7100
Fax (607) 277-1410

Terms of Electronic File Transfer (TOFT)

The purpose of this document is to establish the terms of use and liability related to the electronic transfer of files from Tetra Tech Engineers, Architects & Landscape Architects, P.C. d/b/a Tetra Tech Architects & Engineers (hereinafter "Tetra Tech") to the Recipient (designated below). This Agreement covers all electronic files transmitted to the Recipient, associated with the Project(s) listed below, that are not otherwise covered by a contractual agreement to provide such files.

Project(s) & Project #s: _____

Recipient of Electronic Files:

Company Name: _____
Company Address: _____

Terms of Electronic File Transfer:

1. The electronic files (Files) furnished by Tetra Tech to the person or entity receiving the Files (Recipient) are provided only for the convenience of the Recipient, and only for its sole use. RECIPIENT AGREES THAT, BY OPENING THE PACKAGE CONTAINING THE FILES, RECIPIENT SHALL BE BOUND BY AND SUBJECT TO THE TERMS OF THIS DISCLAIMER.
2. Recipient recognizes that the Files may not be adequate or appropriate for Recipient's needs. In the case of any defects in the Files or any discrepancies between the Files and the hardcopy of the Files bearing the seal of Tetra Tech's professional registrant (if applicable), the sealed hardcopy shall govern. Recipient accepts the Files on an "as-is" basis, with any and all faults. There are no express warranties made by Tetra Tech with respect to the Files, and any implied warranties are excluded.
3. WITHOUT LIMITING THE GENERALITY OF THE FOREGOING, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE EXCLUDED. Tetra Tech assumes no responsibility for the accuracy or completeness of the Files, and any use or reuse of such electronic data for any purpose shall be at the Recipient's sole risk.
4. Furthermore, in consideration of the use of the electronic data and the Files, Recipient agrees, to the fullest extent permitted by law, to defend (by legal counsel selected by Tetra Tech), indemnify, and hold Tetra Tech harmless from any and all claims, damages, losses, costs, and expenses, including attorney's fees and court costs (including the costs of any appeals) arising out of or resulting from Recipient's use, reuse, or use by others, regardless of whether such claims, damages, losses, costs, and expenses are caused in whole or in part by Tetra Tech. The duty to defend, indemnify, and hold Tetra Tech harmless shall apply regardless of whether such claims, damages, losses, costs, and expenses arise out of causes of action for tort, including negligence, contract, warranty, or strict liability.
5. The Recipient agrees to the following use restrictions of the electronic files:
 - a. The use of these files is limited only to the operation and maintenance of the above referenced project(s).
6. By signing below, the Recipient accepts full responsibility for the use of all electronic files received from and/or produced by Tetra Tech for the Project(s) listed above and any documents, instructions, or otherwise produced there from by the Recipient along with all Terms of Electronic Transfer indicated herein. A copy of this Agreement, executed by Tetra Tech, will be provided before or with the first electronic file transmittal.

Signature

Type or Print Name

Title

Date

SECTION 01 32 00 - CONSTRUCTION PROGRESS DOCUMENTATION

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes administrative and procedural requirements for documenting the progress of construction during performance of the Work, including the following:
 - 1. Contractor's construction schedule.
 - 2. Reports.

1.3 INFORMATIONAL SUBMITTALS

- A. Contractor's Construction Schedule: Initial schedule, of size required to display entire schedule for entire construction period. Follow format outlined in attachment at end of this Section.
- B. Site Condition Reports: Submit at time of discovery of differing conditions.
- C. Special Reports: Submit at time of unusual event.

1.4 COORDINATION

- A. Secure time commitments for performing critical elements of the Work from entities involved.
- B. Coordinate each construction activity in the network with other activities and schedule them in proper sequence.

1.5 CONTRACTOR'S CONSTRUCTION SCHEDULE, GENERAL

- A. Time Frame: Extend schedule from date established for commencement of the Work to date of final completion.
- B. Contract completion date shall not be changed by submission of a schedule that shows an early completion date, unless specifically authorized by Change Order.

1.6 CONTRACTOR'S CONSTRUCTION SCHEDULE (GANTT CHART)

- A. Gantt-Chart Schedule: Submit a comprehensive, horizontal, Gantt-chart-type, Contractor's construction schedule per requirements of Division 01 Section "Multiple Contract Project Summary – Project Schedule".
 - 1. Format: Refer to accompanying "Format for Construction Schedule".

- B. Preparation: Indicate each significant construction activity separately, by Specification Section, coordinated with the schedule of values. Provide line item(s) for each Specification Section.
- C. Schedule Updating: At monthly intervals, update schedule to reflect actual construction progress and activities.
- D. Distribution: Distribute copies of approved schedule to Architect, Construction Manager, Owner, separate contractors, testing and inspecting agencies, and other parties with a need-to-know schedule responsibility.
 - 1. When revisions are made, distribute updated schedules to the same parties.

1.7 REPORTS

- A. Site Condition Reports: Immediately on discovery of a difference between site conditions and the Contract Documents, prepare and submit a detailed report. Include a detailed description of the differing conditions, together with recommendations for changing the Contract Documents.
- B. Special Reports: When an event of an unusual and significant nature occurs at Project site, whether or not related directly to the Work, prepare and submit a special report. List chain of events, persons participating, response by Contractor's personnel, evaluation of results or effects, and similar pertinent information.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

Attachment: Format for Construction Schedule

END OF SECTION 01 32 00

FORMAT FOR CONSTRUCTION SCHEDULE

Technical drawing of a construction progress schedule form. The drawing includes dimensions and annotations for the form's layout.

Dimensions:

- Overall width: 17"
- Overall height: 11"
- Top margin: 1 1/2" TYP.
- Left margin: 7"
- Section number column width: 1 1/4" MIN.
- Description column width: 4"
- Date column width: 1" MIN.
- Contract start column width: 10"
- Completion column width: 1 1/2"

Form Layout:

- CONSTRUCTION PROGRESS SCHEDULE** (Title)
- PROJECT NAME** (Header)
- CONTRACT FOR:** (Header)
- CONTRACT START:** (Header)
- COMPLETION:** (Header)
- SECTION NUMBER** (Column Header)
- DESCRIPTION / ITEM** (Column Header)
- DATE** (Column Header)
- MONTH** (Column Header)
- LEGEND** (Section)
- prepared by** (Text)
- date** (Text)
- approved by** (Text)
- revision date** (Text)


Lettering Height: 1/8" MINIMUM

Format

Provide separate bar for each item in sequential order from beginning of Project to completion with the following information included for each item:

- Related Technical Specification number.
Distinct graphic delineation, indicating area of building where schedule item is located.
Shop drawing submittal date and required acceptance date.
Product procurement date and anticipated delivery date.
Projected start and completion dates for each item.

FORMAT FOR CONSTRUCTION SCHEDULE

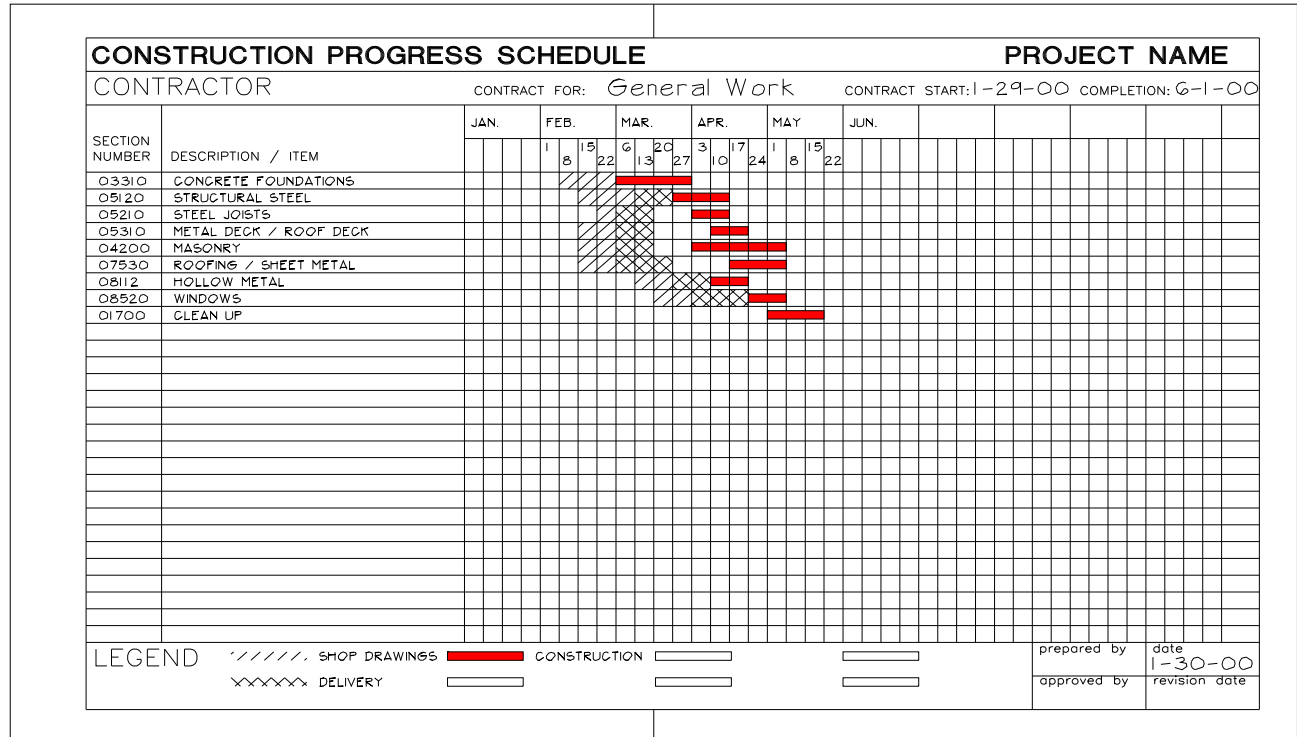

Sample

Provide separate bar for each item in sequential order from beginning of Project to completion with the following information included for each item:

- Related Technical Specification number.
Distinct graphic delineation, indicating area of building where schedule item is located.
Shop drawing submittal date and required acceptance date.
Product procurement date and anticipated delivery date.
Projected start and completion dates for each item.

SECTION 01 33 00 - SUBMITTAL PROCEDURES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes requirements for the administrative and procedural requirements for submitting Shop Drawings, Product Data, Samples, and other submittals.
 - 1. Process designated submittals for the Project electronically through designated Electronic Submittal System. PDF files must be opened, viewed, modified and printed using Adobe Acrobat PDF software to view reviewer comments/stamps.

1.3 DEFINITIONS

- A. Action Submittals: Written and graphic information and physical samples that require Architect's and Construction Manager's responsive action. Action submittals are those submittals indicated in individual Specification Sections as "action submittals."
- B. As-Specified Products: Products to be incorporated into Project as specified by manufacturer name and product designation and including all options in Part 2 of technical specifications, intended to be installed as specified in Part 3 of technical specifications, and from a product category specifically identified as eligible to be considered as an "as-specified product" in the Action Submittals Article in Part 1 of technical specifications.
- C. Informational Submittals: Written and graphic information and physical samples that do not require Architect's and Construction Manager's responsive action. Submittals may be rejected for not complying with requirements. Informational submittals are those submittals indicated in individual Specification Sections as "informational submittals."
- D. Portable Document Format (PDF): An open standard file format licensed by Adobe Systems used for representing documents in a device-independent and display resolution-independent fixed-layout document format.
- E. Electronic Submittal System: A method to transmit certain electronic submittals between the Contractor, Construction Manager, Architect, and Owner, using Submittal Exchange website service.
 - 1. For consistency, the standard file format will be PDF. Convert paper originals and other file formats to PDF prior to submission.
 - 2. In the event of system malfunction, process submittals in accordance with the Architect's instructions, until the system malfunction has been corrected.

3. For this Project, process the following submittal types through the designated electronic submittal system:
 - a. Product Data.
 - b. Sustainable Design Submittals.
 - c. Shop Drawings.
 - d. Product Schedules.
 - e. Qualification Data.
 - f. Certificates (Welding, Installer, Manufacturer, Product, and Material, as applicable).
 - g. Test Reports (Material, Product, Preconstruction, Compatibility, and Field, as applicable).
 - h. Research Reports.
 - i. Warranty (sample).
 - j. Design Data, including calculations.
 - k. Coordination Drawings.
 - l. Delegated-Design Services Certifications.
4. For Samples, provide electronic submittal of Sample cover sheet, identifying location and actual delivery date of Samples. Deliver Samples to location (Architect's office, Project site, etc.) as directed by the Architect.

1.4 COLOR SCHEDULE

- A. Color Schedule: Within 30 days after date of Notice of Award, submit a complete list of proposed manufacturers and complete product designations (i.e. model, grade, series, product line, etc.) for each item requiring color selection by Architect.

1.5 SUBMITTAL ADMINISTRATIVE REQUIREMENTS

- A. Coordination: Coordinate preparation and processing of submittals with performance of construction activities.
 1. Coordinate each submittal with fabrication, purchasing, testing, delivery, other submittals, and related activities that require sequential activity.
 2. Where indicated, submit all submittal items required for each Specification Section concurrently.
 3. Coordinate transmittal of different types of submittals for related parts of the Work so processing will not be delayed because of need to review submittals concurrently for coordination.
 - a. Architect and Construction Manager reserve the right to withhold action on a submittal requiring coordination with other submittals until related submittals are received.

- B. Processing Time: Allow sufficient time for submittal review, including time for resubmittals. No extension of the Contract Time will be authorized because of failure to transmit submittals enough in advance of the Work to permit processing, including resubmittals.
- C. Electronic Submittals: Identify and incorporate information in each electronic submittal file as follows:
1. Include a cover sheet on each submittal item for identification. Do not combine different submittals under same cover sheet; only one submittal is to be provided per email.
 - a. Cover Sheet Form: Use PDF version of sample form included in Project Manual. Complete each item on form, sign and date. Architect will furnish PDF version of sample form.
 2. Name submittal file as directed by Architect.
 3. Transmit each submittal via Electronic Submittal System.
 4. Transmit each submittal to Architect using the Submittal Exchange website www.submittalexchange.com.
- D. Resubmittals: Make resubmittals in same form and, for non-electronic submittals, in the same number of copies as initial submittal.
1. Note date and content of revision in label or title block and clearly indicate extent of revision.
 2. Resubmit submittals until they are marked with approval notation from Architect and Construction Manager.
 3. Refer to the General Conditions for provisions allowing Owner to obtain reimbursement from the Contractor for amounts paid to the Architect for evaluation of certain resubmittals.
- E. Distribution: Furnish copies of final submittals to manufacturers, subcontractors, suppliers, fabricators, installers, authorities having jurisdiction, and others as necessary for performance of construction activities.
- F. Use for Construction: Retain complete electronic copies of submittals on Project site during Construction. Also maintain one complete set of hard paper copies of all approved submittals on Project site during Construction. Use only final action submittals that are marked with approval notation from Architect and Construction Manager.
- G. **Use of As-Specified Verification Form:** The As-Specified Verification Form is intended to reduce certain action submittal paperwork for select products to be incorporated into the Work. If product to be incorporated into Project is specified by name and product designation in Part 2 of the Technical Specification Section and is from a product category specifically identified as eligible to be considered as an “as-specified product” in the Action Submittals Article in Part 1 of technical specifications, submit “**As-Specified Verification Form**” attached to this Specification Section.

1.6 ENVIRONMENTAL REQUIREMENTS

- A. All products provided for use in construction of this Project are to be free of asbestos. Refer to Division 01 Section "Closeout Procedures" for certification required to be provided. The Owner may provide random testing of installed products/ construction for asbestos content. Any Contractor-installed product found to contain asbestos shall be classified as defective work. Defective work shall be corrected by the Contractor as specified in the General Conditions.

1.7 SUBMITTAL PROCEDURES, GENERAL

- A. General Submittal Procedure Requirements: Prepare and submit submittals required by individual Specification Sections. Types of submittals are indicated in individual Specification Sections.

1.8 ELECTRONIC SUBMITTAL REQUIREMENTS

- A. Use the designated electronic submittal system for submittals in this Article.
 - 1. Review and apply electronic stamp certifying that the submittal complies with the requirements of the Contract Documents including verification of manufacturer / product, dimensions and coordination of information with other parts of the work.
 - 2. Transmit each submittal to Construction Manager and Architect using the Submittal Exchange website, www.submittalexchange.com.
 - 3. For Action Submittals, Architect / Engineer and Construction Manager review comments will be made available on the Submittal Exchange website for downloading. Contractor will receive email notice of completed review.
 - 4. Distribution of reviewed submittals to subcontractors and suppliers is the responsibility of the Contractor.
 - 5. After award of contract, training will be provided by Submittal Exchange regarding use of website and PDF submittals. Contact Submittal Exchange at 1-800-714-0024.
 - 6. Internet Service and Equipment Requirements:
 - a. Email address and Internet access at Contractor's main office.
 - b. Adobe Acrobat (www.adobe.com), for applying electronic stamps and comments.
 - 7. If the Contractor is responsible for delays in the final completion and closeout beyond the contract specified time, the Owner is entitled to reimbursement from the Contractor for amounts paid by the Owner to subsequently extend the Electronic Submittal System (Submittal Exchange).
 - 8. Retain one electronic copy of all approved submittals, as part of the project records required at Project Closeout.
 - 9. Tetra Tech Architects and Engineers will be the Submittal Exchange Project Leader and Subscriber.

- B. **Product Data:** Collect information into a single submittal for each element of construction and type of product or equipment.
1. Mark submittal to show which products and options are applicable.
 2. Include the following information, as applicable:
 - a. Manufacturer's catalog cuts.
 - b. Statement of compliance with specified referenced standards.
 - c. Testing by recognized testing agency.
 3. For equipment, include the following in addition to the above, as applicable:
 - a. Printed performance curves.
 - b. Clearances required to other construction, if not indicated on accompanying Shop Drawings.
- C. **As-Specified Submittals:** Complete the **“As-Specified Verification Form”**.
1. Refer to the Action Submittals Article of technical specification sections. If the product to be incorporated into the Project is an “as-specified product” as defined in this Section, then submit **“As-Specified Verification Form”** in lieu of Product Data, otherwise submit full Product Data.
 2. Do not use **“As-Specified Verification Form”** unless specifically indicated in technical specification.
 3. The **“As-Specified Verification Form”** alone serves as the submittal for the specific product and no additional action submittal data is due at the time of the submittal. The full specific product technical data, however, is required to be included in the Operation and Maintenance Manual. Comply with requirements specified in Division 01 Section “Operation and Maintenance Data”.
- D. **Shop Drawings:** Prepare Project-specific information, drawn accurately to scale. Do not base Shop Drawings on reproductions of the Contract Documents or standard printed data, unless submittal based on Architect's digital data drawing files is otherwise permitted.
1. **Preparation:** Fully illustrate requirements in the Contract Documents. Include the following information, as applicable:
 - a. Identification of products.
 - b. Schedules.
 - c. Compliance with specified standards.
 - d. Notation of dimensions established by field measurement.
 - e. Relationship and attachment to adjoining construction clearly indicated.
 - f. Seal and signature of professional engineer if specified.
- E. **Product Schedule:** As required in individual Specification Sections, prepare a written summary indicating types of products required for the Work and their intended location. Include the following information in tabular form:

1. Type of product. Include unique identifier for each product indicated in the Contract Documents or assigned by Contractor if none is indicated.
 2. Manufacturer and product name, and model number if applicable.
 3. Number and name of room or space.
- F. Qualification Data: Prepare written information that demonstrates capabilities and experience of firm or person. Include lists of completed projects with project names and addresses, contact information of architects and owners, and other information specified.
- G. Certificates:
1. Welding Certificates: Prepare written certification that welding procedures and personnel comply with requirements in the Contract Documents. Submit record of Welding Procedure Specification and Procedure Qualification Record on AWS or ASME forms as applicable. Include names of firms and personnel certified.
 2. Installer Certificates: Submit written statements on manufacturer's letterhead certifying that Installer complies with requirements in the Contract Documents and, where required, is authorized by manufacturer for this specific Project.
 3. Manufacturer Certificates: Submit written statements on manufacturer's letterhead certifying that manufacturer complies with requirements in the Contract Documents. Include evidence of manufacturing experience where required.
 4. Product Certificates: Submit written statements on manufacturer's letterhead certifying that product complies with requirements in the Contract Documents.
 5. Material Certificates: Submit written statements on manufacturer's letterhead certifying that material complies with requirements in the Contract Documents.
- H. Test Reports:
1. Material Test Reports: Submit reports written by a qualified testing agency, on testing agency's standard form, indicating and interpreting test results of material for compliance with requirements in the Contract Documents.
 2. Product Test Reports: Submit written reports indicating that current product produced by manufacturer complies with requirements in the Contract Documents. Base reports on evaluation of tests performed by manufacturer and witnessed by a qualified testing agency, or on comprehensive tests performed by a qualified testing agency.
 3. Preconstruction Test Reports: Submit reports written by a qualified testing agency, on testing agency's standard form, indicating and interpreting results of tests performed before installation of product, for compliance with performance requirements in the Contract Documents.
 4. Compatibility Test Reports: Submit reports written by a qualified testing agency, on testing agency's standard form, indicating and interpreting results of compatibility tests performed before installation of product. Include written recommendations for primers and substrate preparation needed for adhesion.

5. Field Test Reports: Submit written reports indicating and interpreting results of field tests performed either during installation of product or after product is installed in its final location, for compliance with requirements in the Contract Documents.
- I. Research Reports: Submit written evidence, from a model code organization acceptable to authorities having jurisdiction, that product complies with building code in effect for Project.
- J. Warranty: Submit sample warranties as required in individual Specification Sections.
- K. Design Data: Prepare and submit written and graphic information, including, but not limited to, performance and design criteria, list of applicable codes and regulations, and calculations. Include list of assumptions and other performance and design criteria and a summary of loads. Include load diagrams if applicable. Provide name and version of software, if any, used for calculations. Include page numbers.
- L. Coordination Drawing Submittals: Comply with requirements specified in Division 01 Section "Project Management and Coordination."
- M. Delegated-Design Submittal: In addition to Shop Drawings, Product Data, and other required submittals, submit certificate, signed and sealed by the responsible professional engineer, for each product and system specifically assigned to Contractor to be designed or certified by a professional engineer, indicating compliance with building code in effect for Project.
 1. Indicate that products and systems comply with performance and design criteria in the Contract Documents. Include list of codes, loads, and other factors used in performing these services.

1.9 SUBMITTAL REQUIREMENTS FOR COMMISSIONING

- A. Provide the Commissioning Authority with a copy of all submittals for equipment to be commissioned.
 1. The Commissioning Authority will review and approve Contractor submittals applicable to systems being commissioned for compliance with commissioning needs, concurrent with the Architect's review.
- B. Data for Commissioning:
 1. Refer to the technical Division Commissioning Section for listing of systems to be commissioned. Provide specific information needed about each piece of commissioned equipment or system in submittal as required to facilitate commissioning. Typically this will include detailed manufacturer installation and start-up, operating, troubleshooting and maintenance procedures, full details of any Owner-contracted tests, fan and pump curves, full factory testing reports, if any, and full warranty information, including all responsibilities of the Owner to keep the warranty in force clearly identified. In addition, the installation and checkout materials that are actually shipped inside the equipment and the actual field checkout sheet forms to be used by the factory or field technicians for pre-functional testing shall be submitted to the Commissioning Authority.

2. The Commissioning Authority may request further documentation necessary for the commissioning process. This data request may be made prior to submittals, during review, or subsequently as additional requirements become evident.
 3. Much of this information is contained in the regular Operation and Maintenance (O&M) manual submittals normally submitted in the Project. For commissioned projects, this information is typically required prior to the regular formal O&M manual submittals and will be duplicated therein, facilitating the later creation of the O&M manual.
- C. Contractor's responsibility for deviations in submittals from requirements of the Contract Documents is not relieved by the Commissioning Authority's review.

1.10 NON-ELECTRONIC SUBMITTAL REQUIREMENTS

- A. Samples: Submit Samples for review of kind, color, pattern, and texture for a check of these characteristics with other elements and for a comparison of these characteristics between submittal and actual component as delivered and installed.
1. Transmit Samples that contain multiple, related components such as accessories together in one submittal package.
 2. Identification: Attach label on unexposed side of Samples that includes the following:
 - a. Generic description of Sample.
 - b. Product name and name of manufacturer.
 - c. Sample source.
 - d. Number and title of applicable Specification Section.
 3. Disposition: Maintain sets of approved Samples at Project site, available for quality-control comparisons throughout the course of construction activity. Sample sets may be used to determine final acceptance of construction associated with each set.
 4. Samples for Initial Selection: Submit manufacturer's color charts consisting of units or sections of units showing the full range of colors, textures, and patterns available.
 - a. Number of Samples: Submit two full sets of available choices where color, pattern, texture, or similar characteristics are required to be selected from manufacturer's product line. Deliver one set to Architect's office, deliver the other set to the construction trailer at the job site.
 5. Samples for Verification: Submit full-size units or Samples of size indicated, prepared from same material to be used for the Work, cured and finished in manner specified, and physically identical with material or product proposed for use, and that show full range of color and texture variations expected. Samples include, but are not limited to, the following: partial sections of manufactured or fabricated components; small cuts or containers of materials; complete units of repetitively used materials; swatches showing color, texture, and pattern; color range sets; and components used for independent testing and inspection.

- a. Number of Samples: Submit two sets of Samples. Deliver one set to Architect's office, deliver the other set to the construction trailer at the job site.
 - 1) If variation in color, pattern, texture, or other characteristic is inherent in material or product represented by a Sample, submit at least three sets of paired units that show approximate limits of variations.
- B. Subcontract List: Prepare a written summary identifying individuals or firms proposed for each portion of the Work, including those who are to furnish products or equipment fabricated to a special design. Include the following information in tabular form:
 - 1. Name, address, telephone number, and email address of entity performing subcontract or supplying products.
 - 2. Number and title of related Specification Section(s) covered by subcontract.
 - 3. Submit subcontract list in the following format:
 - a. Number of Copies: Four paper copies of subcontractor list, unless otherwise indicated. Architect will return one copy.
- C. List of Key Personnel Names: No later than 15 days after date of Notice of Award, submit a list of key personnel assignments, including superintendent and other personnel in attendance at Project site.
 - 1. Identify individuals and their duties and responsibilities; list addresses and telephone numbers, including emergency, office, and cellular telephone numbers and email addresses.
 - a. Number of Copies: Four paper copies of key personnel list, unless otherwise indicated.

1.11 MISCELLANEOUS SUBMITTAL REQUIREMENTS

- A. Closeout Submittals and Maintenance Material Submittals: Comply with requirements specified in Division 01 Section "Closeout Procedures."
- B. Maintenance Data: Comply with requirements specified in Division 01 Section "Operation and Maintenance Data."

1.12 DELEGATED-DESIGN SERVICES

- A. Performance and Design Criteria: Where professional design services or certifications by a design professional are specifically required of Contractor by the Contract Documents, provide products and systems complying with specific performance and design criteria indicated.
 - 1. If criteria indicated are not sufficient to perform services or certification required, submit a written request for additional information to Architect.

1.13 CONTRACTOR'S REVIEW

- A. Action Submittals and Informational Submittals: Review each submittal and check for coordination with other Work of the Contract and for compliance with the Contract Documents. Note corrections and field dimensions. Identify any deviations from Contract Document requirements. Mark cover sheet with approval before submitting to Architect and Construction Manager.
 - 1. Sign and date statement certifying that submittal has been reviewed, checked, and approved for compliance with the Contract Documents.
 - 2. If using Adobe Acrobat to electronically sign the Submittal Cover Sheet do not use the Certify Sign, Time Stamp feature as this will lock the document for further editing.

1.14 ARCHITECT'S AND CONSTRUCTION MANAGER'S ACTION

- A. General: Architect and Construction Manager will not review submittals that do not bear Contractor's approval and will return them without action.
- B. Action Submittals: Architect and Construction Manager will review each submittal, make marks to indicate corrections or revisions required, and return it. Architect and Construction Manager will mark submittal appropriately to indicate action, as follows:
 - 1. Final Unrestricted Release: Where the submittal is marked "Approved," the Work covered by the submittal may proceed provided it complies with the Contract Documents. Final acceptance will depend on that compliance.
 - 2. Final-but-Restricted Release: Where the submittal is marked "Approved As Noted," the Work covered by the submittal may proceed provided it complies both with Architect's notations and corrections on the submittal and the Contract Documents. Final acceptance will depend on that compliance.
 - 3. Rejected: Where the submittal is marked "Rejected," do not proceed with the Work covered by the submittal. Prepare a new submittal for a product that complies with the Contract Documents.
 - 4. Incomplete - Resubmit: Where the submittal is marked "Incomplete, Submit Additional Information," do not proceed with the Work covered by the submittal. Prepare additional information requested, or required by the Contract Documents, that indicates compliance with requirements, and resubmit.
- C. Informational Submittals: Architect and Construction Manager will review each submittal and will not return it, or will return it if it does not comply with requirements.
- D. Incomplete submittals are unacceptable, will be considered nonresponsive, and will be returned for resubmittal without review.
- E. Limit information submitted to specific products indicated. Do not submit extraneous matter. Submittals containing excessive extraneous matter will be returned for resubmittal without review.

- F. Submittals not required by the Contract Documents may be returned by the Architect without action.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION

Attachments: Tt Cover Sheet
 As-Specified Verification Form
 Tt Cover Sheet for Closeout Submittals (Sections 01 78 23 and 01 78 39)
 FeTech, Inc. Cover Sheet to be used ONLY for Submittals for Section 11 40 00
 Foodservice Equipment
 Delegated Design Submittal Form (Refer to Technical Sections)

END OF SECTION 01 33 00

CONTRACTOR: _____

SUBMITTAL DATE ____ / ____ / ____

Check following as applicable:

ARCHITECT: Tetra Tech Architects & Engineers

☐ First Submission

PROJECT IDENTIFICATION

☐ Re-Submission No. ____

Architect's
Project No.: 136396-24002.1

Proj. Name: Adds and Alts to LaGrange Middle School

Location: Arlington CSD

PRODUCT IDENTIFICATION

Specification Section No. _____

Name of Product: _____

Name of Manufacturer: _____

SUBCONTRACTOR

SUPPLIER

RELATIONSHIP TO STRUCTURE

Building
Name _____

(Room #) (Room Name)

Contract Drawing No.: _____

RESERVED FOR USE BY TETRA TECH

ACTION SUBMITTAL:

☐ Approved

☐ Approved As Noted

☐ Rejected

☐ Incomplete, Submit Additional Information

INFORMATIONAL SUBMITTAL:

☐ No Action Taken

☐ Returned for Resubmittal

Reviewed By: _____

Date: _____

Reviewed only for the limited purpose of checking for conformance with information given and the design concept expressed in the Contract Documents. Review not conducted for the purpose of determining the accuracy and completeness of other details such as dimensions and quantities, or for substantiating instructions for installation or performance of equipment or systems, all of which remain the responsibility of the Contractor as required by the Contract Documents. Review shall not constitute approval of safety precautions or of any construction means, methods, techniques, sequences or procedures.

DEVIATION FROM CONTRACT DOCUMENTS: _____

CONTRACTOR COMMENTS: _____

ARCHITECT'S COMMENTS: _____

CONTRACTOR'S STAMP

CONTRACTOR'S CERTIFICATION

I CERTIFY THAT THIS SUBMITTAL HAS BEEN REVIEWED AND APPROVED BY THE CONTRACTOR IN ACCORDANCE WITH THE GENERAL CONDITIONS. PRODUCTS/MATERIALS ARE FREE OF ASBESTOS AS REQUIRED BY THE CONTRACT DOCUMENTS.

BY _____

CONSTRUCTION MANAGER'S CERTIFICATION

I CERTIFY THAT THIS SUBMITTAL HAS BEEN REVIEWED AND APPROVED BY THE CONSTRUCTION MANAGER IN ACCORDANCE WITH THE GENERAL CONDITIONS.

BY _____

CM Submittal No. _____



TETRA TECH
ARCHITECTS & ENGINEERS

As-Specified Verification Form

Project Number: 136396-24002.1

Project Title: Adds and Alts to LaGrange Middle School

Technical
Specification Section: _____
(Include Section Number and Title as shown in Project Manual)

Specified Product: _____
(Include manufacturer's name and product designation)

The undersigned, hereinafter called the Contractor, hereby warrants that the Specified Product listed above will be incorporated into the Project in accordance with requirements specified in the Technical Specification Section identified above without modification or alteration.

By acceptance of this form, Tetra Tech Architects & Engineers (hereinafter called Tetra Tech), agrees that limited submittals identified in the Technical Specification Section identified above are not required, unless otherwise stated in the Submittals article in the Technical Specification Section.

The Contractor is advised that use of this As-Specified Verification Form does not relieve the Contractor from providing remaining submittal documentation required in Technical Specification sections and all information required in Division 1 Closeout section of the Project Manual or from complying with requirements of the General Conditions.

Products/Materials are free of asbestos as required by the Contract Documents.

(Name of Contractor)

(Authorized Signature)

(Title of Signatory)

(Date)

RESERVED FOR USE BY TETRA TECH

ACTION SUBMITTAL:

- ☐ Approved / Approved As Noted
☐ Rejected

Reviewed By: _____

Date: _____

Reviewed only for the limited purpose of checking for conformance with information given and the design concept expressed in the Contract Documents. Review not conducted for the purpose of determining the accuracy and completeness of other details such as dimensions and quantities, or for substantiating instructions for installation or performance of equipment or systems, all of which remain the responsibility of the Contractor as required by the Contract Documents. Review shall not constitute approval of safety precautions or of any construction means, methods, techniques, sequences or procedures.

ARCHITECT'S COMMENTS: _____

CONTRACTOR: _____

SUBMITTAL DATE ____ / ____ / ____

Check following as applicable:

☐ First Submission ____

☐ Re-Submission No. ____

ARCHITECT: Tetra Tech Architects & Engineers

PROJECT IDENTIFICATION

Architect's
Project No.: 136396-24002.1

Proj. Name: Adds and Alts to LaGrange Middle School

Location: Arlington CSD

PRODUCT IDENTIFICATION

Specification Section No. 01 78 23 OR 01 78 39 (circle correct one)

Name of Product: _____

Name of Manufacturer: _____

SUBCONTRACTOR: _____

SUPPLIER: _____

RESERVED FOR USE BY TETRA TECH

INFORMATIONAL SUBMITTAL:

☐ No Action Taken

☐ Returned for Resubmittal

Reviewed By: _____

Date: _____

Reviewed only for the limited purpose of checking for conformance with information given and the design concept expressed in the Contract Documents. Review not conducted for the purpose of determining the accuracy and completeness of other details such as dimensions and quantities, or for substantiating instructions for installation or performance of equipment or systems, all of which remain the responsibility of the Contractor as required by the Contract Documents. Review shall not constitute approval of safety precautions or of any construction means, methods, techniques, sequences or procedures.

DEVIATION FROM CONTRACT DOCUMENTS: _____

CONTRACTOR COMMENTS: _____

CONSTRUCTION MANAGER'S COMMENTS: _____

ARCHITECT'S COMMENTS: _____

CONTRACTOR'S STAMP

CONTRACTOR'S CERTIFICATION

I CERTIFY THAT THIS SUBMITTAL HAS BEEN REVIEWED AND APPROVED BY THE CONTRACTOR IN ACCORDANCE WITH THE GENERAL CONDITIONS. PRODUCTS/MATERIALS ARE FREE OF ASBESTOS AS REQUIRED BY THE CONTRACT DOCUMENTS.

BY _____

CONSTRUCTION MANAGER'S CERTIFICATION

I CERTIFY THAT THIS SUBMITTAL HAS BEEN REVIEWED BY THE CONSTRUCTION MANAGER IN ACCORDANCE WITH THE GENERAL CONDITIONS. AND IN ACCORDANCE WITH THE CONSTRUCTION MANAGER'S CONTRACTUAL OBLIGATIONS WITH THE OWNER.

Approved _____ Rejected _____

BY _____

CM Submittal No. _____

CONTRACTOR: _____

SUBMITTAL DATE ____ / ____ / ____

Check following as applicable:

CONSULTANT: _____

☐ First Submission ____

☐ Re-Submission No. ____

PROJECT IDENTIFICATION

Architect's
Project No.: 136396-24002.1

Proj. Name: Adds and Alts to LaGrange Middle School

Location: Arlington CSD

PRODUCT IDENTIFICATION

Specification Section No. _____

Name of Product: _____

Name of Manufacturer: _____

SUBCONTRACTOR:

SUPPLIER:

RELATIONSHIP TO STRUCTURE:

Building Name: _____

(Room #)

(Room Name)

Contract Drawing No.: _____

DEVIATION FROM CONTRACT DOCUMENTS:

CONTRACTOR COMMENTS:

OWNER'S CONSULTANT COMMENTS:

CONTRACTOR'S STAMP

CONTRACTOR'S CERTIFICATION

I CERTIFY THAT THIS SUBMITTAL HAS BEEN REVIEWED AND APPROVED BY THE CONTRACTOR IN ACCORDANCE WITH THE GENERAL CONDITIONS. PRODUCTS/MATERIALS ARE FREE OF ASBESTOS AS REQUIRED BY THE CONTRACT DOCUMENTS.

BY _____

CONSTRUCTION MANAGER'S CERTIFICATION

I CERTIFY THAT THIS SUBMITTAL HAS BEEN REVIEWED AND APPROVED BY THE CONSTRUCTION MANAGER IN ACCORDANCE WITH THE GENERAL CONDITIONS.

BY _____

CM Submittal No. _____

FETECH, INC. OWNER'S DIRECT CONSULTANT

ACTION SUBMITTAL:

- ☐ Approved
- ☐ Approved As Noted
- ☐ Rejected
- ☐ Incomplete, Submit Additional Information

INFORMATIONAL SUBMITTAL:

- ☐ No Action Taken
- ☐ Returned for Resubmittal

Reviewed By: _____

Date: _____

DELEGATED DESIGN SUBMITTAL

CONTRACTOR: _____

SUBMITTAL DATE ____ / ____ / ____

DESIGN PROFESSIONAL: _____

Check following as applicable:

ARCHITECT: Tetra Tech Architects & Engineers

☐ First Submission

☐ Re-Submission No. ____

PROJECT IDENTIFICATION

Architect's
Project No.: 136396-24002.1

Proj. Name: Adds & Alts to LaGrange MS

Location: Arlington CSD

PRODUCT IDENTIFICATION

Specification Section No. _____

Name of Product: _____

Name of Manufacturer: _____

SUBCONTRACTOR

SUPPLIER

RELATIONSHIP TO STRUCTURE

Building
Name _____

(Room #)

(Room Name)

Contract Drawing No.: _____

DEVIATION FROM CONTRACT DOCUMENTS:

DESIGN PROFESSIONAL'S COMMENTS: _____

CONTRACTOR COMMENTS: _____

ARCHITECT'S COMMENTS: _____

CONSTRUCTION MANAGER'S CERTIFICATION

I certify that this submittal has been reviewed and approved by the Construction Manager in accordance with the General Conditions.

BY _____

CM Submittal No. _____

CONTRACTOR'S STAMP

DESIGN PROFESSIONAL'S CERTIFICATION

I certify that I am a design professional currently licensed in New York State and confirm my responsibility for work included in this submittal in accordance with the General Conditions. Further, I certify that to the best of my knowledge, information and belief, the plans and specifications are in accordance with applicable requirements of the New York State Uniform Fire Prevention and Building Code, the State Energy Conservation Construction Code and construction standards of the Education Department.

BY _____

CONTRACTOR'S CERTIFICATION

I certify that this submittal has been reviewed and approved by the Contractor in accordance with the General Conditions. Products/Materials are free of asbestos as required by the Contract Documents.

BY _____

RESERVED FOR USE BY TETRA TECH

ACTION SUBMITTAL:

☐ Approved

☐ Approved As Noted

☐ Rejected

☐ Incomplete, Submit Additional Information

Reviewed By: _____

Date: _____

Reviewed only for the limited purpose of checking for conformance with information given and the design concept expressed in the Contract Documents and that the delegated component or system design conforms to the performance specifications and any subsequent amendments; to the overall project design; and that it can be integrated into the building system; if such integration requires other modifications or costs to the Project the Contractor shall be responsible for all such additional costs. Review not conducted for the purpose of determining the accuracy and completeness of other details such as dimensions, quantities, and calculations, or for substantiating instructions for installation or performance of equipment or systems, all of which remain the responsibility of the Contractor as required by the Contract Documents. Review shall not constitute approval of safety precautions or of any construction means, methods, techniques, sequences or procedures.

SECTION 01 35 26 – GOVERNMENTAL SAFETY REQUIREMENTS**PART 1 - GENERAL****1.1 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Safety requirements included in 8 NYCRR 155.5 Uniform Safety Standards for School Construction and Maintenance Projects.

1.3 PERFORMANCE REQUIREMENTS

- A. General Performance: Provide all measures, including (but not limited to) materials, equipment, and procedures, required to comply with following requirements of 8 NYCRR 155.5 Uniform Safety Standards for School Construction and Maintenance Projects.
- B. Certificate of Occupancy:
 - 1. 8 NYCRR 155.5 (a): “The occupied portion of any school building shall always comply with the minimum requirements necessary to maintain a certificate of occupancy.”
- C. General Safety and Security Standards for Construction Projects:
 - 1. 8 NYCRR 155.5 (e)(1): “All construction materials shall be stored in a safe and secure manner.”
 - 2. 8 NYCRR 155.5 (e)(2): “Fences around construction supplies or debris shall be maintained.”
 - 3. 8 NYCRR 155.5 (e)(3): “Gates shall always be locked unless a worker is in attendance to prevent unauthorized entry.”
 - 4. 8 NYCRR 155.5 (e)(4): “During exterior renovation work, overhead protection shall be provided for any sidewalks or areas immediately beneath the work site or such areas shall be fenced off and provided with warning signs to prevent entry.”
 - 5. 8 NYCRR 155.5 (e)(5): “Workers shall be required to wear photo identification badges at all times for identification and security purposes while working at occupied sites.”

D. Separation of Construction Areas from Occupied Spaces:

1. 8 NYCRR 155.5 (f): “Construction areas which are under the control of a contractor and therefore not occupied by district staff or students shall be separated from occupied areas. Provisions shall be made to prevent the passage of dust and contaminants into occupied parts of the building. Periodic inspection and repairs of the containment barriers must be made to prevent exposure to dust or contaminants. Gypsum board must be used in exit ways or other areas that require fire rated separation. Heavy duty plastic sheeting may be used only for a vapor, fine dust or air infiltration barrier, and shall not be used to separate occupied spaces from construction areas.”
2. 8 NYCRR 155.5 (f)(1): “A specific stairwell and/or elevator should be assigned for construction worker use during work hours. In general, workers may not use corridors, stairs or elevators designated for students or school staff.”

E. Cleaning Occupied Areas:

1. 8 NYCRR 155.5 (f)(2): “Large amounts of debris must be removed by using enclosed chutes or a similar sealed system. There shall be no movement of debris through halls of occupied spaces of the building. No material shall be dropped or thrown outside the walls of the building.”
2. 8 NYCRR 155.5 (f)(3): “All occupied parts of the building affected by renovation activity shall be cleaned at the close of each workday. School buildings occupied during a construction project shall maintain required health, safety and educational capabilities at all times that classes are in session.”

F. Exiting and Ventilation:

1. 8 NYCRR 155.5(g): Maintain exiting and ventilation during school construction projects.
2. 8 NYCRR 155.5(g)(1): “Required exits, temporary stairs, ramps, exit signs, and door hardware shall be provided at all times.”
3. 8 NYCRR 155.5(g)(2): “Required ventilation to occupied spaces affected by construction will be maintained during the project.”

G. Noise Control:

1. 8 NYCRR 155.5 (i): “Construction and maintenance operations shall not produce noise in excess of 60 dba in occupied spaces or shall be scheduled for times when the building or affected building spaces are not occupied or acoustical abatement measures shall be taken.”

H. Control of Fumes, Gases and Contaminants:

1. 8 NYCRR 155.5 (j): The contractor shall be responsible for the control of chemical fumes, gases, and other contaminants produced by welding, gasoline or diesel engines, roofing, paving, painting, and other fumes to ensure they do not enter occupied portions of the building or air intakes.

I. “Off-Gassing” of Volatile Organic Compounds:

1. 8 NYCRR 155.5 (j)(1): The contractor shall be responsible to ensure that activities and materials which result in "off-gassing" of volatile organic compounds such as glues, paint, furniture, carpeting, wall coverings, drapery, etc. are scheduled, cured or ventilated in accordance with manufacturer’s recommendations before a space can be occupied.

J. Asbestos Isolation:

1. 8 NYCRR 155.5 (k): “Large and small asbestos abatement projects as defined by 12 NYCRR 56 shall not be performed while the building is occupied.” Note, it is NYSED’s interpretation that the term "building", as referenced in this section of 8 NYCRR 155.5, means a wing or major section of a building that can be completely isolated from the rest of the building with sealed non-combustible construction. The isolated portion of the building must contain exits that do not pass through the occupied portion and ventilation systems must be physically separated and sealed at the isolation barrier.
2. Exterior work such as roofing, flashing, siding, or soffit work may be performed on occupied buildings provided proper variances are in place as required, and complete isolation of ventilation systems and at windows is provided. Care must be taken to schedule work so that classes are not disrupted by noise or visual distraction.

K. Lead and Asbestos Testing:

1. 8 NYCRR 155.5 (c)(1): “All school areas to be disturbed during renovation or demolition shall be tested for lead and asbestos.”
 - a. Asbestos and Asbestos-Containing Materials:
 - 1) Be advised that asbestos and asbestos-containing materials are required to be abated as part of this Project. Refer to Division 02 Section “Asbestos Abatement”.
 - a) The extent of asbestos to be abated as part of the Project is indicated on Drawings included in the Contract Documents.
 - b) Prior to beginning Work, review Owner’s “Asbestos Management Plan” to ensure asbestos or asbestos-containing materials identified in that document are not disturbed.
 - 2) Be advised that if materials suspected to be asbestos, or to contain asbestos, that are not included in the Project and not identified in the Contract Documents are encountered during construction, immediately notify Owner and take precautions as required to avoid disturbing materials until directed by Owner.

- 3) Transmission Electron Microscopy (TEM): All asbestos abatement work that requires clearance air sampling in accordance with New York State Industrial Code Rule 56 shall have clearance air samples collected and analyzed using Transmission Electron Microscopy as per the Asbestos Hazard Emergency Response Act (40 CFR 763). Refer to Division 02 Section "Asbestos Abatement".

b. Lead and Lead-Containing Materials:

- 1) Be advised that a lead inspection has been performed as required by New York State Education Department and a copy of the lead inspection report is available at the Owner's offices.

L. Code Rule 56:

1. 8 NYCRR 155.5(k): "All asbestos abatement projects shall comply with all applicable Federal and State laws including but not limited to the New York State Department of Labor industrial code rule 56 (12 NYCRR 56), and the Federal Asbestos Hazard Emergency Response Act (AHERA), 40 CFR part 763 (Code of Federal Regulations, 1998 Edition, Superintendent of Public Documents, U.S. Government Printing Office, Washington, DC 20402; 1998; available at the Office of Facilities Planning, Education Building Annex, Room 360, State Education Department, Albany, NY 12234."

M. Lead:

1. 8 NYCRR 155.5 (l): Surfaces that will be disturbed by reconstruction must have a determination made as to the presence of lead. Projects which disturb surfaces that contain lead shall have in the specifications a plan prepared by a certified Lead Risk Assessor or Supervisor which details provisions for occupant protection, worksite preparation, work methods, cleaning and clearance testing which are in general accordance with the HUD Guidelines.
 - a. Be advised that lead and lead-containing materials are required to be disturbed or removed as part of this Project. Refer to Division 02 Section "Lead-Safe Work Practices".
 - 1) The extent of lead to be disturbed or removed as part of the project is indicated on Drawings included in the Contract Documents.
 - b. Contractor is responsible for complying with requirements of all applicable federal, state and local regulations, including (but not limited to) OSHA Lead in Construction Standard 29 CFR 1926.62, when construction activities involve disturbance of materials containing 1.0 mg/sq cm or 0.5 percent of lead or less, including (but not limited to) lead-based paint, ceramic tile, and similar materials.
 - c. If materials suspected to contain lead above 1.0 mg/sq cm or above 0.5 percent that are not included in Project or identified in Contract Documents are encountered during construction, immediately notify Owner and take applicable precautions to avoid disturbing materials until directed by Owner.

N. Disposal of Lead Abatement Waste:

1. Test all debris from lead abatement activities to determine whether it is hazardous or non-hazardous waste.
2. Transport and dispose of debris determined to be hazardous waste in accordance with applicable regulations.
3. Package, label, and mark all hazardous waste materials in accordance with applicable requirements of 49 CFR 173, 178 and 179.
4. Maintain hazardous waste manifest from date of transport until date of disposal, destruction or recycling.
5. Return fully executed hazardous waste manifests to Owner within 60 days after date waste accepted by initial transporter.
6. Dispose of material determined to be Construction and Demolition Debris in accordance with 6 NYCRR 360 and 364. Provide trip tickets or other documentation clearly identifying generating site, Owner, transporter, disposal site and amount of material removed from site, transported to and disposed of at disposal site.
7. Refer to Division 02 Section "Lead-Safe Work Practices" for additional requirements.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 01 35 26

SECTION 01 40 00 - QUALITY REQUIREMENTS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes administrative and procedural requirements for quality assurance and quality control.
- B. Testing and inspection services are required to verify compliance with requirements specified or indicated. These services do not relieve Contractor of responsibility for compliance with the Contract Document requirements.
 - 1. Specific quality-assurance and quality-control requirements for individual work results are specified in their respective Specification Sections. Requirements in individual Sections may also cover production of standard products.
 - 2. Specified tests, inspections, and related actions do not limit Contractor's other quality-assurance and quality-control procedures that facilitate compliance with the Contract Document requirements.
- C. Requirements for Contractor to provide quality-assurance and quality-control services required by Architect, Owner, Commissioning Authority, Construction Manager, or authorities having jurisdiction are not limited by provisions of this Section.

1.3 DEFINITIONS

- A. Experienced: When used with an entity or individual, "experienced," unless otherwise further described, means having successfully completed a minimum of five previous projects similar in nature, size, and extent to this Project; being familiar with special requirements indicated; and having complied with requirements of authorities having jurisdiction.
- B. Installer/Applicator/Erector: Contractor or another entity engaged by Contractor as an employee, subcontractor, or sub-subcontractor, to perform a particular construction operation, including installation, erection, application, assembly, and similar operations.
- C. Mockups: Physical assemblies of portions of the Work constructed to establish the standard by which the Work will be judged. Mockups are not Samples.
 - 1. Mockups are used for one or more of the following:
 - a. Verify selections made under Sample submittals.
 - b. Demonstrate aesthetic effects.

- c. Demonstrate the qualities of products and workmanship.
 - d. Demonstrate successful installation of interfaces between components and systems.
 - e. Perform preconstruction testing to determine system performance.
- D. Testing Agency: An entity engaged to perform specific tests, inspections, or both. The term "testing laboratory" has the same meaning as the term "testing agency."
- E. Quality-Assurance Services: Activities, actions, and procedures performed before and during execution of the Work, to guard against defects and deficiencies and substantiate that proposed construction will comply with requirements.
- F. Quality-Control Services: Tests, inspections, procedures, and related actions during and after execution of the Work, to evaluate that actual products incorporated into the Work and completed construction comply with requirements. Contractor's quality-control services do not include contract administration activities performed by Architect or Construction Manager.

1.4 DELEGATED DESIGN SERVICES

- A. Performance and Design Criteria: Where professional design services or certifications by a design professional are specifically required of Contractor by the Contract Documents, provide products and systems complying with specific performance and design criteria indicated.
 - 1. If criteria indicated are not sufficient to perform services or certification required, submit a written request for additional information to Architect.

1.5 CONFLICTING REQUIREMENTS

- A. Conflicting Standards and Other Requirements: If compliance with two or more standards or requirements is specified and the standards or requirements establish different or conflicting requirements for minimum quantities or quality levels, inform the Architect regarding the conflict and obtain clarification prior to proceeding with the Work. Refer conflicting requirements that are different, but apparently equal, to Architect for clarification before proceeding.
- B. Minimum Quantity or Quality Levels: The quantity or quality level shown or specified is the minimum provided or performed. The actual installation may comply exactly with the minimum quantity or quality specified, or it may exceed the minimum within reasonable limits. To comply with these requirements, indicated numeric values are minimum or maximum, as appropriate, for the context of requirements. Refer uncertainties to Architect for a decision before proceeding.

1.6 ACTION SUBMITTALS

- A. Delegated Design Services Statement: Submit a statement signed and sealed by the responsible design professional, for each product and system specifically assigned to Contractor to be designed or certified by a design professional, indicating that the products and systems are in compliance with performance and design criteria indicated. Include list of codes, loads, and other factors used in performing these services.

1.7 INFORMATIONAL SUBMITTALS

- A. Contractor's Statement of Responsibility: When required by authorities having jurisdiction, submit copy of written statement of responsibility submitted to authorities having jurisdiction before starting work on the following systems:
 - 1. Seismic-force-resisting system, designated seismic system, or component listed in the Statement of Special Inspections.
 - 2. Primary wind-force-resisting system or a wind-resisting component listed in the Statement of Special Inspections.
- B. Testing Agency Qualifications: For testing agencies specified in "Quality Assurance" Article to demonstrate their capabilities and experience. Include proof of qualifications in the form of a recent report on the inspection of the testing agency by a recognized authority.
- C. Schedule of Tests and Inspections: Prepare in tabular form and include the following:
 - 1. Specification Section number and title.
 - 2. Entity responsible for performing tests and inspections.
 - 3. Description of test and inspection.
 - 4. Identification of applicable standards.
 - 5. Identification of test and inspection methods.
 - 6. Number of tests and inspections required.
 - 7. Time schedule or time span for tests and inspections.
- D. Reports: Prepare and submit certified written reports and documents as specified.
- E. Permits, Licenses, and Certificates: For Owner's record, submit copies of permits, licenses, certifications, inspection reports, releases, jurisdictional settlements, notices, receipts for fee payments, judgments, correspondence, records, and similar documents established for compliance with standards and regulations bearing on performance of the Work.

1.8 REPORTS AND DOCUMENTS

- A. Reports and documents are to be uploaded to Submittal Exchange under the Testing Reports – Contractors tab.
- B. Test and Inspection Reports: Prepare and submit certified written reports specified in other Sections. Include the following:
 - 1. Date of issue.

2. Project title and number.
 3. Name, address, telephone number, and email address of testing agency.
 4. Dates and locations of samples and tests or inspections.
 5. Names of individuals making tests and inspections.
 6. Description of the Work and test and inspection method.
 7. Identification of product and Specification Section.
 8. Complete test or inspection data.
 9. Test and inspection results and an interpretation of test results.
 10. Record of temperature and weather conditions at time of sample-taking and testing and inspection.
 11. Comments or professional opinion on whether tested or inspected Work complies with the Contract Document requirements.
 12. Name and signature of laboratory inspector.
 13. Recommendations on retesting and reinspecting.
- C. Manufacturer's Technical Representative's Field Reports: Prepare written information documenting manufacturer's technical representative's tests and inspections specified in other Sections. Include the following:
1. Name, address, telephone number, and email address of technical representative making report.
 2. Statement on condition of substrates and their acceptability for installation of product.
 3. Statement that products at Project site comply with requirements.
 4. Summary of installation procedures being followed, whether they comply with requirements and, if not, what corrective action was taken.
 5. Results of operational and other tests and a statement of whether observed performance complies with requirements.
 6. Statement of whether conditions, products, and installation will affect warranty.
 7. Other required items indicated in individual Specification Sections.
- D. Factory-Authorized Service Representative's Reports: Prepare written information documenting manufacturer's factory-authorized service representative's tests and inspections specified in other Sections. Include the following:
1. Name, address, telephone number, and email address of factory-authorized service representative making report.
 2. Statement that equipment complies with requirements.
 3. Results of operational and other tests and a statement of whether observed performance complies with requirements.
 4. Statement of whether conditions, products, and installation will affect warranty.
 5. Other required items indicated in individual Specification Sections.

1.9 QUALITY ASSURANCE

- A. Qualifications paragraphs in this article establish the minimum qualification levels required; individual Specification Sections specify additional requirements.

- B. **Manufacturer Qualifications:** A firm experienced in manufacturing products or systems similar to those indicated for this Project and with a record of successful in-service performance, as well as sufficient production capacity to produce required units. As applicable, procure products from manufacturers able to meet qualification requirements, warranty requirements, and technical or factory-authorized service representative requirements.
- C. **Fabricator Qualifications:** A firm experienced in producing products similar to those indicated for this Project and with a record of successful in-service performance, as well as sufficient production capacity to produce required units.
- D. **Installer Qualifications:** A firm or individual experienced in installing, erecting, applying, or assembling work similar in material, design, and extent to that indicated for this Project, whose work has resulted in construction with a record of successful in-service performance.
- E. **Professional Engineer Qualifications:** A professional engineer who is an appropriately licensed design professional legally qualified to practice in New York State and who is experienced in providing engineering services of the kind indicated. Engineering services are defined as those performed for installations of the system, assembly, or product that is similar in material, design, and extent to those indicated for this Project.
- F. **Testing and Inspecting Agency Qualifications:** An NRTL, an NVLAP, or an independent agency with the experience and capability to conduct testing and inspection indicated, as documented in accordance with ASTM E329, and with additional qualifications specified in individual Sections; and, where required by authorities having jurisdiction, that is acceptable to authorities.
- G. **Manufacturer's Technical Representative Qualifications:** An authorized representative of manufacturer who is trained and approved by manufacturer to observe and inspect installation of manufacturer's products that are similar in material, design, and extent to those indicated for this Project.
- H. **Factory-Authorized Service Representative Qualifications:** An authorized representative of manufacturer who is trained and approved by manufacturer to inspect, demonstrate, correct, and perform service on installations of manufacturer's products that are similar in material, design, and extent to those indicated for this Project.
- I. **Mockups:** Before installing portions of the Work requiring mockups, build mockups for each form of construction and finish required to comply with the following requirements, using materials indicated for the completed Work:
 - 1. Build mockups of size indicated.
 - 2. Build mockups in location indicated or, if not indicated, as directed by Architect or Construction Manager.
 - 3. Notify Architect and Construction Manager seven days in advance of dates and times when mockups will be constructed.
 - 4. Employ supervisory personnel who will oversee mockup construction. Employ workers who will be employed to perform same tasks during the construction at Project.

5. Demonstrate the proposed range of aesthetic effects and workmanship.
6. Obtain Architect's and Construction Manager's approval of mockups before starting corresponding Work, fabrication, or construction.
7. Promptly correct unsatisfactory conditions noted by Architect's preliminary review, to the satisfaction of the Architect, before completion of final mockup.
8. Approval of mockups by the Architect does not constitute approval of deviations from the Contract Documents contained in mockups unless Architect specifically approves such deviations in writing.
9. Maintain mockups during construction in an undisturbed condition as a standard for judging the completed Work.
10. Demolish and remove mockups when directed unless otherwise indicated.

1.10 QUALITY CONTROL

- A. Owner Responsibilities: Where quality-control services are indicated as Owner's responsibility, Owner will engage a qualified testing agency to perform these services.
 1. Owner will furnish Contractor with names, addresses, and telephone numbers of testing agencies engaged and a description of types of testing and inspection they are engaged to perform.
 2. Costs for retesting and reinspecting construction that replaces or is necessitated by Work that failed to comply with the Contract Documents will be charged to Contractor, and the Contract Sum will be adjusted by Change Order.
- B. Contractor Responsibilities: Tests and inspections not explicitly assigned to Owner are Contractor's responsibility. Perform additional quality-control activities, whether specified or not, to verify and document that the Work complies with requirements.
 1. Unless otherwise indicated, provide quality-control services specified and those required by authorities having jurisdiction. Perform quality-control services required of Contractor by authorities having jurisdiction, whether specified or not.
 2. Engage a qualified testing agency to perform quality-control services.
 - a. Contractor will not employ same entity engaged by Owner, unless agreed to in writing by Owner.
 3. Notify testing agencies at least 24 hours in advance of time when Work that requires testing or inspection will be performed.
 - a. For testing or inspecting services indicated as Owner's responsibility, notify Owner and testing agency at least 3 business days in advance of time when Work that requires testing or inspecting will be performed.

4. Where quality-control services are indicated as Contractor's responsibility, submit a certified written report, in duplicate, of each quality-control service.
 5. Testing and inspection requested by Contractor and not required by the Contract Documents are Contractor's responsibility.
 6. Submit additional copies of each written report directly to authorities having jurisdiction, when they so direct.
- C. Retesting/Reinspecting: Regardless of whether original tests or inspections were Contractor's responsibility, provide quality-control services, including retesting and reinspecting, for construction that replaced Work that failed to comply with the Contract Documents.
- D. Testing Agency Responsibilities: Cooperate with Architect, Commissioning Authority, Construction Manager, and Contractor in performance of duties. Provide qualified personnel to perform required tests and inspections.
1. Notify Architect, Commissioning Authority, Construction Manager, and Contractor promptly of irregularities or deficiencies observed in the Work during performance of its services.
 2. Determine the locations from which test samples will be taken and in which in-situ tests are conducted.
 3. Conduct and interpret tests and inspections, and state in each report whether tested and inspected Work complies with or deviates from requirements.
 4. Submit a certified written report, in duplicate, of each test, inspection, and similar quality-control service through Contractor.
 5. Do not release, revoke, alter, or increase the Contract Document requirements or approve or accept any portion of the Work.
 6. Do not perform duties of Contractor.
- E. Manufacturer's Field Services: Where indicated, engage a factory-authorized service representative to inspect field-assembled components and equipment installation, including service connections. Report results in writing as specified in Division 01 Section "Submittal Procedures."
- F. Manufacturer's Technical Services: Where indicated, engage a manufacturer's technical representative to observe and inspect the Work. Manufacturer's technical representative's services include participation in preinstallation conferences, examination of substrates and conditions, verification of materials, observation of Installer activities, inspection of completed portions of the Work, and submittal of written reports.
- G. Contractor's Associated Requirements and Services: Cooperate with agencies and representatives performing required tests, inspections, and similar quality-control services, and provide reasonable auxiliary services as requested. Notify agency sufficiently in advance of operations to permit assignment of personnel. Provide the following:

1. Access to the Work.
 2. Incidental labor and facilities necessary to facilitate tests and inspections.
 3. Adequate quantities of representative samples of materials that require testing and inspection. Assist agency in obtaining samples.
 4. Facilities for storage and field curing of test samples.
 5. Preliminary design mix proposed for use for material mixes that require control by testing agency.
 6. Security and protection for samples and for testing and inspection equipment at Project site.
- H. Coordination: Coordinate sequence of activities to accommodate required quality-assurance and quality-control services with a minimum of delay and to avoid necessity of removing and replacing construction to accommodate testing and inspection.
1. Schedule times for tests, inspections, obtaining samples, and similar activities.
- I. Schedule of Tests and Inspections: Prepare a schedule of tests, inspections, and similar quality-control services required by the Contract Documents. Coordinate and submit concurrently with Contractor's Construction Schedule. Update as the Work progresses.
1. Schedule Contents: Include tests, inspections, and quality-control services, including Contractor- and Owner-retained services, commissioning activities, and other Project-required services paid for by other entities.
 2. Distribution: Distribute schedule to Owner, Architect, Commissioning Authority, Construction Manager, testing agencies, and each party involved in performance of portions of the Work where tests and inspections are required.

1.11 SPECIAL TESTS AND INSPECTIONS

- A. Special Tests and Inspections: Owner will engage a qualified testing agency to conduct special tests and inspections required by authorities having jurisdiction as the responsibility of Owner, as indicated in the Statement of Special Inspections attached to this Section, and as follows:
1. Verifying that manufacturer maintains detailed fabrication and quality-control procedures, and reviewing the completeness and adequacy of those procedures to perform the Work.
 2. Notifying Architect, Commissioning Authority, Construction Manager, and Contractor promptly of irregularities and deficiencies observed in the Work during performance of its services.
 3. Submitting a certified written report of each test, inspection, and similar quality-control service to Architect and Commissioning Authority, through Construction Manager, with copy to Contractor and to authorities having jurisdiction.
 4. Submitting a final report of special tests and inspections at Substantial Completion, which includes a list of unresolved deficiencies.

5. Interpreting tests and inspections, and stating in each report whether tested and inspected Work complies with or deviates from the Contract Documents.
6. Retesting and reinspecting corrected Work.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION

3.1 TEST AND INSPECTION LOG

- A. Test and Inspection Log: Prepare a record of tests and inspections. Include the following:
 1. Date test or inspection was conducted.
 2. Description of the Work tested or inspected.
 3. Date test or inspection results were transmitted to Architect.
 4. Identification of testing agency or special inspector conducting test or inspection.
- B. Maintain log at Project site. Post changes and revisions as they occur. Provide access to test and inspection log for Architect's, Commissioning Authority's, and Construction Manager's reference during normal working hours.

3.2 CORRECTION AND PROTECTION

- A. General: On completion of testing, inspection, sample-taking, and similar services, correct damaged construction and restore substrates and finishes.
 1. Provide materials and comply with installation requirements specified in other Specification Sections or matching existing substrates and finishes. Restore patched areas and extend restoration into adjoining areas with durable seams that are as invisible as possible. Comply with the Contract Document requirements for cutting and patching in Division 01 Section "Execution."
- B. Protect construction exposed by or for quality-control service activities.
- C. Correction and protection are Contractor's responsibility, regardless of the assignment of responsibility for quality-control services.

Attachment: Statement of Special Inspections

END OF SECTION 01 40 00



TETRA TECH
ARCHITECTS & ENGINEERS

STATEMENT OF SPECIAL INSPECTIONS

Project: *Additions and Alterations to LaGrange Middle School*

Location: *Lagrangeville, NY 12540*

Owner: *Arlington Central School District*

This *Statement of Special Inspections* is submitted as a condition for permit issuance in accordance with the Special Inspection and Structural Testing requirements of the Building Code of New York State. It includes a schedule of Special Inspection services applicable to this project. *Refer to individual technical specification sections for additional testing requirements.*

This document includes the following parts:

Qualifications of Inspectors and Testing Technicians

Schedule of Special Inspection Services

Qualifications of Inspectors and Testing Technicians

The qualifications of all personnel performing Special Inspection and testing activities are subject to the approval of the Building Official. The credentials of all Inspectors and testing technicians shall be provided if requested.

Key for Minimum Qualifications of Inspection Agents:

When the Registered Design Professional in Responsible Charge deems it appropriate that the individual performing a stipulated test or inspection have a specific certification or license as indicated below, such designation shall appear below the *Qualifications* on the Schedule.

PE	Structural Engineer – a licensed PE specializing in the design of building structures
PE/GE	Geotechnical Engineer – a licensed PE specializing in soil mechanics and foundations
EIT	Engineer-In-Training – a graduate engineer who has passed the Fundamentals of Engineering examination

American Concrete Institute (ACI) Certification

ACI-CFTT	Concrete Field Testing Technician – Grade 1
ACI-CCI	Concrete Construction Inspector
ACI-LTT	Laboratory Testing Technician – Grade 1&2
ACI-STT	Strength Testing Technician

American Welding Society (AWS) Certification

AWS-CWI	Certified Welding Inspector
AWS/AISC-SSI	Certified Structural Steel Inspector

American Society of Non-Destructive Testing (ASNT) Certification

ASNT	Non-Destructive Testing Technician – Level II or III.

International Code Council (ICC) Certification

ICC-SMSI	Structural Masonry Special Inspector
ICC-SWSI	Structural Steel and Welding Special Inspector
ICC-SFSI	Spray-Applied Fireproofing Special Inspector
ICC-PCSI	Prestressed Concrete Special Inspector
ICC-RCSI	Reinforced Concrete Special Inspector

National Institute for Certification in Engineering Technologies (NICET)

NICET-CT	Concrete Technician – Levels I, II, III & IV
NICET-ST	Soils Technician - Levels I, II, III & IV
NICET-GET	Geotechnical Engineering Technician - Levels I, II, III & IV

Association of the Wall and Ceilings Industries International (AWCI)

AWCI 12-B	Standard Practice for the Testing and Inspection of Field Applied Thin-Film Intumescent Fire-Resistive Materials; an Annotated Guide.

Schedule of Special Inspection Services

INSPECTION AND TESTING <i>("Continuous" & "Periodic" defined by the Code; refer to applicable Technical Specification Section for specific frequency requirements)</i>	REQUIRED <i>(Required if checked; Not Applicable if not checked)</i>	TECHNICAL SPECIFICATION SECTION <i>(Refer to for additional information)</i>	CONTINUOUS	PERIODIC
Cast-in-Place Concrete (1705.3)				
1. Inspection of reinforcing steel and verify placement	☒	03 30 00	☐	☒
2. Inspection of reinforcing steel welding:				
a. Verification of ASTM A706 material	☐	03 30 00	☐	☒
b. Inspect single-pass fillet welds, maximum 5/16"	☐	03 30 00	☐	☒
c. Inspect all other welds	☐	03 30 00	☒	☐
3. Inspection of anchors to be installed in concrete prior to and during placement	☒	03 30 00	☒	☐
4. Inspect anchors post-installed in hardened concrete				
a. Adhesive anchors installed in horizontally or upwardly inclined orientations to resist sustained tension loads.	☒	03 30 00	☒	☐
b. Mechanical anchors and adhesive anchors not defined in 4a.	☒	03 30 00	☐	☒
5. Verify use of required design mix	☒	03 30 00	☐	☒
6. Sampling fresh concrete for fabricating specimens for strength testing, perform slump and air content tests, and measure temperature of concrete	☒	03 30 00	☒	☐
7. Inspection of concrete and shotcrete placement for proper application techniques	☒	03 30 00	☒	☐
8. Verify maintenance of specified curing temperature and techniques	☒	03 30 00	☐	☒
9. Verification of in-situ concrete strength, prior to stressing of tendons in post-tensioned concrete, and prior to removal of shores and forms from beams and structural slabs	☒	03 30 00	☐	☒
10. Inspection of formwork for shape, location and dimensions of the concrete member being formed	☒	03 30 00	☐	☒
11. Inspection of post-tensioning operations	☐	03 38 16	☒	☐

Precast Concrete (1705.3)				
1. Inspection of reinforcing steel	☐	03 41 00	☐	☒
2. Verify use of required design mix	☐	03 41 00	☐	☒
3. Inspection of prestressed operations				
a. Application of prestressing forces	☐	03 41 00	☒	☐
b. Grouting of bonded prestressing tendons in the seismic-force-resisting system	☐	03 41 00	☒	☐
4. Sampling fresh concrete; slump, air content, temperature, strength test specimens	☐	03 41 00	☒	☐
5. Inspection of formwork for shape, location and dimensions of the concrete member being formed	☐	03 41 00	☐	☒
6. Inspection of concrete placement for proper application techniques	☐	03 41 00	☒	☐
7. Inspection for maintenance of specified curing temperature and techniques	☐	03 41 00	☐	☒
8. Erection of precast concrete members	☒	03 45 00, 03 48 10	☐	☒

Fabricated Items (1704.2.5 and 1705.10)				
1. Inspection of structural, load-bearing or lateral load-resisting members or assemblies as noted on Contract Documents that are fabricated in a fabricator's shop	☐	?? ?? ??	☐	☐
Exceptions:				
a. The fabricator has been approved to perform work without special inspections per NYSBC 1704.2.5.1.				
b. The members or assemblies are to be fabricated on site. Then refer to the respective material categories for inspections.				

Masonry (1705.4)				
Level 1	☐	04 20 00		
1. Prior to construction, verify certificates of compliance used in masonry construction	☐	04 20 00	☐	☐
Level 2 Level 3	☒ Level 2 ☐ Level 3	04 20 00		
1. Prior to construction, verify compliance with the approved submittals.	☒	04 20 00	☐	☐
2. Prior to construction, verify $f'm$, except where specifically exempted by the Code	☒	04 20 00	☐	☐
3. During construction, verify Slump flow and Visual Stability Index (VSI) when self-consolidating grout is delivered to the project site	☒	04 20 00	☐	☐
4. During construction, verify $f'm$ for every 5,000 sqft	☐	04 20 00	☐	☐
5. During construction, verify proportions of materials in premixed or preblended mortar, and grout other than self-consolidating grout, as delivered to the project site.	☐	04 20 00	☐	☐
6. At start of masonry construction, verify to ensure compliance:				
a. Proportions of site prepared mortar.	☒	04 20 00	☐	☒
b. Grade, type and size of reinforcement, connectors, and anchor bolts.	☒	04 20 00	☐	☒
c. Sample panel construction.	☒	04 20 00	☐	☒
7. Prior to grouting, verify that the following are in compliance:				
a. Grout space	☒	04 20 00	☐	☒
b. Placement of reinforcement, connectors, and anchor bolts	☒	04 20 00	☐	☒
c. Proportions of site-prepared grout	☒	04 20 00	☐	☒
8. During construction, verify compliance of the following:				
a. Materials and procedures with the approved submittals.	☒	04 20 00	☐	☒
b. Placement of masonry units and mortar joint construction.	☒	04 20 00	☐	☒
c. Size and location of structural members.	☒	04 20 00	☐	☒
d. Type, size and location of anchors including anchorage of masonry to structural members, frames or other construction	☒	04 20 00	☐	☒
e. Welding of reinforcing bars	☒	04 20 00	☒	☐
f. Preparation, construction and protection of masonry during cold or hot weather	☒	04 20 00	☐	☒
g. Placement of grout.	☒	04 20 00	☒	☐
9. Observe preparation of grout specimens, mortar specimens and/or prisms	☒	04 20 00	☐	☒

Structural Steel (1705.2.1)				
1. Minimum inspections prior to welding per AISC 360 (including but not limited to material verification, welder qualification and fit-up of joints).	☒	05 12 00	☒	☐
2. Minimum inspections during welding per AISC 360	☒	05 12 00	☒	☐
a. Placement and installation of steel headed stud anchors	☒	05 12 00	☒	☐
b. Verification of ASTM A 706 material	☒	05 12 00	☐	☒
c. Testing of resisting flexural and axial forces in intermediate and special moment frames, and boundary elements of special reinforced concrete shear walls and shear reinforcement.	☐	05 12 00	☒	☐
3. Minimum inspections after welding per AISC 360 (including but not limited to size, length and location of welds; welds meet visual acceptance criteria; and repair activities)	☒	05 12 00	☒	☐
4. Inspection of welding via UT for CJP groove welds subject to transversely applied tension loading in butt, T-, and Corner joints				
a. Risk Category III or IV structures	☒	05 12 00	☒	☐
b. Risk Category II structures	☐	05 12 00	☐	☒
5. Minimum inspections prior to high-strength bolting (except for snug-tight joints) per AISC 360 (including but not limited to material verification of high-strength bolts, nuts, and washers; and bolting procedures)	☒	05 12 00	☒	☐
6. Minimum inspections during high-strength bolting (except for snug-tight joints) per AISC 360 (included but not limited to assemblies and positioning)	☒	05 12 00		
a. For pretension/slip-critical connections using turn-of-nut with match marking method, direct-tension-indicator method, or twist-off-type tension control bolt method.	☒	05 12 00	☐	☒
b. For pretension/slip-critical connections using calibrated wrench method or turn-of-nut method without matchmarking	☒	05 12 00	☒	☐
7. Minimum inspections after high-strength bolting per AISC 360	☒	05 12 00	☐	☒
8. Inspection of fabricated and/or erected steel to verify compliance with the construction drawings.	☒	05 12 00	☐	☒
a. Details such as bracing and stiffeners	☒	05 12 00	☐	☒
b. Member locations	☒	05 12 00	☐	☒
c. Joint details	☒	05 12 00	☐	☒
9. Inspection during placement of anchor rods and other embedded items supporting structural steel for compliance with construction drawings.	☒	05 12 00	☒	☐
8. Material verification of structural steel: Identification markings to conform to ASTM standards specified in the approved construction documents	☐	05 12 00	☐	☐

Open-Web Steel Joists and Joist Girders (1705.2.3)				
1. Installation of open-web steel joists and joist girders				
a. End connections – welded or bolted per SJI	☒	05 21 00	☐	☒
b. Bridging – horizontal or diagonal				
1. Standard bridging per SJI	☒	05 21 00	☐	☒
2. Bridging that differs from SJI specification	☒	05 21 00	☐	☒

Cold-Formed Steel Deck (1705.2.2)				
1. Inspection or Execution Tasks Prior to Deck Placement per SDI QA/QC (including but not limited to compliance of materials with construction documents)	☒	05 31 00	☐	☒
2. Inspection or Execution Tasks After to Deck Placement per SDI QA/QC (including but not limited to compliance of installation with construction documents)	☒	05 31 00	☐	☒
3. Inspection or Execution Tasks Prior to Welding per SDI QA/QC (including but not limited to verification of procedures and certifications)	☒	05 31 00	☐	☒
4. Inspection or Execution Tasks During Welding per SDI QA/QC	☒	05 31 00	☒	☐
5. Inspection or Execution Tasks After Welding per SDI QA/QC (including but not limited to size, length and location of welds; welds meet visual acceptance criteria; and repair activities)	☒	05 31 00	☐	☒
6. Inspection or Execution Tasks Prior to Mechanical Fastening per SDI QA/QC (including but not limited to material verification)	☒	05 31 00	☐	☒
7. Inspection or Execution Tasks During Mechanical Fastening per SDI QA/QC (including but not limited to verification of positioning and installation)	☒	05 31 00	☒	☐
8. Inspection or Execution Tasks After Mechanical Fastening per SDI QA/QC (including but not limited to verification of spacing, type and location; repair activities)	☒	05 31 00	☐	☒

Cold-Formed Steel Trusses (1705.2.4)				
1. For trusses spanning 60 feet or greater:				
a. Verify the temporary installation restraint/bracing is installed per the approved truss submittal package.	☐	05 40 00	☐	☒
b. Verify the permanent individual truss member restraint/bracing is installed per the approved truss submittal package.	☐	05 40 00	☐	☒

Wood Construction (170505)				
1. For Metal-plate connected wood trusses spanning 60 feet or greater:				
a. Verify the temporary installation restraint/bracing is installed per the approved truss submittal package.	☐	06 10 00, 06 16 00, 06 17 53	☐	☒
b. Verify the permanent individual truss member restraint/bracing is installed per the approved truss submittal package.	☐	06 10 00, 06 16 00, 06 17 53	☐	☒
2. Inspect High-load diaphragms for grade and thickness of sheathing material; nominal size of framing members; fastener diameter and length; fastener layout and spacing	☐	06 10 00	☐	☒

Exterior Insulation and Finish Systems (EIFS) (1705.16)				
Not required if water-resistive barrier is installed with a means of draining moisture to the exterior. Also not required for EIFS applications over masonry or concrete walls.	☐	07 24 13	☐	☐
1. Inspection of water-resistive batter coating when installed over a sheathing substrate.				

Sprayed Fire-resistant Materials (1705.14)				
1. Verify surface preparation in accordance with manufacturer's written instructions.	☒	07 81 00	☐	☐
2. Verify temperature and area ventilation before and after application in accordance with manufacturer's written instructions.	☒	07 81 00	☐	☐
3. Verify thickness of sprayed fire-resistant materials				
a. Minimum of 4 measurements per 1,000 sq ft of floor, roof and wall assembly areas, or part thereof at each story.	☒	07 81 00	☐	☐
b. Minimum of 25% of structural members at each story.	☐	07 81 00	☐	☐
4. Verify density of sprayed fire-resistant materials.				
a. Minimum of one sample per 2,500 sq ft of floor, roof and wall assembly areas, or part thereof at each story.	☒	07 81 00	☐	☐
b. Minimum of one sample from each type of structural framing member per 2,500 sq ft of floor area or part thereof at each story.				
5. Verify cohesive/adhesive bond strength of sprayed fire-resistant materials.				
a. Minimum of one sample per 2,500 sq ft of floor, roof and wall assembly areas or part thereof at each story.	☒	07 81 00	☐	☐
b. Minimum of one sample from each type of structural framing member per 2,500 sq ft of floor area or part thereof at each story	☐	07 81 00	☐	☐
c. Bond tests to qualify a primer, paint, or encapsulant when acceptable bond strength performance between those coatings and the fire-resistant material has not been determined.	☒	07 81 00	☐	☐

Mastic and Intumescent Fire-resistant Coatings (1705.15)				
1. Verify surface preparation, application, and thickness when applied to structural elements and decks in accordance with AWCI 12-B	☐	07 81 23	☐	☐

Fire-Resistant Penetrations and Joints (1705.17)				
1. Inspection of through-penetrations and membrane penetration firestops in buildings in Risk Category III or IV per ASTM E2174	☒	07 84 13	☐	☐
2. Inspections of fire-resistant joint systems and perimeter fire barrier systems in buildings in Risk Category III or IV per ASTM E2393	☒	07 84 43, 07 95 13.13	☐	☐

Soils (1705.6)				
1. Verify materials below shallow foundations are adequate to achieve the design bearing capacity	☒	31 20 00	☐	☒
2. Verify excavations are extended to proper depth and have reached proper material	☒	31 20 00	☐	☒
3. Perform classification and testing of compacted fill materials	☒	31 20 00	☐	☒
4. Verify use of proper materials, densities and lift thicknesses during placement and compaction of compacted fill	☒	31 20 00	☒	☐
5. Prior to placement of compacted fill, inspect subgrade and verify that site has been prepared properly	☒	31 20 00	☐	☒

Driven Deep Foundations (1705.7)				
1. Verify element materials, sizes and lengths comply with the requirements	☐	31 62 13, 31 62 16, 31 62 19, 31 22 23	☒	☐
2. Determine capacities of test elements and conduct additional load tests, as required	☐	31 62 13, 31 62 16, 31 62 19, 31 22 23	☒	☐
3. Inspect driving operations and maintain complete and accurate records for each element	☐	31 62 13, 31 62 16, 31 62 19, 31 22 23	☒	☐
4. Verify placement locations and plumbness, confirm type and size of hammer, record number of blows per foot of penetration, determine required penetrations to achieve design capacity, record tip and butt elevations and document any damage to foundation element	☐	31 62 13, 31 62 16, 31 62 19, 31 22 23	☒	☐
5. For steel elements, perform additional special inspections in accordance with 1705.2	☐	31 62 13, 31 62 16, 31 62 19, 31 22 23	☐	☐
6. For concrete elements and concrete-filled elements, perform additional special inspections in accordance with Section 1705.3	☐	31 62 13, 31 62 16, 31 62 19, 31 22 23	☐	☐
7. For specialty elements, perform additional inspections	☐	31 62 13, 31 62 16, 31 62 19, 31 22 23	☐	☐

Cast-In-Place Deep Foundations (1705.8)				
1. Inspect drilling operations and maintain complete and	☐	31 63 16, 31 63 29	☒	☐

accurate records for each element				
2. Verify placement locations and plumbness, confirm element diameters, bell diameters (if applicable), lengths, embedment into bedrock (if applicable), and adequate end bearing strata capacity. Record concrete or grout volumes.	☐	31 63 16, 31 63 29	☒	☐
3. For concrete elements, perform tests and additional special inspections in accordance with Section 1705.3	☐	31 63 16, 31 63 29	☐	☐

Helical Pile Foundations (1705.9)				
1. Inspect installation operations and maintain complete and accurate records for each pier	☐	??	☒	☐
2. Verify and record installation equipment used, pile dimensions, tip elevations, final depth, final installation torque other data as required	☐	??	☒	☐

Wind Resistance Inspections (1705.11)				
1. Structural wood – of elements in main windforce-resisting system				
a. Inspection of gluing operations.	☐	06 10 00, 06 16 00, 06 17 53	☒	☐
b. Inspection of nailing, bolting, anchoring and other fastening	☐	06 10 00, 06 16 00, 06 17 53	☐	☒
2. Cold-formed steel light-frame construction – of elements in main windforce-resisting systems.				
a. Inspection of welding operations	☐	05 40 00	☐	☒
b. Inspection of screw attachment, bolting, anchoring and other fastening	☐	05 40 00	☐	☒
3. Wind-resisting components:				
a. Inspection of roof covering, roof deck and roof framing connections	☐	05 12 00, 05 21 00, 05 31 00, 07 53 23	☐	☒
b. Inspection of exterior wall covering and wall connections to roof and floor diaphragms and framing	☐	04 20 00, 07 24 13, 08 41 13, 08 44 13	☐	☒

Seismic Resistance Inspections (1705.12)				
1. Structural steel:				
SDC B, C, D, E, or F – refer to 1705.12.1.1 for exceptions	☐	05 12 00	☒	☐
a. Seismic force-resisting systems – inspection in accordance with AISC 341				
SDC B (R>3), C (R>3), D, E, or F	☐	05 12 00	☒	☐
b. Structural steel elements - inspection in accordance with AISC 341				
SDC C, D, E, or F, refer to 1705.12.2 for exceptions				
2. Structural wood, seismic-force-resisting systems:				

a. Inspection of field gluing operations.	☐	06 10 00, 06 17 00, 06 17 53	☒	☐
b. Inspection of nailing, bolting, anchoring and other fastening	☐	06 10 00, 06 17 00, 06 17 53	☐	☒
SDC C, D, E, or F, refer to 1705.12.3 for exceptions				
3. Cold-formed steel framing - of elements in seismic-force-resisting systems				
a. Inspection of welding operations of seismic-force-resisting systems	☐	05 40 00	☐	☒
b. Inspection of screw attachment, bolting, anchoring and other fastening	☐	05 40 00	☐	☒
SDC C, D, E or F; coord with 13.2.2 of ASCE 7				
4. Designated seismic systems – Inspection systems requiring Seismic Qualification per ASCE 7. Verify label, anchorage and mounting conforms to certificate of compliance	☐	??	☐	☒
5. Architectural components				
a. Inspection of erection and fastening of exterior cladding	☐		☐	☒
b. Inspection of erection and fastening of interior and exterior nonbearing walls	☐		☐	☒
c. Inspection of erection and fastening of interior and exterior veneer	☐		☐	☒
d. Access floors – inspection of anchorage	☐		☐	☒
6. Mechanical and electrical components:				
SDC C, D, E or F				
a. Inspection of anchorage of electrical equipment for emergency power systems	☐		☐	☒
SDC E or F				
b. Inspection of anchorage installation or other electrical equipment	☐		☐	☒
SDC C, D, E, or F				
c. Inspection of installation and anchorage of piping systems and associated mechanical units designed to carry hazardous materials	☐		☐	☒
SDC C, D, E, or F				
d. Inspection of installation and anchorage of ductwork designed to carry hazardous materials	☐		☐	☒
SDC, C, D, E, or F				
e. Inspection of installation and anchorage of vibration isolation systems	☐		☐	☒
SDC, C, D, E, or F				
f. Inspection of installation of mechanical and electrical equipment where automatic fire sprinkler systems are installed to verify clearances	☐		☐	☒
SDC B, C, D, E or F				
7. Seismic isolation system: Inspection during fabrication and installation of isolator units and energy dissipation devices that are part of the seismic isolation system	☐		☐	☒
SDC D, E or F				
8. Cold-formed steel special bolted moment frames: Inspection during installation of frames part of the seismic isolation system	☐		☐	☒

Seismic Resistance Structural Testing				
1. Structural steel:				
SDC B, C, D, E, or F		05 12 00	☐	☐
a. Seismic force-resisting systems: Non-destructive testing in accordance with quality assurance requirements of AISC 341	☐			
b. Structural steel elements: nondestructive testing in accordance with the quality assurance requirements of AISC 341	☐	05 12 00	☐	☐
SDC B, C, D, E, or F			☐	☐
2. Nonstructural Components: Confirm certification of compliance of seismic qualification for supports and attachments has been submitted by manufacturer for specified systems	☐			
SDC C, D, E or F		??	☐	☐
3. Designated seismic systems: Confirm certification of compliance of seismic qualification has been submitted for designated seismic systems	☐			
SDC B, C, D, E, or F			☐	☐
4. Seismic isolation systems: Testing per ASCE 7, Section 17.8	☐			

Structural Observations				
One or more of: RC IV; high-rise building; special structures as determined by RDP; required by building official	☐			
1. Structural observations for structures				
SDC D, E, or F where RC III or IV or SDC E where RC I or II and > 2 stories above grade plane	☐			
2. Structural observations for seismic resistance				
V = 130 mph or greater and RC III or IV	☐			
3. Structural observations for wind resistance				

SECTION 01 42 00 - REFERENCES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 DEFINITIONS

- A. "Approved": When used to convey Architect's action on Contractor's submittals, applications, and requests, "approved" is limited to Architect's duties and responsibilities as stated in the Conditions of the Contract.
- B. "Directed": A command or instruction by Architect. Other terms including "requested," "authorized," "selected," "required," and "permitted" have the same meaning as "directed."
- C. "Indicated": Requirements expressed by graphic representations or in written form on Drawings, in Specifications, and in other Contract Documents. Other terms including "shown," "noted," "scheduled," and "specified" have the same meaning as "indicated."
- D. "Furnish": Supply and deliver to Project site, ready for unloading, unpacking, assembly, installation, and similar operations.
- E. "Install": Unload, temporarily store, unpack, assemble, erect, place, anchor, apply, work to dimension, finish, cure, protect, clean, and similar operations at Project Site.
- F. "Provide": Furnish and install, complete and ready for the intended use.

1.3 INDUSTRY STANDARDS

- A. Applicability of Standards: Unless the Contract Documents include more stringent requirements, applicable construction industry standards have the same force and effect as if bound or copied directly into the Contract Documents to the extent referenced. Such standards are made a part of the Contract Documents by reference.
- B. Publication Dates: Comply with standards in effect as of date of the Contract Documents unless otherwise indicated.
 - 1. When the building code in effect for the Project cites a different edition, comply with the building code-cited edition.
- C. Copies of Standards: Each entity engaged in construction on Project should be familiar with industry standards applicable to its construction activity. Copies of applicable standards are not bound with the Contract Documents.
 - 1. Where copies of standards are needed to perform a required construction activity, obtain copies directly from publication source.

1.4 ABBREVIATIONS AND ACRONYMS

- A. Industry Organizations: Where abbreviations and acronyms are used in Specifications or other Contract Documents, they shall mean the recognized name of the entities in the following list. This information is subject to change and is believed to be accurate as of the date of the Contract Documents.

1. AA - Aluminum Association (The); www.aluminum.org.
2. AABC - Associated Air Balance Council; www.aabc.com.
3. AAMA - American Architectural Manufacturers Association; www.aamanet.org.
4. AAPFCO - Association of American Plant Food Control Officials; www.aapfco.org.
5. AASHTO - American Association of State Highway and Transportation Officials; www.transportation.org.
6. AATCC - American Association of Textile Chemists and Colorists; www.aatcc.org.
7. ABBA - Air Barrier Association of America; www.airbarrier.org.
8. ABMA - American Bearing Manufacturers Association; www.americanbearings.org.
9. ACI - American Concrete Institute; (Formerly: ACI International); www.concrete.org.
10. ACPA - American Concrete Pipe Association; www.concrete-pipe.org.
11. AEIC - Association of Edison Illuminating Companies, Inc. (The); www.aeic.org.
12. AF&PA - American Forest & Paper Association; www.afandpa.org.
13. AGA - American Gas Association; www.aga.org.
14. AHAM - Association of Home Appliance Manufacturers; www.aham.org.
15. AHRI - Air-Conditioning, Heating, and Refrigeration Institute (The); www.ahrinet.org.
16. AI - Asphalt Institute; www.asphaltinstitute.org.
17. AIA - American Institute of Architects (The); www.aia.org.
18. AISC - American Institute of Steel Construction; www.aisc.org.
19. AISI - American Iron and Steel Institute; www.steel.org.
20. AITC - American Institute of Timber Construction; www.aitc-glulam.org.
21. ALSC - American Lumber Standard Committee, Incorporated; www.alsc.org.
22. AMCA - Air Movement and Control Association International, Inc.; www.amca.org.
23. ANSI - American National Standards Institute; www.ansi.org.
24. AOSA - Association of Official Seed Analysts, Inc.; www.aosaseed.com.
25. APA - APA - The Engineered Wood Association; www.apawood.org.
26. APA - Architectural Precast Association; www.archprecast.org.
27. API - American Petroleum Institute; www.api.org.
28. ARI - Air-Conditioning & Refrigeration Institute; (See AHRI).
29. ARI - American Refrigeration Institute; (See AHRI).
30. ARMA - Asphalt Roofing Manufacturers Association; www.asphaltroofing.org.
31. ASCE - American Society of Civil Engineers; www.asce.org.
32. ASCE/SEI - American Society of Civil Engineers/Structural Engineering Institute; (See ASCE).
33. ASHRAE - American Society of Heating, Refrigerating and Air-Conditioning Engineers; www.ashrae.org.
34. ASME - ASME International; (American Society of Mechanical Engineers); www.asme.org.
35. ASNT - American Society for Nondestructive Testing (The); www.asnt.org.
36. ASSE - American Society of Safety Engineers (The); www.asse.org.
37. ASSE - American Society of Sanitary Engineering; www.asse-plumbing.org.
38. ASTM - ASTM International; www.astm.org.
39. ATIS - Alliance for Telecommunications Industry Solutions; www.atis.org.
40. AWCI - Association of the Wall and Ceiling Industry; www.awci.org.

41. AWEA - American Wind Energy Association; www.awea.org.
42. AWI - Architectural Woodwork Institute; www.awinet.org.
43. AWMAC - Architectural Woodwork Manufacturers Association of Canada; www.awmac.com.
44. AWWA - American Water Works Association; www.awwa.org.
45. AWS - American Welding Society; www.aws.org.
46. AWWA - American Water Works Association; www.awwa.org.
47. BHMA - Builders Hardware Manufacturers Association; www.buildershardware.com.
48. BIA - Brick Industry Association (The); www.gobrick.com.
49. BICSI - BICSI, Inc.; www.bicsi.org.
50. BIFMA - BIFMA International; (Business and Institutional Furniture Manufacturer's Association); www.bifma.com.
51. BISSC - Baking Industry Sanitation Standards Committee; www.bissc.org.
52. BWF - Badminton World Federation; (Formerly: International Badminton Federation); www.bwfbadminton.org.
53. CDA - Copper Development Association; www.copper.org.
54. CE – Conformite Europeenne; <http://ec.europa.eu/growth/single-market/ce-marking/>.
55. CEA - Canadian Electricity Association; www.electricity.ca.
56. CEA - Consumer Electronics Association; www.ce.org.
57. CFFA - Chemical Fabrics & Film Association, Inc.; www.chemicalfabricsandfilm.com.
58. CFSEI - Cold-Formed Steel Engineers Institute; www.cfsei.org.
59. CGA - Compressed Gas Association; www.cganet.com.
60. CIMA - Cellulose Insulation Manufacturers Association; www.cellulose.org.
61. CISCA - Ceilings & Interior Systems Construction Association; www.cisca.org.
62. CISPI - Cast Iron Soil Pipe Institute; www.cispi.org.
63. CLFMI - Chain Link Fence Manufacturers Institute; www.chainlinkinfo.org.
64. CPA - Composite Panel Association; www.pbmdf.com.
65. CPPA – (Formerly: Corrugated Polyethylene Pipe Association; a Division of the Plastic Pipe Institute); www.plasticpipe.org/drainage/.
66. CRI - Carpet and Rug Institute (The); www.carpet-rug.org.
67. CRRC - Cool Roof Rating Council; www.coolroofs.org.
68. CRSI - Concrete Reinforcing Steel Institute; www.crsi.org.
69. CSA - Canadian Standards Association; www.csa.ca.
70. CSA - CSA International; (Formerly: IAS - International Approval Services); www.csa-international.org.
71. CSI - Construction Specifications Institute (The); www.csinet.org.
72. CSSB - Cedar Shake & Shingle Bureau; www.cedarbureau.org.
73. CTI - Cooling Technology Institute; (Formerly: Cooling Tower Institute); www.cti.org.
74. CWC - Composite Wood Council; (See CPA).
75. DASMA - Door and Access Systems Manufacturers Association; www.dasma.com.
76. DHI - Door and Hardware Institute; www.dhi.org.
77. ECA - Electronic Components Association;(See ECIA).
78. ECAMA - Electronic Components Assemblies & Materials Association; (See ECIA).
79. ECIA – Electronic Components Industry Association; www.eciaonline.org.
80. EIA - Electronic Industries Alliance; (See TIA).
81. EIMA - EIFS Industry Members Association; www.eima.com.
82. EJMA - Expansion Joint Manufacturers Association, Inc.; www.ejma.org.
83. ESD - ESD Association; (Electrostatic Discharge Association); www.esda.org.
84. ESTA - Entertainment Services and Technology Association; (See PLASA).
85. ETL - Intertek (See Intertek); www.intertek.com.
86. EVO - Efficiency Valuation Organization; www.evo-world.org.

87. FIBA - Federation Internationale de Basketball; (The International Basketball Federation); www.fiba.com.
88. FIVB - Federation Internationale de Volleyball; (The International Volleyball Federation); www.fivb.org.
89. FM Approvals - FM Approvals LLC; www.fmglobal.com.
90. FM Global - FM Global; (Formerly: FMG - FM Global); www.fmglobal.com.
91. FRSA - Florida Roofing, Sheet Metal & Air Conditioning Contractors Association, Inc.; www.floridarroof.com.
92. FSA - Fluid Sealing Association; www.fluidsealing.com.
93. FSC - Forest Stewardship Council U.S.; www.fscus.org.
94. FSEC - Florida Solar Energy Center; www.fsec.ucf.edu.
95. GA - Gypsum Association; www.gypsum.org.
96. GANA - Glass Association of North America; www.glasswebsite.com.
97. GS - Green Seal; www.greenseal.org.
98. HI - Hydraulic Institute; www.pumps.org.
99. HI/GAMA - Hydronics Institute/Gas Appliance Manufacturers Association; (See AHRI).
100. HMMA - Hollow Metal Manufacturers Association; (See NAAMM).
101. HPVA - Hardwood Plywood & Veneer Association; www.hpva.org.
102. HPW - H. P. White Laboratory, Inc.; www.hpwhite.com.
103. IAPSC - International Association of Professional Security Consultants; www.iapsc.org.
104. IAS – International Accreditation Service; www.iasonline.org.
105. IAS - International Approval Services; (See CSA).
106. ICBO - International Conference of Building Officials; (See ICC).
107. ICC - International Code Council; www.iccsafe.org.
108. ICEA - Insulated Cable Engineers Association, Inc.; www.icea.net.
109. ICPA - International Cast Polymer Alliance; www.icpa-hq.org.
110. ICRI - International Concrete Repair Institute, Inc.; www.icri.org.
111. IEC - International Electrotechnical Commission; www.iec.ch.
112. IEEE - Institute of Electrical and Electronics Engineers, Inc. (The); www.ieee.org.
113. IES - Illuminating Engineering Society; (Formerly: Illuminating Engineering Society of North America); www.ies.org.
114. IESNA - Illuminating Engineering Society of North America; (See IES).
115. IEST - Institute of Environmental Sciences and Technology; www.iest.org.
116. IGCC - Insulating Glass Certification Council; www.igcc.org.
117. IGMA - Insulating Glass Manufacturers Alliance; www.igmaonline.org.
118. IGSHPA - International Ground Source Heat Pump Association; www.igshpa.okstate.edu.
119. ILI - Indiana Limestone Institute of America, Inc.; www.iliai.com.
120. Intertek - Intertek Group; (Formerly: ETL SEMCO; Intertek Testing Service NA); www.intertek.com.
121. ISA - International Society of Automation (The); (Formerly: Instrumentation, Systems, and Automation Society); www.isa.org.
122. ISAS - Instrumentation, Systems, and Automation Society (The); (See ISA).
123. ISFA - International Surface Fabricators Association; (Formerly: International Solid Surface Fabricators Association); www.isfanow.org.
124. ISO - International Organization for Standardization; www.iso.org.
125. ISSFA - International Solid Surface Fabricators Association; (See ISFA).
126. ITU - International Telecommunication Union; www.itu.int/home.
127. KCMA - Kitchen Cabinet Manufacturers Association; www.kcma.org.
128. LMA - Laminating Materials Association; (See CPA).
129. LPI - Lightning Protection Institute; www.lightning.org.

130. MBMA - Metal Building Manufacturers Association; www.mbma.com.
131. MCA - Metal Construction Association; www.metalconstruction.org.
132. MFMA - Maple Flooring Manufacturers Association, Inc.; www.maplefloor.org.
133. MFMA - Metal Framing Manufacturers Association, Inc.; www.metalframingmfg.org.
134. MHIA - Material Handling Industry of America; www.mhia.org.
135. MIA - Marble Institute of America; www.marble-institute.com.
136. MPPA - Moulding & Millwork Producers Association; (Formerly: Wood Moulding & Millwork Producers Association); www.wmmpa.com.
137. MPI - Master Painters Institute; www.paintinfo.com.
138. MSS - Manufacturers Standardization Society of The Valve and Fittings Industry Inc.; www.mss-hq.org.
139. NAAMM - National Association of Architectural Metal Manufacturers; www.naamm.org.
140. NACE - NACE International; (National Association of Corrosion Engineers International); www.nace.org.
141. NADCA - National Air Duct Cleaners Association; www.nadca.com.
142. NAIMA - North American Insulation Manufacturers Association; www.naima.org.
143. NALP - National Association of Landscape Professionals (Formerly Professional Landcare Network); www.landscapeprofessionals.org.
144. NBGQA - National Building Granite Quarries Association, Inc.; www.nbgqa.com.
145. NBI - New Buildings Institute; www.newbuildings.org.
146. NCAA - National Collegiate Athletic Association (The); www.ncaa.org.
147. NCMA - National Concrete Masonry Association; www.ncma.org.
148. NEBB - National Environmental Balancing Bureau; www.nebb.org.
149. NECA - National Electrical Contractors Association; www.necanet.org.
150. NeLMA - Northeastern Lumber Manufacturers Association; www.nelma.org.
151. NEMA - National Electrical Manufacturers Association; www.nema.org.
152. NETA - InterNational Electrical Testing Association; www.netaworld.org.
153. NFHS - National Federation of State High School Associations; www.nfhs.org.
154. NFPA - National Fire Protection Association; www.nfpa.org.
155. NFPA - NFPA International; (See NFPA).
156. NFRC - National Fenestration Rating Council; www.nfrc.org.
157. NHLA - National Hardwood Lumber Association; www.nhla.com.
158. NICET - National Institute for Certification in Engineering Technologies; www.nicet.org.
159. NLGA - National Lumber Grades Authority; www.nlga.org.
160. NOFMA - National Oak Flooring Manufacturers Association; (See NWFA).
161. NOMMA - National Ornamental & Miscellaneous Metals Association; www.nomma.org.
162. NRCA - National Roofing Contractors Association; www.nrca.net.
163. NRMCA - National Ready Mixed Concrete Association; www.nrmca.org.
164. NSF - NSF International; www.nsf.org.
165. NSPE - National Society of Professional Engineers; www.nspe.org.
166. NSSGA - National Stone, Sand & Gravel Association; www.nssga.org.
167. NTMA - National Terrazzo & Mosaic Association, Inc. (The); www.ntma.com.
168. NWFA - National Wood Flooring Association; www.nwfa.org.
169. PCI - Precast/Prestressed Concrete Institute; www.pci.org.
170. PDI - Plumbing & Drainage Institute; www.pdionline.org.
171. PLANET - Professional Landcare Network; (See NALP).
172. PLASA - PLASA; (Formerly: ESTA - Entertainment Services and Technology Association); www.plasa.org.
173. PTI - Post-Tensioning Institute; www.post-tensioning.org.
174. RCSC - Research Council on Structural Connections; www.boltcouncil.org.

175. RFCI - Resilient Floor Covering Institute; www.rfci.com.
176. RIS - Redwood Inspection Service; www.redwoodinspection.com.
177. SAE - SAE International; www.sae.org.
178. SCTE - Society of Cable Telecommunications Engineers; www.scte.org.
179. SDI - Steel Deck Institute; www.sdi.org.
180. SDI - Steel Door Institute; www.steeldoor.org.
181. SEFA - Scientific Equipment and Furniture Association; www.sefalabs.com.
182. SEI/ASCE - Structural Engineering Institute/American Society of Civil Engineers; (See ASCE).
183. SGCC - Safety Glazing Certification Council; www.sgcc.org.
184. SIA - Security Industry Association; www.siaonline.org.
185. SJI - Steel Joist Institute; www.steeljoist.org.
186. SMA - Screen Manufacturers Association; www.smainfo.org.
187. SMACNA - Sheet Metal and Air Conditioning Contractors' National Association; www.smacna.org.
188. SMPTE - Society of Motion Picture and Television Engineers; www.smpte.org.
189. SPFA - Spray Polyurethane Foam Alliance; www.sprayfoam.org.
190. SPIB - Southern Pine Inspection Bureau; www.spib.org.
191. SPRI - Single Ply Roofing Industry; www.spri.org.
192. SRCC - Solar Rating and Certification Corporation; www.solar-rating.org.
193. SSINA - Specialty Steel Industry of North America; www.ssina.com.
194. SSPC - SSPC: The Society for Protective Coatings; www.sspc.org.
195. STI - Steel Tank Institute; www.steeltank.com.
196. SWI - Steel Window Institute; www.steelwindows.com.
197. SWPA - Submersible Wastewater Pump Association; www.swpa.org.
198. TABB - Testing, Adjusting and Balancing Bureau; www.tabbcertified.org.
199. TCA - Tilt-Up Concrete Association; www.tilt-up.org.
200. TCNA - Tile Council of North America, Inc.; www.tileusa.com.
201. TEMA - Tubular Exchanger Manufacturers Association, Inc.; www.tema.org.
202. TIA - Telecommunications Industry Association; (Formerly: TIA/EIA - Telecommunications Industry Association/Electronic Industries Alliance); www.tiaonline.org.
203. TIA/EIA - Telecommunications Industry Association/Electronic Industries Alliance; (See TIA).
204. TMS - The Masonry Society; www.masonrysociety.org.
205. TPI - Truss Plate Institute; www.tpinst.org.
206. TPI - Turfgrass Producers International; www.turfgrasssod.org.
207. TRI - Tile Roofing Institute; www.tilerroofing.org.
208. UFAC - Upholstered Furniture Action Council; www.ufac.org.
209. UL - Underwriters Laboratories Inc.; www.ul.com.
210. ULC - Underwriters Laboratories of Canada; www.ulc.ca.
211. UNI - Uni-Bell PVC Pipe Association; www.uni-bell.org.
212. USAV - USA Volleyball; www.usavolleyball.org.
213. USBA - United States Badminton Association; www.usabadminton.org.
214. USGBC - U.S. Green Building Council; www.usgbc.org.
215. USITT - United States Institute for Theatre Technology, Inc.; www.usitt.org.
216. WA - Wallcoverings Association; www.wallcoverings.org.
217. WASTEC - Waste Equipment Technology Association; www.wastec.org.
218. WCLIB - West Coast Lumber Inspection Bureau; www.wclib.org.
219. WCMA - Window Covering Manufacturers Association; www.wcmanet.org.
220. WDMA - Window & Door Manufacturers Association; www.wdma.com.

221. WI - Woodwork Institute; (Formerly: WIC - Woodwork Institute of California); www.wicnet.org.
222. WMMPA - Wood Moulding & Millwork Producers Association; (See MMPA).
223. WSRCA - Western States Roofing Contractors Association; www.wsrca.com.
224. WWPA - Western Wood Products Association; www.wwpa.org.

B. Code Agencies: Where abbreviations and acronyms are used in Specifications or other Contract Documents, they shall mean the recognized name of the entities in the following list. This information is believed to be accurate as of the date of the Contract Documents.

1. IAPMO - International Association of Plumbing and Mechanical Officials; www.iapmo.org.
2. ICC - International Code Council; www.iccsafe.org.
3. ICC-ES - ICC Evaluation Service, LLC; www.icc-es.org.

C. Federal Government Agencies: Where abbreviations and acronyms are used in Specifications or other Contract Documents, they shall mean the recognized name of the entities in the following list. Information is subject to change and is believed to be accurate as of the date of the Contract Documents.

1. COE - Army Corps of Engineers; www.usace.army.mil.
2. CPSC - Consumer Product Safety Commission; www.cpsc.gov.
3. DOC - Department of Commerce; National Institute of Standards and Technology; www.nist.gov.
4. DOD - Department of Defense; <http://quicksearch.dla.mil>.
5. DOE - Department of Energy; www.energy.gov.
6. EPA - Environmental Protection Agency; www.epa.gov.
7. FAA - Federal Aviation Administration; www.faa.gov.
8. FCC - Federal Communications Commission; www.fcc.gov.
9. FG - Federal Government Publications; www.gpo.gov.
10. GSA - General Services Administration; www.gsa.gov.
11. HUD - Department of Housing and Urban Development; www.hud.gov.
12. LBL - Lawrence Berkeley National Laboratory; Environmental Energy Technologies Division; <http://eetd.lbl.gov>.
13. NIST - National Institute of Standards and Technology; www.nist.gov.
14. OSHA - Occupational Safety & Health Administration; www.osha.gov.
15. SD - Department of State; www.state.gov.
16. TRB - Transportation Research Board; National Cooperative Highway Research Program; www.trb.org.
17. USDA - Department of Agriculture; Agriculture Research Service; U.S. Salinity Laboratory; www.ars.usda.gov.
18. USDA - Department of Agriculture; Rural Utilities Service; www.usda.gov.
19. USDJ - Department of Justice; Office of Justice Programs; National Institute of Justice; www.ojp.usdoj.gov.
20. USP - U.S. Pharmacopeia; www.usp.org.
21. USPS - United States Postal Service; www.usps.com.

D. Standards and Regulations: Where abbreviations and acronyms are used in Specifications or other Contract Documents, they shall mean the recognized name of the standards and regulations in the following list. This information is subject to change and is believed to be accurate as of the date of the Contract Documents.

1. ADAAG - Accessibility Guidelines for Buildings and Facilities, Available from United States Access Board; www.access-board.gov.
2. AHERA - Asbestos Hazard Emergency Response Act, Available from US Environmental Protection Agency; www.epa.gov.
3. BCNYS - Building Code of New York State, Available from New York State Department of State; www.dos.ny.gov/DCEA/.
4. CFR - Code of Federal Regulations; Available from Government Printing Office; www.gpo.gov/fdsys.
5. DOD - Department of Defense; Military Specifications and Standards; Available from Department of Defense Single Stock Point; <http://quicksearch.dla.mil>.
6. DSCC - Defense Supply Center Columbus; (See FS).
7. FED-STD - Federal Standard; (See FS).
8. FS - Federal Specification; Available from DLA Document Services; www.quicksearch.dla.mil.
 - a. Available from Defense Standardization Program; www.dsp.dla.mil.
 - b. Available from General Services Administration; www.gsa.gov.
 - c. Available from National Institute of Building Sciences/Whole Building Design Guide; www.wbdg.org/ccb.
9. IBC - International Building Code, Available from International Code Council; www.iccsafe.org.
10. LEED - Leadership in Energy and Environmental Design (Green Building Rating Systems), Available from U.S. Green Building Council; www.usgbc.org.
11. MILSPEC - Military Specification and Standards; (See DOD).
12. NEC - National Electrical Code, Available from NFPA (National Fire Protection Association); www.nfpa.org.
13. NSPC - National Standard Plumbing Code, Available from Plumbing-Heating-Cooling Contractors Association; www.phccweb.org.
14. NYSED/MPS - New York State Education Department Manual of Planning Standards, Available from New York State Education Department (Facilities Planning); www.p12.nysed.gov/facplan/forms.html.
15. USAB - United States Access Board; www.access-board.gov.
16. UFAS - Uniform Federal Accessibility Standards Available from Access Board; www.access-board.gov.
17. USATBCB - U.S. Architectural & Transportation Barriers Compliance Board; (See USAB).

E. State Government Agencies: Where abbreviations and acronyms are used in Specifications or other Contract Documents, they shall mean the recognized name of the entities in the following list. This information is subject to change and is believed to be accurate as of the date of the Contract Documents.

1. CBHF - State of California; Department of Consumer Affairs; Bureau of Electronic Appliance and Repair, Home Furnishings and Thermal Insulation; www.bearhfti.ca.gov.
2. NYSDEC - New York State Department of Environmental Conservation; www.dec.ny.gov.
3. NYSDOH - New York State Department of Health; www.health.ny.gov.
4. NYSDOT - New York State Department of Transportation; www.dot.ny.gov.
5. NYSED - New York State Education Department (Facilities Planning); www.p12.nysed.gov/facplan/.
6. NYSERDA - New York State Energy Research and Development Authority; www.nyserda.ny.gov.
7. OSHPD - Office of Statewide Health Planning and Development (State of California); www.oshpd.ca.gov.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 01 42 00

SECTION 01 50 00 – TEMPORARY FACILITIES & CONTROLS

PART 1 GENERAL

1.1 SUMMARY

- A. This Section includes requirements for temporary facilities and controls, including temporary utilities, support facilities, and security and protection.
- B. Temporary utilities include, but are not limited to, the following:
 - 1. Water service and distribution.
 - 2. Temporary electric power and light.
 - 3. Temporary heat.
 - 4. Ventilation.
 - 5. Telephone service.
 - 6. Sanitary facilities, including drinking water.
 - 7. Storm and sanitary sewer.
- C. Support facilities include, but are not limited to, the following:
 - 1. Field offices and storage sheds.
 - 2. Architects/Engineers field office.
 - 3. Temporary roads and paving.
 - 4. Dewatering facilities and drains.
 - 5. Temporary enclosures.
 - 6. Hoists and temporary elevator use.
 - 7. Temporary project identification signs and bulletin boards.
 - 8. Waste disposal services.
 - 9. Rodent and pest control.
 - 10. Construction aids and miscellaneous services and facilities.
- D. Security and protection facilities include, but are not limited to, the following:
 - 1. Temporary fire protection.
 - 2. Barricades, warning signs, and lights.
 - 3. Environmental protection.

4. Tree and plant protection.
5. Pest control.
6. Security enclosure and lockup.
7. Temporary enclosures.
8. Temporary partitions.

1.2 DIVISION OF RESPONSIBILITIES

- A. General: Each prime contractor is specifically assigned certain responsibilities for temporary services and facilities to be used by other prime contractors, and other nonprime contractors and separate entities at the site, Owner's workforces, Construction Manager, Architect, testing agencies, personnel of governing authorities, and personnel authorized to be at project site during contract time. The General Construction Work Contractor (Contract #2) is responsible for providing temporary facilities and controls that are not normal construction activities of other prime contractors and are not specifically assigned otherwise by the Contract Documents.

1.3 USE CHARGES

- A. General: Cost or use charges for temporary facilities are not chargeable to the Owner or the Architect. The Architect will not accept a prime contractor's cost or use charges for temporary services or facilities as a basis of claim for an adjustment in the Contract Sum or the Contract Time.
- B. Water Service: Use water from the Owner's existing water system without metering and without payment of use charges. Access to water shall be designated by the Owner.
- C. Electric Power Service: Temporary electric power including set-up, maintenance and use charges is the responsibility of the Electrical Work Contractor (Contract #5).
 1. Use of electric power from the Owner's permanent power system (when operational) will be granted to all prime contractors without payment of use charges.
- D. Temporary Heating, Cooling, and Ventilation for the Building: The General Construction Work Contractor is responsible for temporary building heating, and ventilation, and shall pay for all utility use charges.

1.4 SUBMITTALS

- A. Temporary Utilities: The prime contractor shall submit reports of tests, inspections, meter readings, and similar procedures performed on temporary utilities.
- B. Implementation and Termination Schedule: Within 15 days of the date established for submittal of the Contractor's Construction Schedule, each prime contractor shall submit a schedule indicating implementation and termination of each temporary utility for which the Contractor is responsible.
- C. Temporary Signage: Provide shop drawings, indicating the size and layout of the signs, color choices for Owner selection and installation details.

1.5 QUALITY ASSURANCE

- A. Regulations: The prime contractor shall comply with industry standards and with applicable laws and regulations of authorities having jurisdiction including, but not limited to, the following:
 - 1. Building code requirements.
 - 2. Health and safety regulations.
 - 3. Utility company regulations.
 - 4. Police, fire department and rescue squad rules.
 - 5. Environmental protection regulations.
- B. Standards: The prime contractor shall comply with NFPA 241 "Standard for Safeguarding Construction, Alterations, and Demolition Operations," ANSI-A10 Series standards for "Safety Requirements for Construction and Demolition," and NECA Electrical Design Library "Temporary Electrical Facilities."
 - 1. Trade Jurisdictions: Assigned responsibilities for installation and operation of temporary utilities are not intended to interfere with the normal application of trade regulations and union jurisdictions.
 - 2. Electrical Service: Comply with NEMA, NECA and UL standards and regulations for temporary electric service. Install service to comply with NFPA 70.
- C. Inspections: Arrange for authorities having jurisdiction to inspect and test each temporary utility before use. Obtain required certifications and permits.

1.6 PROJECT CONDITIONS

- A. Temporary Utilities: The prime contractor shall prepare a schedule indicating dates for implementation and termination of each temporary utility for which the Contractor is responsible. At the earliest feasible time, when acceptable to the Owner, change over from use of temporary service to use of permanent service.
 - 1. Temporary Use of Permanent Facilities: The Installer of each permanent service shall assume responsibility for its operation, maintenance, and protection during use as a construction facility prior to the Owner's acceptance, regardless of previously assigned responsibilities.
- B. Conditions of Use: Keep temporary services and facilities clean and neat in appearance. Operate in a safe and efficient manner. Relocate temporary services and facilities as the Work progresses. Do not overload facilities or permit them to interfere with progress. Take necessary fire-prevention measures. Do not allow hazardous, dangerous, or unsanitary conditions, or public nuisances to develop or persist on-site.

PART 2 PRODUCTS

2.1 MATERIALS

- A. General: The prime contractor shall provide new materials. If acceptable to the Architect, undamaged, previously used materials in serviceable condition may be used. Provide materials suitable for use intended.
- B. Lumber and Plywood: Comply with requirements in Division 6 Section "Rough Carpentry."
 - 1. For job-built temporary offices, shops, and sheds within the construction area, provide UL-labeled, fire-treated lumber and plywood for framing, sheathing, and siding.
 - 2. For signs and directory boards, provide exterior-type, Grade B-B high-density concrete form overlay plywood of sizes and thicknesses indicated.
 - 3. For fences and vision barriers, provide minimum 3/8-inch- thick exterior plywood.
 - 4. For safety barriers, sidewalk bridges, and similar uses, provide minimum 5/8-inch-thick exterior plywood.
- C. Pavement: Comply with Division 32 Pavement Sections
- D. Insulation: Unfaced mineral-fiber blanket manufactured from glass, slag wool, or rock wool; with maximum flame spread and smoke developed indices of 25 and 50, respectively.
- E. Gypsum Wallboard: Provide gypsum wallboard on interior walls of temporary offices.
- F. Roofing Materials: Provide UL Class A standard-weight asphalt shingles or UL Class C mineral-surfaced roll roofing on roofs of job-built temporary offices, shops, and sheds.
- G. Paint: Comply with requirements of Division 9 Section "Painting."
 - 1. For job-built temporary offices, shops, sheds, fences, and other exposed lumber and plywood, provide exterior-grade acrylic-latex emulsion over exterior primer.
 - 2. For sign panels and applied graphics, provide exterior-grade alkyd gloss enamel over exterior primer.
 - 3. For interior walls of temporary offices, provide 2 coats interior latex-flat wall paint.
- H. Tarpaulins: Provide waterproof, fire-resistant, UL-labeled tarpaulins with flame-spread rating of 15 or less. For temporary enclosures, provide translucent, nylon-reinforced, laminated polyethylene or polyvinyl chloride, fire-retardant tarpaulins.
- I. Water: Provide potable water approved by local health authorities.
- J. Open-Mesh Fencing: Provide 0.12-inch- thick, galvanized 2-inch chain link fabric fencing 8 feet high and galvanized steel pipe posts, 1-1/2 inches I.D. for line posts and 2-1/2 inches I.D. for corner posts.

2.2 EQUIPMENT

- A. General: The prime contractor shall provide new equipment. If acceptable to the Architect, undamaged, previously used equipment in serviceable condition may be used. Provide equipment suitable for use intended.
- B. Water Hoses: Provide 3/4-inch heavy-duty, abrasion-resistant, flexible rubber hoses 100 feet long, with pressure rating greater than the maximum pressure of the water distribution system. Provide adjustable shutoff nozzles at hose discharge.
- C. Electrical Outlets: Provide properly configured, NEMA-polarized outlets to prevent insertion of 110- to 120-V plugs into higher voltage outlets. Provide receptacle outlets equipped with ground-fault circuit interrupters, reset button, and pilot light for connection of power tools and equipment.
- D. Electrical Power Cords: Provide grounded extension cords. Use hard-service cords where exposed to abrasion and traffic. Provide waterproof connectors to connect separate lengths of electric cords if single lengths will not reach areas where construction activities are in progress. Do not exceed safe length-voltage ratio.
- E. Lamps and Light Fixtures: Provide general service incandescent lamps of wattage required for adequate illumination. Provide guard cages or tempered-glass enclosures, where exposed to breakage. Provide exterior fixtures where exposed to moisture.
- F. Heating Units: Provide temporary heating units that have been tested and labeled by UL, FM, or another recognized trade association related to the type of fuel being consumed.
- G. Temporary Offices: Each prime contractor shall provide its own prefabricated or mobile units or similar job-built construction with lockable entrances, operable windows, and serviceable finishes. Provide heated and air-conditioned units on foundations adequate for normal loading.
- H. Temporary Toilet Units: Provide self-contained, single-occupant toilet units of the chemical, aerated recirculation, or combustion type. Provide units properly vented and fully enclosed with a glass-fiber-reinforced polyester shell or similar nonabsorbent material.
- I. Fire Extinguishers: Provide hand-carried, portable, UL-rated, Class A fire extinguishers for temporary offices and similar spaces. In other locations, provide hand-carried, portable, UL-rated, Class ABC, dry-chemical extinguishers or a combination of extinguishers of NFPA-recommended classes for the exposures.
 - 1. Comply with NFPA 10 and NFPA 241 for classification, extinguishing agent, and size required by location and class of fire exposure.

PART 3 EXECUTION

3.1 TEMPORARY UTILITY INSTALLATION

- A. General: Engage the appropriate local utility company to install temporary service or connect to existing service. Where the company provides only part of the service, provide

the remainder with matching, compatible materials and equipment. Comply with company recommendations.

1. Arrange with the company and existing users for a time when service can be interrupted, if necessary, to make connections for temporary services.
 2. Provide adequate capacity at each stage of construction. Prior to temporary utility availability, provide trucked-in services.
 3. Obtain easements to bring temporary utilities to the site where the Owner's easements cannot be used for that purpose.
- B. Water Service: The Plumbing Work Contractor shall provide and maintain temporary water service and distribution piping of sizes and pressures adequate for construction and hose bibs on site as to provide service to all areas of construction activities as directed by the Architect, as required throughout the construction period.
1. Water service shall be potable and modified as required or as directed by the Architect, as Work progressed.
 - a. Sterilization: Sterilize temporary water piping prior to use.
 2. Wash Facilities: Install wash facilities supplied with potable water at convenient locations for personnel who handle materials that require wash up. Dispose of drainage properly. Supply cleaning compounds appropriate for each type of material handled.
 3. Drinking Water Facilities: Each prime contractor shall provide bottled water drinking water units for its own employees.
 4. Provide safety showers, eyewash fountains, and similar facilities for convenience, safety, and sanitation of personnel.
 5. Users shall provide their own hoses to points of need, but shall practice prudent conservation.
- C. Temporary Electric Power Service: The Electrical Work Contractor shall provide and maintain temporary electric service consisting of main power hook-up and panel board and temporary lighting for site and existing building. Temporary service shall be maintained during all work days, and shall comply with all codes and regulations. System shall be modified as required or as directed by the Construction Manager as work progresses. Each Prime shall provide power distribution for its own use from EC's panel.
1. Obtain temporary service from existing building service or local power pole. If practical, power to each location shall be tapped at transformer vault or main distribution panel, ahead of main breakers to minimize demand on service equipment from operations. Overcurrent protection shall be installed as required.
 2. Provide disconnect at connection to service.
 3. Provide service conductors and equipment.

4. Minimum power characteristics: 240/120 volt, single phase.
 5. Provide distribution equipment, feeders, and branch circuit panelboards to serve:
 - a. Temporary lighting.
 - b. Temporary convenience receptacles. (4 gang outlet boxes to allow for 50' extension cord; enough to accommodate requirements of the entire building)
 - c. To accommodate construction operations requiring power, use of power tools, electric heating and start up testing of permanent electric powered equipment prior to its permanent connection to electrical system.
 6. Each Contractor shall provide his own extension lines, and other special equipment; welding equipment shall run from generator trucks.
 7. The Electrical Work Contract shall be responsible for initial connections and final demolition of all temporary fixtures and wiring at direction of the Construction Manager.
 8. Security lighting for building exteriors shall be continuously operational and maintained. Electrical Work Contract to provide four (4) @ 500 Watt exterior halogen lights each ***ON SITE TO BE LOCATED.***
 9. The Electrical Work Contract Contractor shall maintain OSHA standards for power and foot candle levels in all areas while workers occupy the space. The temporary lighting shall be energized daily at 6:50 A.M. to 4:35 P.M. as a minimum duration until permanent fixtures are installed.
 10. Not unlike other equipment in this contract, upon installation, the temporary electric system becomes the property of the Owner and shall not be controlled by any one contractor.
 11. Temporary Site Lighting: Electrical Work Contract to maintain existing exterior Lighting to adequately light the entrances and exits of project site. Temporary lighting shall be controlled by time clocks and lighting contactors; settings to be coordinated by the Construction Manager.
 12. Each Prime Contractor will be responsible for hookup of their own project trailers to a temporary electric pedestal provided by the Electrical Work Contract. If abused, power from temporary service will be disconnected. The Electric Contractor shall erect poles safely sufficient for site power and telephone service. All installations shall conform to strictest standards. The E.C. shall disconnect all items upon project completion.
- D. Temporary Lighting: When an overhead floor or roof deck has been installed, the Electrical Work Contract shall provide temporary lighting with local switching.
1. Install and operate temporary lighting that will fulfill security and protection requirements without operating the entire system. Provide temporary lighting that will provide adequate illumination for construction operations and traffic conditions.

- a. Temporary lighting shall be maintained in accordance with OSHA standards for power and foot candle levels in all areas while workers occupy the space.
 2. Temporary lighting shall be controlled by time clocks and lighting contactors; settings to be coordinated by the Architect.
- E. Temporary Heat:
1. The General Work Contractor shall provide temporary heating equipment and all fuel necessary to continue construction work at proper heated conditions in the buildings. The means and methods shall be as field determined for specific buildings and/or areas. In no case shall temperature be less than 50°F; electrical power and connections shall be by Electrical Work Contractor; gas piping by the Plumbing Work Contractor. Ventilation requirements by the General Work Contractor.
 2. The General Construction Work Contractor shall provide manpower for maintenance, operation and supervision for the temporary heating system, first and second shifts where applicable.
 3. The Owner will accept utilization of the existing permanent HVAC system for temporary heat until new heating equipment has been installed.
 4. Temporary heating plants utilizing electric power as energy source, shall not be used on this project.
 5. Temporary Heating and Cooling for Isolated work area: Each prime contractor shall provide temporary heating and cooling required by construction activities for curing or drying of completed installations or for protecting installed construction from adverse effects of low temperatures or high humidity. Select safe equipment that will not have a harmful effect on completed installations or elements being installed. Coordinate ventilation requirements to produce the ambient condition required and minimize energy consumption.
 6. Use of gasoline-burning space heaters, open flame, or salamander-type heating units is prohibited.
- F. Temporary Internet & Telephones: Each Prime Contractor shall provide their own temporary internet and telephone service throughout the construction period for all personnel engaged in construction activities.
1. Contractors are required to lease or purchase a cellular telephone – to be used by their site superintendents for communication with the other primes and the Architect.
 2. Provide telephone lines for the following:
 - a. Provide a dedicated telephone line for a fax machine in each prime contractor's field office.
 - b. At each telephone, post a list of important telephone numbers.
- G. Sanitary Facilities: The General Work Contractor shall provide temporary portable chemical toilet facilities for all construction personnel. Comply with regulations and

Department of Health codes and CDC Guidelines for the type, number, location, operation, and maintenance of fixtures and facilities. Install where facilities will best serve the Project's needs.

1. Provide toilet tissue, paper towels, paper cups, and similar disposable materials for each facility. Provide covered waste containers for used material.
2. Toilets: Install self-contained toilet units. Shield toilets to ensure privacy. Use of pit-type privies will not be permitted.
 - a. Provide separate facilities for male and female personnel.

H. Temporary Construction:

1. Temporary bridging, decks, hoists, lifts, scaffolding, and cranes shall be the responsibility of Contractor requiring same.
2. Provide temporary hard barrier partitions to separate construction area from adjacent occupied areas. Construct partitions with non-combustible materials or fire-retardant plywood and seal seams and gaps to control transmission of dust to occupied areas. After completion of work, remove partitions and restore surfaces damaged by temporary provisions. This work is the responsibility of the General Work Contractor.
3. Temporary perimeter and stairwell barricades at grade changes and multiple levels, shall be installed and maintained under the General Work Contractor; if a Contractor should need to temporarily relocate barrier, same Contractor shall protect personnel in the area and replace barrier to original location. This clause does not void any Contractor's liability to maintain a safe work site, but merely to assign temporary work to one contract.
4. Temporary entrances and exits to the building shall be furnished, installed and maintained under the General Work Contractor as directed by the Construction Manager. Exits shall be maintained for exiting in emergency conditions until permanent structures are in place.

I. Daily cleanup

1. Dumpsters are to be provided by the General Work Contractor. Dumpsters will be inspected to ensure they are not misused and removed and hauled to a recycling center off site for processing. The Owner will not be responsible for the removal of any hazardous materials; this will be the responsibility of the prime contractor doing the same.
2. The maintenance of a clean work site shall be the responsibility of each Contractor.
3. Each Contractor shall remove own debris daily from work area to waste disposal containers (dumpsters), time lapses is not acceptable.
4. The condition of cleanliness in which an area is found, is the condition each Contractor shall leave.

5. Each and every Contractor working on site shall submit manpower on Friday at 8 A.M. to work as a team to remove debris to dumpsters until complete. At discretion of Construction Manager, a Contractor not complying may be back-charged for work performed by others. The responsibility of broom cleaning and debris disposal remains with General Construction and shall include use of sweeping compound.
6. Final cleaning shall be the responsibility of each Prime Contractor for his/her own work.
7. Protection of Work: Each Prime Contractor is reminded to temporarily protect work in place until accepted by the Owner per Article 10 of the General Conditions of the Contract.
8. Collection and Disposal of Waste: Collect waste from construction areas and elsewhere daily. Comply with requirements of NFPA 241 for removal of combustible waste material and debris. Enforce requirements strictly. Do not hold materials more than 3 days during normal weather or 1 day when the temperature is expected to rise above 80°F (27°C). Handle hazardous, dangerous, or unsanitary waste materials separately from other waste by containerizing properly. Dispose of material lawfully. First aid requirements are the responsibility of each Contractor.

3.2 INSTALLATION

- A. Use qualified personnel for installation of temporary facilities. Locate facilities where they will serve the Project adequately and result in minimum interference with performance of the Work. Relocate and modify facilities as required.
- B. The prime contractor shall provide each facility ready for use when needed to avoid delay. Maintain and modify as required. Do not remove until facilities are no longer needed or are replaced by authorized use of completed permanent facilities.
- C. The prime Contractor will be responsible for hookup of their own project trailers. Use of energy, including heat (shall be set back at night) if practical from electric service will be available. If abused, power from temporary service will be disconnected. All installations shall conform to strictest standards.

3.3 SAFETY

- A. Identification Badges with picture of worker and Contractor employer will be required.
- B. Personal Protection while on site is strictly enforced in accordance with OSHA regulations(All contractors on site will be 10 Hr OSHA certified) NO TOLERANCE for non-compliance.
- C. All prime contractors must have a bona-fide safety program manual on file with Construction Manager.
- D. All prime contractors must have a COVID-19 Safety Program manual on file with Construction Manager.
- E. All prime contractors must have tool-box meeting reports updated prior to submission of pay apps. (non-compliance will hold up req. process).

- F. Workers non-compliance of regs (includes ID badge,,safety vests, personal protection as outlined by OSHA, security maintenance): Breach of rules ,will be reported to the Foreman and Company employing the worker, and an immediate response is expected, or worker will forfeit his ID badge and be removed from the Project.
- G. If removing the worker causes a delay to other trades, or to the Job schedule, the company employing the removed worker, will be charged for lost time at the rate dictated by the affected trades, and may include multiple trades for schedule delays. These charges will be assessed at the time of req request, and automatically deducted prior to payment process. Construction Manager will maintain records of notification as well as photos of infraction and proof of Contractor notification, in order to enforce "back charge" for infractions.
- H. Emergency Notification: Off hour phone numbers of all trades should be on file in the Construction Manager field office, each trade should designate an ON CALL person in the event of an emergency.

3.4 SUPPORT FACILITIES INSTALLATION

- A. Locate field offices, storage sheds, sanitary facilities, and other temporary construction and support facilities for easy access as directed by the Construction Manager.
 - 1. Maintain support facilities until near Substantial Completion. Remove prior to Substantial Completion. Personnel remaining after Substantial Completion will be permitted to use permanent facilities, under conditions acceptable to the Owner.
- B. Provide incombustible construction for offices, shops, and sheds located within the construction area or within 30 feet of building lines. Comply with requirements of NFPA 241.
- C. Field Offices: Each prime contractor shall provide an insulated, weathertight temporary office of sufficient size to accommodate required office personnel at the Project Site. Keep the office clean and orderly for use for small meetings.
- D. Storage and Fabrication Sheds: Install storage and fabrication sheds sized, furnished, and equipped to accommodate materials and equipment involved, including temporary utility service. Sheds may be open shelters or fully enclosed spaces within the building or elsewhere on-site.
- E. Temporary Parking/Staging and Access Roads
 - 1. Temporary staging and parking areas will be provided by the General Work Contractor where designated on site logistics plans.
 - 2. Contractors will be permitted to utilize existing roads, as designated (as segregated by the Owner - if required).
 - 3. Road Cleaning: Maintain roads and walkways in an acceptably clean condition. This includes the removal of debris daily, if required, and/or a minimum of once a week due to all project traffic. Road cleaning equipment to be wet/vacuum type. General Work Contractor will clean and maintain the roads affected by all contract work until project completion.

4. Snow Plowing & Removal: General Work Contractor will provide snow plowing of temporary roads, parking area, general access to office trailers and in and around building addition.
 5. Contractor Parking/ Staging Area: General Work Contractor shall maintain access for suitable parking areas as indicated on Logistics plans. Re-grade, re-seed and restore any areas disturbed by parking/ staging.
 - a. Parking Areas: Includes contractors' employees and construction vehicle parking. Minimum of 6" reference Item. #304.3 course.
 - b. Access Roads: Includes access roads for delivery through staging area to building work areas, and to equipment and storage areas and sheds. Minimum of 9" reference Item. #304.3 course.
 6. Temporary parking by construction personnel shall be allowed only in areas so designated.
 7. Traffic Regulations:
 - a. Utilize only entrances/temporary roads as designated
 - b. Construction parking will not be allowed adjacent to residential buildings, additions or monuments.
 8. Traffic Controls: General Work Contractor shall provide temporary traffic controls at junction of temporary roads with public roads. Include warning signs for public traffic and "STOP" signs for entrance onto public roads. Comply with requirements of authorities having jurisdiction.
- F. De-watering Facilities and Drains:
1. For temporary drainage and dewatering facilities and operations not directly associated with construction activities included under individual Sections, comply with dewatering requirements of applicable Division 2 Sections. Where feasible, use the same facilities. Maintain the site, excavations, and construction free of water.
 2. For temporary drainage and de-watering facilities and operations directly associated with the building and other construction activities, comply with Division 2; General Construction Work Contractor is directly responsible for de-watering of all excavations associated within the building and any additions.
- G. Temporary Enclosures / Signage: The General Work contractor shall provide temporary enclosure for protection of construction in progress and completed, from exposure, foul weather, other construction operations, and similar activities as follows unless otherwise noted:
1. Install tarpaulins securely, with incombustible wood framing and other materials. Close openings of 25 sq. ft. (2.3 sq. m) or less with plywood of similar materials.

2. Close openings through floor decks and horizontal surfaces with load-bearing, wood-framed construction.
3. Where temporary wood or plywood enclosure exceeds 100 sq. ft. (9.2 sq. m) in area, use UL-labeled, fire-retardant treated material for framing and main sheathing.
4. Generally, temporary closures for specific openings for a prime contractor to perform their work openings are the responsibility of Contractor creating the opening and shall be installed to protect building from exterior elements.
5. Temporary partitions shall be installed at all openings where additions connect to existing buildings, and where required to protect areas, spaces, property, personnel, students, and faculty; to separate and control dust, debris, noise, access, sight, fire areas, safety and security and to separate phased construction areas per the phasing plan. Temporary partitions shall be installed and maintained. Construction material and methods to suit need as determined by Construction Manager.
6. Temporary Lifts and Hoists: Provide facilities for hoisting materials and employees. Truck cranes and similar devices used for hoisting materials are considered “tools and equipment” and not temporary facilities.
7. Temporary Signs: Prepare signs to provide directional information to construction personnel and visitors as follows: The Contractor shall furnish and install construction signage as required:
 - a. Engage an experienced sign painter to apply graphics. Comply with details indicated.
 - b. For construction traffic control/flow at entrances/exits, as designated by the Owner (3 required)
 - c. To direct visitors (1 required)
 - d. For construction parking (1 required)
 - e. To direct deliveries (2 required)
 - f. For warning signs as required
 - g. Per OSHA standards as necessary
 - h. For trailer identification
 - i. Temporary exit signs

3.5 SECURITY AND PROTECTION FACILITIES INSTALLATION

- A. Operations of the Contractor may not block, hinder, impede, or otherwise inhibit the safe and expeditious exiting of the building’s occupants during an emergency.
- B. In the event of an emergency, (designated by the sounding of the fire alarm system) all construction activities must immediately cease. Contractor’s work force will evacuate themselves from work areas and remain outside of work areas until the “all clear” is given. No work operations will be tolerated during the evacuation of the building or during an emergency.

- C. Temporary Facility Changeover: Except for using permanent fire protection as soon as available, do not change over from using temporary security and protection facilities to permanent facilities until Substantial Completion, or longer, as requested by the Architect.
- D. Temporary Fire Protection: General Work Contractor shall provide, until fire-protection needs are supplied by permanent facilities, install and maintain temporary fire-protection facilities of the types needed to protect against reasonably predictable and controllable fire losses. Comply with NFPA 10, "Standard for Portable Fire Extinguishers," and NFPA 241, "Standard for Safeguarding Construction, Alterations, and Demolition Operations."
 - 1. Locate fire extinguishers where convenient and effective for their intended purpose, but not less than one extinguisher on each floor at or near each usable stairwell.
 - 2. Store combustible materials in containers in fire-safe locations.
 - 3. Maintain unobstructed access to fire extinguishers, fire hydrants, temporary fire-protection facilities, stairways, and other access routes for fighting fires. Prohibit smoking in hazardous fire-exposure areas.
 - 4. Provide supervision of welding operations, combustion-type temporary heating units, and similar sources of fire ignition.
 - 5. Permanent Fire Protection: At the earliest feasible date in each area of the Project, complete installation of the permanent fire-protection facility, including connected services, and place into operation and use. Instruct key personnel on use of facilities.
- E. Fall Protection:
 - 1. The General Work Contractor shall provide temporary cable top & mid railings per OSHA regulations around mechanical floor openings. Most of the exterior can be done by running cables from column to column, but some areas may require you to install posts as well. Include toe boards around perimeter and openings where required. The Prime Contractor must provide his own means for providing OSHA approved fall protection for his work persons. Temporary railings removed by a Prime Contractor for some reason other than constructing the permanent wall, must be immediately replaced by that Prime Contractor.
 - 2. The General Work Contractor shall rope off all roof openings in an OSHA approved manner. Include fluorescent ribbons or flags to accent the ropes
- F. Barricades, Warning Signs, and Lights: Comply with standards and code requirements for erecting structurally adequate barricades. Paint with appropriate colors, graphics, and warning signs to inform personnel and the public of the hazard being protected against. Where appropriate and needed, provide lighting, including flashing red or amber lights.
- G. Site Enclosure Fence: General Work Contractor shall before, construction begins, install an enclosure fence with lockable entrance gates. Locate where indicated, or enclose the entire site or the portion determined sufficient to accommodate construction operations. Install in a manner that will prevent people, dogs, and other animals from easily entering the site, except by the entrance gates.

1. Provide open-mesh, 8-foot high chain link fencing with posts at 8-feet on center, set in a compacted mixture of gravel and earth.
 2. Provide min. 3 double swing access gates and man gates. Each gate is to have a chain and padlock.
 - a. Provide (2) keys for each lock to the Construction Manager.
 3. Remove fence upon completion of all exterior activities or sooner if directed by Architect.
- H. Building Security Enclosure and Lockup: General Construction Work Contractor shall install substantial temporary enclosure of partially completed areas of construction. Provide locking entrances to prevent unauthorized entrance, vandalism, theft and similar violations of security.
1. Storage: Where materials and equipment must be stored, and are of value or attractive for theft, provide a secure lockup. Enforce discipline in connection with the installation and release of material to minimize the opportunity for theft and vandalism.
- I. Environmental Protection: Provide protection, operate temporary facilities, and conduct construction in ways and by methods that comply with environmental regulations, and minimize the possibility that air, waterways, and subsoil might be contaminated or polluted or that other undesirable effects might result. Avoid using tools and equipment that produce harmful noise. Restrict use of noise-making tools and equipment to hours that will minimize complaints from persons or firms near the site.
- 3.6 OPERATION, TERMINATION, AND REMOVAL
- A. Supervision: Enforce strict discipline in use of temporary facilities. Limit availability of temporary facilities to essential and intended uses to minimize waste and abuse.
- B. Maintenance: Maintain facilities and good operating condition until removal. Protect from damage by freezing temperatures and similar elements.
1. Maintain operation of temporary enclosures, heating, cooling, humidity control, ventilation, and similar facilities on a 24-hour basis where required to achieve indicated results and to avoid possibility of damage.
 2. Protection: Prevent water-filled piping from freezing. Maintain markers for underground lines. Protect from damage during excavation operations.
- C. Termination and Removal: Unless the Construction Manager requests that it be maintained longer, remove each temporary facility when the need has ended, when replaced by authorized use of a permanent facility, or no later than Substantial Completion. Complete or, if necessary, restore permanent construction that may have been delayed because of interference with the temporary facility. Repair damaged Work, clean exposed surfaces, and replace construction that cannot be satisfactorily repaired.

1. Materials and facilities that constitute temporary facilities are the property of each prime contractor. The Owner reserves the right to take possession of project identification signs.
2. Remove temporary paving not intended for or acceptable for integration into permanent paving. Where the area is intended for landscape development, remove soil and aggregate fill that do not comply with requirements for fill or subsoil in the area. Remove materials contaminated with road oil, asphalt and other petrochemical compounds, and other substances that might impair growth of plant materials or lawns. Repair or replace street paving, curbs, and sidewalks at the temporary entrances, as required by the governing authority.
3. At Substantial Completion, clean and renovate permanent facilities used during the construction period including, but not limited to, the following:
 - a. Replace air filters and clean inside of ductwork and housings.
 - b. Replace significantly worn parts and parts subject to unusual operating conditions.
 - c. Replace lamps burned out or noticeably dimmed by hours of use.

END OF SECTION 015000

SECTION 01 60 00 - PRODUCT REQUIREMENTS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes administrative and procedural requirements for selection of products for use in Project; product delivery, storage, and handling; manufacturers' standard warranties on products; special warranties; and comparable products.

1.3 DEFINITIONS

- A. Products: Items obtained for incorporating into the Work, whether purchased for Project or taken from previously purchased stock. The term "product" includes the terms "material," "equipment," "system," and terms of similar intent.
 - 1. Named Products: Items identified by manufacturer's product name, including make or model number or other designation shown or listed in manufacturer's published product literature that is current as of date of the Contract Documents.
 - 2. Comparable Product: Product that is demonstrated and approved through submittal process to have the indicated qualities related to type, function, dimension, in-service performance, physical properties, appearance, and other characteristics that equal or exceed those of specified product.
- B. Basis-of-Design Product Specification: A specification in which a specific manufacturer's product is named and accompanied by the words "basis-of-design product," including make or model number or other designation, to establish the significant qualities related to type, function, dimension, in-service performance, physical properties, appearance, and other characteristics for purposes of evaluating comparable products.

1.4 ACTION SUBMITTALS

- A. Comparable Product Request Submittal: Submit request for consideration of each comparable product. Identify product or fabrication or installation method to be replaced. Include Specification Section number and title and Drawing numbers and titles.
 - 1. Include data to indicate compliance with the requirements specified in "Comparable Products" Article.

2. Architect's Action: If necessary, Architect will request additional information or documentation for evaluation within one week of receipt of a comparable product request. Architect will notify Contractor through Construction Manager of approval or rejection of proposed comparable product request.

- a. Form of Approval: As specified in Division 01 Section "Submittal Procedures."

- B. Basis-of-Design Product Specification Submittal: Comply with requirements in Division 01 Section "Submittal Procedures." Show compliance with requirements.

1.5 QUALITY ASSURANCE

- A. Compatibility of Options: If Contractor is given option of selecting between two or more products for use on Project, select product compatible with products previously selected, even if previously selected products were also options.

1. Each contractor is responsible for providing products and construction methods compatible with products and construction methods of other contractors.
 2. If a dispute arises between contractors over concurrently selectable but incompatible products, Architect will determine which products shall be used.

- B. The use of asbestos containing building materials is prohibited.

1. Contractor is responsible for providing closeout documentation certifying no asbestos containing building materials have been used in the Work.

1.6 PRODUCT DELIVERY, STORAGE, AND HANDLING

- A. Deliver, store, and handle products using means and methods that will prevent damage, deterioration, and loss, including theft and vandalism. Comply with manufacturer's written instructions.

- B. Delivery and Handling:

1. Schedule delivery to minimize long-term storage at Project site and to prevent overcrowding of construction spaces.
 2. Coordinate delivery with installation time to ensure minimum holding time for items that are flammable, hazardous, easily damaged, or sensitive to deterioration, theft, and other losses.
 3. Deliver products to Project site in an undamaged condition in manufacturer's original sealed container or other packaging system, complete with labels and instructions for handling, storing, unpacking, protecting, and installing.
 4. Inspect products on delivery to determine compliance with the Contract Documents and to determine that products are undamaged and properly protected.

C. Storage:

1. Store products to allow for review and measurement of quantity or counting of units.
2. Store materials in a manner that will not endanger Project structure.
3. Store products that are subject to damage by the elements, under cover in a weathertight enclosure above ground, with ventilation adequate to prevent condensation.
4. Protect foam plastic from exposure to sunlight, except to extent necessary for period of installation and concealment.
5. Comply with product manufacturer's written instructions for temperature, humidity, ventilation, and weather-protection requirements for storage.
6. Protect stored products from damage and liquids from freezing.

1.7 PRODUCT WARRANTIES

- A. Warranties specified in other Sections shall be in addition to, and run concurrent with, other warranties required by the Contract Documents. Manufacturer's disclaimers and limitations on product warranties do not relieve Contractor of obligations under requirements of the Contract Documents.
1. Manufacturer's Warranty: Written warranty furnished by individual manufacturer for a particular product and specifically endorsed by manufacturer to Owner.
- B. Special Warranties: Prepare a written document that contains appropriate terms and identification, ready for execution.
1. Manufacturer's Standard Form: Modified to include Project-specific information and properly executed.
 2. Warranty periods related to Boilers and Accessory Equipment, and Air Conditioning Equipment do not begin until one year after the date of substantial completion.
 3. See individual Specification Sections for specific content requirements and particular requirements for submitting special warranties.
- C. Submittal Time: Comply with requirements in Division 01 Section "Closeout Procedures."

PART 2 - PRODUCTS

2.1 PRODUCT SELECTION PROCEDURES

- A. General Product Requirements: Provide products that comply with the Contract Documents, are undamaged and, unless otherwise indicated, are new at time of installation.
1. Provide products complete with accessories, trim, finish, fasteners, and other items needed for a complete installation and indicated use and effect.
 2. Standard Products: If available, and unless custom products or nonstandard options are specified, provide standard products of types that have been produced and used successfully in similar situations on other projects.

3. Owner reserves the right to limit selection to products with warranties not in conflict with requirements of the Contract Documents.
4. Where products are accompanied by the term "as selected," Architect will make selection.
5. Descriptive, performance, and reference standard requirements in the Specifications establish salient characteristics of products.
6. Or Equal: For products specified by name and accompanied by the term "or equal," or "or approved equal," or "or approved," comply with requirements in "Comparable Products" Article to obtain approval for use of an unnamed product.

B. Product Selection Procedures:

1. Products:
 - a. Where Specifications include a list of names of both available manufacturers and products, provide one of the products listed, or an unnamed product, that complies with requirements. Comply with requirements in "Comparable Products" Article for consideration of an unnamed product.
2. Manufacturers:
 - a. Where Specifications include a list of available manufacturers, provide a product by one of the manufacturers listed, or a product by an unnamed manufacturer, that complies with requirements. Comply with requirements in "Comparable Products" Article for consideration of an unnamed manufacturer's product.
3. Basis-of-Design Product: Where Specifications name a product, or refer to a product indicated on Drawings, and include a list of manufacturers, provide the specified or indicated product or a comparable product by one of the other named manufacturers, or a product by an unnamed manufacturer that complies with requirements. Drawings and Specifications indicate sizes, profiles, dimensions, and other characteristics that are based on the product named. Comply with requirements in "Comparable Products" Article for consideration of an unnamed product.

C. Visual Matching Specification: Where Specifications require "match Architect's sample", provide a product that complies with requirements and matches Architect's sample. Architect's decision will be final on whether a proposed product matches.

1. If no product available within specified category matches and complies with other specified requirements, comply with requirements in Division 01 Section "Substitution Procedures" for proposal of product.

D. Visual Selection Specification: Where Specifications include the phrase "as selected by Architect from manufacturer's full range" or similar phrase, select a product that complies with requirements. Architect will select color, gloss, pattern, density, or texture from manufacturer's product line that includes both standard and premium items.

2.2 COMPARABLE PRODUCTS

- A. Conditions for Consideration of Comparable Products: Architect will consider Contractor's request for comparable product when the following conditions are satisfied. If the following conditions are not satisfied, Architect may return requests without action, except to record noncompliance with these requirements:
1. Evidence that the proposed product does not require revisions to the Contract Documents, that it is consistent with the Contract Documents and will produce the indicated results, and that it is compatible with other portions of the Work.
 2. Detailed comparison of significant qualities of proposed product with those named in the Specifications. Significant qualities include attributes such as performance, weight, size, durability, visual effect, and specific features and requirements indicated.
 3. Evidence that proposed product provides specified warranty.
 4. List of similar installations for completed projects with project names and addresses and names and addresses of architects and owners, if requested.
 5. Samples, if requested.

PART 3 - EXECUTION (Not Used)

END OF SECTION 01 60 00

SECTION 01 73 00 - EXECUTION

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes general administrative and procedural requirements governing execution of the Work including, but not limited to, the following:
 - 1. Examination of conditions.
 - 2. Preparation for construction.
 - 3. Construction layout.
 - 4. Field engineering and surveying.
 - 5. Installation of the Work.
 - 6. Cutting and patching.
 - 7. Progress cleaning.
 - 8. Starting and adjusting.
 - 9. Protection of installed construction.
 - 10. Correction of the Work.

1.3 DEFINITIONS

- A. Cutting: Removal of in-place construction necessary to permit installation or performance of other work.
- B. Patching: Fitting and repair work required to restore construction to original conditions after installation of other work.

1.4 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For professional engineer.
- B. Structural Layout Plan: Survey of Structural Grid in relation to existing building(s).

1.5 CLOSEOUT SUBMITTALS

- A. Certificates: Submit certificate signed by professional engineer certifying that location and elevation of improvements comply with requirements.
- B. Certified Surveys: Submit two copies signed by professional engineer.

1.6 QUALITY ASSURANCE

- A. Land Surveyor Qualifications: A professional land surveyor who is legally qualified to practice in jurisdiction where Project is located and who is experienced in providing land-surveying services of the kind indicated.
- B. Professional Engineer Qualifications: A professional engineer who is legally qualified to practice in jurisdiction where Project is located and who is experienced in providing engineering services of the kind indicated.
- C. Cutting and Patching: Comply with requirements for and limitations on cutting and patching of construction elements.
 - 1. Structural Elements: When cutting and patching structural elements, shore, brace, and support structural elements during cutting and patching. Do not cut and patch structural elements in a manner that could change their load-carrying capacity or increase deflection
 - 2. Operational Elements: Do not cut and patch operating elements and related components in a manner that results in reducing their capacity to perform as intended or that results in increased maintenance or decreased operational life or safety.
 - 3. Other Construction Elements: Do not cut and patch other construction elements or components in a manner that could change their load-carrying capacity, that results in reducing their capacity to perform as intended, or that results in increased maintenance or decreased operational life or safety.
 - 4. Visual Elements: Do not cut and patch construction in a manner that results in visual evidence of cutting and patching. Do not cut and patch exposed construction in a manner that would, in Architect's opinion, reduce the building's aesthetic qualities. Remove and replace construction that has been cut and patched in a visually unsatisfactory manner.
- D. Manufacturer's Installation Instructions: Obtain and maintain on-site manufacturer's written recommendations and instructions for installation of products and equipment.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. General: Comply with requirements specified in other Sections.
- B. In-Place Materials: Use materials for patching identical to in-place materials. For exposed surfaces, use materials that visually match in-place adjacent surfaces to the fullest extent possible.
 - 1. If identical materials are unavailable or cannot be used, use materials that, when installed, will provide a match acceptable to Architect for the visual and functional performance of in-place materials.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Existing Conditions: The existence and location of underground and other utilities and construction indicated as existing are not guaranteed. Before beginning sitework, investigate and verify the existence and location of underground utilities, mechanical and electrical systems, and other construction affecting the Work.
 - 1. Before construction, verify the location and invert elevation at points of connection of sanitary sewer, storm sewer, and water-service piping; underground electrical services, and other utilities.
 - 2. Furnish location data for work related to Project that must be performed by public utilities serving Project site.
- B. Examination and Acceptance of Conditions: Before proceeding with each component of the Work, examine substrates, areas, and conditions, with Installer or Applicator present where indicated, for compliance with requirements for installation tolerances and other conditions affecting performance. Record observations.
 - 1. Examine roughing-in for mechanical and electrical systems to verify actual locations of connections before equipment and fixture installation.
 - 2. Examine walls, floors, and roofs for suitable conditions where products and systems are to be installed.
 - 3. Verify compatibility with and suitability of substrates, including compatibility with existing finishes or primers.
- C. Proceed with installation only after unsatisfactory conditions have been corrected. Proceeding with the Work indicates acceptance of surfaces and conditions.

3.2 PREPARATION

- A. Existing Utility Information: Furnish information to local utility that is necessary to adjust, move, or relocate existing utility structures, utility poles, lines, services, or other utility appurtenances located in or affected by construction. Coordinate with authorities having jurisdiction.
- B. Field Measurements: Take field measurements as required to fit the Work properly. Recheck measurements before installing each product. Where portions of the Work are indicated to fit to other construction, verify dimensions of other construction by field measurements before fabrication. Coordinate fabrication schedule with construction progress to avoid delaying the Work.
- C. Space Requirements: Verify space requirements and dimensions of items shown diagrammatically on Drawings.

- D. Review of Contract Documents and Field Conditions: Immediately on discovery of the need for clarification of the Contract Documents caused by differing field conditions outside the control of Contractor, submit a request for information to Architect according to requirements in Division 01 Section "Project Management and Coordination."

3.3 CONSTRUCTION LAYOUT

- A. Verification: Before proceeding to lay out the Work, verify layout information shown on Drawings, in relation to the property survey and existing benchmarks. If discrepancies are discovered, notify Architect and Construction Manager promptly.
- B. General: Engage a professional engineer to lay out the Work using accepted surveying practices.
 - 1. Establish benchmarks and control points to set lines and levels at each story of construction and elsewhere as needed to locate each element of Project.
 - 2. Establish dimensions within tolerances indicated. Do not scale Drawings to obtain required dimensions.
 - 3. Inform installers of lines and levels to which they must comply.
 - 4. Check the location, level and plumb, of every major element as the Work progresses.
 - 5. Notify Architect and Construction Manager when deviations from required lines and levels exceed allowable tolerances.
- C. Site Improvements: Locate and lay out site improvements, including pavements, grading, fill and topsoil placement, utility slopes, and rim and invert elevations.
- D. Building Lines and Levels: Locate and lay out control lines and levels for structures, building foundations, column grids, and floor levels, including those required for mechanical and electrical work. Transfer survey markings and elevations for use with control lines and levels. Level foundations and piers from two or more locations.
 - 1. Structural Layout Plan: Perform Survey of Structural Grid as provided in Contract Documents, including any specific Layout Notes and/or Plan. Provide Structural Layout Plan for review by Engineer prior to performing any additional work.
- E. Record Log: Maintain a log of layout control work. Record deviations from required lines and levels. Include beginning and ending dates and times of surveys, weather conditions, name and duty of each survey party member, and types of instruments and tapes used. Make the log available for reference by Architect and Construction Manager.

3.4 FIELD ENGINEERING

- A. Reference Points: Locate existing permanent benchmarks, control points, and similar reference points before beginning the Work. Preserve and protect permanent benchmarks and control points during construction operations.

1. Do not change or relocate existing benchmarks or control points without prior written approval of Architect or Construction Manager. Report lost or destroyed permanent benchmarks or control points promptly. Report the need to relocate permanent benchmarks or control points to Architect and Construction Manager before proceeding.
 2. Replace lost or destroyed permanent benchmarks and control points promptly. Base replacements on the original survey control points.
- B. Benchmarks: Establish and maintain a minimum of two permanent benchmarks on Project site, referenced to data established by survey control points.
1. Record benchmark locations, with horizontal and vertical data, on Project Record Documents.
 2. Where the actual location or elevation of layout points cannot be marked, provide temporary reference points sufficient to locate the Work.
 3. Remove temporary reference points when no longer needed. Restore marked construction to its original condition.
- C. Certified Survey: On completion of foundation walls, major site improvements, and other work requiring field-engineering services, prepare a certified survey showing dimensions, locations, angles, and elevations of construction and sitework.

3.5 INSTALLATION

- A. General: Locate the Work and components of the Work accurately, in correct alignment and elevation, as indicated.
1. Make vertical work plumb and make horizontal work level.
 2. Where space is limited, install components to maximize space available for maintenance and ease of removal for replacement.
 3. Conceal pipes, ducts, and wiring in finished areas unless otherwise indicated.
 4. Maintain minimum headroom clearance of 96 inches in occupied spaces and 90 inches in unoccupied spaces, unless otherwise indicated.
- B. Comply with manufacturer's written instructions and recommendations for installing products in applications indicated.
- C. Install products at the time and under conditions that will ensure the best possible results. Maintain conditions required for product performance until Substantial Completion.
- D. Conduct construction operations so no part of the Work is subjected to damaging operations or loading in excess of that expected during normal conditions of occupancy.
- E. Tools and Equipment: Do not use tools or equipment that produce harmful noise levels.
- F. Templates: Obtain and distribute to the parties involved templates for work specified to be factory prepared and field installed. Check Shop Drawings of other work to confirm that adequate provisions are made for locating and installing products to comply with indicated requirements.

- G. Attachment: Provide blocking and attachment plates and anchors and fasteners of adequate size and number to securely anchor each component in place, accurately located and aligned with other portions of the Work. Where size and type of attachments are not indicated, verify size and type required for load conditions.
 - 1. Mounting Heights: Where mounting heights are not indicated, mount components at heights directed by Architect.
 - 2. Allow for building movement, including thermal expansion and contraction.
 - 3. Coordinate installation of anchorages. Furnish setting drawings, templates, and directions for installing anchorages, including sleeves, concrete inserts, anchor bolts, and items with integral anchors, that are to be embedded in concrete or masonry. Deliver such items to Project site in time for installation.
- H. Joints: Make joints of uniform width. Where joint locations in exposed work are not indicated, arrange joints for the best visual effect. Fit exposed connections together to form hairline joints.
- I. Hazardous Materials: Use products, cleaners, and installation materials that are not considered hazardous.

3.6 CUTTING AND PATCHING

- A. Cutting and Patching, General: Employ skilled workers to perform cutting and patching. Proceed with cutting and patching at the earliest feasible time, and complete without delay.
 - 1. Cut in-place construction to provide for installation of other components or performance of other construction, and subsequently patch as required to restore surfaces to their original condition.
- B. Existing Warranties: Remove, replace, patch, and repair materials and surfaces cut or damaged during installation or cutting and patching operations, by methods and with materials so as not to void existing warranties.
- C. Temporary Support: Provide temporary support of work to be cut.
- D. Protection: Protect in-place construction during cutting and patching to prevent damage. Provide protection from adverse weather conditions for portions of Project that might be exposed during cutting and patching operations.
- E. Adjacent Occupied Areas: Avoid interference with use of adjoining areas or interruption of free passage to adjoining areas.
- F. Existing Utility Services and Mechanical/Electrical Systems: Where existing services/systems are required to be removed, relocated, or abandoned, bypass such services/systems before cutting to prevent interruption to occupied areas.
- G. Cutting: Cut in-place construction by sawing, drilling, breaking, chipping, grinding, and similar operations, including excavation, using methods least likely to damage elements retained or adjoining construction.

1. In general, use hand or small power tools designed for sawing and grinding, not hammering and chopping. Cut holes and slots neatly to minimum size required, and with minimum disturbance of adjacent surfaces. Temporarily cover openings when not in use.
 2. Finished Surfaces: Cut or drill from the exposed or finished side into concealed surfaces.
 3. Concrete and Masonry: Cut using a cutting machine, such as an abrasive saw or a diamond-core drill.
 4. Excavating and Backfilling: Comply with requirements in applicable Sections where required by cutting and patching operations.
 5. Mechanical and Electrical Services: Cut off pipe or conduit in walls or partitions to be removed. Cap, valve, or plug and seal remaining portion of pipe or conduit to prevent entrance of moisture or other foreign matter after cutting.
 6. Proceed with patching after construction operations requiring cutting are complete.
- H. Patching: Patch construction by filling, repairing, refinishing, closing up, and similar operations following performance of other work. Patch with durable seams that are as invisible as practicable. Provide materials and comply with installation requirements specified in other Sections, where applicable.
1. Exposed Finishes: Restore exposed finishes of patched areas and extend finish restoration into retained adjoining construction in a manner that will minimize evidence of patching and refinishing.
 2. Floors and Walls: Where walls or partitions that are removed extend one finished area into another, patch and repair floor and wall surfaces in the new space. Provide an even surface of uniform finish, color, texture, and appearance. Remove in-place floor and wall coverings and replace with new materials, if necessary, to achieve uniform color and appearance.
 - a. Where patching occurs in a painted surface, prepare substrate and apply primer and intermediate paint coats appropriate for substrate over the patch, and apply final paint coat over entire unbroken surface containing the patch. Provide additional coats until patch blends with adjacent surfaces.
 3. Ceilings: Patch, repair, or rehang in-place ceilings as necessary to provide an even-plane surface of uniform appearance.
 4. Exterior Building Enclosure: Patch components in a manner that restores enclosure to a weathertight condition and ensures thermal and moisture integrity of building enclosure.
- I. Cleaning: Clean areas and spaces where cutting and patching are performed. Remove paint, mortar, oils, putty, and similar materials from adjacent finished surfaces.

3.7 PROGRESS CLEANING

- A. General: Clean Project site and work areas daily, including common areas. Enforce requirements strictly. Dispose of materials lawfully.
 - 1. Comply with requirements in NFPA 241 for removal of combustible waste materials and debris.
 - 2. Do not hold waste materials more than seven days during normal weather or three days if the temperature is expected to rise above 80 deg F.
 - 3. Containerize hazardous and unsanitary waste materials separately from other waste. Mark containers appropriately and dispose of legally, according to regulations.
 - a. Use containers intended for holding waste materials of type to be stored.
 - 4. Coordinate progress cleaning for joint-use areas where Contractor and other contractors are working concurrently.
- B. Site: Maintain Project site free of waste materials and debris.
- C. Work Areas: Clean areas where work is in progress to the level of cleanliness necessary for proper execution of the Work.
 - 1. Remove liquid spills promptly.
 - 2. Where dust would impair proper execution of the Work, broom-clean or vacuum the entire work area, as appropriate.
- D. Installed Work: Keep installed work clean. Clean installed surfaces according to written instructions of manufacturer or fabricator of product installed, using only cleaning materials specifically recommended. If specific cleaning materials are not recommended, use cleaning materials that are not hazardous to health or property and that will not damage exposed surfaces.
- E. Concealed Spaces: Remove debris from concealed spaces before enclosing the space.
- F. Exposed Surfaces in Finished Areas: Clean exposed surfaces and protect as necessary to ensure freedom from damage and deterioration at time of Substantial Completion.
- G. Waste Disposal: Do not bury or burn waste materials on-site. Do not wash waste materials down sewers or into waterways. Comply with waste disposal requirements in Division 01 Section "Temporary Facilities and Controls."
- H. During handling and installation, clean and protect construction in progress and adjoining materials already in place. Apply protective covering where required to ensure protection from damage or deterioration at Substantial Completion.
- I. Clean and provide maintenance on completed construction as frequently as necessary through the remainder of the construction period. Adjust and lubricate operable components to ensure operability without damaging effects.

- J. Limiting Exposures: Supervise construction operations to assure that no part of the construction, completed or in progress, is subject to harmful, dangerous, damaging, or otherwise deleterious exposure during the construction period.

3.8 STARTING AND ADJUSTING

- A. Coordinate startup and adjusting of equipment and operating components with requirements in Division 01 Section “General Commissioning Requirements.”
- B. Start equipment and operating components to confirm proper operation. Remove malfunctioning units, replace with new units, and retest.
- C. Adjust equipment for proper operation. Adjust operating components for proper operation without binding.
- D. Test each piece of equipment to verify proper operation. Test and adjust controls and safeties. Replace damaged and malfunctioning controls and equipment.

3.9 PROTECTION OF INSTALLED CONSTRUCTION

- A. Provide final protection and maintain conditions that ensure installed Work is without damage or deterioration at time of Substantial Completion.
- B. Comply with manufacturer's written instructions for temperature and relative humidity.

3.10 CORRECTION OF THE WORK

- A. Repair or remove and replace damaged, defective, or nonconforming Work. Restore damaged substrates and finishes.
 - 1. Repairing includes replacing defective parts, refinishing damaged surfaces, touching up with matching materials, and properly adjusting operating equipment.
- B. Architect may issue “Construction Deficiency Report” for items identified by Architect as needing correction. Promptly repair or remove and replace defective construction identified in Construction Deficiency Report. Provide written notification to Architect when identified item has been corrected.
- C. Restore permanent facilities used during construction to their specified condition.
- D. Remove and replace damaged surfaces that are exposed to view if surfaces cannot be repaired without visible evidence of repair.
- E. Repair components that do not operate properly. Remove and replace operating components that cannot be repaired.
- F. Remove and replace chipped, scratched, and broken glass or reflective surfaces.

END OF SECTION 01 73 00

SECTION 01 77 00 - CLOSEOUT PROCEDURES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes administrative and procedural requirements for contract closeout, including, but not limited to, the following:
 - 1. Substantial Completion procedures.
 - 2. Final completion procedures.
 - 3. Warranties.
 - 4. Final cleaning.
 - 5. Repair of the Work.

1.3 SUBSTANTIAL COMPLETION PROCEDURES

- A. Documents Prior to Substantial Completion: Complete the following before Contract-scheduled date of Substantial Completion:
 - 1. Certificates of Release: Obtain and submit releases from authorities having jurisdiction permitting Owner unrestricted use of the Work and access to services and utilities. Include occupancy permits, operating certificates, electrical inspection reports, preliminary balance reports, and similar releases. Documents are to be uploaded to Submittal Exchange under the Closeout tab.
 - 2. Submit notarized letter on Contractor's letterhead certifying no asbestos containing building materials have been used in the Work. Also include a copy in the Operation and Maintenance Manuals. Documents are to be uploaded to Submittal Exchange under the Closeout tab.
 - 3. Submit notarized letter on Contractor's letterhead certifying all required inspections/tests required within the technical specification sections have been successfully completed. Attach to the letter copies of all quality control testing reports, other field test reports, manufacturer required quality control and certifications, and all other quality control reports, certifications, or statements as required by each individual technical specification section. Such attached documentation is to be organized and labeled by each individual technical specification. Documents are to be uploaded to Submittal Exchange under the Test Reports – Contractors tab. Also include a copy in the Operation and Maintenance Manuals.

4. Submit testing, adjusting, and balancing records. Also include a copy in the Operation and Maintenance Manuals. Documents are to be uploaded to Submittal Exchange under the Submittal tab.
5. Submit changeover information related to Owner's occupancy, use, operation, and maintenance. Documents are to be uploaded to Submittal Exchange under the Closeout tab.

B. Procedures Prior to Substantial Completion: Complete the following before Contract-scheduled date of Substantial Completion:

1. Advise Owner of pending insurance changeover requirements.
2. Make final changeover of permanent locks and deliver keys to Owner. Advise Owner's personnel of changeover in security provisions.
3. Complete startup and testing of systems and equipment.
4. Perform preventive maintenance on equipment used prior to Substantial Completion. Maintenance to be performed by a factory authorized service representative so as not to void the equipment warranty.
5. Advise Owner of changeover in heat and other utilities.
6. Terminate and remove temporary facilities from Project site, along with mockups, construction tools, and similar elements.
7. Complete all items on any Field Observation and Construction Deficiency Reports and submit a copy of the reports to the Architect and Construction Manager identifying how each item was addressed in detail, including the date of completion.
8. Complete final cleaning requirements as specified below, including touchup painting.
9. Repair and restore marred exposed finishes to eliminate visual defects.
10. Complete all items noted as requiring completion/correction from the Commissioning consultant and TAB (Testing and Balancing) consultant.
11. Successfully complete all inspections/tests required as part of the individual technical specification sections. Copies of all such inspections/tests are to be included in the Operation and Maintenance manual, refer to Specifications Section 01 78 23.

C. Inspection: No later than 14 days prior to the Contract-scheduled date of Substantial Completion, submit a letter to the Architect and Construction Manager confirming the work is on schedule for Substantial Completion by the contract specified date. No later than seven days after Contract-scheduled date of Substantial Completion (including authorized adjustments), the Architect will make an inspection to determine whether the Work or designated portion thereof is substantially complete. Absent the Contractor letter confirming readiness of work, the Architect may elect to postpone the Substantial Completion inspection.

1. Additional Inspections: Request additional Substantial Completion inspections when the work that was not complete for the scheduled Substantial Completion inspection is now ready to inspect.
 - a. Costs for such additional Substantial Completion inspections will be deducted from sums otherwise due the Contractor by deduct Change Order.
2. Results of completed inspection will form the basis of requirements for final completion.

1.4 FUNCTIONAL COMPLETION PROCEDURES

- A. Functional Completion applies to Contract Work being Commissioned. The commissioning of Divisions 01, 22, 23, and 26 (as applicable to each Contractor) must be complete prior to Functional Completion, except for the following:
 1. Deferred Work approved in writing by the Architect.
 2. Control system training planned to be performed after occupancy and final acceptance.
 3. Any required seasonal TAB work to be formed during Warranty period.
 4. Other approved deferred testing.
- B. Completion of Commissioning required to demonstrate Functional Completion includes the following as applicable for all systems, but is not limited to:
 1. Completed and signed pre-functional checklists and start-up documentation.
 2. Requested trend logs complete, data and forms submitted and approved.
 3. Completion of all functional testing.
 4. Required training of Owner personnel completed and approved.
 5. Submission of final approved TAB report.
 6. Submission of final approved commissioning report.
 7. Submission of the approved O&M manuals.
 8. All identified deficiencies have been corrected or are approved in writing by the Owner to be excepted from this milestone.
- C. The Architect will determine the date of Functional Completion after reviewing the Commissioning Agent's recommendation for Functional Completion.

1.5 FINAL COMPLETION PROCEDURES

- A. Submittals Prior to Final Completion: Before final inspection for determining final completion, complete the following:
 1. Submit copy of Architect's Substantial Completion inspection list of items to be completed or corrected. The copy of the list shall state that each item has been completed or otherwise resolved for acceptance, what corrective action was taken, and the date of completion. Items that are in dispute shall have an explanation attached. Documents are to be uploaded to Submittal Exchange under the SCIR tab.

2. Instruct Owner's personnel in operation, adjustment, and maintenance of products, equipment, and systems. Submit demonstration and training video recordings specified in Division 01 Section "Demonstration and Training."
 3. Submit closeout submittals specified in other Division 01 Sections, including project record documents, operation and maintenance manuals, property surveys, and similar final record information. Documents are to be uploaded to Submittal Exchange under the Submittal tab.
 4. Submit closeout submittals specified in individual Specification Sections, including specific warranties, workmanship bonds, maintenance service agreements, final certifications, and similar documents.
 5. Submit maintenance material submittals specified in individual Specification Sections, including tools, spare parts, extra materials, and similar items, and deliver to location designated by Owner. Contractor to provide a transmittal detailing all delivered maintenance materials and obtain Owner signature confirming delivery of such; a copy of transmittal with Owner's signature shall be provided with Closeout submittals. Label with manufacturer's name and model number where applicable. All keys shall be tagged and labeled. Documents are to be uploaded to Submittal Exchange under the Closeout tab.
 6. Certificate of Insurance: Submit evidence of final, continuing insurance coverage complying with insurance requirements.
 7. Submit a final Application for Payment according to Division 01 Section "Payment Procedures." Document to be uploaded to Submittal Exchange under the Pay App tab.
- B. Inspection: No later than seven days after the Contract-scheduled date for final completion, Architect and Construction Manager will proceed with the final completion inspection. The Architect will review the final Certificate for Payment after the inspection or will notify the Contractor of the outstanding items that must be completed or corrected before the certificate will be processed.
1. Reinspection: Request reinspection when the Work identified in previous inspections as incomplete has been completed or corrected. The Owner and Architect and Construction Manager reserve the right to add items to the Substantial Completion and final completion inspection lists as long as it is part of the Contractor's work. Complete all Contract requirements prior to the final completion inspection to avoid any further reinspection cost.
 - a. Costs for such reinspections and any costs for extension of the Architect's and Construction Manager's services will be deducted from sums otherwise due the Contractor.

1.6 SUBMITTAL OF PROJECT WARRANTIES

- A. Organize warranty documents into an orderly sequence based on the table of contents of Project Manual. Warranties for all equipment, materials, and systems on the Project are to start no sooner than the date of substantial completion. Provide extended warranties for all equipment, materials, and systems that may have been turned over to the Owner for its use regardless of the phased completion of the Project.
- B. Warranty Electronic File: Provide warranties and bonds in PDF format. Assemble complete warranty and bond submittal package into a single electronic PDF file with bookmarks enabling navigation to each item. Provide bookmarked table of contents at beginning of document.
 - 1. Submit two digital media copies, PDF on thumb drive.
- C. Warranties in Paper Form:
 - 1. Bind warranties and bonds in heavy-duty, three-ring, vinyl-covered, loose-leaf binders, thickness as necessary to accommodate contents, and sized to receive 8-1/2-by-11-inch paper.
 - 2. Provide heavy paper dividers with plastic-covered tabs for each separate warranty. Mark tab to identify the product or installation. Provide a typed description of the product or installation, including the name of the product and the name, address, and telephone number of Installer.
 - 3. Identify each binder on the front and spine with the typed or printed title "WARRANTIES," Project name, and name of Contractor.
 - 4. Submit two paper copies, as listed above.
- D. Provide additional copies of each warranty to include in operation and maintenance manuals.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Cleaning Agents: Use cleaning materials and agents recommended by manufacturer or fabricator of the surface to be cleaned. Do not use cleaning agents that are potentially hazardous to health or property or that might damage finished surfaces.

PART 3 - EXECUTION

3.1 FINAL CLEANING

- A. General: Perform final cleaning. Conduct cleaning and waste-removal operations to comply with local laws and ordinances and Federal and local environmental and antipollution regulations.

- B. Cleaning: Employ experienced workers or professional cleaners for final cleaning. Clean each surface or unit to condition expected in an average commercial building cleaning and maintenance program. Comply with manufacturer's written instructions.
1. Complete the following cleaning operations before inspection for certification of Substantial Completion for entire Project or for a designated portion of Project:
 - a. Clean Project site, yard, and grounds, in areas disturbed by construction activities, including landscape development areas, of rubbish, waste material, litter, and other foreign substances.
 - b. Sweep paved areas broom clean. Remove petrochemical spills, stains, and other foreign deposits.
 - c. Rake grounds that are neither planted nor paved to a smooth, even-textured surface.
 - d. Remove tools, construction equipment, machinery, and surplus material from Project site.
 - e. Clean exposed exterior and interior hard-surfaced finishes to a dirt-free condition, free of stains, films, and similar foreign substances. Remove surface dust and dirt from all vertical and horizontal painted surfaces. Avoid disturbing natural weathering of exterior surfaces. Restore reflective surfaces to their original condition.
 - f. Remove debris and surface dust from limited access spaces, including roofs, plenums, shafts, trenches, equipment vaults, manholes, attics, and similar spaces.
 - g. Sweep concrete floors broom clean in unoccupied spaces using sweeping compound that is compatible with new finishes.
 - h. Vacuum carpet and similar soft surfaces, removing debris and excess nap; clean according to manufacturer's recommendations if visible soil or stains remain.
 - i. Clean transparent materials, including mirrors and glass in doors and windows. Remove glazing compounds and other noticeable, vision-obscuring materials. Polish mirrors and glass, taking care not to scratch surfaces.
 - j. Remove labels that are not permanent.
 - k. Wipe surfaces of mechanical and electrical equipment and similar equipment. Remove excess lubrication, paint and mortar droppings, and other foreign substances.
 - l. Clean plumbing fixtures to a sanitary condition, free of stains, including stains resulting from water exposure.
 - m. Replace disposable air filters and clean permanent air filters. Clean exposed surfaces of diffusers, registers, and grills.

- n. Clean ducts, blowers, and coils if units were operated without filters during construction or that display contamination with particulate matter on inspection.
 - o. Clean light fixtures, lamps, globes, and reflectors to function with full efficiency.
 - p. Leave Project clean and ready for occupancy.
- C. Construction Waste Disposal: Comply with waste disposal requirements in Division 01 Section "Temporary Facilities and Controls."

3.2 REPAIR OF THE WORK

- A. Complete repair and restoration operations before inspection for determination of Substantial Completion.
- B. Repair or remove and replace defective construction. Repairing includes replacing defective parts, refinishing damaged surfaces, touching up with matching materials, and properly adjusting operating equipment. Where damaged or worn items cannot be repaired or restored, provide replacements. Remove and replace operating components that cannot be repaired. Restore damaged construction and permanent facilities used during construction to condition acceptable to Owner and Construction Manager.
 - 1. Remove and replace chipped, scratched, and broken glass, reflective surfaces, and other damaged transparent materials.
 - 2. Touch up and otherwise repair and restore marred or exposed finishes and surfaces. Replace finishes and surfaces that already show evidence of repair or restoration.
 - a. Do not paint over "UL" and other required labels and identification, including mechanical and electrical nameplates. Remove paint applied to required labels and identification.
 - 3. Replace parts subject to operating conditions during construction that may impede operation or reduce longevity.
 - 4. Replace burned-out bulbs, bulbs noticeably dimmed by hours of use, and defective and noisy starters in fluorescent fixtures to comply with requirements for new fixtures.

END OF SECTION 01 77 00

SECTION 01 78 23 - OPERATION AND MAINTENANCE DATA

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes administrative and procedural requirements for preparing operation and maintenance manuals.

1.3 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Manual Format: Submit operation and maintenance manuals in the following format:
 - 1. Two paper copies as listed below.
 - 2. Two digital media copies, PDF format on thumb drive.
- B. Prior to submission of paper copies and thumb drives as listed above, submit electronic files in PDF format for review and approval. If Submittal Exchange is used for Construction Document distribution, please upload O&M Manuals under the Submittals tab, Section 01 78 23. If the file is larger than 100MB, split said document into separate parts with a submittal cover sheet for each.

1.4 FORMAT OF OPERATION AND MAINTENANCE MANUALS

- A. Manuals, Paper Copy: Submit manuals in the form of hard-copy, bound and labeled volumes.
 - 1. Binders: Heavy-duty, three-ring, vinyl-covered, loose-leaf binders, in thickness necessary to accommodate contents, sized to hold 8-1/2-by-11-inch paper; with clear plastic sleeve on spine to hold label describing contents.
 - a. If two or more binders are necessary to accommodate data of a system, organize data in each binder into groupings by subsystem and related components. Cross-reference other binders if necessary to provide essential information for proper operation or maintenance of equipment or system.
 - b. Identify each binder on front and spine, with printed title "OPERATION AND MAINTENANCE MANUAL," Project title or name, and subject matter of contents. Indicate volume number for multiple-volume sets.

2. Dividers: Heavy-paper dividers with plastic-covered tabs for each section of the manual. Mark each tab to indicate contents. Include typed list of products and major components of equipment included in the section on each divider, cross-referenced to Specification Section number and title of Project Manual.
 3. Drawings: Attach reinforced, punched binder tabs on drawings and bind with text.
 - a. If oversize drawings are necessary, fold drawings to same size as text pages and use as foldouts.
 4. If drawings are too large to be used as foldouts, fold and place drawings in labeled envelopes and bind envelopes in rear of manual. At appropriate locations in manual, insert typewritten pages indicating drawing titles, descriptions of contents, and drawing locations.
- B. Manuals, Electronic Files: Submit manuals in the form of a multiple file composite electronic PDF file for each manual type required.
1. Electronic Files: Use electronic files prepared by manufacturer where available. Where scanning of paper documents is required, configure scanned file for minimum readable file size.
 2. File Names and Bookmarks: Bookmark individual documents based on file names. Name document files to correspond to system, subsystem, and equipment names used in manual directory and table of contents. Group documents for each system and subsystem into individual composite bookmarked files, then create composite manual, so that resulting bookmarks reflect the system, subsystem, and equipment names in a readily navigated file tree. Configure electronic manual to display bookmark panel on opening file.

1.5 REQUIREMENTS FOR OPERATION AND MAINTENANCE MANUALS

- A. Organization: Unless otherwise indicated, organize each manual into a separate section for each system and subsystem, and a separate section for each piece of equipment not part of a system. Each manual shall contain the following materials, in the order listed:
1. Title Page: Include the following information:
 - a. Subject matter included in manual.
 - b. Name and address of Project.
 - c. Date of submittal.
 - d. Name and contact information for Contractor.
 2. Table of Contents: List each product included in manual, identified by product name, indexed to the content of the volume, and cross-referenced to Specification Section number in Project Manual.
 - a. If operation or maintenance documentation requires more than one volume to accommodate data, include comprehensive table of contents for all volumes in each volume of the set.

3. Manual Contents: Organize into sets of manageable size. Arrange contents alphabetically by system, subsystem, and equipment. If possible, assemble instructions for subsystems, equipment, and components of one system into a single binder.

1.6 OPERATION AND MAINTENANCE MANUALS

- A. Operation Content: In addition to requirements in this Section, include operation data required in individual Specification Sections and the following information:
 1. System, subsystem, and equipment descriptions. Use designations for systems and equipment indicated on Contract Documents.
 - a. Product name and model number. Use designations for products indicated on Contract Documents.
 - b. Manufacturer's name.
 - c. Equipment identification with serial number of each component.
 - d. Equipment function.
 - e. Complete nomenclature and number of replacement parts.
 2. Operating Procedures: Include the following, as applicable:
 - a. Startup procedures.
 - b. Routine and normal operating instructions.
 - c. Regulation and control procedures.
 - d. Normal shutdown instructions.
 - e. Seasonal and weekend operating instructions.
 - f. Special operating instructions and procedures.
 3. Emergency Procedures: Include the following, as applicable:
 - a. Instructions on stopping.
 - b. Shutdown instructions for each type of emergency.
 - c. Operating instructions for conditions outside normal operating limits.
 - d. Special operating instructions and procedures.
 4. Wiring diagrams.
 5. Control diagrams.
 6. Piped system diagrams.
 - a. Piped Systems: Diagram piping as installed, and identify color-coding where required for identification.
 7. Precautions against improper use.
 8. Systems and Equipment Controls: Describe the sequence of operation, and diagram controls as installed.
 9. Include copies of all inspections/tests required in the individual technical specifications section.

- B. Maintenance Content: Organize manual into a separate section for each product, material, and finish. Include source information, product information, maintenance procedures, manufacturers' maintenance documentation, maintenance and service schedules, spare parts list and source information, maintenance service contracts, repair materials and sources, and warranties and bonds, as described below.
1. Source Information: List each product included in manual, identified by product name and arranged to match manual's table of contents. For each product, list name, address, and telephone number of Installer or supplier and maintenance service agent, and cross-reference Specification Section number and title in Project Manual and drawing or schedule designation or identifier where applicable.
 2. Product Information: Include the following, as applicable:
 - a. Product name and model number.
 - b. Manufacturer's name.
 - c. Color, pattern, and texture.
 - d. Material and chemical composition.
 - e. Reordering information for specially manufactured products.
 3. Maintenance Procedures: Include manufacturer's written recommendations and the following:
 - a. Inspection procedures.
 - b. Types of cleaning agents to be used and methods of cleaning.
 - c. List of cleaning agents and methods of cleaning detrimental to product.
 - d. Schedule for routine cleaning and maintenance.
 - e. Repair instructions.
 4. Manufacturers' Maintenance Documentation: Manufacturers' maintenance documentation including the following information for each component part or piece of equipment:
 - a. Standard maintenance instructions and bulletins.
 - b. Drawings, diagrams, and instructions required for maintenance, including disassembly and component removal, replacement, and assembly.
 - c. Identification and nomenclature of parts and components.
 - d. List of items recommended to be stocked as spare parts.
 5. Maintenance and Service Schedules: Include service and lubrication requirements, list of required lubricants for equipment, and separate schedules for preventive and routine maintenance and service with standard time allotment.
 - a. Scheduled Maintenance and Service: Tabulate actions for daily, weekly, monthly, quarterly, semiannual, and annual frequencies.
 - b. Maintenance and Service Record: Include manufacturers' forms for recording maintenance.
 6. Spare Parts List and Source Information: Include lists of replacement and repair parts, with parts identified and cross-referenced to manufacturers' maintenance documentation and local sources of maintenance materials and related services.

7. Maintenance Service Contracts: Include copies of maintenance agreements with name and telephone number of service agent.
8. Repair Materials and Sources: Include lists of materials and local sources of materials and related services.
9. Warranties and Bonds: Include copies of warranties and bonds and lists of circumstances and conditions that would affect validity of warranties or bonds.
 - a. Include procedures to follow and required notifications for warranty claims.

1.7 MANUAL PREPARATION

- A. Operation and Maintenance Manuals: Assemble a complete set of operation and maintenance data indicating operation and maintenance of each system, subsystem, and piece of equipment not part of a system.
- B. Manufacturers' Data: Where manuals contain manufacturers' standard printed data, include only sheets pertinent to product or component installed. Mark each sheet to identify each product or component incorporated into the Work. If data include more than one item in a tabular format, identify each item using appropriate references from the Contract Documents. Identify data applicable to the Work and delete references to information not applicable.
 1. Prepare supplementary text if manufacturers' standard printed data are not available and where the information is necessary for proper operation and maintenance of equipment or systems.
- C. Drawings: Prepare drawings supplementing manufacturers' printed data to illustrate the relationship of component parts of equipment and systems and to illustrate control sequence and flow diagrams. Coordinate these drawings with information contained in record Drawings to ensure correct illustration of completed installation.
 1. Do not use original project record documents as part of operation and maintenance manuals.
- D. Submittals: Include copy of each product submittal approved by Architect.
 1. If the "As-Specified Verification Form" was used as the product submittal, include all pertinent product data as described in this Section.
- E. Safety Data Sheets (SDS): Include copy of SDS for each product installed.
- F. Comply with Division 01 Section "Closeout Procedures" for schedule for submitting operation and maintenance documentation.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 01 78 23

SECTION 01 78 39 - PROJECT RECORD DOCUMENTS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes administrative and procedural requirements for project record documents, including the following:
 - 1. Record Drawings.
 - 2. Miscellaneous record submittals.

1.3 CLOSEOUT SUBMITTALS

- A. Record Drawings: Contractor to submit a full set of marked-up record drawings pertaining to their contract. Provide each drawing, whether or not changes and additional information were recorded. Comply with the following:
 - 1. Submit one full size set of the original, marked-up record prints.
 - 2. Submit two digital media copies, in color, in PDF format on thumb drives. PDFs to be saved and submitted as one file.
 - 3. Prior to submission of paper copies and thumb drives as listed above, submit electronic files in PDF format for review and approval. If Submittal Exchange is used for Construction Document distribution, please upload Record Drawings under the Submittals tab, Section 01 78 39. If the file is larger than 100MB, split said document into separate parts with a submittal cover sheet for each.
- B. Miscellaneous Record Submittals: See other Specification Sections for miscellaneous record-keeping requirements and submittals in connection with various construction activities.
 - 1. Submit two paper copies of each submittal.

1.4 RECORD DRAWINGS

- A. Record Prints: Architect will provide Contractor with one paper set of Contract Drawings at beginning of Work at no cost.
 - 1. Preparation: Mark record prints to show the actual installation where installation varies from that shown originally.

- a. Give particular attention to information on concealed elements that would be difficult to identify or measure and record later.
 - b. Accurately record information in an acceptable drawing technique.
 - c. Record data as soon as possible after obtaining it.
 - d. Record and check the markup before enclosing concealed installations.
 2. Content: Types of items requiring marking include, but are not limited to, the following:
 - a. Dimensional changes to Drawings.
 - b. Revisions to details shown on Drawings.
 - c. Revisions to routing of piping and conduits.
 - d. Revisions to electrical circuitry.
 - e. Locations of concealed internal utilities.
 - f. Changes made by Addendum.
 - g. Changes made by Architect's Supplemental Instruction (ASI) forms.
 - h. Changes made by Change Order or Construction Change Directive.
 - i. Changes made following Architect's written orders.
 3. Mark record sets with red, permanent marker.
- B. Record Digital Data Files: Prepare a full set of digital data files of the Contract Drawings from the marked-up record prints.
- C. Format: Identify and date each record Drawing; include the designation "PROJECT RECORD DRAWING" in a prominent location. Indicate name of Contractor.
1. Record Prints: Organize record prints into manageable sets. Bind each set with durable paper cover sheets. Include identification on cover sheets.
 2. Record Digital Data Files: Organize digital data information into separate electronic files that correspond to each sheet of the Contract Drawings. Name each file with the sheet identification. Include identification in each digital data file.

1.5 MISCELLANEOUS RECORD SUBMITTALS

- A. Assemble miscellaneous records required by other Specification Sections for miscellaneous record keeping and submittal in connection with actual performance of the Work. Bind or file miscellaneous records and identify each, ready for continued use and reference.

1.6 RECORDING AND MAINTENANCE

- A. Maintenance of Record Documents: Store record documents in the field office apart from the Contract Documents used for construction. Do not use project record documents for construction purposes. Maintain record documents in good order and in a clean, dry, legible condition, protected from deterioration and loss. Provide access to project record documents for Architect's, Construction Manager's and Owner's reference during normal working hours.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 01 78 39

SECTION 01 79 00 - DEMONSTRATION AND TRAINING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes administrative and procedural requirements for instructing Owner's personnel, including the following:
 - 1. Demonstration of operation of systems, subsystems, and equipment.
 - 2. Instruction in operation and maintenance of systems, subsystems, and equipment.
 - 3. Demonstration and training video recordings.

1.3 CLOSEOUT SUBMITTALS

- A. Attendance Record: For each demonstration and training session, submit list of participants, subjects covered, and length of instruction time.
- B. Demonstration and Training Video Recordings: Submit two copies of each demonstration and training session.
 - 1. Identification: On each copy, provide an applied label with the following information:
 - a. Name of Project.
 - b. Name of Architect.
 - c. Name of Construction Manager.
 - d. Name of Contractor.
 - e. Name of service representative providing training.
 - f. Name of instructor.
 - g. Date of video recording.

1.4 QUALITY ASSURANCE

- A. Instructor Qualifications: A factory-authorized service representative, complying with requirements in Division 01 Section "Quality Requirements," experienced in operation and maintenance procedures and training.

1.5 COORDINATION

- A. Coordinate instruction schedule with Owner's operations. Adjust schedule as required to minimize disrupting Owner's operations and to ensure availability of Owner's personnel.

1.6 INSTRUCTION PROGRAM

- A. Program Structure: Develop an instruction program that includes individual training for each system and for equipment not part of a system, as required by individual Specification Sections. Include instruction for the following as applicable to the system, equipment, or component:
1. Basis of System Design, Operational Requirements, and Criteria: Include the following:
 - a. System, subsystem, and equipment descriptions.
 - b. Operating standards.
 2. Documentation: Review the following items in detail:
 - a. Manuals.
 - b. Warranties and bonds.
 3. Operations: Include the following, as applicable:
 - a. Startup procedures.
 - b. Routine and normal operating instructions.
 - c. Regulation and control procedures.
 - d. Safety procedures.
 - e. Normal shutdown instructions.
 - f. Operating procedures for emergencies.
 - g. Seasonal and weekend operating instructions.
 - h. Special operating instructions and procedures.
 4. Adjustments: Include the following:
 - a. Noise and vibration adjustments.
 - b. Economy and efficiency adjustments.
 5. Troubleshooting: Include the following:
 - a. Diagnostic instructions.
 - b. Test and inspection procedures.
 6. Maintenance: Include the following:
 - a. Types of cleaning agents to be used and methods of cleaning.
 - b. Procedures for routine cleaning
 - c. Procedures for preventive maintenance.
 - d. Procedures for routine maintenance.
 7. Repairs: Include the following:
 - a. Diagnosis instructions.
 - b. Repair instructions.

1.7 INSTRUCTION

- A. Engage qualified instructors to instruct Owner's personnel to adjust, operate, and maintain systems, subsystems, and equipment not part of a system.
- B. Scheduling: Provide instruction at mutually agreed on times. For equipment that requires seasonal operation, provide similar instruction at start of each season.
 - 1. Schedule training with Owner, through Construction Manager, with at least seven days' advance notice.

1.8 DEMONSTRATION AND TRAINING VIDEO RECORDINGS

- A. Digital Video Recordings: Provide high-resolution, digital video in MPEG format, produced by a digital camera with minimum sensor resolution of 12 megapixels and capable of recording in full HD mode.
 - 1. Submit video recordings on a flash drive.
- B. Preproduced Video Recordings: Provide video recordings used as a component of training modules in same format as recordings of live training.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 01 79 00

SECTION 02 41 19 - SELECTIVE DEMOLITION

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Demolition and removal of selected portions of building or structure.
 - 2. Demolition and removal of selected site elements.
 - 3. Salvage of existing items to be reused or recycled.

1.3 DEFINITIONS

- A. Remove: Detach items from existing construction and dispose of them off-site unless indicated to be salvaged or reinstalled.
- B. Remove and Salvage: Detach items from existing construction, in a manner to prevent damage, and deliver to Owner ready for reuse.
- C. Remove and Reinstall: Detach items from existing construction, in a manner to prevent damage, prepare for reuse, and reinstall where indicated.
- D. Existing to Remain: Leave existing items that are not to be removed and that are not otherwise indicated to be salvaged or reinstalled.

1.4 MATERIALS OWNERSHIP

- A. Unless otherwise indicated, demolition waste becomes property of Contractor.
- B. Historic items, relics, antiques, and similar objects including, but not limited to, cornerstones and their contents, commemorative plaques and tablets, and other items of interest or value to Owner that may be uncovered during demolition remain the property of Owner.
 - 1. Carefully salvage in a manner to prevent damage and promptly return to Owner.

1.5 PREINSTALLATION MEETINGS

- A. Predemolition Conference: Conduct conference at Project site.
 - 1. Inspect and discuss condition of construction to be selectively demolished.
 - 2. Review and finalize selective demolition schedule and verify availability of materials, demolition personnel, equipment, and facilities needed to make progress.

3. Review requirements of work performed by other trades that rely on substrates exposed by selective demolition operations.
4. Review areas where existing construction is to remain and requires protection.

1.6 SUBMITTALS, GENERAL

- A. General: Submit all informational submittals required by this Section concurrently.

1.7 INFORMATIONAL SUBMITTALS

- A. Schedule of Selective Demolition Activities: Indicate the following:

1. Detailed sequence of selective demolition and removal work, with starting and ending dates for each activity. Ensure Owner's on-site operations are uninterrupted.
2. Interruption of utility services. Indicate how long utility services will be interrupted.
3. Coordination for shutoff, capping, and continuation of utility services.

- B. Predemolition Inventory:

1. Submit list of items to be removed and salvaged as part of selective demolition work.
2. Submit list of items to be removed and reinstalled as part of selective demolition work.

- C. Predemolition Photographs or Video: Show existing conditions, including finish surfaces, that might be misconstrued as damage caused by demolition operations. Submit photos or video recordings on thumb drive before Work begins. Include copy of key plan indicating each photograph's or video's location and direction.

1. Submit digital media as originally recorded in the digital camera, without alteration, manipulation, editing, or modification.
2. Photographs: Provide high-resolution color images in JPG format, produced by a digital camera with minimum sensor size of 12 megapixels.
 - a. Name each image with date photograph was taken, location, and unique sequential number keyed to accompanying key plan in file name.
3. Video: Provide high-resolution, digital video in MPEG format, produced by a digital camera with minimum sensor resolution of 12 megapixels.
 - a. Name each video recording with date video recording was recorded, location, and unique sequential number keyed to accompanying key plan in file name.
 - b. Begin narration of each video recording with Contractor's name, videographer's name, and location in Project.
 - 1) Describe scenes on video recording by audio narration.
 - 2) Confirm date and time at beginning and end of recording.

1.8 CLOSEOUT SUBMITTALS

A. Inventory

1. Submit a list of items that have been removed and salvaged.
2. Submit a list of items that have been removed and reinstalled.

B. Warranties: Documentation indicating that existing warranties are still in effect after completion of selective demolition.

1.9 FIELD CONDITIONS

A. Owner will occupy portions of building immediately adjacent to selective demolition area. Conduct selective demolition so Owner's operations will not be disrupted.

B. Conditions existing at time of inspection for bidding purpose will be maintained by Owner as far as practical.

C. Notify Architect of discrepancies between existing conditions and Drawings before proceeding with selective demolition.

D. Hazardous Materials: Present in buildings and structures to be selectively demolished. A report on the presence of hazardous materials is on file for review and use. Examine report to become aware of locations where hazardous materials are present.

1. Hazardous material remediation is specified elsewhere in the Contract Documents.
2. Do not disturb hazardous materials or items suspected of containing hazardous materials except under procedures specified elsewhere in the Contract Documents.

E. Storage or sale of removed items or materials on-site is not permitted.

F. Utility Service: Maintain existing utilities indicated to remain in service and protect them against damage during selective demolition operations.

1. Maintain fire-protection facilities in service during selective demolition operations.

1.10 WARRANTY

A. Existing Warranties: Remove, replace, patch, and restore materials and surfaces cut or damaged during selective demolition, by methods and with materials and using approved contractors so as not to void existing warranties. Notify warrantor before proceeding. Existing warranties include the following:

1. Roofing.

B. Notify warrantor on completion of selective demolition, and obtain documentation verifying that existing system has been inspected and warranty remains in effect. Submit documentation at Project closeout.

1.11 COORDINATION

- A. Arrange selective demolition schedule so as not to interfere with Owner's operations.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Regulatory Requirements: Comply with governing EPA notification regulations before beginning selective demolition. Comply with hauling and disposal regulations of authorities having jurisdiction.
- B. Standards: Comply with ANSI/ASSP A10.6 and NFPA 241.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Survey existing conditions and correlate with requirements indicated to determine extent of selective demolition required.
- B. When unanticipated mechanical, electrical, or structural elements that conflict with intended function or design are encountered, investigate and measure the nature and extent of conflict. Promptly submit a written report to Architect.
- C. Engage a professional engineer to perform an engineering survey of condition of building to determine whether removing any element might result in structural deficiency or unplanned collapse of any portion of structure or adjacent structures during selective building demolition operations.
 - 1. Perform surveys as the Work progresses to detect hazards resulting from selective demolition activities.
- D. Record existing conditions by use of preconstruction photographs or video.
 - 1. Inventory and record the condition of items to be removed and salvaged. Provide photographs or video of conditions that might be misconstrued as damage caused by demolition operations.
 - 2. Inventory and record the condition of items to be removed and reinstalled. Provide photographs or video of conditions that might be misconstrued as damage caused by demolition operations.
- E. Beginning selective demolition constitutes Contractor's acceptance of conditions.

3.2 UTILITY SERVICES AND MECHANICAL/ELECTRICAL SYSTEMS

- A. Existing Services/Systems to Remain: Maintain services/systems indicated to remain and protect them against damage.
- B. Existing Services/Systems to Be Removed, Relocated, or Abandoned: Locate, identify, disconnect, and seal or cap off utility services and mechanical/electrical systems serving areas to be selectively demolished.
 - 1. Arrange to shut off utilities with utility companies.
 - 2. If services/systems are required to be removed, relocated, or abandoned, provide temporary services/systems that bypass area of selective demolition and that maintain continuity of services/systems to other parts of building.
 - 3. Disconnect, demolish, and remove fire-suppression systems, plumbing, and HVAC systems, equipment, and components indicated on Drawings to be removed.
 - a. Piping to Be Removed: Remove portion of piping indicated to be removed and cap or plug remaining piping with same or compatible piping material.
 - b. Piping to Be Abandoned in Place: Drain piping and cap or plug piping with same or compatible piping material and leave in place.
 - c. Equipment to Be Removed: Disconnect and cap services and remove equipment.
 - d. Equipment to Be Removed and Reinstalled: Disconnect and cap services and remove, clean, and store equipment; when appropriate, reinstall, reconnect, and make equipment operational.
 - e. Equipment to Be Removed and Salvaged: Disconnect and cap services and remove equipment and deliver to Owner.
 - f. Ducts to Be Removed: Remove portion of ducts indicated to be removed and plug remaining ducts with same or compatible ductwork material.
 - g. Ducts to Be Abandoned in Place: Cap or plug ducts with same or compatible ductwork material and leave in place.

3.3 PROTECTION

- A. Temporary Protection: Provide temporary barricades and other protection required to prevent injury to people and damage to adjacent buildings and facilities to remain.
 - 1. Provide protection to ensure safe passage of people around selective demolition area and to and from occupied portions of building.
 - 2. Provide temporary weather protection, during interval between selective demolition of existing construction on exterior surfaces and new construction, to prevent water leakage and damage to structure and interior areas.

3. Protect walls, ceilings, floors, and other existing finish work that are to remain or that are exposed during selective demolition operations.
 4. Cover and protect furniture, furnishings, and equipment that have not been removed.
 5. Comply with requirements for temporary enclosures, dust control, heating, and cooling specified in Division 01 Section "Temporary Facilities and Controls."
- B. Temporary Shoring: Design, provide, and maintain shoring, bracing, and structural supports as required to preserve stability and prevent movement, settlement, or collapse of construction and finishes to remain, and to prevent unexpected or uncontrolled movement or collapse of construction being demolished.
1. Strengthen or add new supports when required during progress of selective demolition.
- C. Remove temporary barricades and protections where hazards no longer exist.

3.4 SELECTIVE DEMOLITION, GENERAL

- A. General: Demolish and remove existing construction only to the extent required by new construction and as indicated. Use methods required to complete the Work within limitations of governing regulations and as follows:
1. Proceed with selective demolition systematically, from higher to lower level. Complete selective demolition operations above each floor or tier before disturbing supporting members on the next lower level.
 2. Neatly cut openings and holes plumb, square, and true to dimensions required. Use cutting methods least likely to damage construction to remain or adjoining construction. Use hand tools or small power tools designed for sawing or grinding, not hammering and chopping. Temporarily cover openings to remain.
 3. Cut or drill from the exposed or finished side into concealed surfaces to avoid marring existing finished surfaces.
 4. Do not use cutting torches until work area is cleared of flammable materials. At concealed spaces, such as duct and pipe interiors, verify condition and contents of hidden space before starting flame-cutting operations. Maintain portable fire-suppression devices during flame-cutting operations.
 5. Maintain adequate ventilation when using cutting torches.
 6. Remove decayed, vermin-infested, or otherwise dangerous or unsuitable materials and promptly dispose of off-site.
 7. Remove structural framing members and lower to ground by method suitable to avoid free fall and to prevent ground impact or dust generation.

8. Locate selective demolition equipment and remove debris and materials so as not to impose excessive loads on supporting walls, floors, or framing.
 9. Dispose of demolished items and materials promptly.
- B. Site Access and Temporary Controls: Conduct selective demolition and debris-removal operations to ensure minimum interference with roads, streets, walks, walkways, and other adjacent occupied and used facilities.
- C. Removed and Salvaged Items:
1. Clean salvaged items.
 2. Pack or crate items after cleaning. Identify contents of containers.
 3. Store items in a secure area until delivery to Owner.
 4. Transport items to Owner's storage area designated by Owner.
 5. Protect items from damage during transport and storage.
- D. Removed and Reinstalled Items:
1. Clean and restore items to functional condition adequate for intended reuse.
 2. Pack or crate items after cleaning and restoring. Identify contents of containers.
 3. Protect items from damage during transport and storage.
 4. Reinstall items in locations indicated. Comply with installation requirements for new materials and equipment. Provide connections, supports, and miscellaneous materials necessary to make item functional for use indicated.
- E. Existing Items to Remain: Protect construction indicated to remain against damage and soiling during selective demolition. When permitted by Architect, items may be removed to a suitable, protected storage location during selective demolition and cleaned and reinstalled in their original locations after selective demolition operations are complete.

3.5 SELECTIVE DEMOLITION PROCEDURES FOR SPECIFIC MATERIALS

- A. Concrete: Demolish in sections. Cut concrete full depth at junctures with construction to remain and at regular intervals using power-driven saw, and then remove concrete between saw cuts.
- B. Masonry: Demolish in small sections. Cut masonry at junctures with construction to remain, using power-driven saw, and then remove masonry between saw cuts.
- C. Concrete Slabs-on-Grade: Saw-cut perimeter of area to be demolished, and then break up and remove.
- D. Resilient Floor Coverings: Remove floor coverings and adhesive according to recommendations in RFCI's "Recommended Work Practices for Removal of Resilient Floor Coverings."

- E. Roofing: Remove no more existing roofing than what can be covered in one day by new roofing and so that building interior remains watertight and weathertight. See Division 07 Sections for new roofing requirements.

3.6 DISPOSAL OF DEMOLISHED MATERIALS

- A. Remove demolition waste materials from Project site and dispose of them in an EPA-approved construction and demolition waste landfill acceptable to authorities having jurisdiction.
 - 1. Do not allow demolished materials to accumulate on-site.
 - 2. Remove and transport debris in a manner that will prevent spillage on adjacent surfaces and areas.
 - 3. Remove debris from elevated portions of building by chute, hoist, or other device that will convey debris to grade level in a controlled descent.
- B. Burning: Do not burn demolished materials.

3.7 CLEANING

- A. Clean adjacent structures and improvements of dust, dirt, and debris caused by selective demolition operations. Return adjacent areas to condition existing before selective demolition operations began.

END OF SECTION 02 41 19

SECTION 02 82 00 – ASBESTOS ABATEMENT

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:

1. Asbestos abatement quality assurance requirements, including personnel training and certification.
2. Work sequence requirements.
3. Personnel protective equipment.
4. Construction facilities and temporary controls for asbestos abatement, including containment barriers, engineering controls and decontamination facilities to ensure contamination from areas where abatement activities occur does not migrate to other areas.
5. Procedures for performing asbestos-containing material abatement, including (but not limited to) repair of existing flooring surfaces after completion of abatement.
6. Project monitoring and testing services for asbestos abatement, including requirements for air sampling and monitoring during asbestos abatement activities.
7. Requirements for transport and disposal of asbestos abatement waste materials by legal and appropriate means.

- B. In accordance with 8 NYCRR 155 and ICR 56 asbestos testing has been performed in areas to be disturbed by scheduled renovation or demolition. Testing information is available for review at the Owner's administrative offices.

1.3 CODES AND REFERENCES

- A. The following codes and references apply:

1. Asbestos Hazard Emergency Response Act - 40 CFR Part 763.
2. ASTM E 1368 – Standard Practice for Visual Inspection of Asbestos Abatement Projects.

3. National Emission Standards for Hazardous Air Pollutants; Asbestos-40 CFR 61, Subparts A and M.
 4. New York State Industrial Code Rule 56 - 12 NYCRR Part 56 (ICR 56).
 5. New York State Hazardous Wastes Management Regulations - 6 NYCRR 360 and 364.
 6. OSHA
 - a. 29 CFR 1910.134 – Respiratory Protection
 - b. 29 CFR 1910.1001 – Asbestos
 - c. 29 CFR 1926.1101 – Asbestos for Construction
 - d. 29 CFR 1926.2 – Variances from Safety and Health Standards
 - e. 29 CFR 1926.1200 – Confined Spaces for Construction
 7. NYSDOH Asbestos Safety Program Requirements – 10 NYCRR Part 73
- B. Failure to expressly refer to applicable code, regulation, standard, law and ordinance within Contract Documents does not imply that applicable regulatory requirements are not applicable to the Project.

1.4 DEFINITIONS

- A. Refer to 12 NYCRR Part 56–2.1 for standard definitions. Additional terms are as follows:
1. Asbestos Abatement Work: Encapsulation, enclosure, repair, removal and disposal of asbestos-containing materials in accordance with all applicable codes, regulations, standards, laws and ordinances.
 2. Dust and Debris: Visible particles, fragments, or chunks of material, large enough to have settled in the work area by virtue of their weight, that are presumed to have originated from the material abated by the response action, or from a fiber release episode.
 3. Manual Removal: Removal work undertaken using only manually powered equipment such as scrapers, brushes, spud bars, etc. Manual removal does not include tools that are powered by electrical motors, compressed air, hydraulic fluid, combustion engines, etc.
 4. Residue: Visible material which remains on the abated surface due to incomplete removal and cleaning.
 5. Unremoved Material: Any material which was required to be removed by a response action but remains substantially undisturbed.
 6. Visual Inspection: The activities associated with detecting the presence of visible residue, dust and debris, or unremoved material and verifying the absence thereof at the completion of a response action.

1.5 ACRONYMS

- A. ACM: Asbestos Containing Materials.
- B. HEPA: High Efficiency Particulate Air filter which is capable of trapping and retaining 99.97 percent of all mono-dispersed particles of 0.3 microns in diameter or larger.
- C. NAD: No Asbestos Detected.
- D. NOB: Non-friable asbestos materials embedded in flexible-to-rigid asphalt or vinyl matrices, including but not limited to flooring materials, adhesives, mastics, asphalt shingles, roofing materials and caulks.
- E. PPE: Personal Protective Equipment.
- F. RACM: Regulated Asbestos Containing Material.
- G. TSI: Thermal System Insulation.

1.6 SUBMITTALS, GENERAL

- A. Submit all action submittals and informational submittals (except Employee Training and Certification Documentation) required by this Section concurrently, with each item under separate cover. For items that are not required or applicable, contractor shall still submit cover page for such items and indicate not required or not applicable.

1.7 PRE_ABATEMENT SUBMITTALS

- A. Product Data: For each type of product indicated. Submit MSDS and SDS for each type of chemical to be utilized. Include a summary table or narrative detailing the intended usage of each chemical/product.
 - 1. Chemical mastic removers.
 - 2. Encapsulants.
 - 3. Fire Rated Caulking or Expansion Foams
- B. Quality Control Submittals:
 - 1. USEPA Notification, including all updates.
 - 2. NYSDOL Notification, including all amended notifications.
 - 3. Copy of ICR 56 Notification to Building Occupants
 - 4. NYSDEC "Industrial Waste Hauler Permit".
 - 5. NYSDOL Asbestos Handling License.
 - 6. Proposed Specific Variances from ICR 56.

7. Approved Specific Variances from ICR 56.
8. Work-plan identifying work areas, local exhaust system locations, areas of proposed decontamination units, waste trailers, temporary power/utility, barriers, boundaries of each regulated area, phasing/scheduling, and description of proposed sequencing of removals within each work area.
9. Pre-Fire plan.
10. List of proposed subcontractor.
11. New Flooring Warranty when chemical mastic removal methods are used. Contractor(s) electing to utilize chemical mastic removal methods shall provide, for all new flooring being applied over such areas, an flooring warranty equivalent to that of the new flooring warranty provided by the manufacturer.

1.8 POST-ABATEMENT SUBMITTALS

- A. Notification of intended waste transporter and disposal site. Notification shall include draft manifest clearly identifying type of waste, transporter to be utilized, and disposal facility.
- B. Waste Manifests for RACM and Trip Tickets for all other waste.
- C. Results of any bulk sample analysis, area air sample analysis or OSHA compliance air sample analysis.
- D. Copy of Project record and the supervisor Project log, including training and certification documentation for all workers and supervisors who performed any work on site during the course of the project. Training and certification documentation shall include a summary page listing all supervisors and workers utilized during the course of work. Summary shall include full names, social security numbers, and NYSDOL certification number for each individual.
- E. Record drawings, which identify:
 1. The extents of each abatement work area.
 2. All locations where asbestos materials were removed.
 3. Amount of asbestos materials removed, per location.
 4. Where partial removal occurred, the amount of remaining asbestos material, per location.

1.9 QUALITY ASSURANCE

- A. Qualifications:
 1. Asbestos Abatement Firm:
 - a. Licensing: Possess valid Asbestos-Handling License issued by Commissioner of Labor of New York State.
 - b. Supervision: Full-time, on-site supervisor.

- c. Personnel Training Requirements. Provide, to Project Monitor, valid training and certification documentation for new employees prior to employees beginning work.
 - 1) Abatement Personnel: Successfully completed USEPA asbestos handler training course (initial or refresher) or USEPA approved asbestos contractor supervisor course (initial or refresher) within the previous 12 months, in accordance with 40 CFR 763. Acceptable documentation is the NYSDOH form DOH - 2832.
 - 2) Abatement Supervisory Personnel: Successfully completed USEPA asbestos contractor/supervisor training course (initial or refresher) within previous 12 months, in accordance with 40 CFR 763. Acceptable documentation is the NYSDOH form DOH - 2832.
 - d. Personnel Certification Requirements:
 - 1) Abatement Personnel: Possess valid asbestos handling certificate or valid asbestos supervisor certificate, issued by New York State Department of Labor in accordance with ICR 56.
 - 2) Abatement Supervisory Personnel: Possess valid asbestos supervisor certificate issued by New York State Department of Labor in accordance with ICR 56.
2. Project Monitoring and Air Sampling Firm:
- a. Employed by Owner with valid asbestos handling license issued by NYSDOL and employing individuals performing project monitoring and air sampling duties possessing asbestos handling certificates issued by NYSDOL for following categories:
 - 1) Asbestos Air Sampling Technician.
 - 2) Asbestos Project Monitor.
 - b. Contractor responsible for abatement shall not perform air sampling (except for OSHA compliance sampling) or project monitoring. Contractor shall notify Owner and Architect of any conflict of interest between itself and party responsible for project air sampling and monitoring.
3. Laboratories Performing Phase Contrast Microscopy (PCM) Air Sample Analysis (By Owner):
- a. Possess valid Environmental Laboratory Approval Program (ELAP) certificate issued by New York State Department of Health for category of Environmental Analysis/Air and Emissions, subcategory of Asbestos Fibers.
 - b. Enrolled in American Industrial Hygiene Association's Proficiency Analytical Testing Program for PCM.

- c. Use National Institute for Occupational Safety and Health (NIOSH) Method 7400 entitled "Fibers" published in NIOSH Manual of Analytical Methods, 3rd Edition. Second Supplement, August 1987.
- 4. Laboratories Performing Transmission Electron Microscopy (TEM) Air Sample Analysis (By Owner):
 - a. Possess valid Certificate of Accreditation issued by United State Department of Commerce's National Institute of Standards and Technology (NIST) for Airborne Asbestos Fiber Analysis.
 - b. Use TEM methodology as required by Appendix A to Subpart E of the AHERA regulations 40 CFR 763.
- 5. Laboratories Performing Polarized Light Microscopy (PLM) and Transmission Electron Microscopy (TEM) Bulk Sample Analysis (By Owner):
 - a. Possess valid Environmental Laboratory Approval Program (ELAP) certificate issued by New York State Department of Health for the category of Environmental Analysis / Solid and Hazardous Waste, subcategory of Asbestos in Friable Material and/or Non-Friable Material appropriate to analysis performed.
 - b. Possess valid Certificate of Accreditation issued by United States Department of Commerce's National Institute of Standards and Technology (NIST) for Bulk Asbestos Fiber Analysis.
- B. Regulatory Requirements: Comply with all federal, state, and local codes, laws, ordinances, standards and regulations applicable to asbestos abatement work, transport and disposal, including (but not limited to) standards referenced in "Codes and References" Article.

1.10 NOTIFICATIONS

- A. Comply with the following notification requirements:
 - 1. New York State Department of Labor: Submit notification to Division of Safety and Health Asbestos Control Bureau as required in ICR 56 such that notification is received not fewer than 10 days prior to commencement of Project. Include payment of all related notification fees and other notification expenses.
 - 2. United States Environmental Protection Agency (USEPA): Submit notification to USEPA at following address such that notification is received not fewer than 10 days prior to commencement of Project:

Asbestos NESHAP Coordinator
 Air & Waste Management Division
 USEPA Region 2
 26 Federal Plaza
 New York, New York 10278

3. Building Occupant Notification: Provide notification to building occupants not fewer than 10 days prior to mobilization or start of preparation work. Ensure notifications are posted in accordance with ICR 56, and remain in place. Contractor shall be responsible for maintaining and replacing notifications if damaged or removed.

1.11 VARIANCES

- A. Variances from ICR 56: Use any Applicable Variances issued by New York State Department of Labor (NYSDOL) and any Specific Variances issued by NYSDOL and approved by the Owner and Architect. Remain solely responsible for complying with provisions of variances used.
 1. Obtain any and all variances from ICR 56 which may be necessary or desired to perform the Work.
 2. Contractor-Obtained Variances: Provide copies of all Petitions for Variance requested by Contractor or subcontractors to Owner, Construction Manager and Architect prior to submission of Petition for Variance to NYSDOL.
 - a. Comply with following requirements for all Petitions for Variance:
 - 1) Provide adequate protection from contaminating areas outside work area.
 - 2) Provide adequate relief from air sampling requirements, including relief from air sampling requirements on days when no active abatement work occurs.
 - 3) Conform to overall design criteria for Project.
 - 4) Protect facility from damage as result of conditions of Petition for Variance.
 - b. Contractor retains responsibility for providing all additional conditions, equipment, and other provisions imposed by NYSDOL as part of NYSDOL acceptance of Petition for Variance.
 - c. Extensions of time for performance of asbestos abatement work will not be granted to compensate for NYSDOL review of Contractor-obtained variances.
 - d. Contractor is responsible for all fees and expenses related to submission of any Petitions for Variance.

1.12 PROJECT CONDITIONS

- A. Project/Site Access Limitations: Restrict access to all work areas. Immediately report any access by unauthorized individuals to Owner and Project Monitor.

1.13 PRE-FIRE PLAN

- A. Pre-Fire Plan, indicating primary and secondary emergency escape routes from the work area, local exhaust system locations, decontamination units, waste-out units, access tunnels, temporary facilities, location of fire extinguishers, and location of negative air emergency disconnect switch (if required).
- B. Plan shall be reviewed with all personnel to enter the work area and shall be posted in the decon area as well as in the work area.

1.14 ASBESTOS LOGS/PROJECT RECORD

- A. Maintain a project log as part of ICR 56 during the abatement phase of the work with all information required by ICR 56 and as described herein.
- B. Make project log available on site at all times when a project as defined by ICR 56 is active.
- C. At a minimum, comply with ICR 56 requirements and as follows:
 - 1. Asbestos Abatement Contractor Project Log (Supervisor's Daily Project Log): As per 12 NYCRR 56-7.3.
 - 2. Non-abatement Asbestos Contractor responsible for Air Sampling (Air Sampling Log): As per 12 NYCRR 56-4.5.
 - 3. Non-abatement Asbestos Contractor responsible for Project Monitoring (Project Monitoring Log):
 - a. Name of the firm and the certified Project Monitor(s) performing project monitoring duties.
 - b. Dates of project.
 - c. Observations, per work area regarding:
 - 1) The stage of completion of the work.
 - 2) Schedule concerns.
 - 3) Work that may be out of compliance with project documents or pertinent asbestos regulations.
 - 4) Asbestos abatement contractor corrections to barriers/required cleaning of areas outside of the work area.
 - 5) Removal of work area containment by asbestos abatement contractor.
 - 6) Hidden conditions.
 - 7) Other relevant information.
 - d. Information about potential change orders or work performed for which the asbestos abatement contractor contends is outside the scope of work.
 - e. Coordination with asbestos abatement contractor or others to resolve identified issues.

- f. Resolution of identified issues.
 - g. Project Monitor final visual inspections and final clearance.
 - h. At a minimum, document project observations and other information by work area and day with additional entries to accurately describe the project status.
 - 4. Where the same non-abatement asbestos contractor is responsible for both air sampling and project monitoring, one project log containing all required components of the Air Sampling Log and the Project Monitoring Log shall suffice.
- D. Project Record: At all sites where there is an active project, a project record is required as per ICR 56-3.4 (a) (2).
- 1. The asbestos abatement contractor shall act as the Owner's representative as it relates to responsibility for the following portions of the Project Record required by ICR 56-3.4 (a) (2):
 - a. Copies of licenses of all entities involved with the project.
 - b. Copies of all supervisors and handler certificates, including a summary sheet listing all individuals utilized on the project.
 - c. Copies of all supervisors and handlers training certificates (DOH-2832).
 - d. Copies of notifications and amendments.
 - e. Copies of all variances, amendments and re-openings being used for the project.
 - f. A copy of all air sampling results, including method of analysis, by date for the entire asbestos project, organized by regulated abatement work area.
 - g. The supervisor's daily log with entry/exit logs organized by date.
 - h. All bulk sample data including all asbestos inspections and surveys completed for affected portions of the building, structure and work site.
 - 2. The asbestos contractor performing air sampling on this Project shall act as the Owner's representative as it relates to responsibility for the following portions of the Project Record required by ICR 56-3.4 (a) (2):
 - a. A copy of the air sample log if the Air Sampling Technician is on site. If the Air Sampling Technician is not on site, a copy of the air sample log shall be supplied within 24 hours of the request to produce a copy thereof.
 - 3. The asbestos contractor performing project monitoring on this project shall act as the Owner's representative as it relates to responsibility for the following portions of the Project Record required by ICR 56-3.4 (a) (2):
 - a. A copy of the Project Monitor's daily logs during abatement (if a Project Monitor is used on the project).

1.15 SEQUENCING AND SCHEDULING

- A. Timing of Abatement Preparation and Removal Operations:
 - 1. Coordinate abatement preparation and removal work to allow for removal or demolition work by other entities, prior to commencing abatement preparation or removal activities, where such activities will not disturb ACM.
 - 2. Where items scheduled to be removed, relocated, or demolished by others will impact ACM, coordinate with other entities regarding temporary relocation of these items during abatement activities. Work that will disturb ACM must be performed by the Contractor responsible for abatement activities.
- B. Completion: Complete Asbestos Abatement Work in accordance with construction schedule requirements specified in Division 01 Section "Summary" each phase considered distinct and separate for purpose of schedule and substantial completion.
 - 1. Substantial Completion of a phase occurs when all of the following occur:
 - a. All components of the phase have passed visual inspection by Project Monitor.
 - b. Satisfactory clearance air sampling is achieved for each portion of the phase.
 - c. All containment barriers have been removed.
 - d. Areas are returned to Owner.
 - 2. If Contractor fails to achieve substantial completion within specified schedule requirements, all costs associated with extension of schedule, including (but not limited to) Architect time and expenses, air sampling costs, project monitoring costs, direct costs incurred by Owner, and costs to accelerate sample analysis shall be deducted from final payment.
- C. Restrictions on Working Hours: Schedule work only during regular working hours, as established for Project. Do not use overtime or multiple shifts with "overtime" defined as any time in excess of 8 hours in single day, work on weekends, or work on holidays.
- D. Changes in Working Hours: Advise Project Monitor of any changes in hours or days which Contractor will be on site, at least 24 hours prior to change. Contractor retains all liability resulting from Contractor's failure to make required notification.
- E. Security: Contractor shall maintain the security of the work areas for which they are performing work in, have modified the existing facilities, or are utilizing for staging area.

PART 2 - PRODUCTS

2.1 NON-ASBESTOS PRODUCTS

- A. No products containing asbestos may be used on this project, including but not limited to the following: for temporary construction, work area containment, restoration or renovation work.

2.2 EQUIPMENT

- A. Respirators: Provide respirators jointly approved as acceptable for protection by National Institute for Occupational Safety and Health (NIOSH) under provisions of 30 CFR Part 11.
 - 1. Supply and use respirators in accordance with 29 CFR 1910.134 and 29 CFR 1926.1101.
 - 2. Provide respirators, filters and ancillary supplies as required for employees and authorized visitors.
 - 3. Account for hazards other than asbestos in respirator selection.
- B. Protective Clothing: Provide disposable protective clothing complying with requirements of 29 CFR 1926.1101 that is disposed of after one use. Provide disposable clothing as required for employees and authorized visitors.
- C. Asbestos Abatement Construction Facilities and Controls: Provide all materials and equipment in compliance with requirements of:
 - 1. NYS Industrial Code Rule 56.
 - 2. 29 CFR 1926.1101.
- D. Project Monitoring and Testing Services Equipment (By Owner):
 - 1. Transmission Electron Microscopy (TEM) Air Sampling Cassettes: Use commercially available 25 mm or 37 mm cassettes.
 - a. Filter Media: Use sample collection filters which are either:
 - 1) Polycarbonate with pore size less than or equal to 0.4 micrometers; or
 - 2) Mixed cellulose ester having pore size less than or equal to 0.45 micrometers.
 - 2. Phase Contrast Microscopy (PCM) Air Sampling Cassettes: Use commercially available 25 mm cassettes.
 - a. Filter Media: Use mixed cellulose ester sample collection filters with pore size of 0.8 micrometers.
 - 3. Use only new cassettes. Reloaded cassettes are not acceptable.

2.3 ENCAPSULANTS

- A. Encapsulants shall conform to USEPA requirements, shall contain no toxic or hazardous substances and no solvent.

2.4 FIRE RATED SEALANTS

- A. All sealants to be used shall meet minimum 2-hour fire rating as per ASTM E-814.

- B. Sealant shall be either a polyurethane based expansion foam or a silicone based caulk system.
 - 1. Fire-rated expansion foams shall be manufacturer-colored pink so as to identify its rating. Acceptable products include:
 - a. ABESCO FP200 Fire Rated Expansion Foam,
 - b. FlameShield Fire Rated Expansion Foam, or
 - c. Pyroplex-Fire Rated Expanding Foam.
 - 2. Fire-rated caulking materials are not required to be manufacturer-colored pink. Acceptable products include:
 - a. DAP Fire-Stop Fire Rated Silicon Sealant, and
 - b. Hilti CP 601S Elastomeric Firestop Sealant.
 - 3. Fire-rated caulking may require the use of backer material per manufacturer instructions.
- C. All sealants shall be applied per manufacturer instructions.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, areas, and conditions for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.
- B. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 GENERAL REQUIREMENTS

- A. The Contractor shall not permit eating, smoking, drinking, chewing or applying cosmetics in the regulated area.

3.3 PROTECTION

- A. Provide personal protective equipment as required by 29 CFR 1926.1101 at no cost to employees or authorized visitors.
- B. Institute respirator program in accordance with 29 CFR 1910.134 (b), (d), (e) and (f).
- C. Use protective clothing and respirators whenever asbestos containing materials are being disturbed, abated, cleaned up, containerized or stored in vehicle or container used to transport waste to landfill.
- D. Institute medical surveillance program in accordance with 29 CFR 1926.1101 for all employees performing or supervising asbestos handling work, entering work area containment, or using respirator.

3.4 PREPARATION

- A. Perform all preparation work in accordance with Industrial Code Rule 56 and 29 CFR 1926.1101.
- B. Do not begin asbestos abatement activities until all of following have occurred:
 - 1. Monitoring Firm has completed background air sampling as required.
 - 2. All preparation work, including installation of decontamination enclosure systems and engineering controls (ex. negative air pressure equipment, etc.) is complete.
 - 3. The Project Monitor has inspected containment area.
 - 4. The Project Monitor has given written authorization to proceed.
- C. Decontamination Facilities And Practices
 - 1. The Contractor shall establish a decontamination area in accordance with ICR 56 for the decontamination of employees, material and equipment. The Contractor shall ensure that employees enter and exit the regulated area through the decontamination area.
 - 2. Decontamination Facility – Remote
 - a. Construct decontamination facilities in accordance with ICR 56 and as follows:
 - 1) Personal decontamination facility minimum requirements:
 - a) Where remote decontamination facilities are allowed, construction of the decontamination facility shall include an additional airlock after the equipment room and which shall include a lockable door. An additional airlock is required at the entrance to the containment / regulated area and shall include a lockable door.
 - 2) Waste decontamination facility minimum requirements
 - a) Where remote decontamination facilities are allowed in small and large work areas shall have a washroom constructed between the work area and airlock.
- D. Large and Small Asbestos Work Area Preparation - Interior Work:
 - 1. Ensure occupants vacate work area prior to starting preparation. Post caution signs at all approaches to asbestos abatement work area.
 - a. Do not conduct asbestos abatement activities in occupied buildings. Provide exits from isolated portion of building that do not pass through occupied portions of building. Physically separate and seal ventilation systems passing through occupied portions of building at isolation barrier.
 - 1) “Building”: As defined by New York State Education Department, references to “building” in this Section means wing or major section of structure that can be completely isolated from other portions of the structure with sealed non-combustible construction.

- b. Where interior abatement occurs, isolate wing or major section of building from occupied portions of building with sealed isolation barriers constructed of non-combustible materials. Provide exits from isolated portion of building that do not pass through occupied portions of building. Physically separate and seal ventilation systems passing through occupied portions of building at isolation barrier.
 - c. Do not remove isolation barriers until satisfactory TEM clearance sampling results have been obtained as required by New York State Education Department.
- 2. Shut down and secure electric power to asbestos abatement work area. Provide temporary power and lighting in accordance with all applicable codes and requirements of project schedule.
 - a. Ensure all power to asbestos abatement work area from outside area passes through ground-fault interrupter at source of power.
 - b. Confirm which electrical circuits that pass through the asbestos abatement work area, but do not serve the asbestos work area, cannot be shut down.
 - c. If electrical circuits, machinery or other electrical systems pass through, but do not service the work area and cannot be shut down, isolate, protect and label such systems as per ICR 56-7.7 (a).
 - d. Contractor's competent person shall be responsible for ensuring all electrical is properly shut down and secured.
- 3. Install or construct a personal decontamination enclosure system fully complying with ICR 56-7.5.
 - a. Secure personal decontamination enclosure system to prevent unauthorized entry.
 - b. Remote decontamination system enclosures shall only be used when allowed by ICR 56, or if a petition for variance from ICR 56 is accepted by Owner and Architect and approved by NYSDOL.
 - 1) Confirm that remote decontamination enclosure system location will allow access to regulated work areas without adversely affecting use of the building by Owner or other entities.
 - 2) Provide additional airlocks as required by ICR 56.
- 4. Shut down and isolate heating, ventilating and air conditioning systems.
- 5. Pre-clean and remove all movable objects. Pre-clean all fixed objects and other items to remain and enclosed with two distinct and separate layers of plastic sheeting. Pre-clean asbestos abatement work area.
- 6. Install isolation barriers in accordance with ICR 56-7.11.

7. Install negative pressure equipment fully complying with ICR 56-7.8.
 - a. Provide a manometer for all OSHA Class I work areas.
 - 1) Maintain a minimum of -0.02 column inches of water pressure differential relative to pressure outside the work area.
 - 2) Document the manometer reading at least twice per work shift.
 - 3) At a minimum, provide four air changes per hour or as modified by ICR 56 or a specific variance for particular materials, containment or other requirements.
8. Maintain emergency and fire exits from asbestos abatement work area in accordance with all applicable codes.
9. In boiler areas, shut down and seal burner and boiler accesses and breechings.
10. Shut down elevators that run through asbestos abatement work area or isolate them in accordance with ICR 56-7.11.
11. Install or construct waste decontamination enclosure system fully complying with ICR 56-7.5 and secure to prevent unauthorized entry.
 - a. Waste decontamination system enclosures shall be constructed and functional prior to completion of work area preparation.
 - b. Where a remote personal decontamination system enclosure is allowed comply with the following additional requirements:
 - 1) Small and Large Size Regulated Abatement Work Areas: Construct an additional chamber attached to the regulated work area for use in conjunction with the existing airlock as a contiguous waste decontamination enclosure.
 - 2) Minor Size Regulated Abatement Work Area: No additional chamber required.

E. Negative Pressure Tent Enclosures:

1. Negative pressure tent enclosures may be used in the following circumstances:
 - a. Any amount of gross abatement of exterior and interior non-friable ACM.
 - b. Any amount of glovebag abatement of friable TSI.
 - c. Gross abatement of Minor or Small amounts of friable ACM.
2. Construct negative pressure tent regulated abatement work area enclosures as per ICR 56-7.11 (f) (1).

- F. Exterior Project Removal of Non-friable ACM Roofing, Siding, Caulking, Glazing Compound, Transite, Tars, Sealers, Coatings, and Other NOB ACMs:
 - 1. Perform preparation work in accordance with ICR 56-11.6.
 - 2. Ensure that the materials are maintained in a non-friable condition and that debris does not fall into the building. Contractor shall be responsible for any additional provisions required by failure to comply with these provisions.
- G. Removal of Ceilings and Components:
 - 1. Where non-ACM suspended ceilings and components exist below friable ACM:
 - a. Complete all preparation work, including all plasticizing, decontamination enclosure construction and instituting negative pressure, up to the suspended ceiling.
 - b. Remove ceiling tiles and components and dispose or decontaminate as required.
 - c. Mounted objects or fixtures shall be disposed of or decontaminated and supported in place if scheduled for reuse.
 - d. Complete preparation work above ceiling.
- H. Plasticizing Floors, Walls and Ceilings:
 - 1. Plasticize and seal floors, walls and ceilings as per ICR 56-7.11 or as modified elsewhere in ICR 56 or in accordance with a specific variance from ICR 56 which is approved by NYSDOL and accepted by the Owner and Architect.
- I. Pre-Abatement Settling Period: For all Small and Large size regulated abatement work areas where negative pressure equipment is required, upon completion of construction of all isolation barriers and decontamination system enclosures, including the establishment of the negative air system and prior to beginning actual abatement activities, at a minimum, allow 4-hour settling period to insure that barriers remain intact and secured to walls and fixtures.

3.5 ABATEMENT PROCEDURES

- A. Perform all asbestos abatement work in accordance with ICR 56 and 29 CFR 1926.1101.
- B. Work Area Entry and Exit Procedures: All personnel enter and exit asbestos abatement work area through personal decontamination enclosure system. Post pertinent regulations, personal protection requirements, work area entry and exit procedures, and emergency procedures in clean room.
 - 1. Entry/Exit Log: Ensure all persons sign Entry/Exit Log for each entry and exit. Include at least the following information in Entry/Exit Log:
 - a. Project name.

- b. Building name.
 - c. Unique work area description.
 - d. Date.
 - e. Statement that signature acknowledges review and understanding of posted regulations, personal protection requirements, work area entry and exit procedures, and emergency procedures.
 - f. Printed name, signature, social security number, NYS asbestos certificate number, entry time and exit time for each individual.
2. Asbestos Abatement Work Area Entry:
- a. Initially proceed to clean room and remove all clothing and put on disposable coveralls, head covering, foot covering and gloves.
 - b. Put on NIOSH-approved respiratory protection appropriate to airborne concentrations of asbestos.
 - c. Use clean respirators and protective clothing for each separate entry into asbestos abatement work area.
 - d. Inspect respirators prior to each use and test for proper seal using quantitative or qualitative fit checks.
 - e. Proceed through personal decontamination enclosure system to equipment room and collect necessary tools and put on any additional clothing before entry into asbestos abatement work area.
3. Asbestos Abatement Work Area Exit:
- a. Before leaving asbestos abatement work area, remove gross contamination from outside of respirators and protective clothing on all personnel by brushing, wet cleaning, and HEPA vacuuming.
 - b. Proceed to equipment room.
 - c. Remove all disposable coveralls, head covering, foot covering and gloves and deposit into labeled containers for disposal.
 - d. Store reusable contaminated clothing, footwear, head gear and gloves in equipment room when not in use in asbestos abatement work area.
 - e. Still wearing respirators, enter shower for decontamination.
 - f. Proceed to clean room and put on clothing.

4. Remote Decontamination Procedure Modifications: If remote decontamination enclosures systems are allowed by ICR 56, modify asbestos abatement work area entry and exit procedures as follows:
 - a. Designate a pathway from the regulated abatement work area to the personal decontamination system or next regulated abatement work area that is cordoned off and has appropriate signage as per ICR 56.
 - b. Confirm that location of designated pathway will not adversely affect the operations of the Owner or other entities.
 - c. Put on two suits (coveralls, head covering and foot covering) when putting on disposable clothing.
 - d. Provide attached airlock for each remote asbestos abatement work area and at the entrance to the equipment room of the remote decontamination enclosure system.
 - e. Prior to leaving asbestos abatement work area, HEPA-vacuum and/or wet wipe outer suit, enter airlock, remove outer suit, don a clean set of protective clothing.
 - f. Where provisions of specific variance vary from above, most stringent requirements apply.

C. Asbestos Removal – General Requirements:

1. Wetting Requirements: Wet asbestos materials frequently with amended water, and allow sufficient time for penetration to occur prior to abatement activities.
2. Handling: Directly bag or drop asbestos material on detachment from substrate into flexible catch basin for subsequent bagging.
 - a. Chutes: Use dust tight, enclosed, inclined chutes for asbestos material dropped distances greater than 10 feet.
 - b. Handling Large Components: Wrap large components, removed intact, in two: layers of plastic sheeting, secure and make airtight with tape.
 - c. Sharp-Edged Components: Place asbestos waste material with sharp-edged components that may tear plastic bags or sheeting into hard wall containers and seal airtight.
3. Daily Cleanup Procedures: Perform cleanup of loose asbestos material whenever enough loose asbestos material has been removed to fill single leak-tight container of type suitable for material properties. Perform cleanup at least once per day prior to close of each working day. Keep asbestos material wet until cleaned up.

D. Equipment and Waste Container Decontamination and Removal Procedures:

1. Wet clean or HEPA-vacuum external surfaces of contaminated containers and equipment in asbestos abatement work area before moving items into waste decontamination enclosure system airlock. Do not enter airlock.

2. Remove these contaminated items from airlock using individuals stationed in washroom during waste removal operations.
3. Once in waste decontamination enclosure system, clean external surfaces of contaminated containers and equipment and clean equipment second time by wet cleaning.
4. Dry any excessive pooled or beaded liquid from cleaned containers of asbestos material and equipment, place in uncontaminated plastic bags or sheeting as required by characteristics of item, and seal airtight.
5. Move clean re-containerized items into airlock leading to holding area. Do not enter airlock until waste removal is finished for that period.
6. Provide individuals dressed in clean personal protective equipment that has entered from uncontaminated areas to move containers and equipment from airlock and place in holding area.
7. Place cleaned containers of asbestos material and equipment in watertight carts with doors or tops that close and can be secured. Hold these carts in holding area until removal. Wet-clean or HEPA-vacuum carts at least once each day.
8. When waste decontamination enclosure is part of personal decontamination enclosure, do not remove waste during shift change or when otherwise occupied.

E. Asbestos Removal – Additional Requirements:

1. Multiple Abatement within a Single Regulated Abatement Area: Perform abatement of multiple materials from the same regulated work area as per ICR 56-8.6.
2. Non-Friable Flooring and/or Mastic Removal:
 - a. Completely remove flooring and mastic from the substrate. Mastic removal is incomplete if any residual floor tile mastic can be removed from the surface, edges, corners, pits or cracks.
 - b. Concrete Substrate Mastic Removal Options:
 - 1) Where only mechanical/manual mastic removal methods are allowed, no chemical mastic removal agents are allowed. Perform work using full work area preparation and attached decontamination system enclosures. All provisions as per ICR 56-7, ICR 56-8 and ICR 56-9 apply.
 - 2) Where mechanical/manual methods are utilized, contractor must repair damage to the concrete substrate caused by removal and patch and repair existing floor substrate as required, providing smooth, level surface acceptable to receive new flooring materials.

- 3) Where chemical mastic removal agents are used:
- a) Prevent odors and/or vapors from migrating to interior spaces. Provide additional air changes as necessary to prevent migration.
 - b) Prevent chemical mastic removal agents from soaking into cracks or adjacent materials.
 - c) Completely neutralize and clean all residual chemical mastic removal agents from the substrate and adjacent surfaces.
 - d) Comply with manufacturer's recommendation for use and cleanup.
 - e) Contractor is responsible for the disposal of and any additional requirements or costs related to waste generated by the mastic removal activities.
 - f) Work may be performed in accordance with ICR 56-11.7.
 - g) Use of chemical mastic removal methods voids new flooring manufacturer's warranty. Contractor(s) electing to utilize chemical mastic removal methods shall provide an equivalent warranty to that of the new flooring warranty.
- 4) Where soy-based chemical mastic removal agents are used, they shall meet the following minimum standards:
- a) Hazardous Materials Identification System (HMIS) rating (HMIS III) not exceeding: Health – 0, Flammability – 1, Physical Hazard – 0.
 - b) National Fire Protection Association (NFPA) rating not exceeding: Health Hazard – 0, Flammability – 1, Instability – 0.
 - c) Chemical mastic removal agents limited to soy based mastic removal agents to reduce the possibility of indoor air quality issues during, or subsequent to, application of chemical mastic removal agents.
 - d) Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, *Franmar Chemical, Inc.; BEAN-e-doo Mastic Remover and AG Environmental Products, LLC; SoyGold 1100 Solvent*.
 - e) Mechanical/manual methods may be used in lieu of soy based chemical mastic removers at the contractor's discretion.
- 5) Where petroleum-based chemical mastic removal agents are used, they shall meet the following minimum standards:
- a) Hazardous Materials Identification System (HMIS) rating (HMIS III) not exceeding: Health – 1, Flammability – 2, Physical Hazard – 0.

- b) National Fire Protection Association (NFPA) rating not exceeding: Health Hazard – 0, Flammability – 1, Instability – 0.
 - c) Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, *Sentinel Products, Inc.; 747 Fresh Scent Mastic Remover and ARAMSCO; Chemsafe 100 Low Odor Mastic Remover*.
 - d) Mechanical/manual methods or soy-based mastic remover may be used in lieu of petroleum-based mastic removers at contractor's discretion.
- 6) Where chemical mastic removal agents are not allowed, the following minimum standards shall be met:
- a) Perform wholesale mastic removal using mechanical/manual methods and use manual methods to remove mastic in smaller areas (i.e. around floor penetrations, in corners, or in closets).
 - b) Maximum tolerance from original floor level: 1/8 inch.
 - c) Chemical mastic removal agents of any kind are not allowed.
- 7) Coordinate with flooring Installer to ensure removal of existing flooring is provided in manner acceptable for installation of new flooring materials, including coordination of requirements for abrasive removal of existing flooring adhesives and mastics.
- 8) Patch and repair existing floor substrate as required providing smooth, level surface acceptable to receive new flooring materials.
- a) Applicator Qualifications: Ensure patching and repair materials are applied by applicator experienced in application of patching and repair materials and with at least 3 successfully completed applications of similar materials in similar applications.
 - b) Coordination: Review proposed patching and repair materials with flooring Installer to ensure compatibility between new flooring materials and patching and repair materials.
 - c) Levelness Tolerances: Apply floor patching and repair materials to provide levelness of floor substrate within at least 1/4 inch in 10 feet, unless more stringent levelness recommended or required by finish flooring manufacturer. Coordinate with flooring Installer prior to applying patching and repair materials to confirm required levelness tolerances.

- 9) Patching Floor Substrates Abated by Mechanical Means:
- a) Flash Patching over Floor Substrates Abated by Mechanical Methods: Apply Portland cement-based self-drying cementitious flash patching material similar to *Ardex Engineered Cements; ARDEX Feather Finish*, to damaged areas with 1/8 inch or less depressions.
 - b) Patching over Floor Substrates Abated by Mechanical Methods: Apply Portland cement-based self-drying cementitious patching material similar to *Ardex Engineered Cements; ARDEX SD-P*, to damaged areas with depressions over 1/8 inch deep.
 - c) Self-Leveling over Floor Substrates Abated by Mechanical Means: Apply Portland cement-based cementitious self-leveling material similar to *Ardex Engineered Cements; ARDEX K 15 Self-Leveling Underlayment Concrete*, to large damaged areas where flash-patching and patching described above cannot provide smooth, level surface acceptable to receive new flooring materials.
- 10) Patching Floor Substrates Abated by Chemical Methods: Apply a high strength cement and powdered polymer self-leveling floor underlayment material. Product to meet the following performance requirements:
- a) Compatible with application over chemical abatement residues.
 - b) Thickness of application: minimum thickness of 1/8 inch up to maximum thickness of 2 inches. Thickness over 2 inches to be achievable with the addition of aggregate.
 - c) Compressive Strength (ASTM C 109/mod – Air cure only): 4100 psi at 28 days.
 - d) Flexural Strength (ASTM C 348): 1000 psi at 28 days.
 - e) Flammability (ASTM E84): Flame Spread -0-, Fuel Contribution -0-, Smoke Development -0-.
 - f) Walkable: 3 hours at 70 deg F.
 - g) Products complying with above specified requirements include *Ardex Engineered Cements; ARDEX LU-100 Self-Leveling Flooring Underlayment*.

c. Wood Substrate:

- 1) ACM Mastic: Unless otherwise indicated, remove and dispose of the wood underlayment in its entirety as asbestos containing or contaminated material. Removal includes all fasteners, felts, etc.
- 2) Non-ACM Mastic: Unless otherwise indicated, the wood underlayment and residual mastic shall remain in place after removal of the ACM floor tile.

3. Removal of ACM Ceilings, Walls or Other Components that Expose Areas Beyond:
 - a. Where removal of an ACM component or system, e.g. ceiling or wall, may expose openings to adjacent areas:
 - 1) Complete all preparation work, including, plasticizing, installation of decontamination systems and instituting negative pressure.
 - 2) Carefully remove the component or system at the perimeter and penetrations prior to gross removal.
 - 3) Clean the area around any and all exposed openings.
 - 4) Install critical barriers on all exposed openings.
 - 5) If any additional openings are exposed during gross removal, immediately stop work, clean the area around the exposed opening and install critical barriers.
4. Glovebag Removal Operations:
 - a. Glovebag removals are limited to non-planar surfaces, such as pipes or ducts, unless a variance is granted by the NYSDOL and accepted by the Owner and Architect.
 - b. All glovebag removal work shall be performed within a negative pressurized regulated abatement work area as per ICR 56-7.11 (f) (1).
 - c. Perform all glovebag removal work in accordance with ICR 56-8.4 (a).
 - d. When abating pipe or duct insulation, the pipe or duct insulation diameter worked shall not exceed one half the bag working length.
5. Exterior Work Area Removal of Non-Friable ACM Roofing, Siding, Caulking, Glazing Compound, Transite, Tars, Sealers, Coatings, and Other NOB ACMs
 - a. All removal work shall be performed using manual methods, except for roof removal using rotating blade cutters.
 - b. In no event shall methods be used that may render the ACM friable.
 - c. All removal shall be performed using wet methods.
 - d. Work to the building face, including windows, where not removed within tents, whenever possible, ACM shall be removed with an asbestos handler using a HEPA vacuum to capture small pieces of the ACM as it is dislodged. The vacuum hose shall be within four inches of the material being removed.
 - e. Asbestos containing materials shall not be allowed to accumulate in the work area or the drop cloth.

- f. Asbestos-containing roofing material shall not be dropped or thrown to the ground, but shall be lowered to the ground via covered, dust-tight chute, crane, hoist or other approved method.
- g. In lieu of using an exterior chute, waste bags and containers may be lowered to the waste trailer / dumpster by crane or hoist using a temporary waste transfer container of adequate size and strength.

3.6 WORK STOPPAGE CRITERIA

A. Work Stoppage Level Criteria During Abatement:

1. At any time during abatement activities, stop work immediately for inspection and repair of barriers if:
 - a. Air samples collected outside of work area indicate airborne asbestos fiber concentrations at or above 0.01 fibers per cubic centimeter, or background level, whichever is greater;
 - b. Visible emissions are observed outside a regulated abatement work area; or
 - c. Water leaks are observed outside a regulated abatement work area.
2. Work stoppage due to elevated air results shall require:
 - a. Inspection and repair of barriers and negative air ventilation systems as necessary.
 - b. Clean up of surfaces outside of the regulated abatement work area using HEPA-vacuums and wet-cleaning methods prior to resumption of abatement activities.
 - c. A summary of the elevated results, clean up activities, the results of barrier and negative air system inspections including any necessary repairs, to be documented in the asbestos abatement contractor supervisor's daily project log.
 - d. Work methods shall be altered accordingly to reduce fiber concentrations to acceptable levels.
3. Work stoppage due to visible emissions or water leaks outside a regulated abatement work area shall require:
 - a. Isolate HVAC systems.
 - b. Isolate uncontaminated areas.
 - c. Install critical barriers.
 - d. Negative air pressure equipment ventilation.
 - e. All accumulations of asbestos waste material shall be containerized and removed.

- f. All surfaces in the regulated abatement work area shall be wet-cleaned using rags, mops and sponges.
- g. After the first cleaning, at least twelve hours shall be allowed for asbestos to settle. Thereafter, all objects and surfaces in the regulated abatement work area shall be HEPA vacuumed and wet-cleaned.
- h. All remaining contaminated equipment and containerized waste shall be removed from the regulated abatement work area.
- i. Clearance air sampling shall be conducted, as per the schedule for air sampling and analysis.

3.7 FINAL CLEANING AND CLEARANCE PROCEDURES

- A. Post-Abatement Cleaning: Ensure negative pressure ventilation units remain in continuous operation during settling periods and cleaning. Do not proceed to subsequent stage of cleaning; sheeting removal or clearance air sampling until cleaning has been properly completed. Following completion of all stripping work, HEPA-vacuum and wet clean surfaces from which asbestos material has been removed.
 - 1. Inspection: Provide for Project Monitor to visually inspect entire asbestos abatement work area at completion of each cleaning to determine whether removal and cleaning has been properly completed.
 - a. Any debris and/or residual material in asbestos abatement work area shall be assumed to be asbestos containing material.
 - b. Cleaning not considered properly completed until debris and residue has been cleaned or removed.
 - 2. First Cleaning: Wet clean all surfaces in asbestos abatement work area first using rags, mops and sponges.
 - 3. Encapsulant Use During Cleanup: After first cleaning, prior to first sheeting removal and after asbestos abatement work area has been rendered free of visible residue, apply thin coat of encapsulation agent to any surfaces in asbestos abatement work area not subject to removal or other remediation activities. Do not apply encapsulant to any surface involved in asbestos removal or other remediation activities prior to obtaining satisfactory clearance air monitoring results.
 - 4. First Sheeting Removal: After first cleaning, observe a settling period equal to or greater than that required by ICR 56-9.1 (f) before continuing. Remove cleaned exposed barrier layer of plastic sheeting from walls and floors. Keep windows, doors, HVAC system vents and all other openings sealed. Keep in place and use decontamination systems.
 - 5. Second Cleaning and Sheeting Removal: Then HEPA-vacuum or wet clean all objects and surfaces in asbestos abatement work area. Remove remaining plastic on walls and floors only. Keep all windows, HVAC system vents and all other openings sealed.

6. Third Cleaning After second cleaning, observe a settling period equal to or greater than that required by ICR 56-9.1 (f) before continuing with HEPA-vacuuming and then wet cleaning all surfaces in asbestos abatement work area.
7. Removal of Waste, Tools and Equipment: Remove from asbestos abatement work area and from holding area and decontaminate tools and equipment.
8. Where an exemption from multiple cleaning and sheeting removal exists in ICR 56-9.1 (e) or specific variance granted by NYSDOL and accepted by the Owner and Architect, modify cleaning and sheeting removal to reflect that in ICR 56-9.1 (e) or specific variance.

B. Supervisor Post Abatement Visual Inspection:

1. After all required abatement and cleanings, the asbestos abatement contractor supervisor shall perform a visual inspection for completeness of abatement and cleaning.
2. The asbestos abatement supervisor visual inspection must determine that abatement and cleaning have been properly completed as per the project documents and all pertinent regulations prior to commencement of the Project Monitor visual inspection.
3. Contractor supervisor shall document in the Project Log that abatement and cleaning have been satisfactorily completed in accordance with project documents and all pertinent regulations.

C. Project Monitor Visual Inspection:

1. After all required abatement, cleanings and the asbestos abatement contractor supervisor visual inspection, the Project Monitor shall perform a visual inspection for completeness of abatement and completeness of cleanup as per project documents and the current ASTM E 1368.
2. Upon satisfactory completion of the required Project Monitor visual inspection, an entry shall be made into the asbestos abatement contractor supervisor's daily log by both the supervisor and the Project Monitor, detailing the findings of the visual inspection.
3. The full name and NYSDOL asbestos handling certificate number of the Project Monitor shall also be documented in the supervisor's daily log.

D. Clearance Air Monitoring (By Owner):

1. After Project Monitor has performed visual inspection and provisionally determined that removal and cleaning have been properly completed, Project Monitor shall conduct clearance air monitoring.
 - a. Removal and cleaning not considered properly completed until asbestos abatement work area has achieved satisfactory clearance air sampling in accordance with this Section.
 - b. During clearance air monitoring, negative air pressure equipment shall remain in continuous operation.

2. Failure of Clearance Air Monitoring:
 - a. Satisfactory clearance air sampling is achieved only when requirements of ICR 56, AHERA under 40 CFR 763 and New York State Education Department have been met.
 - b. Re-clean any asbestos abatement work area or other area not meeting satisfactory clearance air monitoring results criteria for any of the following:
 - 1) ICR 56 .
 - 2) AHERA under 40 CFR 763, using wet methods with negative air pressure equipment operating as required by ICR 56.
 - c. Project Monitor shall collect new samples in same locations for each asbestos abatement work area with air samples not meeting clearance air monitoring results criteria.
 - d. Repeat cleaning, air sampling, monitoring, and analysis until satisfactory clearance air monitoring results are achieved throughout entire asbestos abatement work area.
 - e. Failure of clearance air monitoring indicates that Contractor did not properly complete abatement activity:
 - 1) Contractor shall perform all cleaning at no additional cost to Owner.
 - 2) Contractor shall reimburse Owner for all costs associated with project monitoring, air sampling and air sample analysis during additional cleaning and clearance air sampling.
 - 3) Contractor remains responsible for complying with all specified schedules and timing.

3.8 WORK AREA REMOVAL PROCEDURES

A. Removal of Work Area Containment:

1. Remove all remaining plastic sheeting, barriers, decontamination facilities; negative pressure equipment and ancillary items only after satisfactory clearance air monitoring results are achieved.
2. Notify Project Monitor immediately if any residual asbestos-containing debris is discovered during removal of plastic sheeting, barriers, decontamination facilities, negative pressure equipment and ancillary items, and clean up debris in accordance with ICR 56-9.3.
3. Clean all tape, glue, staples, etc. used in abatement process.

4. Repair any damage to walls, floors, ceilings, fixtures, or other items not scheduled for demolition or abatement to at least pre-abatement condition. Where finishes are damaged, refinish or repaint entire object or to nearest break in surface of walls, ceilings, soffits, etc.
5. Where partial occupancy by Owner is required, portion of asbestos abatement work will not be considered returned to Owner until entire containment is removed and Owner can use space for intended purpose or other entities can occupy space for additional work as applicable.

3.9 FIELD QUALITY CONTROL

- A. Inspection of Barriers: Provide inspection of all barriers at least twice daily by Asbestos Supervisor and record inspections and observations in daily project log.
- B. Repairs to Barriers and/or Enclosure Systems: Repair damage and defects in barriers and enclosure systems immediately upon discovery and prior to resumption of abatement activities.
- C. Testing of Barriers and Enclosure Systems: Use smoke tubes with negative air pressure ventilation units in operation to test effectiveness of asbestos abatement work area barriers and personal and waste decontamination enclosure systems. Perform these tests prior to beginning of abatement activities and at least once daily afterwards until satisfactory clearance air monitoring results are achieved. Document test results, observations and modifications in daily project log.
- D. Testing By Owner:
 1. Intent: Project Monitoring and Air Sampling provided by Owner intended to:
 - a. Monitor Contractor's compliance with plans, specifications and asbestos related regulatory requirements.
 - b. Fulfill air-sampling requirements of ICR 56, 40 CFR 763 and New York State Education Department.
 2. Where no air sampling is required by applicable regulations, Owner reserves the right, without incurring any obligation to perform air sampling for any or all stages or portions of the work.
 3. Contractor Requirements:
 - a. Provide access to asbestos abatement work areas for Project Monitor/Air Sampling Technician employed by Owner to observe all asbestos abatement work and collect air samples as required by ICR 56, 40 CFR 763 and New York State Education Department.
 - b. Provide adequate lighting, ladders, scaffolding, and similar items to enable Project Monitor/Air Sampling Technician to perform visual inspections of all surfaces within asbestos abatement work areas.

- c. Provide sufficient temporary electrical power to locations within asbestos abatement work areas as required to supply high volume air sampling pumps for daily and clearance air samples.
- d. Do not perform any air monitoring functions under ICR 56. Notify Owner and Architect immediately of any conflict of interest between Contractor and any firm providing project monitoring, air sampling or laboratory analysis.
- e. Contractor retains complete and total responsibility for complying with plans, specifications and all regulatory requirements.

E. Air Sampling Procedures:

1. Flow Rate, Capacity and Chain of Custody:

- a. Flow Rate: Between 2 and 10 liters per minute.
- b. Calibration: Pre-calibrate and post-calibrate pumps with each use.
- c. Chain of Custody: Transport all samples under chain of custody.
- d. Clearance Air Sampling Equipment Placement: Place air sampling equipment within asbestos abatement work area at random around asbestos abatement work area. If asbestos abatement work area contains number of rooms equivalent to required number of samples, place sampler in each room. When number of rooms is greater than required number of samples, select representative sample of rooms. Do not place in corners of rooms or near obstructions.

2. Analysis Time:

- a. PCM Clearance Air Sample Analysis: Provide overnight delivery of the samples to the laboratory. Maximum turnaround time from receipt of the samples at laboratory until receipt of faxed results is 12 hours. Ensure maximum time between sample collection and analysis of all samples is 48 hours.
- b. TEM Clearance Air Sample Analysis: Provide overnight delivery of the samples to the laboratory. Maximum turnaround time from receipt of the samples at laboratory until receipt of faxed results is 24 hours. Ensure maximum time between sample collection and analysis of all samples is 48 hours.

3. Air Sample Blanks:

- a. PCM Air Samples: Submit blank sample cassettes daily equal to 10 percent of the total number of samples collected that day, but not less than 2 cassette blanks per day.
- b. TEM Air Samples: Submit 1 sealed blank and 2 field blanks for each set of clearance samples.

- F. Air Sampling Required by New York State Education Department: In addition to clearance air sampling requirements included in ICR 56 and AHERA regulations – 40 CFR 763, provide TEM clearance air samples collected and analyzed per AHERA for all projects where clearance air samples are required by ICR 56.
- G. Air Sampling Required by ICR 56:
1. Method of Analysis: At a minimum, use PCM analysis as method of analysis for ICR 56 compliance sampling. Owner reserves the right to allow TEM clearance air samples without PCM samples and where PCM analysis results in fiber counts exceeding air clearance levels, Owner reserves right to use TEM analysis to obtain more accurate asbestos fiber count.
 2. Variance: Where provisions of specific variance differ from ICR 56 and provisions specified in this Section, comply with provisions of specific variance. Where provisions of a specific variance differ from AHERA regulations, the more stringent provisions shall prevail.
 3. Background Air Sampling (prior to start of Project): Collect minimum 1 air sample from inside and outside of each area with minimum volume collected of 1500 liters.
 4. Pre-Abatement Air Sampling (Area Preparation): Collect pre-abatement air samples on at least 1 day during work area preparation with minimum 1500 liters volume collected.
 - a. Large Asbestos Abatement Projects: Collect minimum of 5 samples inside and outside of each asbestos abatement work area. Where area is greater than 25,000 square feet, collect additional representative area sample for every 5,000 square feet.
 - b. Small Asbestos Projects: Collect minimum of 3 samples inside and outside of each asbestos abatement work area.
 - c. Minor Asbestos Projects: Collect minimum of 1 sample inside and outside of each asbestos abatement work area.
 5. During Abatement: Collect air samples daily when actual abatement activities have begun, preparation or other work prior to beginning actual abatement activities has disturbed asbestos containing materials, or preparation or other work prior to beginning actual abatement activities can reasonably be anticipated to disturb asbestos.
 - a. Large Asbestos Projects: Collect samples as required by ICR 56-17.3.
 - b. Quantity: Collect as close to 1500 liters as possible without exceeding flow rate of 10 liters per minute. Continue sample collection during entire workday.

6. Post Abatement (Clearance Air Monitoring):

a. Drying Time:

- 1) Do not begin sampling until period equal to or greater than that required by ICR 56-9.1 (f) final cleaning has been completed and no visible pools of liquid or condensation remain. Use aggressive sampling techniques as per ICR 56-17.
- 2) Negative air pressure equipment shall remain in continuous operation during clearance air monitoring

b. Minimum Collection Volume: 1500 liters.

c. Large Asbestos Abatement Projects: Collect minimum of 5 samples inside and outside of each asbestos abatement work area. Where area is greater than 25,000 square feet, collect additional representative area sample for every 5,000 square feet.

d. Small Asbestos Projects: Collect minimum of 5 samples inside and 3 samples outside of each asbestos abatement work area.

e. Minor Asbestos Projects: Collect minimum of 5 samples inside and 1 sample outside of each asbestos abatement work area.

f. Clearance Criteria: Clearance air monitoring results considered satisfactory when every sample demonstrates airborne concentration of asbestos fibers less than 0.01 fibers per cubic centimeter or background level, whichever is greater.

H. Clearance Air Sampling Required by AHERA Regulations 40 CFR 763:

1. Clearance air sampling requirements for compliance with AHERA regulations provided in addition to ICR 56 requirements.

a. For all clearance air sampling for compliance with the AHERA Regulations, 40 CFR 763, 5 samples shall be collected within each regulated abatement work area.

b. Where PCM air samples are allowed by AHERA, collect and analyze additional PCM samples to supplement samples collected for compliance with ICR 56 for a minimum of 5 samples collected within the regulated abatement work area.

c. Where TEM air samples are required by AHERA, collect and analyze TEM air samples required by AHERA in lieu of PCM air samples required by ICR 56. Collect a minimum of 5 samples within each regulated abatement work area.

2. Required Analysis:

- a. Type of Analysis: Provide TEM analysis when more than 160 square feet or 260 linear feet of asbestos containing material are removed within containment barriers used to isolate functional space. Do not separate contiguous portions of material subject to abatement conducted concurrently or at approximately same time within same building to qualify for PCM analysis.
- b. TEM Sampling:
 - 1) Sample Volumes - Collect sample volumes as follows:
 - a) 25 mm Cassettes: Between 1,199 and 1,800 liters of air.
 - b) 37 mm Cassettes: Between 2,799 and 4,000 liters of air.
 - 2) Sample Number - Collect and submit following samples:
 - a) Within Containment Barriers: 5 samples.
 - b) Outside Containment Barriers: 5 samples.
 - c) Submit 1 sealed blank and 2 field blanks.
 - 3) Clearance Criteria:
 - a) Results considered satisfactory and asbestos abatement activity considered complete when average of 5 samples collected inside containment barriers does not exceed 70 structures per square millimeter.
 - b) If average of 5 samples collected inside containment barriers exceeds 70 structures per square millimeter, Owner may elect to compare results of 5 samples collected inside containment barriers to remaining samples. If concentration of asbestos on 5 samples collected within barriers is not statistically different from concentration of asbestos of 5 samples collected outside of containment barriers when analyzed and compared as per Appendix A of Subpart E of 40 CFR 763, clearance air monitoring results considered satisfactory and asbestos abatement activity considered to be complete.
- c. PCM Sample Analysis:
 - 1) Sample Volume: Collect minimum of 1500 liters of air.
 - 2) Sample Number: Collect 5 samples within containment barriers.
 - 3) Clearance Criteria: Results considered satisfactory and asbestos abatement activity considered complete when each of 5 samples collected inside containment barriers is less than 0.01 fibers per square centimeter.

3.10 CLEANING

- A. Daily Cleaning of Enclosures: HEPA vacuum and/or wet clean personal and waste decontamination enclosure systems at end of each day of abatement activities.

3.11 ASBESTOS WASTE DISPOSAL PROCEDURES

- A. All waste generated as part of the asbestos project shall be removed from the site within 10 days after successful completion of satisfactory clearance air sampling and dismantling of all regulated abatement work areas at the site.
- B. Regulated Asbestos Containing Material (RACM): Category I non-friable asbestos-containing material that does not become friable is not considered to be RACM. All other waste materials removed as part of asbestos abatement work, including (but not limited to) friable asbestos-containing material, Category II non-friable asbestos-containing materials, plastic sheeting, disposable clothing and filters from control devices are considered to be RACM.
 - 1. Adequately wet and properly containerize or seal in leak-tight wrapping all RACM.
 - 2. Label all containers or wrapped material in accordance with requirements of OSHA in 29 CFR 1926.1101 (j) (2) with labels printed in letters of sufficient size and contrast to be readily visible and legible. Include following information on labels:
 - a. Name of waste generator.
 - b. Location where waste was generated.
 - c. Name of abatement contractor.
 - 3. Provide written notification a minimum of 5 days prior to transport of waste to each disposal site utilized. Notification shall include a draft manifest indicating which disposal site and transporter will be used, and which type of waste is included in the shipment. Purpose of notification is to verify if landfill and transporter are permitted and match the submitted items.
 - 4. Deposit all RACM as soon as practical at waste disposal site operated in accordance with 40 CFR Part 61.154 and 6 NYCRR 364.
 - 5. Line all vehicles used to transport RACM off site with two layers of plastic sheeting sealed leak-tight.
 - 6. When RACM is transported off site (regardless of amount), transport using vehicles with valid Industrial Waste Hauler Permit for asbestos containing material as per 6 NYCRR 364.
 - 7. Identify vehicles used to transport RACM during loading, during entire time vehicle is on site, and during unloading as per 40 CFR 61.149.

8. Maintain waste shipment records as per 40 CFR 61.150, and provide copy of waste shipment records to disposal site owners or operators when RACM is delivered to disposal site. Return copy of waste shipment record, signed by owner or operator of designated disposal site, to Owner within 35 days of date waste was accepted by initial transporter.
- C. All Other Waste: Category I non-friable material may be transported and disposed of as Construction and Demolition debris in accordance with 6 NYCRR 360 and 364. Contractor is responsible for maintaining Category I non-friable material in non-friable condition if intended to be disposed of as construction and demolition debris. Provide trip tickets or other documentation clearly identifying amount of material removed from site, transported to disposal site and disposed of including at least:
1. Name, address and telephone of waste generator.
 2. Approximate quantity.
 3. Name and telephone number of disposal site operator.
 4. Name and physical site location of disposal site.
 5. Name, address and telephone number of transporter.
- D. Contractor is responsible to confirm if flow control measures (if in effect in the county of operation) permits use of the proposed landfill.

END OF SECTION 02 82 00

Pre-Renovation Environmental Survey Report(s) available upon request – Please email your request to INE.Arlington@TetraTech.com.

SECTION 02 83 00 – LEAD-SAFE WORK PRACTICES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Lead safe work practices quality assurance requirements including personnel training.
 - 2. Project monitoring and testing services for lead related work, including requirements for sampling and monitoring during lead related activities.
 - 3. Requirements for transport and disposal of lead waste materials by legal and appropriate means.
- B. Lead inspections have been performed in accordance with New York State Education Department requirements and a copy of the lead inspection report is available in the Owner's offices for review.
- C. All painted and glazed surfaces not identified as Lead-Based Paint shall be treated as lead containing. All contractors shall comply with OSHA requirements for work which disturbs lead containing materials.

1.3 CODES AND REFERENCES

- A. The following codes and references apply:
 - 1. New York State Department of Environmental Conservation (DEC):
 - a. 6 NYCRR 360 - Solid Waste Management Facilities.
 - b. 6 NYCRR 364 - Waste Transporter Permits.
 - c. 6 NYCRR 370 - Hazardous Waste Management System: General.
 - d. 6 NYCRR 371 - Identification and Listing of Hazardous Wastes.
 - e. 6 NYCRR 372 - Hazardous Waste Manifest and Related Standards for Generators, Transporters and Facilities.
 - f. 6 NYCRR 373-1 - Hazardous Waste Treatment, Storage and Disposal Facility Permitting Requirements.
 - g. 6 NYCRR 373-2 - Final Status Standards for Owners and Operators of Hazardous Waste Treatment, Storage and Disposal Facilities.
 - h. 6 NYCRR 373-3 - Interim Status Standards Regulations for Owners and Operators of Hazardous Waste Facilities.
 - i. 6 NYCRR 376 - Land Disposal Restrictions.

2. Occupational Safety and Health Administration (OSHA) - 29 CFR 1926.62 - Safety and Health Regulations for Construction - Lead.
3. United States Department of Transportation (DOT):
 - a. 49 CFR 171 - General Information, Regulations, and Definitions.
 - b. 49 CFR 172 - Hazardous Materials Table, Special Provisions, Hazardous Materials Communications, Emergency Response Information, and Training Requirements.
 - c. 49 CFR 173 - Shippers - General Requirements for Shipments and Packagings.
 - d. 49 CFR 174 - Carriage by Rail.
 - e. 49 CFR 175 - Carriage by Aircraft.
 - f. 49 CFR 176 - Carriage by Vessel.
 - g. 49 CFR 177 - Carriage by Public Highway.
 - h. 49 CFR 178 - Specifications for Packagings.
 - i. 49 CFR 179 - Specifications for Tank Cars.
 - j. 49 CFR 180 - Continuing Qualification and Maintenance of Packagings.
4. United States Environmental Protection Agency (USEPA):
 - a. 40 CFR Part 260 - Hazardous Waste Management System: General.
 - b. 40 CFR Part 261 - Identification and Listing of Hazardous Waste.
 - c. 40 CFR Part 262 - Standards Applicable to Generators of Hazardous Waste.
 - d. 40 CFR Part 263 - Standards Applicable to Transporters of Hazardous Waste.
 - e. 40 CFR Part 264 - Standards for Owners and Operators of Hazardous Waste Treatment, Storage, and Disposal Facilities.
 - f. 40 CFR Part 265 - Interim Status Standards for Owners and Operators of Hazardous Waste Treatment, Storage, and Disposal Facilities.
 - g. 40 CFR Part 266 - Standards for the Management of Specific Hazardous Wastes and Specific Types of Hazardous Waste Management Facilities.
 - h. 40 CFR Part 268 - Land Disposal Restrictions.
 - i. 40 CFR Part 270 - EPA Administered Permit Programs: The Hazardous Waste Permit Program.
 - j. 40 CFR Part 745, Subpart L - Lead-Based Paint Activities.
5. United States Department of Housing and Urban Development (HUD)
 - a. Guidelines for the Evaluation and Control of Lead-Based Paint Hazards In Housing.

- B. Failure to expressly refer to applicable code, regulation, standard, law and ordinance within Contract Documents does not imply that applicable regulatory requirements are not applicable to the Project.

1.4 DEFINITIONS

- A. Lead-Based Paint: Paint or other surface coatings that contain lead equal to or greater than 1.0 mg/cm² or 0.5 percent by weight.
- B. Lead Containing Materials: Paint or other surface coatings that contain less than 1.0 mg/cm² or 0.5 percent by weight.

- C. Lead Safe Work Practices: Lead safe work practices provide for disturbance of lead, including removal and disposal of lead-based paint; lead containing dust; and lead contaminated soil in accordance with the “HUD Guidelines for the Evaluation and Control of Lead-Based Paint Hazards in Housing”, all applicable codes, regulations, standards, laws and ordinances and this Section.
- D. Surface Coatings: Paint, shellac, varnish, glaze coat of ceramic tile or block or any other coating including wallpaper that covers painted surfaces.

1.5 ACRONYMS

- A. LBP: Lead-Based Paint.

1.6 SUBMITTALS, GENERAL

- A. Submit all action submittals and informational submittals (except Employee Training and Certification Documentation) required by this Section concurrently.

1.7 ACTION SUBMITTALS

- A. Quality Control Submittals:
 - 1. Valid Waste Transporter Permit, issued by New York State Department of Environmental Conservation.
 - 2. Written communication from designated treatment, storage or disposal facility that it:
 - a. Is authorized to receive and dispose of waste products generated by this Project.
 - b. Has capacity to receive and dispose of waste products generated by this Project.
 - c. Will provide or assure that ultimate disposal method indicated on manifest for particular hazardous waste(s) will be followed.
 - 3. Instruction regarding requirements for distribution of waste manifest as manifest is completed, at time of shipment.
 - 4. Emergency Contact List: List providing means to contact applicable individuals and agencies in event of emergency at any time of day or night and including at least the following individuals and agencies:
 - a. Contractor Personnel:
 - 1) Project manager.
 - 2) Project supervisor.
 - b. Sampling Organization: On site sampling technician.
 - c. Owner.
 - d. Local police department.

- e. Local fire department.
- f. Local hospital and ambulance service.

1.8 INFORMATIONAL SUBMITTALS

- A. Qualification Data: Employee Training and Certification Documentation: Valid training and certification documentation for new employees prior to employees beginning work.

1.9 CLOSEOUT SUBMITTALS

- A. Daily Logs.
- B. Sign In Sheets.
- C. Laboratory Analysis for clearance sampling.
- D. Documentation of Hazardous Waste Determination: Toxicity Characteristic Leachate Procedure sample analysis and documentation that identifies the material(s) sampled.
- E. New York State Uniform Hazardous Waste Manifest or manifest as required by the state where the waste is disposed, for waste that is known or determined to be hazardous, and Trip Tickets for all other waste.

1.10 QUALITY ASSURANCE

- A. Qualifications:
 - 1. Contractor:
 - a. Supervision: Full-time, on-site supervisor for each site.
 - b. Personnel Certification Requirements:
 - 1) Lead-Based Paint Personnel: Maintain current USEPA certification to engage in lead-based paint activities per 40 CFR 745.226.
 - 2) Lead-Based Paint Supervisory Personnel: Maintain current USEPA certification as a lead-based paint abatement supervisor per 40 CFR 745.226.
 - c. Personnel Training Requirements: In addition to the training requirements for USEPA certification, all lead personnel or lead supervisory personnel, including any personnel entering lead activity areas, shall have training as required by 29 CFR 1926.62.

2. Owner's Sampling/Monitoring Firm: Independent of Contractor and possessing current USEPA certification to perform lead-based paint activities.
 - a. Personnel Certification:
 - 1) Monitoring: Possess current USEPA certification, as per 40 CFR 745, subpart L, as either "Risk Assessor" or "Inspector".
 - 2) Final Inspection or Clearance Testing: Possess current USEPA certifications, as per 40 CFR 745, subpart L, as either "Risk Assessor" or "Inspector".
3. Lead Analysis Laboratories:
 - a. Maintain current National Lead Laboratory Accreditation Program (NLLAP) accreditation.
 - b. Maintain current New York State Environmental Laboratory Approval Program (ELAP) accreditation in each method of analysis used.
 - c. Use most recent version of specified test method.
 - d. Analyze samples for waste characterization using:
 - 1) Toxicity Characteristic Leachate Procedure - EPA Method 1311.
 - 2) Analysis by one of following:
 - a) Inductively Coupled Plasma-Atomic Emission Spectrometry - EPA Method 6010.
 - b) Inductively Coupled Plasma-Mass Spectrometry - EPA Method 6020.
 - c) Lead (Atomic Absorption, Direct Aspiration) - EPA Method 7420.
 - d) Lead (Atomic Absorption, Furnace Technique) - EPA Method 7421.
 - e. Analyze air samples for lead for total lead (if required) using one of following:
 - 1) Lead by Flame Atomic Absorption Spectrophotometer - NIOSH 7082.
 - 2) Lead by Graphite Furnace Atomic Absorption Spectrophotometer - NIOSH 7105.
 - 3) Elements by Inductively Coupled Argon Plasma, Atomic Emission Spectroscopy - NIOSH 7300.
 - f. Analyze wipe samples, paint chip samples and soil samples using one of following methods:
 - 1) Inductively Coupled Plasma-Atomic Emission Spectrometry - EPA Method 6010.
 - 2) Inductively Coupled Plasma-Mass Spectrometry - EPA Method 6020.
 - 3) Lead (Atomic Absorption, Direct Aspiration) - EPA Method 7420.
 - 4) Lead (Atomic Absorption, Furnace Technique) - EPA Method 7421.

B. Regulatory Requirements:

1. Hazardous Waste Generator Status: Owner is "Conditionally Exempt / Very Small Quantity Generator" as defined by 6 NYCRR 371 and 40CFR 260. Schedule removal, on-site storage, and transport as required to maintain Owner's status as "Conditionally Exempt Small Quantity Generator".

1.11 PROJECT CONDITIONS

- A. Project/Site Access Limitations: Restrict access to all work areas. Immediately report any access by unauthorized individuals to Owner and Project Monitor.

1.12 SEQUENCING AND SCHEDULING

- A. Completion: Complete lead hazard control activities in accordance with construction schedule requirements specified in Section 01 12 00 "Multiple Contract Summary-Project Schedule" with each phase considered distinct and separate for purpose of schedule and substantial completion.
 1. Substantial Completion of a phase occurs when all of the following occur:
 - a. All components of the phase have passed visual inspection by Supervisor.
 - b. Satisfactory clearance criteria are achieved for each portion of the phase.
 - c. All containment barriers have been removed.
 - d. Areas are returned to Owner.
 2. If Contractor fails to achieve substantial completion within specified schedule requirements, all costs associated with extension of schedule, including (but not limited to) sampling costs, monitoring costs, direct costs incurred by Owner, and costs to accelerate sample analysis shall be deducted from final payment.
- B. Restrictions on Working Hours: Schedule work only during regular working hours, as established for Project. Do not use overtime or multiple shifts with "overtime" defined as any time in excess of 8 hours in single day, work on weekends, or work on holidays.
- C. Changes in Working Hours: Advise Owner of any changes in hours or days when lead hazard control activities will be conducted on site, at least 24 hours prior to change. Contractor retains all liability resulting from Contractor's failure to make required notification.

PART 2 - PRODUCTS

2.1 EQUIPMENT

- A. Respirators: Provide respirators jointly approved as acceptable for protection by National Institute for Occupational Safety and Health (NIOSH) under provisions of 30 CFR Part 11.
 1. Supply and use respirators in accordance with 29 CFR 1910.134 and 29 CFR 1926.62.

2. Provide respirators, filters and ancillary supplies as required for employees and authorized visitors.
 3. Account for hazards other than lead in respirator selection.
- B. Protective Clothing: Provide disposable protective clothing complying with requirements of 29 CFR 1926.62 that is disposed of after one use. Provide disposable clothing as required for employees and authorized visitors.
- C. Lead-Related Construction Facilities and Controls:
1. Polyethylene sheeting (plastic sheeting) - 6-mil thickness, sized to minimize seams.
 2. Tape and/or adhesive spray capable of sealing joints in adjacent polyethylene sheets and for attachment of polyethylene sheet to finished or unfinished surfaces of dissimilar materials and capable of adhering under both dry and wet conditions, including use of amended water.
 3. Polyethylene waste disposal bags - 6-mil thickness with preprinted labels.
 4. HEPA filtered negative pressure equipment.
 5. HEPA filtered vacuums.
 6. Water filtration, 3 stage with final filtration to at least 5 microns.
 7. Barrier tape.
 8. Warning signs.
 9. Hygiene facilities as required by 29 CFR 1926.62 including showers, cleansing agents and disposable towels.
 10. Lead specific detergent, similar to:
 - a. LSZ, Inc.; Ledizolv.
 - b. Sentinel Products, Inc.; Sentinel 805.
- D. Testing Services Equipment:
1. Wipe Testing:
 - a. Disposable wipe meeting criteria of ASTM E1792.
 - b. Non-sterilized non-powdered disposable gloves.
 - c. Non-sterilized polyethylene centrifuge tubes (50 ml size) or equivalent hard-shell container that can be rinsed quantitatively in laboratory.
 2. Air Sampling Cassettes: Commercially available 37 mil cassettes, using mixed cellulose ester sample collection filters with pore size of 0.8 micrometers. Use only new cassettes; reloaded cassettes not acceptable.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, areas, and conditions for compliance with requirements for conditions affecting performance of the Work.
- B. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 DE MINIMIS WORK LEVELS

- A. De minimis disturbance of lead-based paint is defined as work that does not disturb LBP coated surfaces that total more than:
 - 1. 20 square feet on exterior surfaces;
 - 2. 2 square feet in any one interior room or space; or
 - 3. 10 percent of the total surface area on an interior or exterior type of component with a small surface area. Examples include window sills, baseboards, and trim.
- B. Disturbance of lead-based paint that is determined to be at de minimis levels may be performed using the following work methods:
 - 1. None of the "Unacceptable Removal Methods" listed below are used.
 - 2. Work area preparation in full compliance with Level 1 work area preparation.
 - 3. Methods to minimize the creation of dust are used. Methods include, but are not limited to, misting the area to be disturbed, drilling through a wet sponge, using nail fasteners instead of pre-drilling and using screw fasteners.
 - 4. Any generated dust is wet cleaned and appropriately disposed.
 - 5. Clearance sampling consists of a visual inspection by the supervisor to confirm that no dust or debris remains in the area work occurred.

3.3 PROTECTION

- A. Provide personal protective equipment as required by 29 CFR 1926.62 at no cost to employees or authorized visitors.
- B. Institute respirator program in accordance with 29 CFR 1926.62 and 29 CFR 1910.134 (b), (d), (e) and (f).
- C. Use protective clothing and respirators whenever lead is being disturbed, abated, cleaned up, containerized or stored in vehicle or container used to transport waste to landfill.
- D. Institute medical surveillance program in accordance with 29 CFR 1926.26 for all employees performing or supervising lead handling work, entering work area containment, or using respirator.

3.4 PREPARATION

- A. Prior to all other preparation activities, construct decontamination facilities adjacent to lead work area, consisting of:
 - 1. Dirty area changing room.
 - 2. Shower room.
 - 3. Clean area changing room.
 - 4. Airlock at each entrance and between each room.
 - 5. Floors, walls and ceilings sealed with 2 layers of plastic sheeting.
 - 6. Provision of privacy while using decontamination facilities.
- B. Exterior Preparation (Other Than Windows):
 - 1. Seal all openings to interior of building within 20 feet of lead work area, except windows or doors may be closed and locked with two layers of plastic sheeting.
 - 2. Install single layer of plastic sheeting on ground extending 10 feet beyond perimeter of lead work area in all directions. Anchor or tape plastic sheeting to building to avoid gaps between sheeting and building. Secure all plastic to prevent movement; wood studs or similar objects acceptable.
 - 3. Install barrier tape and warning signs at 20-foot perimeter from lead work area.
 - 4. Move all movable objects 20 feet from lead work area.
 - 5. Seal fixed objects and large objects that cannot be moved with a single layer of plastic sheeting.
- C. Window Treatment or Removal Preparation:
 - 1. Close all windows within 20 feet of lead activities.
 - 2. Attach single layer of plastic sheeting on ground extending 5 feet beyond perimeter of lead activity in all directions. Anchor or tape plastic sheeting to building to prevent gaps between sheeting and building. Secure all plastic to prevent movement; wood studs or similar objects acceptable.
 - 3. Install barrier tape and warning signs at 20-foot perimeter from lead work area.
 - 4. Where lead activities occur outside structure, seal interior of affected window with two layers of plastic sheeting.
 - 5. Where lead activities occur within structure, provide at least lead work area preparation conforming to Interior Preparation, Level 2, specified below.
 - 6. Move all movable objects 20 feet from lead work area.
 - 7. Seal fixed objects and large objects that cannot be moved with single layer of plastic sheeting.

D. Interior Preparation:

1. Level 1: Dust removal and lead disturbance of no more than 2 square feet of painted surface per room.
 - a. Single layer of plastic sheeting on floor extending 5 feet beyond perimeter of treated area in all directions.
 - b. Barrier tape and warning signs at all entrances to room.
 - c. Ventilation systems turned off and all vents within 5 feet of treated surfaces sealed with plastic sheeting.
 - d. Move furniture and movable objects at least 5 feet from treated surfaces.
 - e. Seal fixed objects and large objects that cannot be moved with plastic sheeting.
 - f. Provide negative pressure equipment where large supplies of fresh air are required to control exposure to other hazardous substances, such as solvent vapors.
2. Level 2: Lead disturbance of 2 square feet to 10 square feet of painted surface per room, where all work in all rooms will be completed in one day.
 - a. Apply 2 layers of plastic over entire floor.
 - b. Install airlock at entrance to lead work area or room.
 - c. Install barrier tape and warning signs at all entrances to room.
 - d. Turn off ventilation systems and seal all vents with plastic sheeting.
 - e. Move furniture and movable objects from lead work area.
 - f. Seal fixed objects and large objects that cannot be moved with a single layer of plastic sheeting.
 - g. Provide negative pressure equipment where large supplies of fresh air are required to control exposure to other hazardous substances, such as solvent vapors.
3. Level 3: Lead disturbance of 2 square feet to 10 square feet of painted surface per room, where work in all rooms will be completed in not more than 5 work days.
 - a. Apply 2 layers of plastic over entire floor.
 - b. Install airlock at entrance to lead work area or room. Airlock not required on doors between adjacent rooms within lead work area.
 - c. Post warning signs at entrances to building.
 - d. Install barrier tape and warning signs at all entrances to room.
 - e. Seal or lock any entrances to room or lead work area not to be used.
 - f. Turn off ventilation systems and seal all vents with plastic sheeting.
 - g. Move furniture and movable objects from lead work area.
 - h. Seal fixed objects and large objects that cannot be moved with a single layer of plastic sheeting.
 - i. Provide negative pressure equipment where large supplies of fresh air are required to control exposure to other hazardous substances, such as solvent vapors.
4. Level 4: Lead disturbance of more than 10 square feet of painted surface per room.
 - a. Apply 2 layers of plastic over entire floor.
 - b. Install airlock at entrance to lead work area or room. Airlock not required on doors between adjacent rooms within lead work area.
 - c. Post warning signs at entrances to building.
 - d. Install barrier tape and warning signs at all entrances to room.

- e. Seal or lock any entrances to room or lead work area not to be used.
 - f. Turn off ventilation systems and seal all vents with plastic sheeting.
 - g. Move furniture and movable objects from lead work area.
 - h. Seal fixed objects and large objects that cannot be moved with a single layer of plastic sheeting.
 - i. Provide negative pressure equipment where large supplies of fresh air are required to control exposure to other hazardous substances, such as solvent vapors.
- E. Do not begin lead disturbance or removal activities until all preparation work, including installation of decontamination enclosure systems and any required engineering controls, including negative air pressure equipment, has been completed.

3.5 LEAD WORK PROCEDURES

- A. Exterior Lead Work Constraints: Do not proceed with lead activities if wind speeds are greater than 20 miles per hour. Stop lead activities and proceed with cleanup activities before rain begins.
- B. Unacceptable Removal Methods:
- 1. Open flame burning or torching (includes propane-fueled heat grids).
 - 2. Machine sanding or grinding without HEPA local vacuum exhaust tool.
 - 3. Hydroblasting or high-pressure wash.
 - 4. Abrasive blasting or sandblasting without HEPA vacuum exhaust tool.
 - 5. Heat guns operating above 1,100 deg F.
 - 6. Methylene chloride paint removal products.
 - 7. Dry scraping.
- C. Acceptable Removal Methods: Since acceptable methods are not appropriate or acceptable for every item or location, refer to Drawings for approved removal methods for individual items and locations.
- 1. Component Removal:
 - a. Mist all disturbed paint and dust and maintain in moist condition.
 - b. Entirely remove indicated components.
 - c. Wet scrape residual paint from adjacent unpainted surfaces. Do not damage adjacent surfaces.
 - d. Collect all paint chips, dust and debris and seal in 6 mil plastic bags.
 - e. Seal removed building components in 6 mil plastic sheeting or 6 mil plastic bags.
 - 2. Heat Gun Removal (operating at less than 1,100 deg F):
 - a. Provide fire extinguishers in lead work area, and ensure adequate electrical power is available.
 - b. Use in limited areas only.
 - c. Do not gouge or abrade substrate.

3. Wet Scraping:

- a. Apply adequate water to moisten surface completely; avoid large amounts of water on floor or ground.
- b. Do not moisten areas near electrical circuits.
- c. Use spray bottles or wet sponge attached to scraper.

4. Offsite Stripping:

- a. Apply paint removers in accordance with manufacturer's recommendations.
- b. Test paint remover in inconspicuous location approved by Architect to avoid damage to substrate.
- c. Identify building component to ensure reinstallation in same location.
- d. Mist all paint and dust disturbed and maintain in moist condition.
- e. Remove components indicated on Drawings entirely. Wet scrape residual paint from adjacent unpainted surfaces. Do not damage adjacent surfaces.
- f. Collect all paint chips, dust and debris and seal in 6 mil plastic bags. Seal removed building components in plastic sheeting. Inform offsite paint remover regarding presence of lead-based paint before shipping;
- g. Do not reinstall components until removal of residual paint and cleaning is complete and satisfactory clearance sampling achieved.

5. Onsite Stripping:

- a. Apply paint removers in accordance with manufacturer's recommendations.
- b. Test paint remover in inconspicuous location approved by Architect to avoid damage to substrate.
- c. Do not damage adjacent surfaces.
- d. Collect all paint chips, dust and debris and seal in 6 mil plastic bags.

D. Work Stoppage Criteria During Lead Activities:

- 1. During lead related activities, stop work immediately if damaged containment barriers are discovered or if dust or paint chips are discovered outside of lead work area.
- 2. Prior to resumption of lead activities, perform cleanup of areas adjacent to lead work area using HEPA vacuums or wet cleaning methods.

E. Clean Up Procedures:

1. Exterior:

- a. At end of each day, whether or not lead related activities are complete, clean up and store all removed components, debris, and plastic sheeting drop cloths in lockable containers with solid floors, walls and ceilings until transported off site.

- b. HEPA vacuum and wash all plastic sheeting with lead specific detergent.
 - c. Place all plastic sheeting used to cover ground and seal openings to interior of building in containers.
2. Interior:
- a. Conduct ongoing cleaning during lead related activities, including regular removal of large and small debris.
 - b. Clean up visible debris and components prior to leaving lead work site at end of work shift.
 - c. Decontaminate all tools, equipment, and worker protection gear before removing from contaminated areas.
 - d. Wait at least 1 hour after active lead removal or disturbance has ceased before final cleaning.
 - e. Final cleaning includes HEPA vacuum, wet wash, and HEPA vacuum cycle:
 - 1) HEPA vacuum all surfaces in room (ceilings, walls, trim, and floors), starting with ceiling and working down, moving toward entry door. Completely clean each room before beginning clean up in another room.
 - 2) Wash all surfaces with lead-specific detergent, changing cleaning solution after completing cleaning in every room.
 - 3) Repeat HEPA vacuuming of all surfaces in room (ceilings, walls, trim, and floors), starting with ceiling and working down, moving toward entry door. Completely clean each room before clean up in another room.
 - f. After completing all disturbance, removal and cleaning activities, and completion of the 1 hour waiting period, provide access to areas for Owner's monitoring firm to perform visual examination to ensure that all removal has been completed and all visible dust and debris have been removed. Correct all incomplete lead work prior to clearance sampling.
- F. Clearance Monitoring: After supervisor and monitor have performed visual inspection and have provisionally determined that removal and cleaning have been properly completed, monitor begins clearance monitoring. Removal and cleaning not properly completed until lead work area achieves satisfactory clearance sampling in accordance with this Section.
- G. Removal of Work Area Containment:
- 1. Do not remove remaining plastic sheeting, barriers, decontamination facilities, negative pressure equipment and ancillary items until satisfactory clearance air monitoring results are achieved.

2. Notify Owner immediately if any residual lead debris is identified during removal of plastic sheeting, barriers, decontamination facilities, negative pressure equipment and ancillary items, and clean up debris.
3. Clean all tape, glue, staples, etc. used in lead work process.
4. Repair damage to walls, floors, ceilings, fixtures, or other items not scheduled for demolition or lead work to pre-lead work condition. Where finishes are damaged, refinish or repaint entire object or to nearest break in surface of walls, ceilings, soffits, etc.
5. Remove entire containment when partial occupancy by Owner is required before Owner occupies area or other entities occupy space for additional construction as required.
6. Paint or otherwise seal treated surfaces not scheduled for painting.

3.6 WASTE SEGREGATION AND CHARACTERIZATION

A. Segregate waste in following categories:

1. Removed components (considered construction and demolition debris for bidding purposes).
2. Paint chips, dust and filters from HEPA vacuums (considered hazardous waste for bidding purposes).
3. Respirator filter cartridges, rags, sponges, mops, scrapers and other materials used for testing lead work, and clean-up (considered construction and demolition debris for bidding purposes).
4. Contaminated soil (considered hazardous waste for bidding purposes).
5. Cleaned plastic sheeting and disposable work clothes (considered construction and demolition debris for bidding purposes).

B. Sample each container of waste to determine if it is characterized as hazardous waste, treating each sample as follows:

1. Prepare using Toxicity Characteristic Leachate Procedure, EPA method 1311.
2. Analyze for lead using EPA method 6010, 6020, 7420 or 7421.
3. Analyze for any other hazardous characteristic introduced into waste by lead procedures.

C. Consider cleaned plastic sheeting and disposable work clothes not sufficiently cleaned as hazardous waste and dispose as hazardous waste at no additional cost to Owner.

D. Maintain each waste category above in separate hard-walled lockable containers until waste characterization is complete. If waste is mixed from different categories, dispose all mixed waste as hazardous waste at no additional cost to Owner.

3.7 FIELD QUALITY CONTROL

- A. Inspection of Barriers: Provide inspection of all barriers at least twice daily by Contractor's Supervisor and record inspections and observations in daily project log.
- B. Repairs to Barriers and/or Enclosure Systems: Repair damage and defects in barriers and enclosure systems immediately upon discovery and prior to resumption of lead activities.
- C. Testing By Owner: Owner reserves right to obtain independent monitoring and sampling services to provide independent documentation regarding compliance with regulatory requirements. Where Owner provides monitoring, sampling (or both), use most stringent results from inspections, daily air sampling and clearance sampling.
- D. Contractor Requirements:
 - 1. Provide air sampling as required by 29 CFR 1926.62.
 - 2. Provide sampling and analysis for waste characterization.
 - 3. Provide access to lead work areas for Owner's Monitor/Sampling Technician to observe all lead related work and collect samples.
 - 4. Provide adequate lighting, ladders, scaffolding, and similar items to enable Monitor/Sampling Technician to perform visual inspections of all surfaces within lead work areas.
 - 5. Provide sufficient temporary electrical power to locations within lead work areas as required to supply high volume air sampling pumps for daily and clearance air samples.
 - 6. Do not perform any monitoring functions with Contractor's personnel or with firms wholly or partly owned by Contractor. Notify Owner and Architect immediately of any conflict of interest between Contractor and any firm providing monitoring, sampling or laboratory analysis.
 - 7. Contractor retains complete and total responsibility for complying with Contract Documents and all regulatory requirements.
- E. Area Air Sampling Procedures (if used): Comply with provisions of NIOSH 7082.
- F. Clearance Sampling Procedures:
 - 1. Timing of Clearance Sampling: Do not begin clearance sampling until:
 - a. All lead related work and cleaning work has ceased.
 - b. All personnel have left lead work area.
 - c. Minimum 1 hour settling period has elapsed.

2. Exterior Work Area Clearance:

a. Background Sampling:

- 1) Background sampling is optional and for informational purposes only. If elected to be performed, determine required clearance sampling strategy.
- 2) Collect representative samples of same number and kind as required for clearance.
- 3) Hold samples until after lead disturbance, removal, cleaning, clearance sampling and sample analysis is complete.
- 4) If any sample results are above clearance criteria, analyze background samples for comparison with clearance sample results.
- 5) Background sampling intended for informational purposes only and does not relieve the contractor from meeting below clearance criteria.

b. Clearance Wipe Sampling:

- 1) Collect minimum of 1 sample from horizontal surfaces in immediate area of lead work on each side of building where lead work occurs.
- 2) Collect minimum of 1 window trough sample on each floor and each side of building where lead work occurs.
- 3) If applicable, collect minimum of 1 additional window trough sample on floor below lead work for each side of building where lead work occurs.
- 4) Refer to U.S. Department of Housing and Urban Development Guidelines for the Evaluation and Control of Lead-Based Paint Hazards in Housing, Appendix 13.1: Wipe Sampling for Settled Lead-Contaminated Dust for sampling requirements.
- 5) Use the Lead Hazard Control Clearance Dust Sampling Form (Single Surface Sampling) Form 15.2, from U.S. Department of Housing and Urban Development Guidelines for the Evaluation and Control of Lead-Based Paint Hazards in Housing to document following:
 - a) Sample locations.
 - b) Surface area sampled.
 - c) Project information.
 - d) Chain of custody information.
 - e) Signatures.
- 6) Clearance Level: 400 µg/sq ft.

c. Clearance Soil Sampling:

- 1) Clearance wipe sampling consists of composite samples, consisting of 2 to 4 component samples.
- 2) Collect 1 composite sample from each side of building on which lead work occurs.

- 3) Refer to U.S. Department of Housing and Urban Development Guidelines for the Evaluation and Control of Lead-Based Paint Hazards in Housing, Appendix 13.3: Soil Sampling Protocol For Housing for sampling requirements.
 - 4) Use Lead Hazard Control Clearance Soil Sampling Form (Composite Sampling Only) Form 15.3, from U.S. Department of Housing and Urban Development Guidelines for the Evaluation and Control of Lead-Based Paint Hazards in Housing to document following:
 - a) Sample locations.
 - b) Surface area sampled.
 - c) Project information.
 - d) Chain of custody information.
 - e) Signatures.
 - 5) Clearance Level: 400 µg/g.
3. Interior Work Area Clearance:
- a. Background Sampling:
 - 1) Background sampling is optional and for informational purposes only. If elected to be performed, determine required clearance sampling strategy.
 - 2) Collect representative samples of same number and kind as required for clearance.
 - 3) Hold samples until after lead disturbance, removal, cleaning, clearance sampling and sample analysis is complete.
 - 4) If any of sample results are above clearance criteria, analyze background samples for comparison with clearance sample results.
 - 5) Background sampling intended for informational purposes only and does not relieve the contractor from meeting below clearance criteria.
 - b. Clearance Wipe Sampling:
 - 1) Collect minimum 2 dust samples from at least 4 rooms. If lead work occurs in less than 4 rooms, collect samples where no lead work occurred.
 - 2) Collect 1 floor sample in each room where lead work occurred.
 - 3) Collect 1 interior windowsill or window trough per room where lead work occurred, alternating between rooms.
 - 4) For 20 percent of rooms where lead work occurs, collect 1 floor sample outside of room in uncontaminated space, but within 10 feet of airlock.
 - 5) For each room over 2,000 square feet, collect 1 additional floor sample for every 2,000 square feet and collect 1 floor sample outside of room in uncontaminated space, but within 10 feet of airlock.

- 6) Refer to U.S. Department of Housing and Urban Development Guidelines for the Evaluation and Control of Lead-Based Paint Hazards in Housing, Appendix 13.1: Wipe Sampling for Settled Lead-Contaminated Dust for sampling requirements.
- 7) Use Lead Hazard Control Clearance Dust Sampling Form (Single Surface Sampling) Form 15.2, from U.S. Department of Housing and Urban Development Guidelines for the Evaluation and Control of Lead-Based Paint Hazards in Housing to document following:
 - a) Sample locations.
 - b) Surface area sampled.
 - c) Project information.
 - d) Chain of custody information.
 - e) Signatures.
- 8) Satisfactory Clearance Level:
 - a) Bare and Carpeted Floors: 10 $\mu\text{g}/\text{sq ft}$.
 - b) Interior Window Sills: 100 $\mu\text{g}/\text{sq ft}$.
 - c) Window Troughs: 400 $\mu\text{g}/\text{sq ft}$.

G. Failure of Clearance Sampling:

1. Clearance criteria achieved when:
 - a. All scheduled lead removal is complete.
 - b. No dust or debris remains within lead work area.
 - c. Clearance sample results are below clearance level or background whichever is greater.
2. Re-clean any lead work area or other area not meeting clearance criteria.
3. Where clearance criteria are not met for soil, remove 2 inches of soil from perimeter of 20 feet around building, or portion thereof, where lead was removed or wherever paint chips are found, whichever is greater.
4. Sampling technician collects new samples in approximately same locations for each lead work area with samples not meeting clearance criteria.
5. Repeat cleaning, sampling, monitoring, and analysis until satisfactory clearance criteria are achieved.
6. Failure of clearance monitoring indicates lead activity has not been properly completed; Contractor performs additional cleaning at no additional cost to Owner, including sampling and sample analysis during additional cleaning and clearance sampling. Contractor remains responsible for complying with all specified schedules and timing.

3.8 PACKAGING, TRANSPORTATION AND WASTE DISPOSAL

- A. Perform additional surveys as hazardous material disposal progresses to detect hazards resulting from hazardous material disposal activities.
- B. Use hazardous waste characterization performed in accordance with “Waste Segregation and Characterization” Article above to document and confirm classification of waste. Prior to removing waste from site, confirm in writing to Owner:
 - 1. Results of waste characterization testing.
 - 2. Identification of waste documented to have waste classification identified in “Waste Segregation and Characterization”.
 - 3. Identification of waste characterization varying from “Waste Segregation and Characterization”.
- C. Packaging: Package, label, and mark all hazardous waste materials in accordance with applicable requirements of 49 CFR 173, 178 and 179.
- D. Temporary On-Site Storage and Protection: Provide storage on site of hazardous materials removed from service and scheduled for disposal complying with requirements of 6 NYCRR 372.2 (a) (8). Do not exceed 180 days storage on site.
- E. Hazardous Waste Determination: Provide analysis required by treatment, storage or disposal facility to document hazardous waste determination.
- F. Hazardous Waste Manifests:
 - 1. Maintain manifest from date of transport until date of disposal, destruction or recycling.
 - 2. Return fully executed manifests to Owner within 60 days of date waste accepted by initial transporter.
 - 3. Use following type of manifest as applicable:
 - a. If waste disposed of in New York State or if waste disposed in state not requiring use of specific manifest form, use New York State Uniform Hazardous Waste Manifest.
 - b. If waste disposed of in state other than New York State and use of specific manifest form is required, use manifest required by state where waste is disposed in lieu of New York State Uniform Hazardous Waste Manifest.
 - 4. Complete manifest and deliver to Owner for review and signature.
 - 5. Retain copies of manifest required to remain with hazardous waste shipment and deliver remaining copies to Owner.
 - 6. Advise Owner regarding required distribution of manifest, both verbally and in writing.

- G. Disposal: Transport hazardous waste to treatment or disposal facility complying with following requirements:
1. Permitted, licensed or registered by state to dispose of hazardous waste.
 2. Possesses interim status to dispose of hazardous waste.
 3. Authorized to manage hazardous waste under Resource Conservation and Recovery Act (RCRA).
 4. Beneficially uses/re-uses or legitimately recycles/reclaims waste; or treats waste prior to beneficial use/reuse or legitimate recycling/reclamation.
- H. Construction and Demolition Debris: Dispose of material determined to be construction and demolition debris as such in accordance with 6 NYCRR 360 and 364. Provide trip tickets or other documentation clearly identifying amount of material removed from site, transported to disposal site and disposed of, including at least:
1. Name, address and telephone of waste generator.
 2. Approximate quantity.
 3. Name and telephone of disposal site operator.
 4. Name and physical site location of disposal site.
 5. Name, address and telephone number of transporter.

END OF SECTION 02 83 00

SECTION 03 30 00 - CAST-IN-PLACE CONCRETE**PART 1 - GENERAL****1.1 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes cast-in-place concrete, including formwork, reinforcement, concrete materials, mixture design, accessories, placement procedures, and finishes, for the following:
 - 1. Footings.
 - 2. Foundation walls.
 - 3. Slabs-on-grade.
 - 4. Suspended slabs.
 - 5. Concrete reconstruction and corrective work.

1.3 DEFINITIONS

- A. Cementitious Materials: Portland cement alone or in combination with one or more of the following: blended hydraulic cement, fly ash and other pozzolans, ground granulated blast-furnace slag, and silica fume; subject to compliance with requirements.

1.4 SUBMITTALS

- A. Action Submittals:
 - 1. Product Data: For each type of product indicated.
 - a. Fiber reinforcement.
 - b. Vapor barrier.
 - c. Concrete sealer.
 - d. Curing compound.
 - e. Interior Slab control joint sealer.
 - f. Penetrating silane sealer.
 - g. Bonding agent
 - h. Non-Shrink Grout.
 - i. Chemical anchor adhesives.
 - j. Corrective mortar (industry name is Repair mortar).
 - k. Thin coat patching mortar.
 - l. Corrective overlayment (industry name is Repair overlayment).

2. Design Mixtures: For each concrete mixture.
 - a. Indicate amounts of mixing water to be withheld for later addition at Project site.
 - b. Include compressive strength test reports.
 - c. Include all ingredient certifications and product data concurrently.
 - d. Pumping of concrete requires a mix design specifically prepared and previously used for pumping.
 - e. Submit alternate design mixtures when characteristics of materials, Project conditions, weather, test results, or other circumstances warrant adjustments.
3. Steel Reinforcement Shop Drawings: Placing drawings that detail fabrication, bending, and placement. Include bar and welded-wire reinforcement sizes, lengths, materials, grades, bar schedules, stirrup spacing, bent bar diagrams, bar arrangement, splices and laps, mechanical connections, tie spacing, hoop spacing, and supports for concrete reinforcement. Show all concrete wall and footing reinforcement on elevation drawings at a scale not less than 1/4-inch = 1 ft. Do not submit placement plans showing only piece marks referencing a cut list.
4. Construction Joint Layout: Shop Drawings indicating proposed construction joint locations and details in elevated concrete slabs and concrete beams.
5. Slab-on-Grade Control Joint Layout Drawings: Indicate joints as shown on Drawings and proposed locations following required spacing requirements.

B. Informational Submittals:

1. Proposed curing method for all concrete elements.
2. Curing compound compatibility with floor finishes and adhesives certificate.

1.5 QUALITY ASSURANCE

- A. Installer Qualifications: A qualified installer who employs Project personnel qualified as an ACI-certified Flatwork Technician and Finisher and a supervisor who is an ACI-certified Concrete Flatwork Technician.
 1. Post-Installed Concrete Anchors Installers: ACI-certified Adhesive Anchor Installer.
- B. Manufacturer Qualifications: A firm experienced in manufacturing ready-mixed concrete products and that complies with ASTM C 94/C 94M requirements for production facilities and equipment.
- C. Testing Agency Qualifications: An independent agency, qualified according to ASTM C 1077 and ASTM E 329 to perform material evaluation tests and to design concrete mixtures.
 1. Personnel performing laboratory tests shall be ACI-certified Concrete Strength Testing Technician and Concrete Laboratory Testing Technician - Grade I. Testing Agency laboratory supervisor shall be an ACI-certified Concrete Laboratory Testing Technician - Grade II.

- D. Source Limitations: Obtain each type or class of cementitious material of the same brand from the same manufacturer's plant, obtain aggregate from single source, and obtain admixtures from single source from single manufacturer.
- E. ACI Publications: Comply with the following unless modified by requirements in the Contract Documents:
 - 1. ACI 301, "Specifications for Structural Concrete," Sections 1 through 5. and Section 7, "Lightweight Concrete."
 - 2. ACI 117, "Specifications for Tolerances for Concrete Construction and Materials."
- F. Structural Preconstruction Conference: Attend conference at Project site.

1.6 DELIVERY, STORAGE, AND HANDLING

- A. Steel Reinforcement: Deliver, store, and handle steel reinforcement to prevent bending and damage. Avoid damaging coatings on steel reinforcement.
 - 1. Store reinforcement to avoid contact with earth.
 - 2. Do not allow epoxy-coated reinforcement to be stored outdoors for more than 60 days without being stored under an opaque covering.
- B. Comply with ASTM C94/C94M and ACI 301.

PART 2 - PRODUCTS

2.1 FORM-FACING MATERIALS

- A. Rough-Formed Finished Concrete: Plywood, lumber, metal, or another approved material. Provide lumber dressed on at least two edges and one side for tight fit.
- B. Chamfer Strips: Wood, metal, PVC, or rubber strips 3/4 by 3/4 inch, minimum, unless otherwise noted on drawings.
- C. Form-Release Agent: Commercially formulated form-release agent that will not bond with, stain, or adversely affect concrete surfaces and will not impair subsequent treatments of concrete surfaces. VOC compliant.
 - 1. Formulate form-release agent with rust inhibitor for steel form-facing materials.
- D. Form Ties: Factory-fabricated, removable or snap-off metal or glass-fiber-reinforced plastic form ties designed to resist lateral pressure of fresh concrete on forms and to prevent spalling of concrete on removal.
 - 1. Furnish units that will leave no corrodible metal closer than 1 inch to the plane of exposed concrete surface.

2.2 STEEL REINFORCEMENT

- A. Reinforcing Bars: ASTM A 615/A 615M, Grade 60, deformed.
- B. Epoxy-Coated Reinforcing Bars: ASTM A 615/A 615M, Grade 60, deformed bars, ASTM A 775/A 775M or ASTM A 934/A 934M, epoxy coated, with less than 2 percent damaged coating in each 12-inch bar length.
- C. Plain-Steel Welded Wire Reinforcement: ASTM A 1064/A 1064M, plain, fabricated from as-drawn steel wire into flat sheets.

2.3 REINFORCEMENT ACCESSORIES

- A. Joint Dowel Bars: ASTM A 615/A 615M, Grade 60, plain-steel bars, cut true to length with ends square and free of burrs.
- B. Epoxy-Coated Joint Dowel Bars: ASTM A 615/A 615M, Grade 60, plain-steel bars, ASTM A 775/A 775M epoxy coated.
- C. Epoxy Corrective Coating: Liquid, two-part, epoxy corrective coating; compatible with epoxy coating on reinforcement and complying with ASTM A 775/A 775M.
- D. Bar Supports: Bolsters, chairs, spacers, and other devices for spacing, supporting, and fastening reinforcing bars and welded wire reinforcement in place. Manufacture bar supports from steel wire, plastic, or precast concrete according to CRSI's "Manual of Standard Practice," of greater compressive strength than concrete and as follows:
 - 1. For exterior concrete, use galvanized wire or dielectric-polymer-coated wire bar supports.
 - 2. For epoxy-coated reinforcement, use epoxy-coated or other dielectric-polymer-coated wire bar supports.

2.4 CONCRETE MATERIALS

- A. Cementitious Material: Use the following cementitious materials, of the same type, brand, and source, throughout Project:
 - 1. Portland Cement: ASTM C 150, Type I or Type II. Supplement with the following (optional):
 - a. Fly Ash: ASTM C 618, Class F or C.
 - b. Ground Granulated Blast-Furnace Slag: ASTM C 989, Grade 100 or 120.
 - 2. Blended Hydraulic Cement: ASTM C 595 – Type IL, portland limestone; Type IS, portland blast-furnace slag; Type IP, portland-pozzolan; Type I (PM), pozzolan-modified portland; or Type I (SM), slag-modified portland cement.
- B. Normal-Weight Aggregates:
 - 1. Provide aggregates from a single source.

2. ASTM C 33, Class 3S coarse aggregate or better, graded.
 3. ASTM C 33, Class 4S coarse aggregate or better, graded, for exterior concrete.
 4. Maximum Coarse-Aggregate Size:
 - a. Slabs on Grade: 1-1/2 inches nominal.
 - b. All Other Concrete: 1 inch nominal.
 - c. For pumpable mixes: 3/4 inch nominal.
 5. Fine Aggregate: ASTM C 33. Free of materials with deleterious reactivity to alkali in cement.
- C. Water: ASTM C 1602/C 1602M and potable.

2.5 ADMIXTURES

- A. Air-Entraining Admixture: ASTM C 260.
- B. Chemical Admixtures: Provide admixtures certified by manufacturer to be compatible with other admixtures and that will not contribute water-soluble chloride ions exceeding those permitted in hardened concrete. Do not use calcium chloride or admixtures containing chlorides.
1. Water-Reducing Admixture: ASTM C 494/C 494M, Type A.
 2. Retarding Admixture: ASTM C 494/C 494M, Type B.
 3. Accelerating Admixture: ASTM C 494/C 494M, Type C.
 4. Water-Reducing and Retarding Admixture: ASTM C 494/C 494M, Type D.
 5. Water-Reducing and Accelerating Admixture: ASTM C 494/C 494M, Type E.
 6. Mid-Range, Water-Reducing Admixture: ASTM C 494/C 494M, Type A or Type F.
Water content reduction to be greater than 7%.
 7. High-Range, Water-Reducing Admixture: ASTM C 494/C 494M, Type F.
 8. High-Range, Water-Reducing and Retarding Admixture: ASTM C 494/C 494M, Type G.
 9. Plasticizing and Retarding Admixture: ASTM C 1017/C 1017M, Type II.

2.6 FIBER REINFORCEMENT

- A. Synthetic Macro-Fiber: Polyolefin macro-fibers (containing no reprocessed olefin materials) engineered and designed for use as secondary reinforcing in concrete, complying with ASTM C 1116/C 1116M, Type III, 1 1/4 to 2-1/4 inches long, varying fiber thickness, and no water absorption.
1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. 3M; Scotchcast Polyolefin Fibers 2".
 - b. Master Builders Solutions US LLC; "MasterFiber MAC" Series.
 - c. Euclid Chemical Company (The), an RPM company; Tuf-Strand SF.
 - d. FORTA Corporation; FORTA FERRO.

- e. GCP Applied Technologies Inc.; Strux 90/40.
 - f. Nycon, Inc.; XL.
 - g. Sika Corporation; Fibermesh 650.
- B. Synthetic Micro-Fiber: Polyolefin micro-fibers (containing no reprocessed olefin materials) engineered and designed for use as secondary reinforcing in concrete, complying with ASTM C 1116/C 1116M, Type III, 1/2 to 3/4 inches long, varying fiber thickness, and no water absorption.
- 1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Master Builders Solutions US LLC; "MasterFiber M 100" Series
 - b. Euclid Chemical Company (The), an RPM company; PSI Fiberstrand 150.
 - c. FORTA Corporation; MIGHTY MONO.
 - d. GCP Applied Technologies Inc.; SINTA M2219

2.7 VAPOR BARRIER

- A. Vapor Barrier: Water-vapor transmission rate (permeance) less than 0.015 perms (gr/ft²/hr/in-Hg), in accordance with ASTM E 1745. The product must meet water-vapor transmission rate (0.01 perms) requirement for both the new material and the ASTM E 1745 mandatory conditioning tests (ASTM E 1745; paragraphs 7.12 through 7.15.) Provide all manufacturers' accessories required for complete installation including mastic and seam tape. Seam tape to be provided with a water-vapor transmission rate of 0.3 perms or lower.
- 1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Layfield Construction Materials; VaporFlex 15.
 - b. Reef Industries, Inc.; Griffolyn Vaporguard.
 - c. Stego Industries, LLC; Stego Wrap 15 mil Class A.

2.8 SEALED CONCRETE

- A. Sealer: Clear, chemically reactive, waterborne solution of inorganic silicate or silicate materials and proprietary components; odorless; that penetrates, hardens, and densifies concrete surfaces.
- 1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ChemMasters; Chemisil Plus.
 - b. ChemMasters; StarSeal PS Clear.
 - c. ChemTec Int'l; ChemTec One.
 - d. Curecrete Distribution Inc.; Ashford Formula.
 - e. Dayton Superior Corporation; Day-Chem Sure Hard Densifier (J-17).
 - f. Euclid Chemical Company (The), an RPM company; Euco Diamond Hard.
 - g. Kaufman Products, Inc.; SureHard.
 - h. Laticrete International, Inc.; L&M Seal Hard.

- i. Meadows, W. R., Inc.; LIQUI-HARD.
- j. Metalcrete Industries; Floorsaver.
- k. Nox-Crete Products Group; Duro-Nox.

2.9 CURING MATERIALS

- A. Moisture-Retaining Cover: ASTM C 171, polyethylene film or white burlap–polyethylene sheet.
 - 1. Color:
 - a. Ambient Temperature Below 50 deg F: Black.
 - b. Ambient Temperature Between 50 and 85 deg F: Any color.
 - c. Ambient Temperature Above 85 deg F: White.
- B. Clear, Waterborne, Membrane-Forming Curing Compound: ASTM C 309, Type 1-D, Class B, dissipating, with fugitive dye.
- C. Evaporation Retarder: Waterborne, monomolecular film forming, manufactured for application to fresh concrete.

2.10 RELATED MATERIALS

- A. Expansion- and Isolation-Joint-Filler Strips: ½-inch rigid, extruded polystyrene insulation (at exterior walls), ASTM D 1751, asphalt-saturated cellulosic fiber, or ASTM D 1752, cork or self-expanding cork.
- B. Interior Slab Control Joint Sealer: Two-component, self-leveling, flexible, 100 percent solids, epoxy resin and adhesive with a Type A shore durometer hardness of 80 per ASTM D 2240 and conforming to ACI 302.1R (5.12-Joint Materials).
 - 1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Chem Masters; PolyTops 480.
 - b. Euclid Chemical Company (The); DURAL 340 SL
 - c. Sika Corporation; Sikadur 51 SL.
- C. Penetrating, Silane Sealer: Single component, minimum 40% silane, waterbased slab sealer that forms chemical bond to the concrete. VOC compliant.
 - 1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Chem Masters; Aquanil Plus 40.
 - b. Dayton Superior Corporation; Weather Worker 40% J29.
 - c. Sika Corporation; Sikagard H 400
- D. Bond breakers: Waterborne, VOC compliant form release agent.

- E. Bonding Agent: ASTM C 881/C 881M, liquid bonding agent specifically designed to bond fresh cementitious materials to a variety of substrates for interior and exterior applications and provide an anti-corrosion coating for reinforcing steel.
 - 1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. BASF Construction Chemicals; MasterEmaco P 124.
 - b. Euclid Chemical Company (The); DURAL LPL MV.
 - c. Sika Corporation; Sika Armatec 110 EpoCem.
- F. Non-Shrink Grout: ASTM C 1107, factory-packaged, shrinkage-resistant, nonmetallic aggregate grout, noncorrosive and nonstaining, mixed with water to consistency suitable for application and a 30-minute working time.
- G. Chemical Anchor Adhesives: Heavy duty, two component injectable adhesive designed to be dispensed using double chamber gun with mixing nozzle. Adhesives in capsule form will not be accepted.
 - 1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. DeWalt.; AC200+
 - b. Hilti, Inc.; Hit-HY 200A; Hit-HY 200R; Hit-Ice
 - c. ITW Redhead; A7+.

2.11 RECONSTRUCTION AND CORRECTIVE MATERIALS

- A. Corrective Mortar (Industry name is Repair Mortar): Site-mixed Portland-cement mix for vertical and overhead surfaces. Mix dry-pack corrective mortar, consisting of one part shrinkage-compensating, Portland cement to two and one-half parts fine aggregate passing a No. 16 sieve by damp, loose volume, using only enough water for handling and placing.
- B. Thin Coat Patching Mortar: Polymer modified, Portland cement, suitable for interior and exterior applications. Featheredge up to 3/16 inch. For thicker applications manufacturer's recommendations to extend mix with an aggregate may apply.
 - 1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ChemMasters, Inc.; Thin Patch
 - b. Euclid Chemical Company (The); Duraltop Flowable Mortar.
 - c. Sika Corporation; SikaFloor QuartzTop 115.
- C. Corrective Overlayment (Industry name is Repair Overlayment): Cement-based, polymer-modified, self-leveling product that can be applied in thicknesses from 1/4 inch and that can be filled in over a scarified surface to match adjacent floor elevations. For thicker applications manufacturer's recommendations to extend mix with an aggregate may apply.

1. Cement Binder: ASTM C 150, portland cement or hydraulic or blended hydraulic cement as defined in ASTM C 219.
2. Primer: Product of topping manufacturer recommended for substrate, conditions, and application.
3. Aggregate: Well-graded, washed gravel, 1/8 to 1/4 inch or coarse sand as recommended by topping manufacturer.
4. Compressive Strength: Not less than 5000 psi at 28 days when tested according to ASTM C 109/C 109M.

2.12 CONCRETE MIXTURES, GENERAL

- A. Prepare design mixtures for each type and strength of concrete, proportioned on the basis of laboratory trial mixture or field test data, or both, according to ACI 301.
 1. Use a qualified independent testing agency for preparing and reporting proposed mixture designs based on laboratory trial mixtures.
- B. Cementitious Materials: Limit percentage, by weight, of cementitious materials other than Portland cement in concrete as follows:
 1. Fly Ash: 25 percent, but if used, a minimum of 15 percent.
 - a. In exterior slabs, limit fly ash to a maximum 25 percent by weight of the total cementitious materials.
 2. Combined Fly Ash and Pozzolan: 25 percent.
 - a. In exterior slabs, limit combined fly ash and pozzolan to a maximum 35 percent by weight of the total cementitious materials.
 3. Ground Granulated Blast-Furnace Slag: 50 percent.
 - a. In exterior slabs, limit slag to a maximum 50 percent by weight of the total cementitious materials.
 4. Combined Fly Ash or Pozzolan and Ground Granulated Blast-Furnace Slag: 50 percent portland cement minimum, with fly ash or pozzolan not exceeding 25 percent.
 - a. In exterior slabs, limit the combined fly ash or pozzolans and slag to a maximum 50 percent by weight of the total cementitious materials.
- C. Limit water-soluble, chloride-ion content in hardened concrete to 0.15 percent by weight of cement.
- D. Admixtures: Use admixtures according to manufacturer's written instructions.
 1. Use water-reducing, high-range water-reducing or plasticizing admixture in all concrete. Design mix for optimum placement and workability.
 2. Use water-reducing and retarding admixture when required by high temperatures, low humidity, or other adverse placement conditions.

3. Use a mid-range, water-reducing admixture in pumped concrete, all concrete slabs (including concrete walks), concrete required to be watertight, and concrete with a water-cementitious materials ratio below 0.50.

2.13 CONCRETE MIXTURES FOR BUILDING ELEMENTS

A. Footings, Piers, Foundation Walls, or Grade Beams: Proportion normal-weight concrete mixture as follows:

1. Minimum Compressive Strength: 4000 psi at 28 days.
2. Maximum Water-Cementitious Materials Ratio: 0.50.
3. Slump Limit: 4 inches, plus or minus 1 inch; or 8 inches for concrete with verified slump of 2 to 4 inches before adding high-range water-reducing admixture or plasticizing admixture, plus or minus 1 inch.
4. Air Content: 6 percent, plus or minus 1.5 percent at point of delivery for 1-inch nominal maximum aggregate size.

B. Interior Slabs-on-Grade: Proportion normal-weight concrete mixture as follows:

1. Minimum Compressive Strength: 4000 psi at 28 days.
2. Maximum Water-Cementitious Materials Ratio: 0.50.
3. Minimum Cementitious Materials Content: 470 lb/cu. yd..
4. Slump Limit: 4 inches, plus or minus 1 inch.
5. Air Content: Do not allow air content of trowel-finished floors to exceed 3 percent.
6. Synthetic Macro-Fiber: Uniformly disperse in concrete mixture, at concrete batch facility, at manufacturer's recommended rate, but not less than 3.0 lb/cu. yd..

C. Interior Suspended Slabs: Proportion normal-weight concrete mixture as follows:

1. Minimum Compressive Strength: 4000 psi at 28 days.
2. Minimum Cementitious Materials Content: 520 lb/cu. yd..
3. Slump Limit: 4 inches, plus or minus 1 inch.
4. Air Content: Do not allow air content of trowel-finished floors to exceed 3 percent.
5. Maximum Water-Cementitious Materials Ratio: 0.50.
6. Synthetic Micro-Fiber: Uniformly disperse in concrete mixture, at concrete batch facility, at manufacturer's recommended rate, but not less than 1.5 lb/cu. yd..

2.14 CONCRETE MIXTURES FOR EXTERIOR CONCRETE

A. Exterior Slabs (concrete pads, walks, ramps, stairs, and curbs): Proportion normal-weight concrete mixture as follows:

1. Minimum Compressive Strength: 5000 psi at 28 days.
2. Maximum Water-Cementitious Materials Ratio: 0.40.

3. Slump Limit: 4 inches, plus or minus 1 inch; or 8 inches for concrete with verified slump of 2 to 4 inches before adding high-range water-reducing admixture or plasticizing admixture, plus or minus 1 inch.
4. Air Content: 5.5 percent, plus or minus 1.5 percent at point of delivery for 1-1/2-inch nominal maximum aggregate size.
5. Synthetic Macro-Fiber: Uniformly disperse in concrete mixture, at concrete batch facility, at manufacturer's recommended rate, but not less than 3.0 lb/cu. yd.. At sidewalks.

2.15 FABRICATING REINFORCEMENT

- A. Fabricate steel reinforcement according to CRSI's "Manual of Standard Practice."

2.16 CONCRETE MIXING

- A. Ready-Mixed Concrete: Measure, batch, mix, and deliver concrete according to ASTM C 94/C 94M and ASTM C 1116/C 1116M, and furnish batch ticket information.
 1. When air temperature is between 85 and 90 deg F, reduce mixing and delivery time from 1-1/2 hours to 75 minutes; when air temperature is above 90 deg F, reduce mixing and delivery time to 60 minutes.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Verify that subgrade conditions are satisfactory prior to forming or pouring concrete. Owner's Testing Agency shall inspect slab and footing subgrade prior to placing concrete.
- B. Verify that reinforcing, including masonry dowels, is properly in place prior to pouring concrete.
- C. Verify that formwork is complete and properly secured prior to placing concrete.
- D. Proceed with installation only after unsatisfactory conditions have been corrected.
- E. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 FORMWORK

- A. Design, erect, shore, brace, and maintain formwork, according to ACI 301, to support vertical, lateral, static, and dynamic loads, and construction loads that might be applied, until structure can support such loads.
- B. Construct formwork so concrete members and structures are of size, shape, alignment, elevation, and position indicated, within tolerance limits of ACI 117.

- C. Limit concrete surface irregularities, designated by ACI 347 as abrupt or gradual, as follows:
1. Class C, 1/2 inch for rough-formed finished surfaces without additional finish, permanently exposed.
 2. Class D, 1 inch for concealed, rough-formed finished surfaces.
- D. Construct forms tight enough to prevent loss of concrete mortar.
1. Minimize joints.
 2. Exposed Concrete: Symmetrically align joints in forms.
- E. Construct forms for easy removal without hammering or prying against concrete surfaces. Provide crush or wrecking plates where stripping may damage cast concrete surfaces. Provide top forms for inclined surfaces steeper than 1.5 horizontal to 1 vertical.
1. Install keyways, reglets, recesses, and the like, for easy removal.
 2. Do not use rust-stained steel form-facing material.
- F. Set edge forms, bulkheads, and intermediate screed strips for slabs to achieve required elevations and slopes in finished concrete surfaces. Provide and secure units to support screed strips; use strike-off templates or compacting-type screeds.
- G. Provide temporary openings for cleanouts and inspection ports where interior area of formwork is inaccessible. Close openings with panels tightly fitted to forms and securely braced to prevent loss of concrete mortar. Locate temporary openings in forms at inconspicuous locations.
- H. Chamfer exterior corners and edges of permanently exposed concrete.
- I. At construction joints, overlap forms onto previously placed concrete not less than 12 inches.
- J. Form openings, chases, offsets, sinkages, keyways, reglets, blocking, screeds, and bulkheads required in the Work. Determine sizes and locations from trades providing such items. Obtain written approval of Architect prior to forming openings not indicated on Drawings.
- K. Provide temporary ports or openings in formwork where required to facilitate cleaning and inspection. Locate ports and openings in bottom of vertical forms, in inconspicuous location, to allow flushing water to drain. Close temporary ports and openings with tight-fitting panels, flush with inside face of form, and neatly fitted, so joints will not be apparent in exposed concrete surfaces.
- L. Clean forms and adjacent surfaces to receive concrete. Remove chips, wood, sawdust, dirt, and other debris just before placing concrete.
- M. Retighten forms and bracing before placing concrete, as required, to prevent mortar leaks and maintain proper alignment.
- N. Coat contact surfaces of forms with form-release agent, according to manufacturer's written instructions, before placing reinforcement.

3.3 EMBEDDED ITEMS

- A. Place and secure anchorage devices and other embedded items required for adjoining work that is attached to or supported by cast-in-place concrete. Use setting drawings, templates, diagrams, instructions, and directions furnished with items to be embedded.
 - 1. Install anchor rods, accurately located, to elevations required and complying with tolerances in Section 7.5 of AISC's "Code of Standard Practice for Steel Buildings and Bridges."
 - 2. Install leveling plates, bearing plates, railing sleeves, brackets, and all other embedded steel items shown on Drawings.
 - 3. Install reinforcing steel required for attachment of masonry to concrete structures.
 - 4. Install sleeves for pipe, conduit and other items passing through cast-in-place structural concrete. Coordinate with other trades for sleeve details, invert elevations, locations, and sizes.

3.4 REMOVING AND REUSING FORMS

- A. General: Formwork for sides of walls, and similar parts of the Work that does not support weight of concrete may be removed after cumulatively curing at not less than 50 deg F for 24 hours after placing concrete. Concrete has to be hard enough to not be damaged by form-removal operations and curing and protection operations need to be maintained.
 - 1. Leave formwork for slabs, and other structural elements that supports weight of concrete in place until concrete has achieved at least 75 percent of its 28-day design compressive strength.
 - 2. Remove forms only if shores have been arranged to permit removal of forms without loosening or disturbing shores.
- B. Clean and provide corrective work to surfaces of forms to be reused in the Work. Split, frayed, delaminated, or otherwise damaged form-facing material will not be acceptable for exposed surfaces. Apply new form-release agent.
- C. When forms are reused, clean surfaces, remove fins and laitance, and tighten to close joints. Align and secure joints to avoid offsets. Do not use patched forms for exposed concrete surfaces unless approved by Architect.

3.5 VAPOR BARRIERS

- A. Place, protect, and correct vapor barrier according to ASTM E 1643 and manufacturer's written instructions.
 - 1. Lap joints 6 inches and seal with manufacturer's recommended tape.
 - 2. Terminate vapor barrier at the top of floor slabs, grade beams, and walls, sealing entire perimeter to floor slabs, grade beams, or foundation walls.

3. Seal penetrations in accordance with vapor barrier and retarder manufacturer's instructions.
4. Protect vapor barrier and retarder during placement of reinforcement and concrete.

3.6 STEEL REINFORCEMENT

- A. General: Comply with CRSI's "Manual of Standard Practice" for placing reinforcement.
 1. Do not cut or puncture vapor barrier. Correct damage and reseal vapor barrier before placing concrete.
- B. Clean reinforcement of loose rust and mill scale, earth, ice, and other foreign materials that would reduce bond to concrete.
- C. Accurately position, support, and secure reinforcement against displacement. Locate and support reinforcement with bar supports to maintain minimum concrete cover. Do not tack weld crossing reinforcing bars.
- D. Set wire ties with ends directed into concrete, not toward exposed concrete surfaces.
- E. Install welded wire reinforcement in longest practicable lengths on bar supports spaced to minimize sagging, but not less than 24 inches on center.
 1. Lap edges and ends of adjoining sheets at least one mesh spacing plus 2 inches.
 2. Offset laps of adjoining sheet widths to prevent continuous laps in either direction.
 3. Lace overlaps with wire.
- F. Epoxy-Coated Reinforcement: Correct cut and damaged epoxy coatings with epoxy corrective coating according to ASTM D 3963/D 3963M. Use epoxy-coated steel wire ties to fasten epoxy-coated steel reinforcement.
- G. Field bending or straightening of bars partially embedded in concrete is permitted only where shown on the Drawings.
- H. All openings in concrete walls with a dimension of one foot or greater are to have two #5 bars on all sides of opening, unless noted otherwise.

3.7 JOINTS

- A. General: Construct joints true to line with faces perpendicular to surface plane of concrete.
- B. Construction Joints: Coordinate with floor slab pattern and concrete placement sequence. Install so strength and appearance of concrete are not impaired, at locations indicated or as approved by Architect.
 1. Place joints perpendicular to main reinforcement. Continue reinforcement across construction joints unless otherwise indicated. Do not continue reinforcement through sides of strip placements of floors and slabs.
 2. Form keyed joints as indicated. Embed keys at least 1-1/2 inches into concrete.

3. Locate horizontal joints in walls at underside of floors, beams, and girders and at the top of footings or floor slabs.
 4. Locate vertical joints beside piers integral with walls, near corners, and in concealed locations where possible.
 5. Roughen surface of hardened concrete, wet surface, and immediately pour fresh concrete against wet surface.
- C. Control joints in Slabs-on-Grade: Form weakened-plane control joints, sectioning concrete into areas as indicated. Construct control joints for a depth equal to at least one-fourth of concrete thickness as follows:
1. Sawed Joints: Form control joints with power saws equipped with shatterproof abrasive or diamond-rimmed blades. Cut 1/8-inch-wide joints into concrete when cutting action will not tear, abrade, or otherwise damage surface and before concrete develops random contraction cracks. Space joints as shown on Drawings or, if not indicated, at 12 feet average spacing and not exceeding 15 feet. Locate joints at column centerlines where possible.
- D. Isolation Joints in Slabs-on-Grade: Install joint-filler strips at slab junctions with vertical surfaces, such as column pedestals, foundation walls, grade beams, and other locations, as indicated.
1. Extend joint-filler strips full width and depth of joint, terminating flush with finished concrete surface unless otherwise indicated.
 2. Terminate full-width joint-filler strips not less than 1/2 inch or more than 1 inch below finished concrete surface where joint sealants, specified in Division 07 Section "Joint Sealants," are indicated.
 3. Install joint-filler strips in lengths as long as practicable. Where more than one length is required, lace or clip sections together.
- E. Doweled Joints: Install dowel bars and support assemblies at joints where indicated. Lubricate or asphalt coat one-half of dowel length to prevent concrete bonding to one side of joint.

3.8 CONCRETE PLACEMENT

- A. Before placing concrete, verify that installation of formwork, reinforcement, and embedded items is complete and that required inspections have been performed.
- B. Before test sampling and placing concrete, water may be added at Project site, subject to limitations of ACI 301, (4.3.2.1 Slump Adjustment.)
1. With each concrete mixture submittal, indicate amounts of mixing water to be withheld for later addition at Project site.
 2. Water added must not increase the water-cement ratio past the approved mix design ratio.

3. Add additional water reducer or plasticizer to mix instead of adding water to achieve flowable, workable concrete. Do not add water to concrete after adding these admixtures to mixture.
 4. Do not add water after truck is more than half empty.
- C. Deposit concrete continuously in one layer or in horizontal layers of such thickness that no new concrete will be placed on concrete that has hardened enough to cause seams or planes of weakness. If a section cannot be placed continuously, provide construction joints as indicated. Deposit concrete to avoid segregation.
1. Deposit concrete in horizontal layers of depth to not exceed formwork design pressures and in a manner to avoid inclined construction joints.
 2. Consolidate placed concrete with mechanical vibrating equipment according to ACI 301.
 - a. Do not use vibrators to transport concrete inside forms.
 - b. Insert and withdraw vibrators vertically at uniformly spaced locations to rapidly penetrate placed layer and at least 6 inches into preceding layer.
 - c. Do not insert vibrators into lower layers of concrete that have begun to lose plasticity.
 - d. At each insertion, limit duration of vibration to time necessary to consolidate concrete and complete embedment of reinforcement and other embedded items without causing mixture constituents to segregate.
 3. Concrete placed over steel deck is to have a minimum thickness as shown on the Drawings. Thickness of the slab will be greater at the center of the beam or deck spans as they deflect during casting of the concrete. Estimated deflections of the composite beams due to the wet weight of the concrete are indicated on the plans. Compensate for beam deflection by adding additional concrete as required near the center of the beam span.
 4. At Composite Steel Joists – Concrete placed over steel deck is to have a constant thickness across the entire length of the composite steel joist, as noted on Drawings. Joists are to be cambered for non-composite dead load. During concrete placement do not start at center of span, but start at one end of joist then distribute concrete evenly over the joist. Once concrete has cured, joist should deflect so that there is no camber remaining.
- D. Deposit and consolidate concrete for floors and slabs in a continuous operation, within limits of construction joints, until placement of a panel or section is complete.
1. Consolidate concrete during placement operations so concrete is thoroughly worked around reinforcement and other embedded items and into corners.
 2. Maintain reinforcement in position on chairs during concrete placement.
 3. Screed slab surfaces with a straightedge and strike off to correct elevations.
 4. Level concrete, cut high areas, and fill low areas.
 5. Slope surfaces uniformly to drains where required.

6. Begin initial floating using bull floats or darbies to form a uniform and open-textured surface plane, before excess bleedwater appears on the surface.
 7. Do not further disturb slab surfaces before starting finishing operations.
- E. For pumpable mixes: refer to ACI 304.2R “Guide to Placing Concrete by Pumping Methods”.
- F. Cold-Weather Placement: Comply with ACI 306.1 and as follows. Protect concrete work from physical damage or reduced strength that could be caused by frost, freezing actions, or low temperatures.
1. When average high and low temperature is expected to fall below 40 deg F for three successive days, maintain delivered concrete mixture temperature within the temperature range required by ACI 301.
 2. Do not use frozen materials or materials containing ice or snow. Do not place concrete on frozen subgrade or on subgrade containing frozen materials.
 3. Do not use calcium chloride, salt, or other materials containing antifreeze agents or chemical accelerators unless otherwise specified and approved in mixture designs.
- G. Hot-Weather Placement: Comply with ACI 301 and ACI 305R and as follows:
1. Maintain concrete temperature below 90 deg F at time of placement. Chilled mixing water or chopped ice may be used to control temperature, provided water equivalent of ice is calculated to total amount of mixing water. Using liquid nitrogen to cool concrete is Contractor's option.
 2. Fog-spray forms, steel reinforcement, and subgrade just before placing concrete. Keep subgrade uniformly moist without standing water, soft spots, or dry areas.

3.9 FINISHING FORMED SURFACES

- A. Rough-Formed Finish: As-cast concrete texture imparted by form-facing material with tie holes and defects corrected and patched. Remove fins and other projections that exceed specified limits on formed-surface irregularities.
1. Apply to concrete surfaces not exposed to public view.
- B. Related Unformed Surfaces: At tops of walls, horizontal offsets, and similar unformed surfaces adjacent to formed surfaces, strike off smooth and finish with a texture matching adjacent formed surfaces. Continue final surface treatment of formed surfaces uniformly across adjacent unformed surfaces unless otherwise indicated.

3.10 FINISHING FLOORS AND SLABS

- A. General: Comply with ACI 302.1R recommendations for screeding, restraightening, and finishing operations for concrete surfaces. Do not wet concrete surfaces.
1. Contractor to coordinate concrete finish with floor finish plan and floor finish manufacturer requirements, and provide the appropriate surface.

- B. Float Finish: Consolidate surface with power-driven floats or by hand floating if area is small or inaccessible to power driven floats. Restraighten, cut down high spots, and fill low spots. Repeat float passes and restraightening until surface is left with a uniform, smooth, granular texture and complies with ACI 117 tolerances for conventional concrete
- C. Trowel Finish: After applying float finish, apply first troweling and consolidate concrete by hand or power-driven trowel. Continue troweling passes and restraighten until surface is free of trowel marks and uniform in texture and appearance. Grind smooth any surface defects that would telegraph through applied coatings or floor coverings. Do not add water to concrete surface.
1. For fiber reinforced concrete, to provide consolidation and bury surface fibers, open slab surfaces to be struck off with a vibrating screed or laser screed. Where a laser screed is used, adjust the magnitude of vibration and control the speed of the refracting leveling head to ensure adequate consolidation of the concrete and embedment of the fibers. Magnesium floats in the form of a bullfloat, channel radius float, or highway straightedge to be used to establish a surface and close tears or open areas. Do not use wood floats.
 2. Flatness and Levelness: Finish surfaces to the following tolerances, according to ASTM E 1155, for a randomly trafficked floor surface:
 - a. Conventional: Specified overall values of flatness, F(F) 20; and of levelness, F(L) 15; with minimum local values of flatness, F(F) 15; and of levelness, F(L) 10; for all other floor finishes not noted below.
 - b. Moderately Flat: Specified overall values of flatness, F(F) 25; and of levelness, F(L) 20; with minimum local values of flatness, F(F) 17; and of levelness, F(L) 15; for slabs to receive carpeting, and luxury vinyl tile.
 - c. Flat for Slabs on Grade: Specified overall values of flatness, F(F) 35; and of levelness, F(L) 25; with minimum local values of flatness, F(F) 24; and of levelness, F(L) 17; for slabs to receive thinset ceramic tile.
 - d. Very Flat for Slabs on Grade: Specified overall values of flatness, F(F) 45; and of levelness, F(L) 35; with minimum local values of flatness, F(F) 30; and of levelness, F(L) 24; for slabs to receive epoxy terrazzo.
 - e. Flat for Suspended Slabs: Specified overall values of flatness, F(F) 30; and of levelness, F(L) 20; with minimum local values of flatness, F(F) 24; and of levelness, F(L) 15; for slabs to receive epoxy terrazzo.
 3. At Suspended Slabs over Composite Steel Joists, finish and measure surface so gap at any point between concrete surface and an unlevelled, freestanding, 10-ft.-long straightedge resting on two high spots and placed anywhere on the surface does not exceed 1/4 inch.
 4. For all floor finish classifications, also measure floor finish tolerances after slab has cured and dried out, within 2 weeks before installation of floor finish materials to establish compliance with flooring manufacturer's tolerance requirements and to determine if corrective leveling is required.

- D. Trowel and Fine-Broom Finish: After applying a first trowel finish and while concrete is still plastic, slightly scarify surface with a fine broom perpendicular to main traffic route.
 - 1. Comply with flatness and levelness tolerances for trowel-finished floor surfaces.
- E. Broom Finish: Apply a broom finish to exterior concrete walks, slabs, platforms, steps, ramps, and elsewhere as indicated.
 - 1. Immediately after float finishing, slightly roughen trafficked surface by brooming with fiber-bristle broom perpendicular to main traffic route. Coordinate required final finish with Architect before application. For synthetic fiber reinforced concrete, pull broom in a single direction and do not excessively overlap previously textured concrete.
- F. Exposed Architectural Concrete Surfaces: Use the same finish procedure for all pours. All pours to be done in similar weather conditions. Use breathable sealer after set to prevent efflorescence.
- G. Exterior Concrete Walks and Slabs: Apply penetrating, silane sealer per manufacturer's instructions.

3.11 MISCELLANEOUS CONCRETE ITEMS

- A. Filling In: Fill in holes and openings left in concrete structures after work of other trades is in place unless otherwise indicated. Mix, place, and cure concrete, as specified, to blend with in-place construction. Provide other miscellaneous concrete filling indicated or required to complete the Work.
- B. Curbs: Provide monolithic finish to interior curbs by stripping forms while concrete is still green and by steel-troweling surfaces to a hard, dense finish with corners, intersections, and terminations slightly rounded.
- C. Equipment Bases and Foundations:
 - 1. Coordinate sizes and locations of concrete bases with actual equipment provided.
 - 2. Construct concrete bases 4 inches high unless otherwise indicated; and extend base not less than 6 inches in each direction beyond the maximum dimensions of supported equipment unless otherwise indicated or unless required for seismic anchor support.
 - 3. Minimum Compressive Strength: 4000 psi at 28 days.
 - 4. Install dowel rods to connect concrete base to concrete floor. Unless otherwise indicated, install dowel rods on 18-inch centers around the full perimeter of concrete base.
 - 5. For supported equipment, install epoxy-coated anchor bolts that extend through concrete base, and anchor into structural concrete substrate.
 - 6. Prior to pouring concrete, place and secure anchorage devices. Use setting drawings, templates, diagrams, instructions, and directions furnished with items to be embedded.

7. Cast anchor-bolt insert into bases. Install anchor bolts to elevations required for proper attachment to supported equipment.
- D. Steel Pan Stairs: Provide concrete fill for steel pan stair treads, landings, and associated items. Cast-in inserts and accessories as shown on Drawings. Screed, tamp, and trowel finish concrete surfaces.

3.12 CONCRETE PROTECTING AND CURING

- A. General: Protect freshly placed concrete from premature drying and excessive cold or hot temperatures. Comply with ACI 306.1 for cold-weather protection and ACI 301 and 305.1 for hot-weather protection during curing.
- B. Slabs: Protect slabs within building from precipitation accumulation. Immediately remove water, snow or ice from surface of slabs within building regardless if source is from precipitation, construction activities, etc.
- C. Evaporation Retarder: Apply evaporation retarder to unformed concrete surfaces if hot, dry, or windy conditions cause moisture loss approaching 0.2 lb/sq. ft. x h before and during finishing operations. Apply according to manufacturer's written instructions after placing, screeding, and bull floating or darbying concrete, but before float finishing.
- D. Formed Surfaces: Cure formed concrete surfaces. If forms remain during curing period, moist cure after loosening forms. If removing forms before end of curing period, continue curing for the remainder of the curing period.
- E. Unformed Surfaces: Begin curing immediately after finishing concrete. Cure unformed surfaces, including floors and slabs, concrete floor toppings, and other surfaces. Protect all slabs from precipitation accumulation.
- F. Cure concrete according to ACI 308.1, by one of the following methods:
 1. Moisture-Retaining-Cover Curing: Cover concrete surfaces with moisture-retaining cover for curing concrete, placed in widest practicable width, with sides and ends lapped at least 12 inches, and sealed by waterproof tape or adhesive. Cure for not less than seven days. Immediately correct any holes or tears during curing period using cover material and waterproof tape.
 - a. Use moisture-retaining covers to cure all interior slabs on grade.
 - b. Use moisture-retaining covers to cure all items to receive penetrating silane sealer.
 2. Curing Compound: Apply uniformly in continuous operation by power spray or roller according to manufacturer's written instructions. Recoat areas subjected to heavy rainfall within three hours after initial application. Maintain continuity of coating and correct damage during curing period.
 - a. Use curing compound for moisture-sensitive flooring areas.

- 1) Ensure compatibility of curing compounds with finish flooring and adhesives, prior to use, otherwise provide curing method such as continuous sprinkling, or remove curing compound through blast-tracking or similar method prior to installation of flooring.

3.13 SEALED CONCRETE

- A. Sealer: Prepare, apply, and finish sealer according to manufacturer's written instructions.
 1. Remove curing compounds, sealers, oil, dirt, laitance, and other contaminants and complete surface corrective work.
 2. Do not apply to concrete that is less than 28 days old.
 3. Apply liquid until surface is saturated, scrubbing into surface until a gel forms; rewet; and repeat brooming or scrubbing. Rinse with water; remove excess material until surface is dry. Apply a second coat in a similar manner if surface is rough or porous.

3.14 JOINT SEALING

- A. Prepare, clean, and install slab control joint sealer according to manufacturer's written instructions.
 1. Defer joint sealing until concrete has aged at least one month(s). Do not seal joints until construction traffic has permanently ceased.
- B. Remove dirt, debris, saw cuttings, curing compounds, and sealers from joints; leave contact faces of joint clean and dry.
- C. Install semirigid joint sealer full depth in saw-cut joints and at least 2 inches deep in formed joints. Overfill joint and trim joint sealer flush with top of joint after hardening.

3.15 CONCRETE SURFACE CORRECTIVE WORK

- A. Defective Concrete: Correct and patch defective areas when approved by Architect. Remove and replace concrete that cannot be corrected and patched to Architect's approval.
- B. Correcting Formed Surfaces: Surface defects include color and texture irregularities, cracks, spalls, air bubbles, honeycombs, rock pockets, fins, exposed or otherwise visible fiber reinforcement, and other projections on the surface, and stains and other discolorations that cannot be removed by cleaning.
 1. Immediately after form removal, cut out honeycombs, rock pockets, and voids more than 1/2 inch in any dimension to solid concrete. Limit cut depth to 3/4 inch. Make edges of cuts perpendicular to concrete surface. Remove exposed or otherwise visible fiber reinforcement from the concrete surface. Clean, dampen with water, and brush-coat holes and voids with bonding agent. Fill and compact with corrective mortar before bonding agent has dried. Fill form-tie voids with corrective mortar or cone plugs secured in place with bonding agent.

2. Correct defects on surfaces exposed to view by blending white Portland cement and standard Portland cement so that, when dry, corrective mortar will match surrounding color. Patch a test area at inconspicuous locations to verify mixture and color match before proceeding with patching. Compact mortar in place and strike off slightly higher than surrounding surface.
 3. Correct defects on concealed formed surfaces that affect concrete's durability and structural performance as determined by Architect.
- C. Correcting Unformed Surfaces: Test unformed surfaces, such as floors and slabs, for finish and verify surface tolerances specified for each surface. Correct low and high areas. Test surfaces sloped to drain for trueness of slope and smoothness; use a sloped template.
1. Correct finished surfaces containing defects. Surface defects include spalls, popouts, honeycombs, rock pockets, crazing and cracks in excess of 0.01 inch wide or that penetrate to reinforcement or completely through unreinforced sections regardless of width, and other objectionable conditions such as exposed or otherwise visible fiber reinforcement.
 2. After concrete has cured at least 14 days, correct high areas by grinding.
 3. Remove exposed or otherwise visible fiber reinforcement from the concrete surface. If concrete surface is damaged by the process of fiber removal, correct surface as described by the remainder of this section.
 4. Correct localized low areas during or immediately after completing surface finishing operations by cutting out low areas and replacing with thin coat patching mortar. Finish corrected areas to blend into adjacent concrete.
 5. Correct other low areas scheduled to remain exposed with a corrective overlayment. Cut out low areas to ensure a minimum corrective overlayment depth of 1/4 inch to match adjacent floor elevations. Prepare, mix, and apply corrective overlayment and primer according to manufacturer's written instructions to produce a smooth, uniform, plane, and level surface.
 6. Correct defective areas, except random cracks and single holes 1 inch or less in diameter, by cutting out and replacing with fresh concrete. Remove defective areas with clean, square cuts and expose steel reinforcement with at least a 3/4-inch clearance all around. Dampen concrete surfaces in contact with patching concrete and apply bonding agent. Mix patching concrete of same materials and mixture as original concrete except without coarse aggregate. Place, compact, and finish to blend with adjacent finished concrete. Cure in same manner as adjacent concrete.
 7. Correct random cracks and single holes 1 inch or less in diameter with corrective overlayment. Groove top of cracks and cut out holes to sound concrete and clean off dust, dirt, and loose particles. Dampen cleaned concrete. Place corrective overlayment before surface has dried. Finish to match adjacent concrete. Keep patched area continuously moist for at least 72 hours.

3.16 FIELD QUALITY CONTROL

- A. Testing and Special Inspections: Owner will engage a special inspector and qualified testing and inspecting agency to perform field tests and inspections and prepare test reports, except where noted.
- B. Contractor to supply all batch tickets to Owner's testing agency. Batch tickets to note quantity, mix identification, admixtures, design strength, aggregate size, design air content, design slump at time of batching, w/c ratio and amount of water allowed to be added at Project site.
- C. Inspections:
 - 1. Steel reinforcement placement.
 - a. Installation of masonry wall reinforcement dowels prior to pouring of elevated slabs.
 - 2. Chemical Anchors: Test 5% of all chemical anchors in tension, randomly selected but in varied locations. Testing to be in accordance with ASTM E 488 to the approved manufacturer's allowable loads. Concrete must cure a minimum of 3 days prior to testing. Do not test anchors until after the anchor manufacturer's recommended curing time. If an anchor fails during this test additional anchors may be requested to be tested as directed by the Architect.
 - 3. Headed bolts and studs.
 - 4. Verification of use of required design mixture.
 - 5. Concrete placement, including conveying and depositing.
 - 6. Curing procedures and maintenance of curing temperature.
 - 7. Verification of concrete strength before removal of shores and forms from beams and slabs.
 - 8. Vapor barrier inspection after installation. To be performed by the vapor barrier manufacturer. Verify correct installation according to specifications and details. To be performed no more than 48 hours prior to slab pour.
- D. Concrete Tests: Testing of composite samples of fresh concrete obtained according to ASTM C 172 shall be performed according to the following requirements:
 - 1. Testing Frequency: Obtain at least one composite sample for each 100 cu. yd. or fraction thereof of each concrete mixture placed each day, nor less than once per each 5000 square foot of surface area of walls or slabs.
 - a. When frequency of testing will provide fewer than five compressive-strength tests for each concrete mixture, testing shall be conducted from at least five randomly selected batches or from each batch if fewer than five are used.
 - 2. Include corresponding concrete mix batch tickets with each test report.

3. Indicate amount of water added to batch at Project site.
4. Slump: ASTM C 143/C 143M; one test at point of placement for each composite sample, but not less than one test for each day's pour of each concrete mixture. Perform additional tests when concrete consistency appears to change. Measure after slump adjustment.
 - a. Pumped concrete is to be tested at point of placement, with an additional slump test taken at point of delivery.
5. Air Content: ASTM C 231, pressure method, for normal-weight concrete; one test for each composite sample, but not less than one test for each day's pour of each concrete mixture.
6. Concrete Temperature: ASTM C 1064/C 1064M; one test hourly when air temperature is 40 deg F and below and when 80 deg F and above, and one test for each composite sample.
7. Density (Unit Weight): ASTM C 138/C 138M, fresh unit weight of concrete. Two tests per truck load; one at beginning of pour and near end of pour.
8. Compression Test Specimens: ASTM C 31/C 31M.
 - a. Cast and standard cure six (6) cylinder specimens for each composite sample.
 - b. Cast and field cure two (2) standard cylinder specimens for each composite sample.
 - c. Autoclave curing and oven-drying of test specimens containing synthetic fiber is not permitted.
9. Compressive-Strength Tests: ASTM C 39/C 39M;
 - a. Test two standard cured specimens at 7 days, three specimens at 28 days, and retain one specimen for testing at 56 days as deemed necessary by Architect.
 - b. Test two field-cured specimens at 28 days.
 - c. A compressive-strength test shall be the average compressive strength from a set of two specimens obtained from same composite sample and tested at age indicated.
 - d. If one specimen in the test shows evidence of improper sampling, molding or testing, discard the specimen and consider the strength of the remaining cylinders to be the test result. If more than one specimen in a test shows any defects, discard the entire test.
10. Test for workability and air content of each synthetic fiber reinforced concrete mixture composite sample taken according to ASTM C172 (except that wet-sieving is not permitted) and whenever consistency of concrete appears to vary, according to ASTM C 1116.
11. When strength of field-cured cylinders is less than 85 percent of companion laboratory-cured cylinders, Contractor shall evaluate operations and provide corrective procedures for protecting and curing in-place concrete.

12. Strength of each concrete mixture will be satisfactory if every average of any three consecutive compressive-strength tests equals or exceeds specified compressive strength and no compressive-strength test value falls below specified compressive strength by more than 500 psi.
13. Test results shall be reported in writing to Architect, concrete manufacturer, and Contractor within 48 hours of testing. Reports of compressive-strength tests shall contain Project identification name and number, date of concrete placement, name of concrete testing and inspecting agency, location of concrete batch in Work, design compressive strength at 28 days, concrete mixture proportions and materials, compressive breaking strength, and type of break for both 7- and 28-day tests.
14. Nondestructive Testing: Impact-echo, ultrasonic methods, or other nondestructive methods may be permitted by Architect but will not be used as sole basis for approval or rejection of concrete.
15. Additional Tests: Testing and inspecting agency shall make additional tests of concrete when test results indicate that slump, air entrainment, compressive strengths, or other requirements have not been met, as directed by Architect. Testing and inspecting agency may conduct tests to determine adequacy of concrete by cored cylinders complying with ASTM C 42/C 42M or by other methods as directed by Architect.
16. Additional testing and inspecting, at Contractor's expense, will be performed to determine compliance of replaced or additional work with specified requirements.
17. Correct deficiencies in the Work that test reports and inspections indicate do not comply with the Contract Documents.

3.17 PROTECTION

A. Protect concrete surfaces as follows:

1. Protect from petroleum stains.
2. Diaper hydraulic equipment used over concrete surfaces.
3. Prohibit vehicles from interior concrete slabs.
4. Prohibit use of pipe-cutting machinery over concrete surfaces.
5. Prohibit placement of steel items on concrete surfaces.
6. Prohibit use of acids or acidic detergents over concrete surfaces.

END OF SECTION 03 30 00

SECTION 03 48 10 - PRECAST CONCRETE LIGHTING POLE BASES**PART 1 - GENERAL****1.1 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Precast concrete bases for site lighting poles.

1.3 SUBMITTALS

- A. General: Submit all action submittals and informational submittals required by this Section concurrently.
- B. Action submittals
 - 1. Design Mixtures: For each precast concrete mixture. Include compressive strength and water-absorption tests. Include all ingredient certifications and product data concurrently.
 - 2. Shop Drawings: Include pole base locations, plans, elevations, dimensions, shapes and sections, openings, and reinforcement. Detail fabrication and installation of pole bases.
 - a. Indicate joints, reveals, and extent and location of each surface finish.
 - b. Detail loose and cast-in hardware, lifting and erection inserts, anchor bolts, and grounding rod.
 - c. Indicate locations, tolerances, and details of anchorage devices to be embedded in or attached to structure or other construction.
 - d. Include and locate openings, including for conduit.
 - e. Indicate location of each pole base by same identification mark placed on panel.
- C. Informational submittals
 - 1. Qualification Data: For fabricator.
 - 2. Material Certificates: For the following, from manufacturer:
 - a. Reinforcing materials.
 - b. Cementitious materials.
 - 3. Material Test Reports: For aggregates.
 - 4. Source quality-control reports.

1.4 QUALITY ASSURANCE

A. Fabricator Qualifications

1. Participates in PCI's Plant Certification program at time of bidding and is designated a PCI-certified plant as follows:
 - a. Group CA, Category C1A - Precast Concrete Products (no prestressed reinforcement).

B. Design Standards: Comply with ACI 318 and design recommendations in PCI MNL 120, "PCI Design Handbook - Precast and Prestressed Concrete," and in PCI MNL 117, "Manual for Quality Control for Plants and Production of Architectural Precast Concrete Products."

C. Quality-Control Standard: For manufacturing procedures and testing requirements, quality-control recommendations, and dimensional tolerances for types of units required, comply with PCI MNL 116, "Manual for Quality Control for Plants and Production of Structural Precast Concrete Products."

D. Preinstallation Conference: Conduct conference at Project site.

1.5 DELIVERY, STORAGE, AND HANDLING

A. Support units during shipment on nonstaining shock-absorbing material in same position as during storage.

B. Store units with adequate bracing and protect units to prevent contact with soil, to prevent staining, and to prevent cracking, distortion, warping or other physical damage.

1. Store units with dunnage across full width of each bearing point unless otherwise indicated.
2. Place adequate dunnage of even thickness between each unit.
3. Place stored units so identification marks are clearly visible, and units can be observed.

C. Handle and transport units in a position consistent with their shape and design in order to avoid excessive stresses that would cause cracking or damage.

D. Lift and support units only at designated points shown on Shop Drawings.

1.6 COORDINATION

A. Furnish loose connection hardware and anchorage items to be embedded in or attached to other construction before starting that Work. Provide locations, setting diagrams, templates, instructions, and directions, as required, for installation.

PART 2 - PRODUCTS

2.1 MOLD MATERIALS

- A. Molds: Rigid, dimensionally stable, non-absorptive material, warp and buckle free, that will provide continuous and true precast concrete surfaces within fabrication tolerances indicated; nonreactive with concrete and suitable for producing required finishes.
 - 1. Mold-Release Agent: Commercially produced liquid-release agent that will not bond with, stain or adversely affect precast concrete surfaces and will not impair subsequent surface or joint treatments of precast concrete.

2.2 REINFORCING MATERIALS

- A. Reinforcing Bars: ASTM A 615/A 615M, Grade 60, deformed.
- B. Supports: Suspend reinforcement from back of mold or use bolsters, chairs, spacers, and other devices for spacing, supporting, and fastening reinforcing bars and welded wire reinforcement in place according to PCI MNL 116.

2.3 CONCRETE MATERIALS

- A. Portland Cement: ASTM C 150, Type I or Type III, gray, unless otherwise indicated.
 - 1. For surfaces exposed to view in finished structure, mix gray with white cement, of same type, brand, and mill source.
- B. Supplementary Cementitious Materials:
 - 1. Ground Granulated Blast-Furnace Slag: ASTM C 989, Grade 100 or 120.
- C. Normal-Weight Aggregates: Except as modified by PCI MNL 116, ASTM C 33, with coarse aggregates complying with Class 5S. Stockpile fine and coarse aggregates for each type of exposed finish from a single source (pit or quarry) for Project.
- D. Water: Potable; free from deleterious material that may affect color stability, setting, or strength of concrete and complying with chemical limits of PCI MNL 116.
- E. Air-Entraining Admixture: ASTM C 260, certified by manufacturer to be compatible with other required admixtures.
- F. Chemical Admixtures: Certified by manufacturer to be compatible with other admixtures and to not contain calcium chloride, or more than 0.15 percent chloride ions or other salts by weight of admixture.
 - 1. Water-Reducing Admixtures: ASTM C 494/C 494M, Type A.
 - 2. Retarding Admixture: ASTM C 494/C 494M, Type B.
 - 3. Water-Reducing and Retarding Admixture: ASTM C 494/C 494M, Type D.
 - 4. Water-Reducing and Accelerating Admixture: ASTM C 494/C 494M, Type E.

5. High-Range, Water-Reducing Admixture: ASTM C 494/C 494M, Type F.
6. High-Range, Water-Reducing and Retarding Admixture: ASTM C 494/C 494M, Type G.
7. Plasticizing and Retarding Admixture: ASTM C 1017/C 1017M.

2.4 CONCRETE MIXTURES

- A. Prepare design mixtures for each type of precast concrete required.
 1. Limit use of granulated blast-furnace slag to 40 percent of portland cement by weight.
- B. Design mixtures may be prepared by a qualified independent testing agency or by qualified precast plant personnel at pole base fabricator's option.
- C. Limit water-soluble chloride ions to maximum percentage by weight of cement permitted by ACI 318 or PCI MNL 116 when tested according to ASTM C 1218/C 1218M.
- D. Normal-Weight Concrete Mixtures: Proportion full-depth mixture by either laboratory trial batch or field test data methods according to ACI 211.1, with materials to be used on Project, to provide normal-weight concrete with the following properties:
 1. Compressive Strength (28 Days): 5000 psi.
 2. Maximum Water-Cementitious Materials Ratio: 0.45.
- E. Water Absorption: 6 percent by weight or 14 percent by volume, tested according to PCI MNL 116.
- F. Add air-entraining admixture at manufacturer's prescribed rate to result in concrete at point of placement having an air content complying with PCI MNL 116.
- G. When included in design mixtures, add other admixtures to concrete mixtures according to manufacturer's written instructions.
- H. Concrete Mix Adjustments: Concrete mix design adjustments may be proposed by fabricator if characteristics of materials, Project conditions, weather, test results, or other circumstances warrant.

2.5 MOLD FABRICATION

- A. Molds: Accurately construct molds, mortar tight, of sufficient strength to withstand pressures due to concrete-placement operations and temperature changes. Coat contact surfaces of molds with release agent before reinforcement is placed. Avoid contamination of reinforcement by release agent.
- B. Maintain molds to provide completed pole bases of shapes, lines, and dimensions indicated, within fabrication tolerances specified.
 1. Edge and Corner Treatment: Uniformly chamfered or radiused as detailed on Drawings.

2.6 FABRICATION

- A. Set anchor bolts according to anchor-bolt templates furnished by light pole manufacturer.
- B. Cast-in reglets, slots, holes, and other accessories in pole bases as indicated on the Contract Drawings.
- C. Cast-in openings larger than 10 inches in any dimension. Do not drill or cut openings or reinforcing bars without Architect's approval. Coordinate size and locations of openings required for conduit or other equipment.
- D. Reinforcement: Comply with recommendations in PCI MNL 116 for fabricating, placing, and supporting reinforcement.
 - 1. Clean reinforcement of loose rust and mill scale, earth, and other materials that reduce or destroy the bond with concrete.
 - 2. Accurately position, support, and secure reinforcement against displacement during concrete-placement and consolidation operations. Completely conceal support devices to prevent exposure on finished surfaces.
 - 3. Place reinforcing steel to maintain at least 1 1/2-inch minimum concrete cover. Arrange, space, and securely tie bars and bar supports to hold reinforcement in position while placing concrete. Direct wire tie ends away from finished, exposed concrete surfaces.
- E. Reinforce pole bases to resist handling, transportation, and erection stresses.
- F. Comply with requirements in PCI MNL 116 and in this Section for measuring, mixing, transporting, and placing concrete. After concrete batching, no additional water may be added.
- G. Place concrete in a continuous operation to prevent seams or planes of weakness from forming in precast concrete units.
- H. Thoroughly consolidate placed concrete by internal and external vibration without dislocating or damaging reinforcement and built-in items, and minimize pour lines, honeycombing, or entrapped air on surfaces. Use equipment and procedures complying with PCI MNL 116.
 - 1. Place self-consolidating concrete without vibration according to PCI TR-6, "Interim Guidelines for the Use of Self-Consolidating Concrete in Precast/Prestressed Concrete Institute Member Plants."
- I. Comply with ACI 306.1 procedures for cold-weather concrete placement.
- J. Comply with PCI MNL 116 procedures for hot-weather concrete placement.
- K. Identify pickup points of pole bases and orientation in structure with permanent markings, complying with markings indicated on Shop Drawings. Imprint or permanently mark casting date on each pole base on a surface that will not show in finished structure.

- L. Cure concrete, according to requirements in PCI MNL 116, by moisture retention without heat or by accelerated heat curing using low-pressure live steam or radiant heat and moisture. Cure units until compressive strength is high enough to ensure that stripping does not have an effect on performance or appearance of final product.
- M. Discard and replace pole base that do not comply with requirements, including structural, manufacturing tolerance, and appearance, unless corrective work meets requirements in PCI MNL 116 and meet Architect's approval.

2.7 FABRICATION TOLERANCES

- A. Fabricate pole bases straight and true to size and shape with exposed edges and corners precise and true so each finished unit complies with PCI MNL 116 product dimension tolerances.

2.8 COMMERCIAL FINISHES

- A. Commercial Grade: Remove fins and large protrusions and fill large holes. Rub or grind ragged edges. Faces must have true, well-defined surfaces. Air holes, water marks, and color variations are permitted. Limit form joint offsets to 3/16 inch. This finish applies to sections of pole base that is hidden from public view.
- B. Smooth, steel trowel finish unformed surfaces (i.e.: top of pole base.) Consolidate concrete, bring to proper level with straightedge, float, and trowel to a smooth, uniform finish.

2.9 SOURCE QUALITY CONTROL

- A. Testing Agency: Owner will engage a qualified testing agency to evaluate pole base fabricator's quality-control and testing methods.
 - 1. Allow testing agency access to material storage areas, concrete production equipment, concrete placement, and curing facilities. Cooperate with testing agency and provide samples of materials and concrete mixtures as may be requested for additional testing and evaluation.
- B. Testing: Test and inspect pole bases according to PCI MNL 116 requirements.
 - 1. Test and inspect self-consolidating concrete according to PCI TR-6.
- C. Strength of pole bases will be considered deficient if units fail to comply with ACI 318 requirements for concrete strength.
- D. If there is evidence that strength of precast concrete units may be deficient or may not comply with ACI 318 requirements, employ a qualified testing agency to obtain, prepare, and test cores drilled from hardened concrete to determine compressive strength according to ASTM C 42/C 42M.
 - 1. A minimum of three representative cores will be taken from units of suspect strength, from locations directed by Architect.

2. Cores will be tested in an air-dry condition or, if units will be wet under service conditions, test cores after immersion in water in a wet condition.
3. Strength of concrete for each series of 3 cores will be considered satisfactory if average compressive strength is equal to at least 85 percent of 28-day design compressive strength and no single core is less than 75 percent of 28-day design compressive strength.
4. Test results will be made in writing on same day that tests are performed, with copies to Architect, Contractor, and precast concrete fabricator. Test reports will include the following:
 - a. Project identification name and number.
 - b. Date when tests were performed.
 - c. Name of precast concrete fabricator.
 - d. Name of concrete testing agency.
 - e. Identification letter, name, and type of precast concrete unit(s) represented by core tests; design compressive strength; type of break; compressive strength at breaks, corrected for length-diameter ratio; and direction of applied load to core in relation to horizontal plane of concrete as placed.
- E. Patching: If core test results are satisfactory and pole base comply with requirements, clean and dampen core holes and solidly fill with same precast concrete mixture that has no coarse aggregate, and finish to match adjacent precast concrete surfaces.
- F. Defective Units: Discard and replace pole bases that do not comply with requirements, including strength, manufacturing tolerances, and color and texture range. Chipped, spalled, or cracked units may be corrected, subject to Architect's approval. Architect reserves the right to reject precast units that do not match approved samples, or sample panels.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine subgrade conditions for compliance with requirements for installation tolerances, true and level bearing surfaces, and other conditions affecting performance of the Work. Owner's Geotechnical Engineer or Owner's Testing Agency shall inspect subgrade prior to installing pole bases.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.
- C. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 INSTALLATION

- A. Erect pole bases level, plumb, and square within specified allowable tolerances. Provide temporary supports and bracing as required to maintain position, stability, and alignment of units until backfill and compaction is complete.
 - 1. Remove projecting lifting devices and grout fill voids within recessed lifting devices flush with surface of adjacent precast surfaces when recess is exposed.
- B. Field cutting of pole bases is not permitted without approval of the Architect.
- C. Fasteners: Do not use drilled or powder-actuated fasteners for attaching accessory items to precast, prestressed concrete units.
- D. At bolted connections, use lock washers, tack welding, or other approved means to prevent loosening of nuts after final adjustment.

3.3 ERECTION TOLERANCES

- A. Erect pole base level, plumb, square, true, and in alignment without exceeding the noncumulative erection tolerances of PCI MNL 135.

3.4 FIELD QUALITY CONTROL

- A. Special Inspections: Owner will engage a qualified special inspector to perform the following special inspections:
 - 1. Erection of pole bases.
- B. Testing Agency: Owner will engage a qualified testing agency to perform tests and inspections.
- C. Testing agency will report test results promptly and in writing to Contractor and Architect.
- D. Correct or remove and replace work where tests and inspections indicate that it does not comply with specified requirements.
- E. Additional testing and inspecting, at Contractor's expense, will be performed to determine compliance of replaced or additional work with specified requirements.
- F. Testing agency will prepare test and inspection reports.

3.5 CORRECTIVE WORK

- A. Correct pole bases if permitted by Architect.
 - 1. Corrective work may be permitted if structural adequacy, serviceability, durability, and appearance of units has not been impaired.

- B. Mix patching materials and correct units so cured patches blend with color, texture, and uniformity of adjacent exposed surfaces and show no apparent line of demarcation between original and corrected work, when viewed in typical daylight illumination from a distance of 20 feet.
- C. Prepare and correct damaged galvanized coatings with galvanizing corrective paint according to ASTM A 780.
- D. Wire brush, clean, and paint damaged prime-painted components with same type of shop primer.
- E. Remove and replace damaged pole bases that cannot be corrected or when corrective work does not comply with requirements as determined by Architect.

3.6 CLEANING

- A. Clean grout, weld slag, and other deleterious material from concrete surfaces and adjacent materials immediately.
- B. Clean exposed surfaces of precast concrete units after erection and completion of joint treatment to remove weld marks, other markings, dirt, and stains.
 - 1. Perform cleaning procedures, if necessary, according to precast concrete fabricator's written recommendations. Clean soiled precast concrete surfaces with detergent and water, using stiff fiber brushes and sponges, and rinse with clean water. Protect other work from staining or damage due to cleaning operations.
 - 2. Do not use cleaning materials or processes that could change the appearance of exposed concrete finishes or damage adjacent materials.

END OF SECTION 03 48 10

SECTION 03 54 15 – MOISTURE CONTROL SYSTEM

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes moisture control system for concrete surfaces below hydraulic-cement-based underlayment and interior floor coverings.

1.3 SUBMITTALS, GENERAL

- A. General: Submit all action submittals and informational submittals required by this Section concurrently.

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated.
 - 1. Moisture control system.
 - 2. Sand.
 - 3. Crack and joint filler.
 - 4. Patching compound.

1.5 INFORMATIONAL SUBMITTALS

- A. Manufacturer Certificates: Signed by manufacturers of moisture control system, underlayment and floor covering system certifying that products are compatible.

1.6 CLOSEOUT SUBMITTALS

- A. Warranty: Executed special warranty.
- B. Warranty: Each product warranty.
- C. Agreement to Warranty: Signed by manufacturer of moisture control system confirming agreement to warranty the system.

1.7 QUALITY ASSURANCE

- A. Installer Qualifications: Installer who is approved by manufacturer for application of moisture control system products required for this Project.
- B. Product Compatibility: Manufacturers of moisture control system, underlayment and floor covering system certify in writing that products are compatible.
- C. Pre-installation Conference: Conduct conference at Project site to comply with requirements in Division 01 Section "Project Management and Coordination."

1.8 DELIVERY, STORAGE, AND HANDLING

- A. Store materials to comply with manufacturer's written instructions to prevent deterioration from moisture or other detrimental effects.

1.9 PROJECT CONDITIONS

- A. Environmental Limitations: Comply with manufacturer's written instructions for substrate temperature, ambient temperature and humidity, ventilation, and other conditions affecting moisture control system performance.
 - 1. Place moisture control system only when ambient temperature and temperature of substrates are between 50 and 80 deg F. Expedite installation if substrate and site conditions are above 70 deg F.
 - 2. Place moisture control system only when building is enclosed, with permanent HVAC system operating.

1.10 COORDINATION

- A. Coordinate application of moisture control system with requirements of underlayment products, specified in other Division 03 Sections, and with requirements of floor covering products, including adhesives, specified in Division 09 Sections, to ensure compatibility of products.

1.11 WARRANTY

- A. Special Warranty: Moisture control system manufacturer's standard form in which manufacturer agrees to repair or replace moisture control system that does not comply with requirements to properly control moisture within specified warranty period.
 - 1. Warranty Period: 20 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 MOISTURE CONTROL SYSTEM

- A. Moisture Control System: One-component epoxy-based moisture control system “Ardex MC Rapid” consisting of primer, P-4 and sealer coats.
- B. Sand: Fine sand less than 1/50 of an inch in grain size or 98.5 percent passing sieve size #35. Keep sand clean and dry as per manufacturers’ recommendation.
- C. Crack and Joint Filler: Two-part epoxy crack and joint filler.
 - 1. Available Products: Subject to compliance with requirements, products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Ardex Ardifix Joint Sealant.
- D. Patching Compound: Portland cement-based smoothing compound.
 - 1. Available Products: Subject to compliance with requirements, products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Ardex; K-60, K-301 and MRP.
- E. Water: Potable and at a temperature of not more than 70 deg F.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, with Installer present, for conditions affecting performance.
 - 1. File pre-installation checklist with manufacturer and obtain manufacturer’s written agreement to warranty and confirmation of approval to proceed.
 - 2. Proceed with application only after unsatisfactory conditions have been corrected.
- B. Beginning installation constitutes Contractor’s acceptance of substrates and conditions.

3.2 PREPARATION

- A. General: Prepare and clean substrate according to manufacturer's written instructions.
 - 1. Treat nonmoving substrate cracks according to manufacturer's written instructions to prevent cracks from telegraphing (reflecting) through moisture control system.

- B. Concrete Substrates: Mechanically remove, according to manufacturer's written instructions, laitance, glaze, efflorescence, curing compounds, form-release agents, dust, dirt, grease, oil, and other contaminants that might impair moisture control system bond. Prepare surface to achieve minimum surface profile of ICRI CSP #3 (light shot blast).
 - 1. Apply patching compound to pre-smooth concrete where mechanical preparation results in a surface exceeding limits set by moisture control system manufacturer.
- C. Testing: Test substrates for moisture vapor emissions in accordance with either of the following methods:
 - 1. Moisture Testing Method 1: Perform anhydrous calcium chloride test, ASTM F 1869. Proceed with installation only after substrates do not exceed a maximum moisture-vapor-emission rate of 20 lb.
 - 2. Moisture Testing Method 2: Perform relative humidity test, ASTM F 2170. Proceed with installation only after substrates do not exceed a maximum relative humidity of 95 percent as measured by a Wagner Rapid RH probe.

3.3 APPLICATION

- A. General: Mix and apply moisture control system components according to manufacturer's written instructions.
 - 1. Close areas to traffic during moisture control system application and for time period after application recommended in writing by manufacturer.
 - 2. Coordinate application of components to provide optimum substrate and intercoat adhesion.
 - 3. At substrate expansion, isolation, and other moving joints, allow joint of same width to continue through moisture control system.
- B. Apply primer over prepared substrate at manufacturer's recommended spreading rate.
- C. Apply sealer coat over primer at manufacturer's recommended spreading rate. While sealer coat is fresh, broadcast sand layer at manufacturer's recommended spreading rate.
- D. Unless otherwise recommended by manufacturer, allow system to cure for at least 16 hours before broom sweeping and vacuuming to remove excess sand.
- E. Do not allow traffic of any type on unprotected moisture control system.
- F. Apply compatible underlayment over moisture control system after time period recommended in writing by manufacturer.

3.4 PROTECTION

- A. Protect moisture control system during installation of construction over system and for remainder of construction period.

END OF SECTION 03 54 15

SECTION 04 01 20.19 - UNIT MASONRY RESTORATION

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Cleaning unit masonry surfaces.
 - 2. Removing and replacing brick masonry.
 - 3. Reanchoring veneers.
 - 4. Patching brick.
 - 5. Repointing joints with mortar.

1.3 DEFINITIONS

- A. Low-Pressure Spray: 100 to 400 psi; 4 to 6 gpm.
- B. Rebuilding (Setting) Mortar: Mortar used to set and anchor masonry in a structure, distinct from pointing mortar installed after masonry is set in place.

1.4 PREINSTALLATION MEETINGS

- A. Preinstallation Conference: Conduct conference at Project site.
 - 1. Review methods and procedures related to unit masonry restoration including, but not limited to, the following:
 - a. Verify unit masonry restoration specialist's personnel, equipment, and facilities needed to make progress.
 - b. Materials, material application, sequencing, tolerances, and required clearances.
 - c. Cleaning program.
 - d. Reconstruction program.
 - e. Repointing program.
 - f. Quality-control program.

1.5 SEQUENCING AND SCHEDULING

- A. Work Sequence: Perform unit masonry restoration work in the following sequence, which includes work specified in this and other Sections:
 - 1. Remove plant growth.

2. Inspect masonry for open mortar joints and permanently or temporarily point them before cleaning to prevent the intrusion of water and other cleaning materials into the wall.
3. Clean masonry.
4. Rake out mortar from joints surrounding masonry to be replaced and from joints adjacent to masonry reconstruction areas along joints.
5. Reconstruct masonry, including replacing existing masonry with new masonry materials.
6. Rake out mortar from joints to be repointed.
7. Point mortar joints.
8. After reconstruction and repointing have been completed and cured, perform a final cleaning to remove residues from this work.

1.6 SUBMITTALS, GENERAL

- A. General: Submit all action submittals (except Samples for Verification) and informational submittals required by this Section concurrently.

1.7 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated.
 1. Face brick.
 2. Portland cement.
- B. As-Specified Data: If the product to be incorporated into Project is as specified by manufacturer name and product designation in Part 2 of this Specification Section, submit the “**As-Specified Verification Form**” (attached to Division 01 Section “Submittal Procedures”) for item listed below, otherwise submit full Product Data for the following:
 1. Nonacidic gel cleaner.
 2. Nonacidic liquid cleaner.
 3. Brick patching compound.
 4. Liquid strippable masking agent.
 5. Masonry reconstruction anchors, expansion type.
 6. Masonry reconstruction anchors, spiral type.
 7. Flexible flashing.
 8. Weep products.
- C. Samples for Initial Selection:
 1. Mortar: Submit sets of mortar that will be left exposed in the form of sample mortar strips, 6 inches long by 1/2 inch wide, set in aluminum or plastic channels.
 - a. Have each set contain a close color range of at least three Samples of different mixes of colored sands and cements that produce a mortar matching existing, cleaned mortar when cured and dry.
 - b. Submit with precise measurements on ingredients, proportions, gradations, and source of colored sands from which each Sample was made.

2. Patching Compound: Submit sets of patching compound Samples in the form of plugs (patches in drilled holes) in sample units of masonry representative of the range of masonry colors on the building.
 - a. Have each set contain a close color range of at least three Samples of different mixes of patching compound that matches the variations in existing masonry when cured and dry.

D. Samples for Verification:

1. Face Brick: Each type of face brick unit to be used for replacing existing units. Include sets of Samples to show the full range of shape, color, and texture to be expected. For each brick type, provide straps or panels containing at least four bricks. Include multiple straps for brick with a wide range.

1.8 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For unit masonry restoration specialist including field supervisors and workers.
- B. Cleaning program.
- C. Reconstruction program.
- D. Repointing program.
- E. Quality-control program.

1.9 QUALITY ASSURANCE

- A. Unit Masonry Restoration Specialist Qualifications: Engage an experienced unit masonry restoration firm to perform work of this Section. Firm shall have completed work similar in material, design, and extent to that indicated for this Project with a record of successful in-service performance. Experience in only installing masonry is insufficient experience for masonry restoration work.
 1. Field Supervision: Unit masonry restoration specialist firm shall maintain experienced full-time supervisors on Project site during times that unit masonry restoration work is in progress.
 2. Workers: Persons who are experienced in unit masonry restoration work of types they will be performing.
 3. At Contractor's option, work may be divided between two specialist firms: one for cleaning work and one for reconstruction/repointing work.
- B. Cleaning Program: Prepare a written cleaning program that describes cleaning process in detail, including materials, methods, and equipment to be used; protection of surrounding materials; and control of runoff during operations.
- C. Reconstruction Program: Prepare a written reconstruction program that describes reconstruction process in detail, including materials, methods, and equipment to be used; and protection of surrounding materials.

- D. Repointing Program: Prepare a written repointing program that describes repointing process in detail, including materials, methods, and equipment to be used; and protection of surrounding materials.
- E. Quality-Control Program: Prepare a written quality-control program for this Project to systematically demonstrate the ability of personnel to properly follow methods and use materials and tools without damaging masonry. Include provisions for supervising performance and preventing damage.

1.10 MOCKUPS

- A. LaGrange Middle School has been recognized as a historic building under the Division for Historic Preservation of the Office of Parks, Recreation and Historic Preservation (OPRHP).
 - 1. Brick pattern, texture, color and size with mortar match are to be reviewed on site in all interior and exterior areas of patch to match of the exiting building.
 - 2. In areas of existing brick removal, preserve and salvage for reuse in adjacent areas requiring patching.
- B. Cleaning Mockups: Prepare mockups of cleaning on existing surfaces to demonstrate aesthetic effects and to set quality standards for materials and execution.
 - 1. Clean an area approximately 24 sq. ft. for each type of masonry and surface condition.
 - a. Test cleaners and methods on samples of adjacent materials for possible adverse reactions. Do not test cleaners and methods known to have deleterious effect.
 - b. Allow a waiting period of not less than seven days after completion of sample cleaning to permit a study of sample panels for negative reactions.
- C. Brick Masonry Reconstruction Mockups: Prepare mockups of brick masonry reconstruction to demonstrate aesthetic effects and to set quality standards for materials and execution and for fabrication and installation.
 - 1. Prepare sample areas for each type of masonry reconstruction work performed. If not otherwise indicated, size each mockup not smaller than 72 inches wide by 48 inches high. Construct sample areas in locations in existing walls where directed by Architect unless otherwise indicated. Demonstrate quality of materials, workmanship, and blending with existing work. Include the following as a minimum:
 - a. Replacement: Four brick units replaced.
 - b. Patching: Three small holes at least 1 inch in diameter for each type of brick indicated to be patched.
 - c. Reanchoring Veneers: Three masonry reconstruction anchors of each type installed.
- D. Repointing Mockups: Prepare mockups of brick masonry repointing to demonstrate aesthetic effects and to set quality standards for materials and execution.
 - 1. Rake out joints in an area not smaller than 72 inches wide by 48 inches high, in two halves, each approximately 36 inches wide demonstrating each type of repointing required and repoint one of the areas.

- E. Approval of mockups does not constitute approval of deviations from the Contract Documents contained in mockups unless Architect specifically approves such deviations in writing.
- F. Subject to compliance with requirements, approved mockups may become part of the completed Work if undisturbed at time of Substantial Completion.

1.11 DELIVERY, STORAGE, AND HANDLING

- A. Deliver bricks to Project site strapped together in suitable packs or pallets or in heavy-duty cartons and protected against impact and chipping.
- B. Deliver packaged materials to Project site in manufacturer's original and unopened containers, labeled with manufacturer's name and type of products.
- C. Store cementitious materials on elevated platforms, under cover, and in a dry location. Do not use cementitious materials that have become damp.
- D. Store hydrated lime in manufacturer's original and unopened containers. Discard lime if containers have been damaged or have been opened for more than two days.
- E. Store sand where grading and other required characteristics can be maintained and contamination avoided.
- F. Handle bricks to prevent overstressing, chipping, defacement, and other damage.

1.12 FIELD CONDITIONS

- A. Weather Limitations: Proceed with installation only when existing and forecasted weather conditions permit unit masonry restoration work to be performed according to product manufacturers' written instructions and specified requirements.
- B. Clean masonry surfaces only when air temperature is 50 deg F and above and is predicted to remain so for at least seven days after completion of cleaning.
- C. Cold-Weather Requirements: Comply with the following procedures for masonry reconstruction and pointing unless otherwise indicated:
 - 1. When air temperature is below 40 deg F, heat mortar ingredients, masonry reconstruction materials, mortar ingredients, and existing masonry walls to produce temperatures between 40 and 120 deg F.
 - 2. When mean daily air temperature is below 40 deg F, provide enclosure and heat to maintain temperatures above 32 deg F within the enclosure for seven days after reconstruction and pointing.
- D. Hot-Weather Requirements: Protect masonry reconstruction areas and mortar-joint pointing when temperature and humidity conditions produce excessive evaporation of water from mortar and reconstruction materials. Provide artificial shade and wind breaks and use cooled materials as required to minimize evaporation. Do not apply mortar to substrates with temperatures of 90 deg F and above unless otherwise indicated.
- E. For manufactured reconstruction materials, perform work within the environmental limits set by each manufacturer.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. LaGrange Middle School has been recognized as a historic building under the Division for Historic Preservation of the Office of Parks, Recreation and Historic Preservation (OPRHP).
 - 1. Brick pattern, texture, color and size with mortar match are to be reviewed on site in all interior and exterior areas of patch to match of the exiting building.
- B. Source Limitations: Obtain each type of material for restoring brick masonry (brick, cement, sand, etc.) from single source with resources to provide materials of consistent quality in appearance and physical properties, unless otherwise indicated.

2.2 CLEANING MATERIALS

- A. Water: Potable.
- B. Hot Water: Water heated to a temperature of 140 to 160 deg F.
- C. Detergent Solution, Job Mixed: Solution prepared by mixing 2 cups of tetrasodium pyrophosphate (TSPP), 1/2 cup of laundry detergent, and 20 quarts of hot water for every 5 gal. of solution required.
- D. Mold, Mildew, and Algae Remover, Job Mixed: Solution prepared by mixing 2 cups of tetrasodium pyrophosphate (TSPP), 5 quarts of 5 percent sodium hypochlorite (bleach), and 15 quarts of hot water for every 5 gal. of solution required.
- E. Nonacidic Gel Cleaner: Manufacturer's standard gel formulation, with pH between 6 and 9, that contains detergents with chelating agents and is specifically formulated for cleaning masonry surfaces.
 - 1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Cathedral Stone Products, Inc.; CSP Light Duty Cleaner.
 - b. PROSOCO, Inc.; Sure Klean 942 Limestone & Marble Cleaner.
- F. Nonacidic Liquid Cleaner: Manufacturer's standard mildly alkaline liquid cleaner formulated for removing mold, mildew, and other organic soiling from ordinary building materials, including polished stone, brick, aluminum, plastics, and wood.
 - 1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Cathedral Stone Products, Inc.; CSP Bio-Cleaner.
 - b. PROSOCO, Inc.; Enviro Klean 2010 All Surface Cleaner.

2.3 MASONRY MATERIALS

A. Face Brick: As required to complete brick masonry restoration work.

1. Brick Matching Existing: Units with colors, color variation within units, surface texture, size, shape, and physical properties that match existing brickwork.
 - a. LaGrange Middle School has been recognized as a historic building under the Division for Historic Preservation of the Office of Parks, Recreation and Historic Preservation (OPRHP).
 - b. For existing brickwork that exhibits a range of colors or color variation within units, provide brick that proportionally matches that range and variation rather than brick that matches an individual color within that range.
2. Special Shapes:
 - a. Provide molded, 100 percent solid shapes for applications where core holes or "frogs" could be exposed to view or weather when in final position and where shapes produced by sawing would result in sawed surfaces being exposed to view.
 - b. Provide specially ground units, shaped to match patterns, for arches and where indicated.
 - c. Mechanical chopping or breaking brick, or bonding pieces of brick together by adhesive, are unacceptable procedures for fabricating special shapes.
3. Salvaged Brick: Obtain salvaged brick from Owner from location shown on Drawings. Clean off residual mortar and prepare for reuse.

B. Face Brick: Facing brick complying with ASTM C 216.

1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following
 - a. Glen-Gery: Toledo Grey (W75)
 - b. Glen-Gery: Pearl River (Wirecut)
 - c. Glen-Gery: Dark Brown (W76)
 - d. Glen-Gery: Mink Grey (Wirecut)
 - e. Glen-Gery: Dolomite Grey(W181)

2.4 MORTAR MATERIALS

A. Portland Cement: ASTM C150/C150M, Type I or Type II, except Type III may be used for cold-weather construction; white or gray, or both where required for color matching of mortar.

1. Provide cement containing not more than 0.60 percent total alkali when tested according to ASTM C114.

B. Hydrated Lime: ASTM C207, Type S.

C. Mortar Sand: ASTM C144.

1. Exposed Mortar: Match size, texture, color, and gradation of existing mortar sand as closely as possible. Blend several sands if necessary to achieve suitable match.

D. Water: Potable.

2.5 MANUFACTURED RECONSTRUCTION MATERIALS

A. Brick Patching Compound: Factory-mixed cementitious product that is custom manufactured for patching brick masonry.

1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Cathedral Stone Products, Inc.; Jahn M100 Restoration Mortar.
 - b. Edison Coatings, Inc.; Custom System 45.
2. Use formulation that is vapor and water permeable (equal to or more than the brick), exhibits low shrinkage, has lower modulus of elasticity than bricks being patched, and develops high bond strength to all types of masonry.
3. Use formulation having working qualities and retardation control to permit forming and sculpturing where necessary.
4. Formulate patching compound in colors and textures to match each brick being patched. Provide sufficient number of colors to enable matching of the color, texture, and variation of each unit.

2.6 ACCESSORY MATERIALS

A. Liquid Strippable Masking Agent: Manufacturer's standard liquid, film-forming, strippable masking material for protecting glass, metal, glazed masonry, and polished stone surfaces from damaging effects of masonry cleaners.

1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. American Building Restoration Products, Inc.; ABR Rubber Mask.
 - b. PROSOCO, Inc.; Sure Klean Strippable Masking.

B. Masonry Reconstruction Anchors, Spiral Type: Type 304 stainless steel spiral rods 8 mm] in diameter, length as required, for anchoring veneer to existing walls; driven-in anchors for installation in drilled holes, relying on screw effect, rather than adhesive to secure veneer to backing.

1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:

- a. Heckmann Building Products, Div. of Mechanical Plastics Corp.; Helix Remedial Tie (391).
 - b. Hohmann & Barnard, Inc.; Spira-Lok.
- C. Setting Buttons and Shims: Resilient plastic, nonstaining to masonry, sized to suit joint thicknesses and bed depths of bricks, less the required depth of pointing materials unless removed before pointing.
- D. Masking Tape: Nonstaining, nonabsorbent material; compatible with mortar, joint primers, sealants, and surfaces adjacent to joints; and that easily comes off entirely, including adhesive.
- E. Flexible Flashing: Use the following unless otherwise indicated:
 - 1. Copper-Laminated Flashing: 5-oz./sq. ft. copper sheet bonded between two layers of glass-fiber cloth/polymer fabric; non-asphaltic type. Use only where flashing is fully concealed in masonry.
 - a. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - 1) Advanced Building Products, Inc.; Copper Sealtite 2000.
 - 2) Wire-Bond; Copper Seal (Copper Fabric Flashing) #4140.
 - 3) York Manufacturing, Inc.; Multi-Flash 500.
 - 2. Adhesives, Primers, and Seam Tapes for Flashings: Flashing manufacturer's standard products or products recommended by flashing manufacturer for bonding flashing sheets to each other and to substrates.
 - 3. Termination Bars for Flexible Flashing: Stainless steel bars not less than 1/8 inch by 1 inch.
- F. Weep Products: Use the following unless otherwise indicated:
 - 1. Cellular Plastic Weep: One-piece, flexible extrusion made from UV-resistant polypropylene copolymer, full height and width of head joint and depth 1/8 inch less than depth of outer wythe, in color selected from manufacturer's standards.
 - a. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - 1) Advanced Building Products, Inc.; Mortar Maze Weep Vents.
 - 2) Heckmann Building Products, Div. of Mechanical Plastics Corp.; Cell Vent (85).
 - 3) Hohmann & Barnard, Inc.; QV – Quadro-Vent.
 - 4) Wire-Bond; #3601 Cell Vent.
- G. Other Products: Select materials and methods of use based on the following, subject to approval of a mockup:
 - 1. Previous effectiveness in performing the work involved.
 - 2. Minimal possibility of damaging exposed surfaces.

3. Consistency of each application.
4. Uniformity of the resulting overall appearance.
5. Do not use products or tools that could leave residue on surfaces.

2.7 MORTAR MIXES

- A. Measurement and Mixing: Measure cementitious materials and sand in a dry condition by volume or equivalent weight. Do not measure by shovel; use known measure. Mix materials in a clean, mechanical batch mixer.
 1. Mixing Pointing Mortar: Thoroughly mix cementitious materials and sand together before adding any water. Then mix again, adding only enough water to produce a damp, unworkable mix that retains its form when pressed into a ball. Maintain mortar in this dampened condition for 15 to 30 minutes. Add remaining water in small portions until mortar reaches desired consistency. Use mortar within one hour of final mixing; do not retemper or use partially hardened material.
- B. Mortar: Produce mortar of color required by using specified ingredients. Do not alter specified proportions without Architect's approval.
- C. Do not use admixtures in mortar unless otherwise indicated.
- D. Mixes: Mix mortar materials in the following proportions:
 1. Rebuilding (Setting) Mortar:
 - a. By Type: ASTM C270, Proportion Specification, Type N unless otherwise indicated; with cementitious material limited to portland cement and lime.
 2. Pointing Mortar:
 - a. By Type: ASTM C270, Proportion Specification, Type N unless otherwise indicated; with cementitious material limited to portland cement and lime.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine conditions, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.
- B. Use the gentlest means to perform the Work and take the greatest of care to ensure materials are not damaged in the course of the Work.
 1. In addition to the requirements in this Section, comply with "The Secretary of the Interior's Standards for the Treatment of Historic Properties with Guidelines for Preserving, Rehabilitating, Restoring, and Reconstructing Historic Buildings."

- C. Proceed with installation only after unsatisfactory conditions have been corrected.
- D. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 PROTECTION

- A. Comply with each manufacturer's written instructions for protecting building and other surfaces against damage from exposure to its products. Prevent chemical cleaning solutions from coming into contact with people, motor vehicles, landscaping, buildings, and other surfaces that could be harmed by such contact.
 - 1. Cover adjacent surfaces with materials that are proven to resist chemical cleaners used unless products being used will not damage adjacent surfaces. Use protective materials that are waterproof and UV resistant. Apply masking agents according to manufacturer's written instructions. Do not apply liquid strippable masking agent to painted or porous surfaces. When no longer needed, promptly remove masking to prevent adhesive staining.
 - 2. Do not apply chemical solutions during winds of enough force to spread them to unprotected surfaces.
 - 3. Neutralize alkaline and acid wastes before disposal.
 - 4. Dispose of runoff from operations by legal means and in a manner that prevents soil erosion, undermining of paving and foundations, damage to landscaping, and water penetration into building interiors.
- B. Prevent mortar from staining face of surrounding masonry and other surfaces.
 - 1. Cover sills, ledges, and other projecting items to protect them from mortar droppings.
 - 2. Keep wall area wet below restoration work to discourage mortar from adhering.
 - 3. Immediately remove mortar splatters in contact with exposed masonry and other surfaces.
- C. Remove lightning protection and associated hardware adjacent to masonry and store during masonry restoration. Reinstall when restoration is complete.
 - 1. Provide temporary rain drainage during work to direct water away from building.

3.3 CLEANING MASONRY, GENERAL

- A. Cleaning Appearance Standard: Cleaned surfaces are to have a uniform appearance as viewed from 20 feet away by Architect.
- B. Proceed with cleaning in an orderly manner; work from bottom to top of each scaffold width and from one end of each elevation to the other. Ensure that dirty residues and rinse water do not wash over dry, cleaned surfaces.

- C. Use only those cleaning methods indicated for each masonry material and location.
1. Brushes: Do not use wire brushes or brushes that are not resistant to chemical cleaner being used.
 2. Spray Equipment: Use spray equipment that provides controlled application at volume and pressure indicated, measured at nozzle. Adjust pressure and volume to ensure that cleaning methods do not damage surfaces, including joints.
 - a. Equip units with pressure gages.
 - b. For chemical-cleaner spray application, use low-pressure tank or chemical pump suitable for chemical cleaner indicated, equipped with nozzle having a cone-shaped spray.
 - c. For water-spray application, use fan-shaped spray that disperses water at an angle of 25 to 50 degrees.
 - d. For heated water-spray application, use equipment capable of maintaining temperature between 140 and 160 deg F at flow rates indicated.
- D. Perform each cleaning method indicated in a manner that results in uniform coverage of all surfaces, including corners, moldings, and interstices, and that produces an even effect without streaking or damaging masonry surfaces. Keep wall wet below area being cleaned to prevent streaking from runoff.
- E. Perform additional general cleaning, paint and stain removal, and spot cleaning of small areas that are noticeably different when viewed according to the "Cleaning Appearance Standard" Paragraph, so that cleaned surfaces blend smoothly into surrounding areas.
- F. Water Application Methods:
1. Water-Spray Applications: Unless otherwise indicated, hold spray nozzle at least 6 inches from masonry surface and apply water in horizontal back-and-forth sweeping motion, overlapping previous strokes to produce uniform coverage.
- G. Chemical-Cleaner Application Methods: Apply chemical cleaners to masonry surfaces according to chemical-cleaner manufacturer's written instructions; use brush or spray application. Do not spray apply at pressures exceeding 50 psi. Do not allow chemicals to remain on surface for periods longer than those indicated or recommended in writing by manufacturer.
- H. Rinse off chemical residue and soil by working upward from bottom to top of each treated area at each stage or scaffold setting. Periodically during each rinse, test pH of rinse water running off of cleaned area to determine that chemical cleaner is completely removed.
1. Apply neutralizing agent and repeat rinse if necessary to produce tested pH of between 6.7 and 7.5.
- I. After cleaning is complete, remove protection no longer required. Remove tape and adhesive marks.

3.4 PRELIMINARY CLEANING

- A. Removing Plant Growth: Completely remove visible plant, moss, and shrub growth from masonry surfaces. Carefully remove plants, creepers, and vegetation by cutting at roots and allowing remaining growth to dry as long as possible before removal. Remove loose soil and plant debris from open joints to whatever depth they occur.
- B. Preliminary Cleaning: Before beginning general cleaning, remove extraneous substances that are resistant to planned cleaning methods. Extraneous substances include paint, calking, asphalt, and tar.
 - 1. Carefully remove heavy accumulations of rigid materials from masonry surface with sharp chisel. Do not scratch or chip masonry surface.

3.5 CLEANING MASONRY

- A. Hot-Water Wash: Use hot water applied by low-pressure spray.
- B. Detergent Cleaning:
 - 1. Wet surface with hot water applied by low-pressure spray.
 - 2. Scrub surface with detergent solution using medium-soft brushes until soil is thoroughly dislodged and can be removed by rinsing. Use small brushes to remove soil from mortar joints and crevices. Dip brush in solution often to ensure that adequate fresh detergent is used and that surface remains wet.
 - 3. Rinse with hot water applied by low-pressure spray to remove detergent solution and soil.
 - 4. Repeat cleaning procedure above where required to produce cleaning effect established by mockup.
- C. Mold, Mildew, and Algae Removal:
 - 1. Wet surface with hot water applied by low-pressure spray.
 - 2. Apply mold, mildew, and algae remover by brush or low-pressure spray.
 - 3. Scrub surface with medium-soft brushes until mold, mildew, and algae are thoroughly dislodged and can be removed by rinsing. Use small brushes for mortar joints and crevices. Dip brush in mold, mildew, and algae remover often to ensure that adequate fresh cleaner is used and that surface remains wet.
 - 4. Rinse with hot water applied by low-pressure spray to remove mold, mildew, and algae remover and soil.
 - 5. Repeat cleaning procedure above where required to produce cleaning effect established by mockup.

D. Nonacidic Gel Chemical Cleaning:

1. Wet surface with hot water applied by low-pressure spray.
2. Apply gel cleaner in 1/8-inch thickness by brush, working into joints and crevices. Apply quickly and do not brush out excessively, so area is uniformly covered with fresh cleaner and dwell time is uniform throughout area being cleaned.
3. Let cleaner remain on surface for period recommended in writing by chemical-cleaner manufacturer established by mockup.
4. Remove bulk of gel cleaner.
5. Rinse with hot water applied by low-pressure spray to remove chemicals and soil.
6. Repeat cleaning procedure above where required to produce cleaning effect established by mockup. Do not repeat more than once.

E. Nonacidic Liquid Chemical Cleaning:

1. Wet surface with hot water applied by low-pressure spray.
2. Apply cleaner to surface in two applications by brush or low-pressure spray.
3. Let cleaner remain on surface for period recommended in writing by chemical-cleaner manufacturer established by mockup.
4. Rinse with hot water applied by low-pressure spray to remove chemicals and soil.
5. Repeat cleaning procedure above where required to produce cleaning effect established by mockup. Do not repeat more than once.

3.6 MASONRY RECONSTRUCTION, GENERAL

- A. Appearance Standard: Reconstructed surfaces are to have a uniform appearance as viewed from 20 feet away by Architect.

3.7 BRICK REMOVAL AND REPLACEMENT

- A. At locations indicated, remove bricks that are damaged, spalled, or deteriorated or are to be reused. Carefully remove entire units from joint to joint, without damaging surrounding masonry, in a manner that permits replacement with full-size units.
1. When removing single bricks, remove material from center of brick and work toward outside edges.
- B. Support and protect remaining masonry that surrounds removal area.
- C. Maintain flashing, reinforcement, lintels, and adjoining construction in an undamaged condition.
- D. Notify Architect of unforeseen detrimental conditions including voids, cracks, bulges, and loose units in existing masonry backup, rotted wood, rusted metal, and other deteriorated items.

- E. Remove in an undamaged condition as many whole bricks as possible.
 - 1. Remove mortar, loose particles, and soil from brick by cleaning with hand chisels, brushes, and water.
 - 2. Remove sealants by cutting close to brick with utility knife and cleaning with solvents.
 - 3. Store brick for reuse. Store off ground, on skids, and protected from weather.
 - 4. Deliver cleaned brick not required for reuse to Owner unless otherwise indicated.
- F. Clean masonry surrounding removal areas by removing mortar, dust, and loose particles in preparation for brick replacement.
- G. Replace removed damaged brick with other removed brick and salvaged brick in good condition, where possible, or with new brick matching existing brick. Do not use broken units unless they can be cut to usable size.
- H. Install replacement brick into bonding and coursing pattern of existing brick. If cutting is required, use a motor-driven saw designed to cut masonry with clean, sharp, unchipped edges.
 - 1. Maintain joint width for replacement units to match existing joints.
 - 2. Use setting buttons or shims to set units accurately spaced with uniform joints.
- I. Lay replacement brick with rebuilding (setting) mortar and with completely filled bed, head, and collar joints. Butter ends with enough mortar to fill head joints and shove into place. Wet both replacement and surrounding bricks that have ASTM C67 initial rates of absorption (suction) of more than 30 g/30 sq. in. per min. Use wetting methods that ensure that units are nearly saturated but surface is dry when laid.
 - 1. Tool exposed mortar joints in reconstructed areas to match joints of surrounding existing brickwork.
 - 2. When mortar is hard enough to support units, remove shims and other devices interfering with pointing of joints.
- J. Curing: Cure mortar by maintaining in thoroughly damp condition for at least 72 consecutive hours, including weekends and holidays.
 - 1. Hairline cracking within the mortar or mortar separation at edge of a joint is unacceptable. Completely remove such mortar and repoint.

3.8 REANCHORING VENEERS

- A. Anchor masonry veneers to concrete and masonry backup with masonry reconstruction anchorsspiral type to comply with the following requirements:
 - 1. Install in horizontal mortar joints and according to manufacturer's written instructions.
 - 2. Space anchors as indicated, but not more than 16 inches o.c. vertically and 32 inches o.c. horizontally.
 - 3. Install at locations to avoid penetrating flashing.
 - 4. Recess anchors at least 5/8 inch from surface of mortar joint and fill recess with pointing mortar.

3.9 FLASHING AND WEEP HOLES

- A. General: Install embedded flashing and weep holes in masonry at shelf angles, lintels, ledges, other obstructions to downward flow of water in wall, and where indicated.
- B. Install flashing as follows unless otherwise indicated:
 - 1. Prepare masonry surfaces so they are smooth and free from projections that could puncture flashing. Where flashing is within mortar joint, place through-wall flashing on sloping bed of mortar and cover with mortar. Before covering with mortar, seal penetrations in flashing with adhesive, sealant, or tape as recommended by flashing manufacturer.
 - 2. At multiwythe masonry walls, including cavity walls, extend flashing through outer wythe, turned up a minimum of 12 inches, and at least 6 inches above the top of cavity drainage material. Refer to Division 04 Section "Unit Masonry" for cavity drainage material. Fasten upper edge of flexible flashing to inner wythe through termination bar.
 - 3. At masonry-veneer walls, extend flashing through veneer, across airspace behind veneer, and up face of sheathing at least 12 inches, and at least 6 inches above the top of the cavity drainage material. Refer to Division 04 Section "Unit Masonry" for cavity drainage material. Fasten upper edge of flexible flashing to sheathing through termination bar.
 - 4. Apply a continuous bead of compatible sealant to the top of the termination bar.
 - 5. At lintels and shelf angles, extend flashing a minimum of 6 inches into masonry at each end. At heads and sills, extend flashing 6 inches at ends and turn up not less than 2 inches to form end dams.
 - 6. Cut flexible flashing off flush with face of wall after masonry wall construction is completed.
- C. Install weep holes in veneers in head joints of first course of masonry immediately above embedded flashing.
 - 1. Use specified weep products to form weep holes.
 - 2. Space weep holes 24 inches o.c. unless otherwise indicated.

3.10 BRICK MASONRY PATCHING

- A. Patch the following bricks unless another type of reconstruction or replacement is indicated:
 - 1. Bricks indicated to be patched.
 - 2. Bricks with holes.
 - 3. Bricks with chipped edges or corners. Patch chipped edges or corners measuring more than 3/4 inch in least dimension.
 - 4. Bricks with small areas of deep deterioration. Patch deep deteriorations measuring more than 3/4 inch in least dimension and more than 1/4 inch deep.

B. Patching Bricks:

1. Remove loose material from masonry surface. Carefully remove additional material so patch does not have feathered edges but has square or slightly undercut edges on area to be patched and is at least 1/4 inch thick, but not less than recommended in writing by patching compound manufacturer.
2. Mask adjacent mortar joint or rake out for repointing if patch extends to edge of brick.
3. Mix patching compound in individual batches to match each unit being patched. Combine one or more colors of patching compound, as needed, to produce exact match.
4. Rinse surface to be patched and leave damp, but without standing water.
5. Brush-coat surfaces with slurry coat of patching compound according to manufacturer's written instructions.
6. Place patching compound in layers as recommended in writing by patching compound manufacturer, but not less than 1/4 inch or more than 2 inches thick. Roughen surface of each layer to provide a key for next layer.
7. Trowel, scrape, or carve surface of patch to match texture and surrounding surface plane or contour of brick. Shape and finish surface before or after curing, as determined by testing, to best match existing brick.
8. Keep each layer damp for 72 hours if recommended by manufacturer or until patching compound has set.
9. Remove and replace patches with hairline cracks or that show separation from brick at edges, and those that do not match adjoining brick in color or texture.

3.11 MASONRY REPOINTING, GENERAL

- A. Appearance Standard: Repointed surfaces are to have a uniform appearance as viewed from 20 feet away by Architect.

3.12 REPOINTING

- A. Rake out and repoint joints to the following extent:

1. Joints indicated as sealant-filled joints.
2. Joints at locations of the following defects:
 - a. Holes and missing mortar.
 - b. Cracks that can be penetrated 1/4 inch or more by a knife blade 0.027 inch thick.
 - c. Cracks 1/8 inch or more in width and of any depth.
 - d. Hollow-sounding joints when tapped by metal object.
 - e. Eroded surfaces 1/4 inch or more deep.
 - f. Deterioration to point that mortar can be easily removed by hand, without tools.
 - g. Joints filled with substances other than mortar.

- B. Do not rake out and repoint joints where not required.
- C. Rake out joints as follows, according to procedures demonstrated in approved mockup:
 - 1. Remove mortar from joints to depth of joint width plus 1/8 inch, but not less than 1/2 inch and not less than that required to expose sound, unweathered mortar. Do not remove unsound mortar more than 2 inches deep; consult Architect for direction.
 - 2. Remove mortar from brick and other masonry surfaces within raked-out joints to provide reveals with square backs and to expose masonry for contact with pointing mortar. Brush, vacuum, or flush joints to remove dirt and loose debris.
 - 3. Do not spall edges of brick or other masonry units or widen joints. Replace or patch damaged brick or other masonry units as directed by Architect.
 - a. Cut out mortar by hand with chisel and resilient mallet. Do not use power-operated grinders without Architect's written approval.
- D. Notify Architect of unforeseen detrimental conditions including voids in mortar joints, cracks, loose masonry units, rotted wood, rusted metal, and other deteriorated items.
- E. Pointing with Mortar:
 - 1. Rinse joint surfaces with water to remove dust and mortar particles. Time rinsing application so, at time of pointing, joint surfaces are damp but free of standing water. If rinse water dries, dampen joint surfaces before pointing.
 - 2. Apply pointing mortar first to areas where existing mortar was removed to depths greater than surrounding areas. Apply in layers not greater than 3/8 inch until a uniform depth is formed. Fully compact each layer and allow it to become thumbprint hard before applying next layer.
 - 3. After deep areas have been filled to same depth as remaining joints, point joints by placing mortar in layers not greater than 3/8 inch. Fully compact each layer and allow to become thumbprint hard before applying next layer. Where existing masonry units have worn or rounded edges, slightly recess finished mortar surface below face of masonry to avoid widened joint faces. Take care not to spread mortar beyond joint edges onto exposed masonry surfaces or to featheredge the mortar.
 - 4. When mortar is thumbprint hard, tool joints to match original appearance of joints as demonstrated in approved mockup. Remove excess mortar from edge of joint by brushing.
 - 5. Cure mortar by maintaining in thoroughly damp condition for at least 72 consecutive hours, including weekends and holidays.
 - 6. Hairline cracking within mortar or mortar separation at edge of a joint is unacceptable. Completely remove such mortar and repoint.
- F. Where repointing work precedes cleaning of existing masonry, allow mortar to harden at least 30 days before beginning cleaning work.

3.13 FINAL CLEANING

- A. After mortar has fully hardened, thoroughly clean exposed masonry surfaces of excess mortar and foreign matter; use wood scrapers, stiff-nylon or -fiber brushes, and clean water applied by low-pressure spray.
 - 1. Do not use metal scrapers or brushes.
 - 2. Do not use acidic or alkaline cleaners.
- B. Clean adjacent nonmasonry surfaces. Use detergent and soft brushes or cloths.
- C. Clean mortar and debris from roof; remove debris from gutters and downspouts. Rinse off roof and flush gutters and downspouts.
- D. Remove masking materials, leaving no residues that could trap dirt.
- E. Sweep and rake adjacent pavement and grounds to remove mortar and debris. Where necessary, pressure wash pavement surfaces to remove mortar, dust, dirt, and stains.

3.14 FIELD QUALITY CONTROL

- A. Architect's Project Representatives: Architect will assign Project representatives to help carry out Architect's responsibilities at the site, including observing progress and quality of portion of the Work completed. Allow Architect's Project representatives use of lift devices and scaffolding, as needed, to observe progress and quality of portion of the Work completed.
- B. Notify Architect's Project representatives in advance of times when lift devices and scaffolding will be relocated. Do not relocate lift devices and scaffolding until Architect's Project representatives have had reasonable opportunity to make inspections and observations of work areas at lift device or scaffold location.

END OF SECTION 04 01 20.19

SECTION 04 20 00 - UNIT MASONRY

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Concrete masonry units.
2. Concrete building brick.
3. Face brick.
4. Building (common) brick.
5. Mortar and grout.
6. Steel reinforcing bars.
7. Masonry-joint reinforcement.
8. Ties and anchors.
9. Embedded flashing.
10. Miscellaneous masonry accessories.

B. Products Installed but not Furnished under This Section:

1. Steel lintels in unit masonry.
2. Cavity wall insulation.

1.3 DEFINITIONS

- A. CMU(s): Concrete masonry unit(s).
- B. NRC: Noise Reduction Coefficient.
- C. Reinforced Masonry: Masonry containing reinforcing steel in grouted cells.

1.4 PREINSTALLATION MEETINGS

- A. Preinstallation Conference: Conduct conference at Project site.

1.5 SUBMITTALS, GENERAL

- A. General: Submit all action submittals (except Samples for Verification) and informational submittals required by this Section concurrently.

1.6 ACTION SUBMITTALS

A. Product Data: For each type of product indicated.

1. CMUs.
2. Concrete building brick.
3. Face brick.
4. Building (common) brick.
5. Portland cement.
6. Colored cement products.
7. Aggregate for mortar.
8. Masonry-joint reinforcement for single-wythe masonry.
9. Masonry-joint reinforcement for multiwythe masonry.
10. Individual anchors.
11. Anchors for connecting CMU to existing masonry.
12. Adjustable anchors for connecting to structural steel framing.
13. Adjustable veneer anchors to structural steel.
14. Joint stabilization anchors.
15. Adjustable masonry-veneer anchors.
16. Top-of-wall wind clips.
17. Top-of-wall concealed wind anchors.
18. Adhesives, primers, and seam tapes for flashings.
19. Proprietary cleaner.

B. As-Specified Data: If the product to be incorporated into Project is as specified by manufacturer name and product designation in Part 2 of this Specification Section, submit the “**As-Specified Verification Form**” (attached to Division 01 Section “Submittal Procedures”) for each item listed below, otherwise submit full Product Data for the following:

1. Flexible flashing.
2. Drip plate flashing.
3. Termination bars for flexible flashing.
4. Compressible filler.
5. Preformed control-joint gaskets.
6. Weep/cavity vent products.
7. Cavity drainage material.

C. Shop Drawings: For the following:

1. Reinforcing Steel: Detail bending, lap lengths, and placement of unit masonry reinforcing bars. Comply with ACI 315. Show elevations of reinforced walls. Show all anchorage and top-of-wall wind clips and concealed wind anchors.
2. Concrete Masonry Control Joint Layout Plans: Show all concrete masonry unit control joint locations, at minimum 1/8 inch = 1 ft. scale.
 - a. For each joint, indicate type of control joint; i.e., at columns, indicate if joint is provided by the masonry grouted into the column web, or by a joint-stabilization anchor.

- b. Indicate control joint location and type in accordance with the typical masonry plan details shown on the Drawings and as specified.

D. Samples for Initial Selection:

- 1. Face brick, in the form of portable display panels.
- 2. Colored mortar.

E. Samples for Verification: For each type and color of the following:

- 1. Face brick, in the form of straps of five or more bricks.
- 2. Pigmented mortar. Make Samples using same sand and mortar ingredients to be used on Project.

1.7 INFORMATIONAL SUBMITTALS

A. Material Certificates: For each type and size of the following:

- 1. Masonry units.
 - a. Include material test reports substantiating compliance with requirements.
 - 1) Testing and reports shall be completed by an independent laboratory.
 - a) Test reports for each type of brick including Facing, Building, and Glazed brick, when appropriate, shall be submitted to the Architect for review.
 - b) Test Reports shall indicate:
 - c) Compressive strength
 - d) 24-hour cold water absorption
 - e) 5-hour boil absorption
 - f) Saturation coefficient
 - g) Initial rate of absorption
 - h) Efflorescence
 - b. For brick, include size-variation data verifying that actual range of sizes falls within Type FBX tolerances
 - c. For exposed brick, include test report for efflorescence according to ASTM C67.
 - d. For masonry units, include data and calculations establishing average net-area compressive strength of units.
- 2. Cementitious materials. Include name of manufacturer, brand name, and type.

3. Water-repellent admixture used in mortar.
 4. Preblended, dry mortar mixes. Include description of type and proportions of ingredients.
 5. Grout mixes. Include description of type and proportions of ingredients.
 6. Reinforcing bars.
 7. Low-alloy steel reinforcing bars.
 8. Joint reinforcement.
 9. Anchors, ties, and metal accessories.
- B. Mix Designs: For each type of mortar and grout. Include description of type and proportions of ingredients.
1. Include test reports, according to ASTM C1019, for grout mixes required to comply with compressive strength requirement.
- C. Statement of Compressive Strength of Masonry: For each combination of masonry unit type and mortar type, provide statement of average net-area compressive strength of masonry units, mortar type, and resulting net-area compressive strength of masonry determined according to TMS 602.

1.8 QUALITY ASSURANCE

- A. Sample Panels: Build sample panels to verify selections made under Sample submittals and to demonstrate aesthetic effects. Comply with requirements in Division 01 Section "Quality Requirements".
1. Build sample panels for each type of exposed unit masonry construction in sizes approximately 48 inches long by 48 inches high.
 2. Build sample panels facing south, unless otherwise indicated.
 3. Where masonry is to match existing, build panels adjacent and parallel to existing surface.
 4. Clean one-half of exposed faces of panels with masonry cleaner indicated.
 5. Protect approved sample panels from the elements with weather-resistant membrane.
 6. Approval of sample panels is for color, texture, and blending of masonry units; relationship of mortar and sealant colors to masonry unit colors; tooling of joints; aesthetic qualities of workmanship; and other material and construction qualities specifically approved by Architect in writing.
 - a. Approval of sample panels does not constitute approval of deviations from the Contract Documents contained in sample panels unless Architect specifically approves such deviations in writing.

7. Demolish and remove sample panels when directed by Architect.
- B. Mockups: Build mockups to verify selections made under Sample submittals, to demonstrate aesthetic effects, and to set quality standards for materials and execution.
1. Build mockups for typical exterior wall in sizes approximately 96 inches long by 96 inches high by full thickness, including; air barrier, reinforcement, face wythe, metal studs, sheathing, air barrier, veneer anchors, insulation, cavity drainage material, and weeps.
 - a. Include a sealant-filled joint at least 16 inches long in mockup.
 - b. Include lower corner of window opening at upper corner of exterior wall mockup. Make opening approximately 12 inches wide by 16 inches high.
 - c. Include through-wall flashing installed for a 24-inch length in corner of exterior wall mockup approximately 16 inches down from top of mockup, with a 12-inch length of flashing left exposed to view (omit masonry above half of flashing).
 2. Where masonry is to match existing, erect mockups adjacent and parallel to existing surface.
 3. Clean one-half of exposed faces of mockups with masonry cleaner as indicated.
 4. Protect accepted mockups from the elements with weather-resistant membrane.
 5. Approval of mockups is for color, texture, and blending of masonry units; relationship of mortar and sealant colors to masonry unit colors; tooling of joints; and aesthetic qualities of workmanship.
 - a. Approval of mockups does not constitute approval of deviations from the Contract Documents contained in mockups unless Architect specifically approves such deviations in writing.

1.9 DELIVERY, STORAGE, AND HANDLING

- A. Store masonry units on elevated platforms in a dry location. If units are not stored in an enclosed location, cover tops and sides of stacks with waterproof sheeting, securely tied. If units become wet, do not install until they are dry.
- B. Store cementitious materials on elevated platforms, under cover, and in a dry location. Do not use cementitious materials that have become damp.
- C. Store aggregates where grading and other required characteristics can be maintained and contamination avoided.
- D. Deliver preblended, dry mortar mix in moisture-resistant containers. Store preblended, dry mortar mix in delivery containers on elevated platforms in a dry location or in covered weatherproof dispensing silos.

- E. Store masonry accessories, including metal items, to prevent corrosion and accumulation of dirt and oil.

1.10 FIELD CONDITIONS

- A. Protection of Masonry: During construction, cover tops of walls, projections, and sills with waterproof sheeting at end of each day's work. Cover partially completed masonry when construction is not in progress.
 - 1. Extend cover a minimum of 24 inches down both sides of walls, and hold cover securely in place.
 - 2. Where one wythe of multiwythe masonry walls is completed in advance of other wythes, secure cover a minimum of 24 inches down face next to unconstructed wythe, and hold cover in place.
- B. Do not apply uniform floor or roof loads for at least 12 hours and concentrated loads for at least three days after building masonry walls or columns.
- C. Stain Prevention: Prevent grout, mortar, and soil from staining the face of masonry to be left exposed or painted. Immediately remove grout, mortar, and soil that come in contact with such masonry.
 - 1. Protect base of walls from rain-splashed mud and from mortar splatter by spreading coverings on ground and over wall surface.
 - 2. Protect sills, ledges, and projections from mortar droppings.
 - 3. Protect surfaces of window and door frames, as well as similar products with painted and integral finishes, from mortar droppings.
 - 4. Turn scaffold boards near the wall on edge at the end of each day to prevent rain from splashing mortar and dirt onto completed masonry.
- D. Cold-Weather Requirements: Do not use frozen materials or materials mixed or coated with ice or frost. Do not build on frozen substrates. Remove and replace unit masonry damaged by frost or by freezing conditions. Comply with cold-weather construction requirements contained in TMS 602.
 - 1. Cold-Weather Cleaning: Use liquid cleaning methods only when air temperature is 40 deg F and higher and will remain so until masonry has dried, but not less than seven days after completing cleaning.
- E. Hot-Weather Requirements: Comply with hot-weather construction requirements contained in TMS 602.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Source Limitations for Masonry Units: Obtain exposed masonry units of a uniform texture and color, or a uniform blend within the ranges accepted for these characteristics, from single source from single manufacturer for each product required.
- B. Source Limitations for Mortar Materials: Obtain mortar ingredients of a uniform quality, including color for exposed masonry, from single manufacturer for each cementitious component and from single source or producer for each aggregate.

2.2 PERFORMANCE REQUIREMENTS

- A. Provide unit masonry that develops indicated net-area compressive strengths at 28 days.
 - 1. Determine net-area compressive strength of masonry from average net-area compressive strengths of masonry units and mortar types (unit-strength method) according to TMS 602.

2.3 UNIT MASONRY, GENERAL

- A. Masonry Standard: Comply with TMS 602, except as modified by requirements in the Contract Documents.
- B. Defective Units: Referenced masonry unit standards may allow a certain percentage of units to contain chips, cracks, or other defects exceeding limits stated. Do not use units where such defects are exposed in the completed Work and will be within 20 feet vertically and horizontally of a walking surface.
- C. Fire-Resistance Ratings: Comply with requirements for fire-resistance-rated assembly designs indicated.
 - 1. Where fire-resistance-rated construction is indicated, units shall be listed and labeled by a qualified testing agency acceptable to authorities having jurisdiction.
 - 2. All fire-rated units shall meet NYSBC 722 and are to be tested in accordance with ANSI UL 263.

2.4 CONCRETE MASONRY UNITS

- A. Shapes: Provide shapes indicated and as follows, with exposed surfaces matching exposed faces of adjacent units unless otherwise indicated.
 - 1. Provide special shapes for lintels, corners, jambs, sashes, movement joints, headers, bonding, and other special conditions.
 - 2. Provide bullnose units for outside corners unless otherwise indicated.

B. CMUs: ASTM C90.

1. Unit Compressive Strength: Provide units with minimum average net-area compressive strength of 2000 psi
2. Density Classification: Lightweight unless otherwise indicated.
3. Size (Width): Manufactured to dimensions 3/8 inch less than nominal dimensions.
4. Exposed Faces: Provide uniform fine texture units suitable for painting.

C. Concrete Building Brick: ASTM C55.

1. Unit Compressive Strength: Provide units with minimum average net-area compressive strength of 2500 psi.
2. Density Classification: Lightweight.
3. Size (Actual Dimensions): 3-5/8 inches wide by 2-1/4 inches high by 7-5/8 inches long.

2.5 MASONRY LINTELS

- A. Masonry Lintels: Prefabricated or built-in-place masonry lintels made from bond beam CMUs matching adjacent CMUs in color, texture, and density classification, with reinforcing bars placed as indicated and filled with coarse grout.

2.6 BRICK

- A. General: Provide shapes indicated and as follows, with exposed surfaces matching finish and color of exposed faces of adjacent units:

1. For ends of sills and caps and for similar applications that would otherwise expose unfinished brick surfaces, provide units without cores or frogs and with exposed surfaces finished.
2. Provide special shapes for applications where stretcher units cannot accommodate special conditions, including those at corners, movement joints, bond beams, sashes, and lintels.
3. Provide special shapes for applications requiring brick of size, form, color, and texture on exposed surfaces that cannot be produced by sawing.
4. Provide special shapes for applications where shapes produced by sawing would result in sawed surfaces being exposed to view.

B. Face Brick: Facing brick complying with ASTM C216.

1. Basis-of-Design Product: Subject to compliance with requirements, provide All Facing Brick specified and shown on drawings shall be Emporium Series Wirecut as manufactured by the Glen-Gery Corporation., or comparable product.
 - a. Face Brick type B1 – Glean-Gery – Dolomite Grey (W181)
 - b. Face Brick type B2 - Glean-Gery – Mink Grey (Wirecut)
2. Grade: SW.

3. Type: FBX
 4. Initial Rate of Absorption: Less than 30 g/30 sq. in. per minute when tested according to ASTM C67.
 5. Efflorescence: Provide brick that has been tested according to ASTM C67 and is rated "not effloresced."
 6. Size (Actual Dimensions): 3-5/8 inches wide by 2-1/4 inches high by 7-5/8 inches long.
 7. Application: Use where brick is exposed unless otherwise indicated.
 8. Where shown to "match existing" provide face brick matching color range, texture, and size of existing adjacent brickwork.
 9. Basis-of-Design Color and Texture: Glen-Gery Emporium Series, Wirecut Texture and Modular Size; Smokey Quartz Wirecut, Tawny Beige Wirecut, Toledo Grey Wirecut, Cream White Wirecut, and W76.
- C. Building (Common) Brick: ASTM C62, Grade SW.
1. Size: Match size of face brick.
 2. Application: Use where brick is indicated for concealed locations.

2.7 MORTAR AND GROUT MATERIALS

- A. Portland Cement: ASTM C150/C150M, Type I or II, except Type III may be used for cold-weather construction. Provide natural color or white cement as required to produce mortar color indicated.
1. Alkali content shall not be more than 0.1 percent when tested according to ASTM C114.
- B. Hydrated Lime: ASTM C207, Type S.
- C. Portland Cement-Lime Mix: Packaged blend of portland cement and hydrated lime containing no other ingredients.
- D. Mortar Pigments: Natural and synthetic iron oxides and chromium oxides, compounded for use in mortar mixes and complying with ASTM C979/C979M. Use only pigments with a record of satisfactory performance in masonry mortar.
- E. Colored Cement Products: Packaged blend made from portland cement and hydrated lime and mortar pigments, all complying with specified requirements, and containing no other ingredients.
1. Formulate blend as required to produce color indicated.
 - a. Basis-of-Design Color: As selected from manufacturer's standard colors.
 2. Pigments shall not exceed 10 percent of portland cement by weight.

F. Aggregate for Mortar: ASTM C144.

1. For mortar that is exposed to view, use washed aggregate consisting of natural sand or crushed stone.
2. For joints less than 1/4 inch thick, use aggregate graded with 100 percent passing the No. 16 sieve.
3. White-Mortar Aggregates: Natural white sand or crushed white stone.
4. Colored-Mortar Aggregates: Natural sand or crushed stone of color necessary to produce required mortar color.

G. Aggregate for Grout: ASTM C404.

2.8 REINFORCEMENT

A. Uncoated-Steel Reinforcing Bars: ASTM A615/A615M or ASTM A996/A996M, Grade 60.

B. Low-Alloy Steel Reinforcing Bars: Where reinforcement is to be welded, provide reinforcing bars meeting ASTM A706/A706M, deformed.

C. Reinforcing Bar Positioners: Wire units designed to fit into mortar bed joints spanning masonry unit cells and to hold reinforcing bars in center of cells. Units are formed from 0.148-inch (9 gage) steel wire, hot-dip galvanized after fabrication. Provide units designed for number of bars indicated.

1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Heckmann Building Products Inc., Div. of US Masonry and Building Products; Wire Rebar Positioner (376).
 - b. Hohmann & Barnard, Inc.; RB Rebar Positioners or RB-Twin Rebar Positioners.
 - c. Wire-Bond; Figure 8 Rebar Positioners.

D. Masonry-Joint Reinforcement, General: ASTM A951/A951M.

1. Interior Walls: Mill-galvanized carbon steel.
2. Exterior Walls: Hot-dip galvanized carbon steel.
3. Wire Size for Side Rods: 0.148-inch diameter (9 gage).
4. Wire Size for Cross Rods: 0.148-inch diameter (9 gage).
5. Wire Size for Veneer Ties: 0.187-inch diameter.
6. Spacing of Cross Rods, Tabs, and Cross Ties: Not more than 16 inches o.c.
7. Provide in lengths of not less than 10 feet, with prefabricated corner and tee units.

E. Masonry-Joint Reinforcement for Single-Wythe Masonry: Horizontal ladder or truss type with single pair of side rods.

1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:

- a. Heckmann Building Products Inc., Div. of US Masonry and Building Products; Ladder-Type Wall Reinforcement (1100) or Truss Type Wall Reinforcement (1200).
- b. Hohmann & Barnard, Inc.; 220 Ladder Mesh Reinforcement or 120 Truss-Mesh.
- c. Wire-Bond; Series 200 Ladder Mesh or 300 Truss Mesh 2 Wire.

F. Masonry-Joint Reinforcement for Multiwythe Masonry:

- 1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Heckmann Building Products Inc., Div. of US Masonry and Building Products; Ladder Pintle Eye Wall (1300).
 - b. Hohmann & Barnard, Inc.; 270-2X Ladder or 170-2X Truss Eye-Wire.
 - c. Wire-Bond; Series 800 Ladder or 900 Truss Level-Eye (Hook & Eye).
- 2. Adjustable (two-piece) type, ladder or truss design, with one side rod at each face shell of backing wythe and with separate adjustable ties with pintle-and-eye connections having a maximum horizontal play of 1/16 inch and maximum vertical adjustment of 1-1/4 inches. Size ties to extend at least halfway through facing wythe but with at least 5/8-inch cover on outside face.

2.9 TIES AND ANCHORS

- A. General: Ties and anchors shall extend at least 1-1/2 inches into veneer but with at least a 5/8-inch cover on outside face.
- B. Materials: Provide ties and anchors specified in this article that are made from materials that comply with the following unless otherwise indicated:
 - 1. Hot-Dip Galvanized, Carbon-Steel Wire: ASTM A82/A82M, with ASTM A153/A153M, Class B-2 coating.
 - 2. Steel Sheet, Galvanized after Fabrication: ASTM A1008/A1008M, Commercial Steel, with ASTM A153/A153M, Class B coating.
 - 3. Steel Plates, Shapes, and Bars: ASTM A36/A36M.
- C. Individual Anchors: Provide anchors that allow vertical adjustment.
 - 1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Heckmann Building Products Inc., Div of US Masonry and Building Products; Dovetail Triangular Veneer Anchor (#103-C).
 - b. Hohmann & Barnard, Inc.; 345-BT Flexible Tie.
 - c. Wire-Bond; #2102 Dovetail Triangular Tie.
 - 2. Connector Section: Tab formed from 0.105-inch-thick (12 gage) steel sheet, hot-dip galvanized after fabrication

3. Tie Section: Triangular-shaped wire tie made from 0.187-inch-diameter, hot-dip galvanized steel wire, sized to extend within one inch of masonry face.
 4. Anchor: weld to steel; 1/4-inch-diameter hex-head concrete screw anchor, 1-1/4-inch length (minimum) for connecting to masonry or concrete.
- D. Anchors for Connecting CMU to Existing Masonry: Provide anchors that resist tension and compression forces perpendicular to plane of wall.
1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Heckmann Building Products Inc., Div. of US Masonry and Building Products; #103 C Dovetail Triangular Veneer Anchor.
 - b. Hohmann & Barnard, Inc.; #315 Flexible Dovetail Brick Tie.
 - c. Wire-Bond; #2102 Dovetail Triangular Tie.
 2. Connector Section: Dovetail clips attached to tie section with hole for anchoring to existing wall; formed from 0.105-inch-thick (12 gage) steel sheet, hot-dip galvanized.
 3. Tie Section: Triangular-shaped wire tie made from 0.187-inch-diameter hot-dip galvanized wire.
 4. Anchor: 1/4-inch-diameter hex-head concrete screw anchor; 1-1/4-inch length (minimum).
- E. Adjustable Anchors for Connecting to Structural Steel Framing: Provide anchors that allow vertical or horizontal adjustment but resist tension and compression forces perpendicular to plane of wall.
1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Heckmann Building Products Inc., Div. of US Masonry and Building Products; #317 Continuous Weld-On Anchor Rods and #316 Web Ties.
 - b. Hohmann & Barnard, Inc.; 359-C - Weld-On Ties and VBT – Vee Byna-Ties.
 - c. Wire-Bond; #1002 Type I Continuous Weld-On Anchors and #1100 Triangular Ties.
 2. Anchor Section for Welding to Steel Frame: Crimped 1/4-inch-diameter, hot-dip galvanized steel.
 3. Tie Section: Triangular-shaped wire tie made from 0.187-inch-diameter, hot-dip galvanized steel.
- F. Adjustable Veneer Anchors to Structural Steel: Provide individual anchors that allow vertical adjustment.
1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:

- a. Heckmann Building Products Inc., Div of US Masonry and Building Products; Double Pintle Brick Veneer Anchor (#213) and Double Pintle Tie (#263).
 - b. Hohmann & Barnard, Inc.; Veneer Anchor Plates with 2X-Hook (HB-213-2X).
 - c. Wire-Bond; Adjustable Veneer Anchor (#2401 RJ-711) with Double Hook (#2402).
 2. Anchor Section: Plate formed from 0.0747-inch-thick (14 gage) steel sheet, hot-dip galvanized after fabrication
 3. Tie Section: Triangular-shaped wire tie made from 0.187-inch-diameter, hot-dip galvanized steel wire, sized to extend within one inch of masonry face.
- G. Joint Stabilization Anchors: Provide anchors that bond masonry walls across expansion and control joints while allowing lateral movement, made from hot-dip galvanized-steel
1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Heckmann Building Products Inc., Div. of US Masonry and Building Products; Control Joint Anchor (353).
 - b. Hohmann & Barnard, Inc.; Slip-Set Stabilizer.
 - c. Wire-Bond; #1700 Control Joint Anchor.
- H. Adjustable Masonry-Veneer Anchors:
1. General: Provide anchors that allow vertical adjustment but resist a 100-lbf load in both tension and compression perpendicular to plane of wall without deforming or developing play in excess of 1/16 inch.
 2. Fabricate wire ties from 0.187-inch- diameter, hot-dip galvanized-steel wire unless otherwise indicated.
 3. Screw-Attached, Thermally-Isolated, Masonry-Veneer Anchors: Wire tie and a corrosion-resistant, self-drilling, barrel screw designed to receive wire tie. Barrel has gasketed washer head that covers hole in insulation.
 - a. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - 1) Heckmann Building Products Inc., Div. of US Masonry and Building Products; Pos-I-Tie ThermalClip System (Original Pos-I-Tie Veneer Anchoring Clip (75), Pos-I-Tie ThermalClip (75TC), and Pintle Wire Tie for ThermalClip (282-N)).
 - 2) Hohmann & Barnard, Inc.; Thermal 2-Seal Wing Nut Anchor and 2X Hook Wall Ties.
 - 3) Wire-Bond; Sure Tie WS Anchoring System (#4522 SureTie WS, #4590 Thermal Grip Washer, and #4515 SureTie WS Adjustable Double Hook).
- I. Top-of-Wall Wind Clips: Provide bent, galvanized steel plate clips as detailed on Drawings.

- J. Top-of-Wall Concealed Wind Anchors: Provide a metal plate with a 3/8-inch metal rod welded to plate and with a closed-end plastic tube fitted over rod that allows rod to move in and out of tube. Fabricate from steel, hot dip galvanized after fabrication.
1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Heckmann Building Products Inc., Div. of US Masonry and Building Products; #419 Pin Stabilizing Wall Anchor (419) with Plastic Tube (421).
 - b. Hohmann & Barnard, Inc.; Partition Top Anchor, PTA 420 HS with PTA Tube.
 - c. Wire-Bond; PTA #4301 Partition Top Anchor with PTA tube.

2.10 EMBEDDED FLASHING MATERIALS

- A. Flexible Flashing: Use the following unless otherwise indicated:
1. Copper-Laminated Flashing: 7-oz./sq. ft. copper sheet bonded between two layers of glass-fiber cloth/polymer fabric; non-asphaltic type. Use only where flashing is fully concealed in masonry.
 - a. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - 1) Advanced Building Products, Inc.; Copper Sealtite 2000.
 - 2) Wire-Bond; Copper Seal (Copper Fabric Flashing) #4140.
 - 3) York Manufacturing, Inc.; Multi-Flash 500.
- B. Drip Plate Flashing: Fabricate from copper to shape indicated, including inside corners, outside corners, and end dams. Provide hemmed edge drip plate flashing materials with foam seal and adhesive strip as follows:
1. Basis-of-Design Product: Subject to compliance with requirements, provide Hohmann & Barnard, Inc.; FTS Series Drip Plate or comparable product.
 2. Width: Not less than 3 inches.
 3. Copper: 16-oz./sq. ft.
- C. Single-Wythe CMU Flashing System: System of CMU cell flashing pans and interlocking CMU web covers made from UV-resistant, high-density polyethylene. Cell flashing pans have integral weep spouts designed to be built into mortar bed joints and that extend into the cell to prevent clogging with mortar.
1. Basis-of-Design Product: Subject to compliance with requirements, provide Mortar Net Solutions; BlockFlash or comparable product.
- D. Adhesives, Primers, and Seam Tapes for Flashings: Flashing manufacturer's standard products or products recommended by flashing manufacturer for bonding flashing sheets to each other and to substrates.

E. Termination Bars for Flexible Flashing: Stainless steel bars not less than 1/8 inch by 1 inch.

1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Heckmann Building Products Inc., Div. of US Masonry and Building Products; Termination Bar (1050).
 - b. Hohmann & Barnard, Inc.; T1 - Termination Bar.
 - c. Wire-Bond; #4200 Termination Bar.

2.11 MISCELLANEOUS MASONRY ACCESSORIES

A. Compressible Filler: Premolded filler strips complying with ASTM D1056, Grade 2A1; compressible up to 35 percent; of width and thickness indicated; formulated from neoprene.

1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Hohmann & Barnard, Inc.; NS – Closed Cell Neoprene Sponge.
 - b. Wire-Bond; #3300 Expansion Joint.

B. Preformed Control-Joint Gaskets: Made from styrene-butadiene-rubber compound, complying with ASTM D2000, Designation M2AA-805 and designed to fit standard sash block and to maintain lateral stability in masonry wall; size and configuration as indicated.

1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Hohmann & Barnard, Inc.; RS Series – Rubber Control Joint.
 - b. Wire-Bond; Rubber Control Joint.

C. Weep/Cavity Vent Products: Use the following unless otherwise indicated:

1. Cellular Plastic Weep/Vent: One-piece, flexible extrusion made from UV-resistant polypropylene copolymer, full height and width of head joint and depth 1/8 inch less than depth of outer wythe, in color selected from manufacturer's standard.
 - a. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - 1) Advanced Building Products, Inc.; Mortar Maze Weep Vents.
 - 2) Heckmann Building Products Inc., Div. of US Masonry and Building Products; Cell Vent (85).
 - 3) Hohmann & Barnard, Inc.; QV – Quadro-Vent.
 - 4) Wire-Bond; #3601 Cell Vent.

- D. Cavity Drainage Material: Free-draining mesh, made from polymer strands that will not degrade within the wall cavity.
1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Hohmann & Barnard, Inc.; Mortar Trap.
 - b. Mortar Net Solutions; WallDefender.
 - c. Wire-Bond; Cavity Net DT.
 2. Configuration: Provide the following:
 - a. Strips, full depth of cavity and 10 inches high, with dovetail-shaped notches 7 inches deep that prevent clogging with mortar droppings.

2.12 MASONRY CLEANERS

- A. Proprietary Cleaner: Manufacturer's standard-strength cleaner designed for removing mortar/grout stains, efflorescence, and other new construction stains from new masonry without discoloring or damaging masonry surfaces. Use product expressly approved for intended use by cleaner manufacturer and manufacturer of masonry units being cleaned.
1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Prosoco, Inc.

2.13 MORTAR AND GROUT MIXES

- A. General: Do not use admixtures, including pigments, air-entraining agents, accelerators, retarders, water-repellent agents, antifreeze compounds, or other admixtures unless otherwise indicated.
1. Do not use calcium chloride in mortar or grout.
 2. Use portland cement-lime mortar unless otherwise indicated.
- B. Preblended, Dry Mortar Mix: Furnish dry mortar ingredients in form of a preblended mix. Measure quantities by weight to ensure accurate proportions, and thoroughly blend ingredients before delivering to Project site.
- C. Mortar for Unit Masonry: Comply with ASTM C270, Proportion Specification. Provide the following types of mortar for applications stated unless another type is indicated.
1. For concrete masonry unit backup in exterior walls, masonry bearing walls, shear walls and masonry below grade or in contact with earth, use Type S. Not for use in masonry veneer construction.
 2. Use Type N mortar in all masonry veneer construction and in all masonry construction other than noted in the requirements for Type S mortar above.

D. Pigmented Mortar: Use colored cement product.

1. Application: Use pigmented mortar for exposed mortar joints with the following units:
 - a. Decorative CMUs.
 - b. Pre-faced CMUs.
 - c. Face brick.

E. Grout for Unit Masonry: Comply with ASTM C476.

1. Use grout of type indicated or, if not otherwise indicated, of type (fine or coarse) that will comply with TMS 602 for dimensions of grout spaces and pour height.
2. Proportion grout in accordance with ASTM C476, Table 1
3. Provide grout with a slump of 8 to 11 inches as measured according to ASTM C143/C143M.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine conditions, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.
 1. Verify that foundations are within tolerances specified.
 2. Verify that reinforcing dowels are properly placed.
 3. Verify that substrates are free of substances that impair mortar bond.
- B. Before installation, examine rough-in and built-in construction for piping systems to verify actual locations of piping connections.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.
- D. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 INSTALLATION, GENERAL

- A. Thickness: Build cavity and composite walls and other masonry construction to full thickness shown. Build single-wythe walls to actual widths of masonry units, using units of widths indicated.
- B. Build chases and recesses to accommodate items specified in this and other Sections.
- C. Leave openings for equipment to be installed before completing masonry. After installing equipment, complete masonry to match construction immediately adjacent to opening.
- D. Use full-size units without cutting if possible. If cutting is required to provide a continuous pattern or to fit adjoining construction, cut units with motor-driven saws; provide clean, sharp, unchipped edges. Allow units to dry before laying unless wetting of units is specified. Install cut units with cut surfaces and, where possible, cut edges concealed.

- E. Select and arrange units for exposed unit masonry to produce a uniform blend of colors and textures. Mix units from several pallets or cubes as they are placed.
- F. Matching Existing Masonry: Match coursing, bonding, color, and texture of existing masonry.
- G. Wetting of Brick: Wet brick before laying if initial rate of absorption exceeds 30 g/30 sq. in. per minute when tested according to ASTM C67. Allow units to absorb water so they are damp but not wet at time of laying.

3.3 TOLERANCES

A. Dimensions and Locations of Elements:

- 1. For dimensions in cross section or elevation, do not vary by more than plus 1/2 inch or minus 1/4 inch.
- 2. For location of elements in plan, do not vary from that indicated by more than plus or minus 1/2 inch.
- 3. For location of elements in elevation, do not vary from that indicated by more than plus or minus 1/4 inch in a story height or 1/2 inch total.

B. Lines and Levels:

- 1. For bed joints and top surfaces of bearing walls, do not vary from level by more than 1/4 inch in 10 feet, or 1/2-inch maximum.
- 2. For conspicuous horizontal lines, such as lintels, sills, parapets, and reveals, do not vary from level by more than 1/8 inch in 10 feet, 1/4 inch in 20 feet, or 1/2-inch maximum.
- 3. For vertical lines and surfaces, do not vary from plumb by more than 1/4 inch in 10 feet, 3/8 inch in 20 feet, or 1/2-inch maximum.
- 4. For conspicuous vertical lines, such as external corners, door jambs, reveals, and expansion and control joints, do not vary from plumb by more than 1/8 inch in 10 feet, 1/4 inch in 20 feet, or 1/2-inch maximum.
- 5. For lines and surfaces, do not vary from straight by more than 1/4 inch in 10 feet, 3/8 inch in 20 feet, or 1/2-inch maximum.
- 6. For vertical alignment of exposed head joints, do not vary from plumb by more than 1/4 inch in 10 feet or 1/2-inch maximum.
- 7. For faces of adjacent exposed masonry units, do not vary from flush alignment by more than 1/16 inch except due to warpage of masonry units within tolerances specified for warpage of units.

C. Joints:

- 1. For bed joints, do not vary from thickness indicated by more than plus or minus 1/8 inch, with a maximum thickness limited to 1/2 inch.

2. For exposed bed joints, do not vary from bed-joint thickness of adjacent courses by more than 1/8 inch.
3. For head and collar joints, do not vary from thickness indicated by more than plus 3/8 inch or minus 1/4 inch.
4. For exposed head joints, do not vary from thickness indicated by more than plus or minus 1/8 inch. Do not vary from adjacent bed-joint and head-joint thicknesses by more than 1/8 inch.
5. For exposed bed joints and head joints of stacked bond, do not vary from a straight line by more than 1/16 inch from one masonry unit to the next.

3.4 LAYING MASONRY WALLS

- A. Lay out walls in advance for accurate spacing of surface bond patterns with uniform joint thicknesses and for accurate location of openings, movement-type joints, returns, and offsets. Avoid using less-than-half-size units, particularly at corners, jambs, and, where possible, at other locations.
- B. Bond Pattern for Exposed Masonry: Unless otherwise indicated, lay exposed masonry in running bond; do not use units with less-than-nominal 4-inch horizontal face dimensions at corners or jambs.
- C. Lay concealed masonry with all units in a wythe in running bond or bonded by lapping not less than 2 inches. Bond and interlock each course of each wythe at corners. Do not use units with less-than-nominal 4-inch horizontal face dimensions at corners or jambs.
- D. Stopping and Resuming Work: Stop work by stepping back units in each course from those in course below; do not tooth. When resuming work, clean masonry surfaces that are to receive mortar, remove loose masonry units and mortar, and wet brick if required before laying fresh masonry.
- E. Built-in Work: As construction progresses, build in items specified in this and other Sections. Fill in solidly with masonry around built-in items.
- F. Fill space between steel frames and masonry solidly with mortar unless otherwise indicated.
- G. Where built-in items are to be embedded in cores of hollow masonry units, place a layer of metal lath, wire mesh, or plastic mesh in the joint below, and rod mortar or grout into core.
- H. Fill cores in hollow CMUs with grout 24 inches under bearing plates, beams, lintels, posts, and similar items unless otherwise indicated.
- I. Build nonload-bearing interior partitions full height of story to underside of solid floor or roof structure above unless otherwise indicated.
 1. Install compressible filler in joint between top of partition and underside of structure above.

2. Fasten top-of-wall wind clips to structure above. Grout cells of CMUs solidly and space clips four feet on center maximum or as indicated on Drawings.
3. Fasten concealed wind anchors to structure above and build into top of partition. Grout cells of CMUs solidly around plastic tubes of anchors, and push tubes down into grout to provide 1/2-inch clearance between end of anchor rod and end of tube. Space anchors as indicated on Drawings.
4. At fire-rated partitions, treat joint between top of partition and underside of structure above to comply with Division 07 Section "Joint Firestopping."

3.5 MORTAR BEDDING AND JOINTING

A. Lay CMUs as follows:

1. Bed face shells in mortar and make head joints of depth equal to bed joints.
 2. Bed webs in mortar in all courses of piers, columns, and pilasters.
 3. Bed webs in mortar in grouted masonry, including starting course on footings.
 4. Fully bed entire units, including areas under cells, at starting course on footings where cells are not grouted.
 5. Fully bed units and fill cells with mortar at anchors and ties as needed to fully embed anchors and ties in mortar.
- B. Lay solid masonry units with completely filled bed and head joints; butter ends with sufficient mortar to fill head joints and shove into place. Do not deeply furrow bed joints or slush head joints.
- C. Tool exposed joints slightly concave when thumbprint hard, using a jointer larger than joint thickness unless otherwise indicated.
- D. Cut joints flush for masonry walls to receive plaster or other direct-applied finishes (other than paint) unless otherwise indicated.
- E. Cut joints flush where indicated to receive air barriers unless otherwise indicated.

3.6 COMPOSITE MASONRY

A. Bond wythes of composite masonry together as follows:

1. Masonry-Joint Reinforcement: Installed in horizontal mortar joints.
 - a. Use adjustable-type (two-piece-type) reinforcement
- B. Collar Joints: Solidly fill collar joints by parging face of first wythe that is laid and shoving units of other wythe into place.

- C. Corners: Provide interlocking masonry unit bond in each wythe and course at corners unless otherwise indicated.
 - 1. Provide continuity with masonry-joint reinforcement at corners by using prefabricated L-shaped units as well as masonry bonding.
- D. Intersecting and Abutting Walls: Unless vertical expansion or control joints are shown at juncture, bond walls together as follows:
 - 1. Provide continuity with masonry-joint reinforcement by using prefabricated T-shaped units.

3.7 CAVITY WALLS

- A. Bond wythes of cavity walls together using one of the following methods:
 - 1. Masonry-Joint Reinforcement: Installed in horizontal mortar joints.
 - a. Use adjustable-type (two-piece-type) reinforcement
 - 2. Adjustable Masonry-Veneer Anchors: Comply with requirements for anchoring masonry veneers.
- B. Keep cavities clean of mortar droppings and other materials during construction. Bevel beds away from cavity, to minimize mortar protrusions into cavity.
- C. Install air barrier system to comply with Division 07 Section "Fluid-Applied Membrane Air Barriers."
- D. Installing Cavity Wall Insulation: Place small dabs of adhesive, spaced approximately 12 inches o.c. both ways, on inside face of insulation boards, or attach with plastic fasteners designed for this purpose. Fit courses of insulation between wall ties and other confining obstructions in cavity, with edges butted tightly both ways. Press units firmly against inside wythe of masonry or other construction as shown.
 - 1. Fill cracks and open gaps in insulation with crack sealer compatible with insulation, air barrier, and masonry.

3.8 ANCHORED MASONRY VENEERS

- A. Anchor masonry veneers to wall framing and masonry with masonry-veneer anchors to comply with the following requirements:
 - 1. Fasten screw-attached anchors through sheathing to wall framing and to masonry backup metal fasteners of type indicated. Use two fasteners unless anchor design only uses one fastener.
 - 2. Embed tie sections in masonry joints.

3. Locate anchor sections to allow maximum vertical differential movement of ties up and down.
 4. Space anchors as indicated, but not more than 16 inches o.c. vertically and 16 inches o.c. horizontally, with not less than one anchor for each 2 sq. ft. of wall area. Install additional anchors within 12 inches of openings and at intervals, not exceeding 8 inches, around perimeter.
- B. Provide not less than 2 inches of airspace between back of masonry veneer and face of insulation.
1. Keep airspace clean of mortar droppings and other materials during construction. Bevel beds away from airspace, to minimize mortar protrusions into airspace.

3.9 MASONRY-JOINT REINFORCEMENT

- A. General: Install entire length of longitudinal side rods in mortar with a minimum cover of 5/8 inch on exterior side of walls, 1/2 inch elsewhere. Lap reinforcement a minimum of 6 inches.
1. Space reinforcement not more than 16 inches o.c.
 2. Space reinforcement not more than 8 inches o.c. in parapet walls.
 3. Provide reinforcement not more than 8 inches above and below wall openings and extending 12 inches beyond openings in addition to continuous reinforcement.
- B. Interrupt joint reinforcement at control and expansion joints unless otherwise indicated.
- C. Provide continuity at wall intersections by using prefabricated T-shaped units.
- D. Provide continuity at corners by using prefabricated L-shaped units.
- E. Cut and bend reinforcing units as directed by manufacturer for continuity at returns, offsets, column fireproofing, pipe enclosures, and other special conditions.

3.10 ANCHORING MASONRY TO STRUCTURAL STEEL AND CONCRETE

- A. Anchor masonry to structural steel and concrete, where masonry abuts or faces structural steel or concrete, to comply with the following:
1. Provide an open space not less than 2 inches wide between masonry and structural steel or concrete unless otherwise indicated. Keep open space free of mortar and other rigid materials.
 2. Anchor masonry with anchors embedded in masonry joints and attached to structure.
 3. Space anchors as indicated, but not more than 16 inches o.c. vertically and 16 inches o.c. horizontally.

3.11 CONTROL AND EXPANSION JOINTS

- A. General: Install control- and expansion-joint materials in unit masonry as masonry progresses. Do not allow materials to span control and expansion joints without provision to allow for in-plane wall or partition movement.
 - 1. Locate joints as indicated on Drawings; if not indicated, locate vertical joints not more than 20 feet o.c. for expansion joints in masonry veneer and 24 feet o.c. for control joints in concrete masonry and 2 feet from all corners.
- B. Form control joints in concrete masonry as follows:
 - 1. Install preformed control-joint gaskets designed to fit standard sash block.
 - 2. At steel columns, construct control-joint according to Drawings.
- C. Form expansion joints in brick as follows:
 - 1. Build in compressible joint fillers where indicated.
 - 2. Form open joint full depth of brick wythe and of width indicated, but not less than 3/8 inch for installation of sealant and backer rod specified in Division 07 Section "Joint Sealants."
- D. Provide horizontal, pressure-relieving joints by either leaving an airspace or inserting a compressible filler of width required for installing sealant and backer rod specified in Division 07 Section "Joint Sealants," but not less than 3/8 inch.

3.12 LINTELS

- A. Install steel lintels where indicated.
- B. Provide masonry lintels where shown and where openings of more than 12 inches for brick-size units and 24 inches for block-size units are shown without structural steel or other supporting lintels.
- C. Provide minimum bearing of 8 inches at each jamb unless otherwise indicated.

3.13 FLASHING, WEEP HOLES, AND CAVITY VENTS

- A. General: Install embedded flashing and weep holes in masonry at shelf angles, lintels, ledges, other obstructions to downward flow of water in wall, and where indicated. Install cavity vents at shelf angles, ledges, and other obstructions to upward flow of air in cavities, and where indicated.
- B. Install flashing as follows unless otherwise indicated:
 - 1. Prepare masonry surfaces so they are smooth and free from projections that could puncture flashing. Where flashing is within mortar joint, place through-wall flashing on sloping bed of mortar and cover with mortar. Before covering with mortar, seal penetrations in flashing with adhesive, sealant, or tape as recommended by flashing manufacturer.

2. At multiwythe masonry walls, including cavity walls, extend flashing through outer wythe, turned up a minimum of 12 inches, and at least 6 inches above the top of cavity drainage material or to height as recommended by cavity drainage material manufacturer. Fasten upper edge of flexible flashing to inner wythe through termination bar.
 3. At masonry-veneer walls, extend flashing through veneer, across airspace behind veneer, and up face of sheathing at least 12 inches, and at least 6 inches above the top of the cavity drainage material or to height as recommended by cavity drainage material manufacturer. Fasten upper edge of flexible flashing to sheathing through termination bar.
 4. Apply a continuous bead of compatible sealant to the top of the termination bar.
 5. At lintels and shelf angles, extend flashing a minimum of 6 inches into masonry at each end. At heads and sills, extend flashing 6 inches at ends and turn up not less than 2 inches to form end dams.
 6. Install metal drip plate flashing beneath flexible flashing at exterior face of wall as recommended by manufacturer. Stop flexible flashing 1/2 inch back from outside face of wall and adhere flexible flashing to top of metal drip plate flashing.
- C. Install single-wythe CMU flashing system in bed joints of CMU walls where indicated to comply with manufacturer's written instructions. Install CMU cell pans with upturned edges located below face shells and webs of CMUs above and with weep spouts aligned with face of wall. Install CMU web covers so that they cover upturned edges of CMU cell pans at CMU webs and extend from face shell to face shell.
- D. Install weep holes in exterior wythes and veneers in head joints of first course of masonry immediately above embedded flashing.
1. Use specified weep/cavity vent products to form weep holes.
 2. Space weep holes 24 inches o.c. unless otherwise indicated.
- E. Place cavity drainage material in airspace behind veneers to comply with configuration requirements for cavity drainage material in "Miscellaneous Masonry Accessories" Article.
- F. Install cavity vents in head joints in exterior wythes at 24 inches o.c. unless otherwise indicated. Use specified weep/cavity vent products to form cavity vents.
1. Close cavities off vertically and horizontally with blocking in manner indicated. Install through-wall flashing and weep holes above horizontal blocking.

3.14 REINFORCED UNIT MASONRY

- A. Temporary Formwork and Shores: Construct formwork and shores as needed to support reinforced masonry elements during construction.
1. Construct formwork to provide shape, line, and dimensions of completed masonry as indicated. Make forms sufficiently tight to prevent leakage of mortar and grout. Brace, tie, and support forms to maintain position and shape during construction and curing of reinforced masonry.

2. Do not remove forms and shores until reinforced masonry members have hardened sufficiently to carry their own weight and that of other loads that may be placed on them during construction.
- B. Placing Reinforcement: Comply with requirements in TMS 602.
 - C. Welded Reinforcing Bars: Weld in accordance with AWS D1.4/D1.4M, where indicated on Drawings.
 - D. Grouting: Do not place grout until entire height of masonry to be grouted has attained enough strength to resist grout pressure.
 1. Comply with requirements in TMS 602 for cleanouts and for grout placement, including minimum grout space and maximum pour height.
 2. Limit height of vertical grout pours to not more than 60 inches.

3.15 FIELD QUALITY CONTROL

- A. Testing and Special Inspections: Owner will engage special inspector and qualified testing and inspecting agency to perform tests and inspections and prepare reports. Allow inspectors access to scaffolding and work areas as needed to perform tests and inspections. Retesting of materials that fail to comply with specified requirements shall be done at Contractor's expense.
- B. Inspections: Special inspections according to Level 2 in TMS 402.
 1. Begin masonry construction only after inspectors have verified proportions of site-prepared mortar.
 2. Place grout only after inspectors have verified compliance of grout spaces and of grades, sizes, and locations of reinforcement.
 3. Place grout only after inspectors have verified proportions of site-prepared grout.
- C. Testing Prior to Construction: One set of tests.
- D. Testing Frequency: One set of tests for each 5000 sq. ft. of wall area or portion thereof.
- E. Clay Masonry Unit Test: For each type of unit provided, according to ASTM C67 for compressive strength.
- F. Concrete Masonry Unit Test: For each type of unit provided, according to ASTM C140 for compressive strength.
- G. Mortar Aggregate Ratio Test (Proportion Specification): For each mix provided, according to ASTM C780.
- H. Grout Test (Compressive Strength): For each mix provided, according to ASTM C1019.
- I. Reinforcement Inspections: Inspect reinforcement for size and placement.
- J. Grout and Mortar Inspection: Inspect grout and mortar mixing operations to ensure mix proportions and procedures comply with specified requirements.

- K. Tie and Anchor Inspections: Inspect ties and anchors for type, spacing, and proper installation.
- L. Flashing and Accessories Inspections: Inspect flashing and accessories for type and proper installation.
- M. Cold-Weather and Hot-Weather Inspections: Inspect masonry construction operations for compliance with specified cold-weather and hot-weather procedures.

3.16 CORRECTING, POINTING, AND CLEANING

- A. Remove and replace masonry units that are loose, chipped, broken, stained, or otherwise damaged or that do not match adjoining units. Install new units to match adjoining units; install in fresh mortar, pointed to eliminate evidence of replacement.
- B. Pointing: During the tooling of joints, enlarge voids and holes, except weep holes, and completely fill with mortar. Point up joints, including corners, openings, and adjacent construction, to provide a neat, uniform appearance. Prepare joints for sealant application, where indicated.
- C. In-Progress Cleaning: Clean unit masonry as work progresses by dry brushing to remove mortar fins and smears before tooling joints.
- D. Final Cleaning: After mortar is thoroughly set and cured, clean exposed masonry as follows:
 - 1. Remove large mortar particles by hand with wooden paddles and nonmetallic scrape hoes or chisels.
 - 2. Test cleaning methods on sample wall panel; leave one-half of panel uncleaned for comparison purposes. Obtain Architect's approval of sample cleaning before proceeding with cleaning of masonry.
 - 3. Protect adjacent stone and nonmasonry surfaces from contact with cleaner by covering them with liquid strippable masking agent or polyethylene film and waterproof masking tape.
 - 4. Wet wall surfaces with water before applying cleaners; remove cleaners promptly by rinsing surfaces thoroughly with clear water.
 - 5. Clean brick by bucket-and-brush hand-cleaning method described in BIA Technical Notes 20.
 - 6. Clean concrete masonry by applicable cleaning methods indicated in NCMA TEK 8-4A.
 - 7. Clean masonry with a proprietary cleaner applied according to manufacturer's written instructions.

END OF SECTION 04 20 00

SECTION 04 43 13.13 – ANCHORED STONE MASONRY VENEER**PART 1 - GENERAL****1.1 SUMMARY****A. Section Includes:**

1. Stone masonry anchored to cold-formed metal framing and sheathing.

B. Related Requirements:

1. Section 042000 "Unit Masonry" for concealed flashing, horizontal joint reinforcement, and veneer anchors.

1.2 ACTION SUBMITTALS**A. Product Data:** For each variety of stone, stone accessory, and manufactured product.**B. Samples for Initial Selection:** For colored mortar and other items involving color selection.**C. Samples for Verification:**

1. For each stone type indicated. Include at least two 8" x 8" Samples in each set and show the full range of color and other visual characteristics in completed Work.
2. For each color of mortar required.

1.3 INFORMATIONAL SUBMITTALS**A. Qualification Data:** For Installer.**B. Material Test Reports:**

1. Stone Test Reports: For each stone variety proposed for use on Project, by a qualified testing agency, indicating compliance with required physical properties, other than abrasion resistance, according to referenced ASTM standards. Base reports on testing done within previous five years.
2. Sealant Compatibility and Adhesion Test Report: From sealant manufacturer indicating that sealants will not stain or damage stone. Include interpretation of test results and recommendations for primers and substrate preparation needed for adhesion.

C. Shop Drawings:

1. Prepare and submit cutting and setting drawings for approval. Such drawings shall show in detail the sizes, sections, and dimensions of stones, the arrangement of joints and bonding, anchoring, and other necessary details.

1.4 QUALITY ASSURANCE

- A. Installer Qualifications: A qualified installer who employs experienced stonemasons and stone fitters.
- B. Obtain each variety of stone from a single quarry with an adequate supply and annual rate of production to deliver stone to the job site to assure no delay in the progress and completion of the work.

1.5 PRECONSTRUCTION TESTING

- A. Preconstruction Sealant Compatibility and Adhesion Testing: Submit to joint-sealant manufacturers, for compatibility and adhesion testing according to sealant manufacturer's standard testing methods and Section 079200 "Joint Sealants," Samples of materials that will contact or affect joint sealants.

1.6 DELIVERY, STORAGE, AND HANDLING

- A. Store cementitious materials on elevated platforms, under cover, and in a dry location. Do not use cementitious materials that have become damp.
- B. Store aggregates where grading and other required characteristics can be maintained and contamination avoided.
- C. Deliver preblended, dry mortar mix in moisture-resistant containers designed for use with dispensing silos. Store preblended, dry mortar mix in delivery containers on elevated platforms, under cover, in a dry location, or in covered weatherproof dispensing silos.
- D. Store masonry accessories, including metal items, to prevent corrosion and accumulation of dirt and oil.

1.7 FIELD CONDITIONS

- A. Protection of Stone Masonry: During construction, cover tops of walls, projections, and sills with waterproof sheeting at end of each day's work. Cover partially completed stone masonry when construction is not in progress.
 - 1. Extend cover a minimum of 24 inches down both sides and hold cover securely in place.
- B. Stain Prevention: Immediately remove mortar and soil to prevent them from staining stone masonry face.
 - 1. Protect base of walls from rain-splashed mud and mortar splatter using coverings spread on the ground and over the wall surface.
 - 2. Protect sills, ledges, and projections from mortar droppings.
 - 3. Protect surfaces of window and door frames, as well as similar products with painted and integral finishes, from mortar droppings.
 - 4. Turn scaffold boards near the wall on edge at end of each day to prevent rain from splashing mortar and dirt on completed stone masonry.

- C. Cold-Weather Requirements: Do not use frozen materials or materials mixed or coated with ice or frost. Do not build on frozen substrates. Remove and replace stone masonry damaged by frost or freezing conditions. Comply with cold-weather construction requirements contained in TMS 602/ACI 530.1/ASCE 6.
 - 1. Cold-Weather Cleaning: Use liquid cleaning methods only when air temperature is 40 deg F and above and will remain so until masonry has dried, but not less than seven days after completing cleaning.
- D. Hot-Weather Requirements: Comply with hot-weather construction requirements contained in TMS 602/ACI 530.1/ASCE 6.

1.8 COORDINATION

- A. Advise installers of adjacent Work about specific requirements for placement of reinforcement, veneer anchors, flashing, and similar items to be built into stone masonry.
- B. Coordinate locations of dovetail slots installed in concrete that are to receive stone anchors.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Source Limitations for Stone: Obtain stone from single quarry with resources to provide materials of consistent quality in appearance and physical properties.
- B. Source Limitations for Mortar Materials: Obtain mortar ingredients of uniform quality for each cementitious component from single manufacturer and each aggregate from single source or producer.

2.2 LIMESTONE – See drawings KA702, KA201, KA202

- A. Material Standard: Comply with ASTM C568/C568M.
 - 1. Classification: II Medium Density.
- B. Description: Oolitic limestone.
- C. Basis-of-Design Product: Subject to compliance with requirements, provide Stone Panels from the Cornerstone Collection manufactured by U.S. Stone Industries, LLC, or comparable product.
 - 1. Stone: Type LSP
 - a. Height: 2' – 6", or as recommended by manufacturer
 - b. Thickness: 3-5/8"
 - c. Length: 2'
 - d. Color: Bottom Ledge Cottonwood
 - e. Finish: Brushed

2.3 STONE FABRICATION

- A. General: Fabricate stonework in sizes and shapes required to comply with requirements indicated on contract drawings and final shop drawings.
- B. Cut and drill sinkages and holes for anchors, fasteners and supports as indicated by final shop drawings.
- C. Cut stones to produce pieces of thickness, size and shape indicated or required within fabrication tolerances recommended by the ILI.
- D. Finish exposed stone faces and edges to comply with requirements indicated for finish and to match approved samples

2.4 MORTAR MATERIALS

- A. Portland Cement: ASTM C150/C150M, Type I or Type II, except Type III may be used for cold-weather construction; natural color or white cement may be used as required to produce mortar color indicated.
 - 1. Low-Alkali Cement: Not more than 0.60 percent total alkali when tested according to ASTM C114.
- B. Hydrated Lime: ASTM C207, Type S.
- C. Portland Cement-Lime Mix: Packaged blend of portland cement and hydrated lime containing no other ingredients.
- D. Water: Potable.
- E. Anchors: Type per Manufacturer's recommendation

2.5 MISCELLANEOUS MASONRY ACCESSORIES

- A. Compressible Filler: Premolded filler strips complying with ASTM D1056, Grade 2A1; compressible up to 35 percent; of width and thickness indicated; formulated from neoprene.
- B. Cementitious Dampproofing for Limestone: Cementitious formulation recommended by ILI and nonstaining to stone, compatible with joint sealants, and noncorrosive to veneer anchors and attachments.
- C. Asphalt Dampproofing: Cut-back asphalt complying with ASTM D4479/D4479M, Type I or asphalt emulsion complying with ASTM D1227, Type III or Type IV.
- D. Weep/Vent Products: Use one of the following unless otherwise indicated:
 - 1. Wicking Material: Absorbent rope, made from UV-resistant synthetic fiber, 1/4 to 3/8 inch in diameter, in length required to produce 2-inch exposure on exterior and 18 inches in cavity behind stone masonry. Use only for weeps.
 - 2. Round Plastic Tubing: Medium-density polyethylene, 3/8-inch OD by thickness of stone masonry.

3. Rectangular Plastic Tubing: Clear butyrate, 3/8 by 1-1/2 inches by thickness of stone masonry.
 4. Mesh Weep Holes/Vents: Free-draining mesh; made from polyethylene strands, full width of head joint and 2 inches high by thickness of stone masonry; in color selected from manufacturer's standard.
 5. Vinyl Weep Holes/Vents: One-piece, offset, T-shaped units made from flexible, injection-molded PVC, designed to fit into head joint and consisting of louvered vertical leg, flexible wings to seal against ends of stone units, and top flap to keep mortar out of head joint; in color approved by Architect to match that of mortar.
- E. Cavity Drainage Material: Free-draining mesh, made from polymer strands that will not degrade within the wall cavity.
1. Provide one of the following configurations:
 - a. Strips, full depth of cavity and 10 inches wide, with dovetail-shaped notches 7 inches deep that prevent mesh from being clogged with mortar droppings.
 - b. Strips, not less than 1-1/2 inches thick and 10 inches wide, with dimpled surface designed to catch mortar droppings and prevent weep holes from being clogged with mortar.
 - c. Sheets or strips full depth of cavity and installed to full height of cavity.
 - d. Sheets or strips not less than 1 inch thick and installed to full height of cavity with additional strips 4 inches high at weep holes and thick enough to fill entire depth of cavity and prevent weep holes from being clogged with mortar.

2.6 MASONRY CLEANERS

- A. Proprietary Acidic Cleaner: Manufacturer's standard-strength cleaner designed for removing mortar and grout stains, efflorescence, and other new construction stains from stone masonry surfaces without discoloring or damaging masonry surfaces; expressly approved for intended use by cleaner manufacturer and stone producer.

2.7 MORTAR MIXES

- A. General: Do not use admixtures, including pigments, air-entraining agents, accelerators, retarders, water-repellent agents, antifreeze compounds, or other admixtures, unless otherwise indicated.
 1. Do not use calcium chloride.
 2. Use portland cement-lime mortar unless otherwise indicated.
- B. Preblended, Dry Mortar Mix: Furnish dry mortar ingredients in the form of a preblended mix. Measure quantities by weight to ensure accurate proportions, and thoroughly blend ingredients before delivering to Project site.

C. Mortar for Stone Masonry: Comply with ASTM C270, Proportion Specification.

1. Mortar for Setting Stone: Type N.
2. Mortar for Pointing Stone: Type N.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine surfaces indicated to receive stone masonry, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of stone masonry.
- B. Examine substrate to verify that dovetail slots, inserts, reinforcement, veneer anchors, flashing, and other items installed in substrates and required for or extending into stone masonry are correctly installed.
- C. Examine wall framing, sheathing, and weather-resistant sheathing paper to verify that stud locations are suitable for spacing of veneer anchors and that installation will result in a weatherproof covering.
- D. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Accurately mark stud centerlines on face of weather-resistant sheathing paper before beginning stone installation.
- B. Coat concrete and unit masonry backup with asphalt dampproofing.
- C. Clean dirty or stained stone surfaces by removing soil, stains, and foreign materials before setting. Clean stone by thoroughly scrubbing with fiber brushes and then drenching with clear water. Use only mild cleaning compounds that contain no caustic or harsh materials or abrasives.

3.3 INSTALLATION OF STONE MASONRY

- A. Perform necessary field cutting and trimming as stone is set.
 1. Use power saws to cut stone that is fabricated with saw-cut surfaces. Cut lines straight and true, with edges eased slightly to prevent snipping.
- B. Instal supports, fasteners, and other attachments indicated or necessary to secure stone masonry in place.
- C. Set stone accurately in locations indicated with edges and faces aligned according to established relationships and indicated tolerances.

- D. Provide sealant joints of widths and at locations indicated.
1. Keep sealant joints free of mortar and other rigid materials.
 2. Sealant joints are specified in Section 079200 "Joint Sealants."
- E. Install metal expansion strips in sealant joints at locations indicated. Build flanges of expansion strips into masonry by embedding in mortar between stone masonry and backup wythe. Lap each joint 4 inches in direction of water flow. Seal joints below grade and at junctures with horizontal expansion joints if any.
- F. Install embedded flashing and weep holes at shelf angles, lintels, ledges, other obstructions to downward flow of water in wall, and where indicated.
1. At stud-framed walls, extend flashing through stone masonry, up sheathing face at least 12 inches, and behind weather barrier.
 2. At sills, extend flashing not less than 4 inches at ends.
 3. At ends of head and sill flashing, turn up not less than 2 inches to form end dams.
 4. Interlock end joints of ribbed sheet metal flashing by overlapping ribs not less than 1-1/2 inches or as recommended by flashing manufacturer, and seal lap with elastomeric sealant complying with requirements in Section 079200 "Joint Sealants" for application indicated.
 5. Install metal drip edges and sealant stops with ribbed sheet metal flashing by interlocking hemmed edges to form hooked seam. Seal seam with elastomeric sealant complying with requirements in Section 079200 "Joint Sealants" for application indicated.
 6. Extend sheet metal flashing 1/2 inch beyond masonry face at exterior, and turn flashing down to form a drip.
 7. Install metal drip edges beneath flexible flashing at exterior wall face. Stop flexible flashing 1/2 inch back from exterior wall face and adhere flexible flashing to top of metal drip edge.
 8. Install metal flashing termination beneath flexible flashing at exterior wall face. Stop flexible flashing 1/2 inch back from exterior wall face and adhere flexible flashing to top of metal flashing termination.
 9. Cut flexible flashing flush with wall face after completing masonry wall construction.
- G. Place weep holes and vents in joints where moisture may accumulate, including at base of cavity walls, above shelf angles, and at flashing.
1. Use wicking material, round plastic tubing, rectangular plastic tubing, mesh weep holes/vents, or, vinyl weep holes/vents to form weep holes.
 2. Use wicking material to form weep holes above flashing in stone sills. Turn wicking down at lip of sill to be as inconspicuous as possible.
 3. Space weep holes 16 inches o.c.
 4. Space weep holes formed from plastic tubing or wicking material 16 inches o.c.

5. Trim wicking material used in weep holes flush with exterior wall face after mortar has set.
6. Place pea gravel in cavities as soon as practical to a height of not less than 2 inches above top of flashing, to maintain drainage.
7. Place cavity drainage material in cavities to comply with configuration requirements for cavity drainage material in "Miscellaneous Masonry Accessories" Article.

H. Coat limestone with cementitious dampproofing as follows:

1. Stone at Grade: Beds, joints, and back surfaces to at least 12 inches above finish-grade elevations.
2. Stone Extending below Grade: Beds, joints, back surfaces, and face surfaces below grade.
3. Allow cementitious dampproofing formulations to cure before setting dampproofed stone. Do not damage or remove dampproofing in the course of handling and setting stone.

3.4 INSTALLATION OF ANCHORED STONE MASONRY

- A. Anchor stone masonry to stud framing with screw-attached veneer anchors unless otherwise indicated.
- B. Anchor stone masonry to metal-stud framing with wire anchors unless otherwise indicated. Tie anchors to studs.
- C. Embed veneer anchors in mortar joints of stone masonry at least halfway, but not less than 1-1/2 inches, through stone masonry and with at least a 5/8-inch cover on exterior face..
- D. Space anchors to provide not less than one anchor per 2 sq. ft. of wall area. Install additional anchors within 12 inches of openings, sealant joints, and perimeter at intervals not exceeding 12 inches.
- E. Anchor stone trim with stone trim anchors where indicated. Install anchors by fastening to substrate and inserting tabs and dowels into kerfs and holes in stone units. Provide compressible filler in ends of dowel holes and bottoms of kerfs to prevent end bearing of dowels and anchor tabs on stone. Fill remainder of anchor holes and kerfs with mortar.
- F. Set stone in full bed of mortar with full head joints unless otherwise indicated. Build anchors into mortar joints as stone is set.
- G. Fill space between back of stone masonry and weather-resistant sheathing paper with mortar as stone is set.
- H. Provide 1-inch cavity between stone masonry and backup construction unless otherwise indicated. Keep cavity free of mortar droppings and debris.
 1. Slope beds toward cavity to minimize mortar protrusions into cavity.
 2. Do not attempt to trowel or remove mortar fins protruding into cavity.

- I. Rake out joints for pointing with mortar to depth of not less than 1/2 inch before setting mortar has hardened. Rake joints to uniform depths with square bottoms and clean sides.

3.5 POINTING

- A. Prepare stone-joint surfaces for pointing with mortar by removing dust and mortar particles. Where setting mortar was removed to depths greater than surrounding areas, apply pointing mortar in layers not more than 3/8 inch deep until a uniform depth is formed.
- B. Point stone joints by placing and compacting pointing mortar in layers of not more than 3/8 inch deep. Compact each layer thoroughly and allow to it become thumbprint hard before applying next layer.
- C. Tool joints, when pointing mortar is thumbprint hard, with a smooth jointing tool to produce the following joint profile:
 1. Joint Profile: Smooth, flat face slightly below edges of stone.

3.6 ADJUSTING AND CLEANING

- A. Remove and replace stone masonry of the following description:
 1. Broken, chipped, stained, or otherwise damaged stone. Stone may be repaired if methods and results are approved by Architect.
 2. Defective joints.
 3. Stone masonry not matching approved samples and mockups.
 4. Stone masonry not complying with other requirements indicated.
- B. Replace in a manner that results in stone masonry matching approved samples and mockups, complying with other requirements, and showing no evidence of replacement.
- C. In-Progress Cleaning: Clean stone masonry as work progresses. Remove mortar fins and smears before tooling joints.
- D. Final Cleaning: After mortar is thoroughly set and cured, clean stone masonry as follows:
 1. Remove large mortar particles by hand with wooden paddles and nonmetallic scrape hoes or chisels.
 2. Test cleaning methods on mockup; leave one-half of panel uncleaned for comparison purposes. Obtain Architect's approval of sample cleaning before cleaning stone masonry.
 3. Protect adjacent stone and nonmasonry surfaces from contact with cleaner by covering them with liquid strippable masking agent, polyethylene film, or waterproof masking tape.
 4. Wet wall surfaces with water before applying cleaner; remove cleaner promptly by rinsing thoroughly with clear water.

5. Clean stone masonry by bucket and brush hand-cleaning method described in BIA Technical Note No. 20, Revised II, using job-mixed detergent solution.
6. Clean limestone masonry to comply with recommendations in ILI's "Indiana Limestone Handbook."

3.7 EXCESS MATERIALS AND WASTE

- A. Excess Stone: Stack excess stone where directed by Owner for Owner's use.
- B. Disposal as Fill Material: Dispose of clean masonry waste, including mortar and excess or soil-contaminated sand, by crushing and mixing with fill material as fill is placed.
 1. Crush masonry waste to less than 4 inches in greatest dimension.
 2. Mix masonry waste with at least 2 parts of specified fill material for each part of masonry waste. Fill material is specified in Section 312000 "Earth Moving."
 3. Do not dispose of masonry waste as fill within 18 inches of finished grade.
- C. Excess Masonry Waste: Remove excess clean masonry waste that cannot be used as fill, as described above, and other waste, and legally dispose of off Owner's property.

END OF SECTION 04 43 13.13

SECTION 04 72 00 - CAST STONE MASONRY**PART 1 - GENERAL****1.1 SUMMARY****A. Section Includes:**

1. Trim units.
2. Mortar materials.
3. Accessories.

B. Related Requirements:

1. Section 04 20 00 "Unit Masonry"

1.2 ACTION SUBMITTALS**A. Product Data:** For each type of product.

1. For cast stone units, include construction details, material descriptions, dimensions of individual components and profiles, and finishes.

B. Shop Drawings: Submit manufacturer's shop drawings including profiles, cross-sections, reinforcement, exposed faces, arrangement of joints (optional for standard or semi-custom installations), anchoring methods, anchors (if required), annotation of stone types and their location.

1. Include building elevations showing layout of units and locations of joints and anchors.

C. Samples for Verification:

1. For each color and texture of cast stone required, 4 inches square in size.
2. Make Samples from materials to be used for units used on Project.
3. Approved Samples may be installed in the Work.

1.3 INFORMATIONAL SUBMITTALS**A. Qualification Data:** For manufacturer.**B. Material Test Reports:** For each mix required to produce cast stone, based on testing according to ASTM C1364.**C. Cast Stone:**

1. Provide test reports based on testing within previous six months.
2. Compressive strength: ASTM C1194: 6,500 psi minimum for products at 28 days.
3. Absorption: ASTM C1195: 6 percent maximum by the cold water method for products at 28 days.

4. Freeze-thaw: ASTM C1364: The CPWL shall be less than 5% after 300 cycles of freezing and thawing.
 5. Linear Shrinkage – ASTM C426
- D. Job Site Testing: One sample from production units may be selected at random from the field for each 500 cubic feet delivered to the job site.
1. Three field cut cube specimens from each of these samples shall have an average compressive strength of not less than 85% with no single specimen testing less than 75% of design strength as allowed by ACI 318.
 2. Three field cut cube specimens from each of these samples shall have an average maximum cold-water absorption of 6%.
 3. Field specimens shall be tested in accordance with ASTM C 1194 and C 1195.

1.4 QUALITY ASSURANCE

- A. Manufacturer Qualifications: A qualified manufacturer of cast stone units similar to those indicated for this Project, that has sufficient production capacity to manufacture required units, and is a plant certified by CSI.
- B. Manufacturer shall have sufficient plant facilities to produce shapes, quantities and size of Cast Stone required in accordance with the project schedule.
- C. Warranty Period: 10 years.

1.5 DELIVERY, STORAGE, AND HANDLING

- A. Coordinate delivery of cast stone with unit masonry work to avoid delaying the Work and to minimize the need for on-site storage.
- B. Pack, handle, and ship cast stone units in suitable packs or pallets.
 1. Lift with wide-belt slings; do not use wire rope or ropes that might cause staining. Move cast stone units if required, using dollies with wood supports.
 2. Store cast stone units on wood skids or pallets with nonstaining, waterproof covers, securely tied. Arrange to distribute weight evenly and to prevent damage to units. Ventilate under covers to prevent condensation.
 3. Provide an itemized list of product to support the bill of lading.
- C. Store cementitious materials on elevated platforms, under cover, and in a dry location. Do not use cementitious materials that have become damp.

- D. Store mortar aggregates where grading and other required characteristics can be maintained and contamination can be avoided.
- E. Mark production units with the identification marks as shown on the shop drawings.

1.6 PROJECT CONDITIONS

- A. Cold-Weather Requirements: Do not use frozen materials or materials mixed or coated with ice or frost. Do not build on frozen substrates. Comply with cold-weather construction requirements in TMS 602.
 - 1. Cold-Weather Cleaning: Use liquid cleaning methods only when air temperature is 40 deg F and above and will remain so until cast stone has dried, but no fewer than seven days after completing cleaning.
- B. Hot-Weather Requirements: Comply with hot-weather construction requirements in TMS 602.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Source Limitations for Cast Stone: Obtain cast stone units from single source from single manufacturer.
- B. Source Limitations for Mortar Materials: Obtain mortar ingredients of a uniform quality, including color, from one manufacturer for each cementitious component and from one source or producer for each aggregate.

2.2 CAST STONE MATERIALS

- A. Portland Cement: ASTM C150/C150M, Type I or Type III, containing not more than 0.60 percent total alkali when tested according to ASTM C114. Provide natural color or white cement as required to produce cast stone color indicated.
- B. Coarse Aggregates: Granite, quartz, or limestone complying with ASTM C33/C33M; gradation and colors as needed to produce required cast stone textures and colors.
- C. Fine Aggregates: Natural sand or crushed stone complying with ASTM C33/C33M, gradation and colors as needed to produce required cast stone textures and colors.
- D. Color Pigment: ASTM C979/C979M, synthetic mineral-oxide pigments or colored water-reducing admixtures; color stable, free of carbon black, nonfading, and resistant to lime and other alkalis.

- E. Admixtures: Use only admixtures specified or approved in writing by Architect.
1. Do not use admixtures that contain more than 0.1 percent water-soluble chloride ions by mass of cementitious materials. Do not use admixtures containing calcium chloride.
 2. Use only admixtures that are certified by manufacturer to be compatible with cement and other admixtures used.
 3. Air-Entraining Admixture: ASTM C260/C260M. Add to mixes for units exposed to the exterior at manufacturer's prescribed rate to result in an air content of 4 to 6 percent, except do not add to zero-slump concrete mixes.
 4. Water-Reducing Admixture: ASTM C494/C494M, Type A.
 5. Water-Reducing, Retarding Admixture: ASTM C494/C494M, Type D.
 6. Water-Reducing, Accelerating Admixture: ASTM C494/C494M, Type E.
- F. Water: Potable.
- G. Reinforcement:
1. Deformed steel bars complying with ASTM A615/A615M, Grade 40. Use galvanized or epoxy-coated reinforcement when covered with less than 1-1/2 inches of cast stone material.
 - a. Epoxy Coating: ASTM A775/A775M.
 - b. Galvanized Coating: ASTM A767/A767M.
 2. Plain-Steel, Welded-Wire Reinforcement: ASTM A1064/A1064M, plain, fabricated from as-drawn steel wire into flat sheets.
 3. Galvanized-Steel, Welded-Wire Reinforcement: ASTM A1064/A1064M, plain, fabricated from galvanized-steel wire into flat sheets.
 4. Fiber Reinforcement: ASTM C1116/C1116M.
- H. Embedded Anchors and Other Inserts: Fabricated from stainless steel complying with ASTM A240/A240M, ASTM A276/A276M, or ASTM A666, Type 304.
1. All anchors, dowels and other anchoring devices and shims shall be standard building stone anchors commercially available in a non-corrosive material such as zinc plated, galvanized steel, brass, or stainless steel.

2.3 CAST STONE UNITS

- A. Basis-of-Design Product: Subject to compliance with requirements, all cast stone units shown on drawings shall be manufactured by Custom Cast Stone, Inc., or comparable product.

- B. Cast Stone Units: Comply with ASTM C1364.
1. Units are manufactured using the manufacturer's selected method.
 2. Trim units including window sills and items as indicated on Drawings.
- C. Fabricate units with sharp arris and accurately reproduced details, with indicated texture on all exposed surfaces unless otherwise indicated.
1. Slope exposed horizontal surfaces 1:12 to drain unless otherwise indicated.
 2. Provide raised fillets at backs of sills and at ends indicated to be built into jambs.
 3. Provide drips on projecting elements unless otherwise indicated.
- D. Fabrication Tolerances:
1. Variation in Cross Section: Do not vary from indicated dimensions by more than 1/8 inch.
 2. Variation in Length: Do not vary from indicated dimensions by more than 1/360 of the length of unit or 1/8 inch, whichever is greater, but in no case by more than 1/4 inch.
 3. Warp, Bow, and Twist: Not to exceed 1/360 of the length of unit or 1/8 inch, whichever is greater.
 4. Location of Grooves, False Joints, Holes, Anchorages, and Similar Features: Do not vary from indicated position by more than 1/8 inch on formed surfaces of units and 3/8 inch on unformed surfaces.
- E. Cure Units as Follows:
1. Cure units in enclosed, moist curing room at 95 percent relative humidity and temperature of 100 deg F for 12 hours or 70 deg F for 16 hours.
 2. Keep units damp and continue curing to comply with one of the following:
 - a. No fewer than five days at mean daily temperature of 70 deg F or above.
 - b. No fewer than seven days at mean daily temperature of 50 deg F or above.
- F. Acid etch units after curing to remove cement film from surfaces to be exposed to view.
- G. Colors and Textures: As selected by Architect from manufacturer's full range.

2.4 MORTAR MATERIALS

- A. Provide mortar materials that comply with Section 042000 "Unit Masonry."

2.5 ACCESSORIES

- A. Anchors: Type and size indicated, fabricated from Type 304 stainless steel complying with ASTM A240/A240M, ASTM A276/A276M, or ASTM A666.

- B. Dowels: 1/2-inch- diameter round bars, fabricated from Type 304 stainless steel complying with ASTM A240/A240M, ASTM A276/A276M, or ASTM A666.

2.6 MORTAR MIXES

- A. Comply with requirements in Section 042000 "Unit Masonry" for mortar mixes.
- B. Do not use admixtures including pigments, air-entraining agents, accelerators, retarders, water-repellent agents, antifreeze compounds, or other admixtures unless otherwise indicated.
 - 1. Do not use calcium chloride in mortar or grout.
 - 2. Use portland cement-lime mortar unless otherwise indicated.
- C. Preblended dry mortar mix complying with ASTM C1714/C1714M and capable of producing mortar strength as indicated in ASTM C270.
 - 1. For setting mortar, use Type N.
 - 2. For pointing mortar, use Type N.

2.7 SOURCE QUALITY CONTROL

- A. Engage a qualified independent testing agency to sample and test cast stone units according to ASTM C1364.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates and conditions, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 SETTING CAST STONE IN MORTAR

- A. Set cast stone as indicated in TMS 604.
- B. Set cast stone as indicated on Drawings. Set units accurately in locations indicated, with edges and faces aligned according to established relationships and indicated tolerances.
 - 1. Install anchors, supports, fasteners, and other attachments indicated or necessary to secure units in place.
 - 2. Coordinate installation of cast stone with installation of flashing specified in other Sections.
- C. Wet joint surfaces thoroughly before applying mortar or setting in mortar.

- D. Set units in full bed of mortar with full head joints unless otherwise indicated.
 - 1. Set units with joints 1/4 to 3/8 inch wide unless otherwise indicated.
 - 2. Build anchors and ties into mortar joints as units are set.
 - 3. Fill dowel holes and anchor slots with mortar.
 - 4. Build concealed flashing into mortar joints as units are set.
 - 5. Keep head joints in copings and between other units with exposed horizontal surfaces open to receive sealant.
 - 6. Keep joints at shelf angles open to receive sealant.
- E. Rake out joints for pointing with mortar to depths of not less than 3/4 inch. Rake joints to uniform depths with square bottoms and clean sides. Scrub faces of units to remove excess mortar as joints are raked.
- F. Point mortar joints by placing and compacting mortar in layers not greater than 3/8 inch. Compact each layer thoroughly and allow it to become thumbprint hard before applying next layer.
- G. Tool exposed joints slightly concave when thumbprint hard. Use a smooth plastic jointer larger than joint thickness.
- H. Rake out joints for pointing with sealant to depths of not less than 3/4 inch. Scrub faces of units to remove excess mortar as joints are raked.
- I. Point joints with sealant to comply with applicable requirements in Section 079200 "Joint Sealants."
 - 1. Prime cast stone surfaces to receive sealant and install compressible backer rod in joints before applying sealant unless otherwise indicated.
- J. Provide sealant joints at head joints of copings and other horizontal surfaces; at expansion, control, and pressure-relieving joints; and at locations indicated.
 - 1. Keep joints free of mortar and other rigid materials.
 - 2. Build in compressible foam-plastic joint fillers where indicated.
 - 3. Form joint of width indicated, but not less than 3/8 inch.
 - 4. Prime cast stone surfaces to receive sealant and install compressible backer rod in joints before applying sealant unless otherwise indicated.
 - 5. Prepare and apply sealant of type and at locations indicated to comply with applicable requirements in Section 079200 "Joint Sealants."

3.3 SETTING ANCHORED CAST STONE WITH SEALANT-FILLED JOINTS

- A. Set cast stone as indicated in TMS 604.

- B. Set cast stone as indicated on Drawings. Set units accurately in locations indicated, with edges and faces aligned according to established relationships and indicated tolerances.
 - 1. Install anchors, supports, fasteners, and other attachments indicated or necessary to secure units in place.
 - 2. Shim and adjust anchors, supports, and accessories to set cast stone in locations indicated with uniform joints.
- C. Keep cavities open where unfilled space is indicated between back of cast stone units and backup wall; do not fill cavities with mortar or grout.
- D. Fill anchor holes with sealant.
 - 1. Where dowel holes occur at pressure-relieving joints, provide compressible material at ends of dowels.
- E. Set cast stone supported on clip or continuous angles on resilient setting shims. Use material of thickness required to maintain uniform joint widths. Hold shims back from face of cast stone a distance at least equal to width of joint.
- F. Keep joints free of mortar and other rigid materials. Remove temporary shims and spacers from joints after anchors and supports are secured in place and cast stone units are anchored. Do not begin sealant installation until temporary shims and spacers are removed.
 - 1. Form open joint of width indicated, but not less than 3/8 inch.
- G. Prime cast stone surfaces to receive sealant and install compressible backer rod in joints before applying sealant unless otherwise indicated.
- H. Prepare and apply sealant of type and at locations indicated to comply with applicable requirements in Section 079200 "Joint Sealants."

3.4 ADJUSTING AND CLEANING

- A. Remove and replace stained and otherwise damaged units and units not matching approved Samples. Cast stone may be repaired if methods and results are approved by Architect.
- B. Replace units in a manner that results in cast stone matching approved Samples, complying with other requirements, and showing no evidence of replacement.
- C. In-Progress Cleaning: Clean cast stone as work progresses.
 - 1. Remove mortar fins and smears before tooling joints.
 - 2. Remove excess sealant immediately, including spills, smears, and spatter.
- D. Final Cleaning: After mortar is thoroughly set and cured, clean exposed cast stone as follows:
 - 1. Remove large mortar particles by hand with wooden paddles and nonmetallic scrape hoes or chisels.

2. Saturate units to be cleaned prior to applying an approved masonry cleaner. Never use a power washer, muratic acid, sandblasting, to clean units.
3. Test cleaning methods on sample; leave one sample uncleaned for comparison purposes. Obtain Architect's approval of sample cleaning before proceeding with cleaning of cast stone.
4. Protect adjacent surfaces from contact with cleaner by covering them with liquid strippable masking agent or polyethylene film and waterproof masking tape.
5. Wet surfaces with water before applying cleaners; remove cleaners promptly by rinsing thoroughly with clear water.
6. Clean cast stone by methods described in Cast Stone Institute Technical Bulletin #39.

END OF SECTION 04 72 00

SECTION 05 12 00 - STRUCTURAL STEEL FRAMING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Structural steel.
 - 2. Fiberglass reinforced polymer (FRP) fabrications
 - 3. Primer.
 - 4. Non-Shrink Grout.

1.3 DEFINITIONS

- A. Structural Steel: Elements of structural-steel frame, as classified by ANSI/AISC 303, "Code of Standard Practice for Steel Buildings and Bridges."
- B. Architecturally Exposed Structural Steel: Structural steel designated as "architecturally exposed structural steel" or "AESS" on Drawings.
 - 1. Category AESS 1: Structural steel that is categorized by ANSI/AISC 303, Section 10, as AESS 1 and may be designated AESS 1 or Category AESS 1 in the Contract Documents.

1.4 SUBMITTALS

- A. Action Submittals:
 - 1. Product Data: For each type of product indicated.
 - a. High-strength bolts, nuts and washers
 - b. Direct-tension indicators
 - c. Shear stud connectors
 - d. Headed anchor rods
 - e. Threaded rods
 - f. Post-installed Anchors
 - g. Fire-release connectors
 - h. Fiberglass reinforced polymer structural shapes
 - i. Galvanizing repair paint
 - j. Non-Shrink Grout

2. Shop Drawings: Show fabrication of structural-steel components.
- a. Include FRP structural shapes with structural steel shop drawings.
 - b. Anchor Rod/Embedded Item Layout Plans and Details: Show anchor rod layout, dimensions, elevation, orientation and details of anchor rods, leveling plates and other items embedded in concrete.
 - 1) Submit anchor rod/embedded item plans and obtain Architect's approval prior to submitting erection plans.
 - c. Erection Plans and Details: Include member layout, dimensions, elevations, member sizes, erection details, and all information required for erection.
 - 1) Submit erection plans and obtain Architect's approval prior to submitting fabrication details.
 - d. Fabrication Details: Submit drawings indicating all details necessary for shop fabrication and erection of each individual steel member.
 - 1) Detail simple shear connections to withstand loads indicated and comply with other information and restrictions indicated.
 - a) Select and complete connections using ANSI/AISC 360 and LRFD.
 - b) Provide connections, at a minimum, sized for beam end reactions shown on Drawings and per Tables 10-1, 10-2, 10-3 or 10-4, ANSI/AISC Steel Construction Manual. Unless otherwise noted, beam end reactions are given at factored load level.
 - 2) Include details of cuts, connections, splices, camber, holes, and other pertinent data.
 - 3) Indicate welds by standard AWS symbols, distinguishing between shop and field welds, and show size, length, and type of each weld. Show backing bars that are to be removed and supplemental fillet welds where backing bars are to remain.
 - 4) Indicate type, size, and length of bolts, distinguishing between shop and field bolts. Identify pretensioned and slip-critical high-strength bolted connections.
 - 5) Identify members not to be shop primed.
 - 6) For members noted to be AESS, show the following additional information:
 - a) Identify AESS category for each steel member and connection, including transitions between AESS categories and between AESS and non-AESS.
 - b) Include orientation of mill marks and HSS seams.

- c) Indicate grinding, finish and profile of welds.
 - d) Indicate orientation and location of bolt heads.
 - e) Indicate exposed surfaces and edges and surface preparation being used.
 - f) Indicate special tolerances and erection requirements.
 - g) Indicate weep holes for HSS.
 - h) Indicate vent holes for galvanized HSS.
 - i) Indicate surface preparation, primer, and coating requirements, including systems specified in other Sections.
- e. Shear Stud Placement Drawings: Submit shear stud placement drawings showing layout of shear studs, stud size, number, spacing and installation details and instructions.
- B. Informational Submittals:
- 1. Mill test reports for structural steel, including chemical and physical properties.
 - 2. Product Test Reports: For the following:
 - a. Bolts, nuts, and washers including mechanical properties and chemical analysis.
 - b. Direct-tension indicators.
 - c. Shear stud connectors.
 - d. Fiberglass reinforced polymer structural shapes.
 - e. Non-shrink grout.
- C. Closeout Submittals:
- 1. Record Drawings: Provide complete set of erection and fabrication drawings with all construction changes incorporated.

1.5 QUALITY ASSURANCE

- A. Fabricator Qualifications: A qualified fabricator that participates in the AISC Quality Certification Program and is designated an AISC-Certified Plant, Category BU is preferred. At least 10 projects completed of a similar size and scope to Project.
- 1. If fabricator is not designated an AISC-Certified Plant, see Source Quality Control Article for Contractor responsibilities.
 - 2. A qualified manufacturer of FRP material that is certified to the ISO-9001:2000 standard and with a minimum of five years' experience in the manufacture of FRP structural shapes.

- B. A qualified fabricator of FRP material with a minimum of five years' experience in the fabrication of FRP structural shapes. Installer Qualifications: At least 10 projects completed of similar size and scope.
- C. Comply with applicable provisions of the following specifications and documents:
 - 1. ANSI/AISC 303.
 - 2. ANSI/AISC 360.
 - 3. RCSC's "Specification for Structural Joints Using High Strength Bolts."
- D. Structural Preconstruction Conference: Attend conference at Project site.

1.6 DELIVERY, STORAGE, AND HANDLING

- A. Store materials to permit easy access for inspection and identification. Keep steel members off ground and spaced by using pallets, dunnage, or other supports and spacers. Protect steel members and packaged materials from corrosion and deterioration.
 - 1. Do not store materials on structure in a manner that might cause distortion, damage, or overload to members or supporting structures. Repair or replace damaged materials or structures as directed.
- B. Store fasteners in a protected place in sealed containers with manufacturer's labels intact.
 - 1. Fasteners may be repackaged provided Owner's testing and inspecting agency observes repackaging and seals containers.
 - 2. Clean and relubricate bolts and nuts that become dry or rusty before use.
 - 3. Comply with manufacturers' written recommendations for cleaning and lubricating ASTM F 3125, Grade F1852 bolt assemblies and for retesting bolt assemblies after lubrication.
- C. Keep shear studs and ferrules dry by storing in waterproof enclosure.

1.7 COORDINATION

- A. Coordinate installation of anchorage items to be embedded in or attached to other construction without delaying the Work. Provide setting diagrams, sheet metal templates, instructions, and directions for installation.

PART 2 - PRODUCTS

2.1 STRUCTURAL-STEEL MATERIALS

- A. W-Shapes: ASTM A 992/A 992M.
- B. Channels: ASTM A 992/A 992M.

- C. Angles: ASTM A 572/A 572M, Grade 50.
- D. Plate and Bar: ASTM A 36/A 36M.
- E. Cold-Formed Hollow Structural Sections: ASTM A 500, Grade C, structural tubing.
- F. Welding Electrodes:
 - 1. Welding Electrodes shall conform to AWS classification E70XX, and shall comply with all AWS requirements.

2.2 BOLTS, CONNECTORS, AND ANCHORS

- A. High-Strength Bolts, Nuts, and Washers: ASTM F3125, Grade A325, Type 1, heavy-hex steel structural bolts, 3/4-inch diameter unless noted otherwise on Drawings; ASTM A 563, Grade DH, heavy-hex carbon-steel nuts; and ASTM F 436, Type 1, hardened carbon-steel washers; all with plain finish.
 - 1. Direct-Tension Indicators: ASTM F 959, Type 325-1, compressible-washer type with plain finish.
- B. Shear Stud Connectors: ASTM A 108, Grades 1015 through 1020, headed-stud type, cold-finished carbon steel; AWS D1.1/D1.1M, Type B.
- C. Headed Anchor Rods: ASTM F 1554, Grade 55.
 - 1. Nuts: ASTM A 563 heavy-hex carbon steel.
 - 2. Plate Washers: ASTM A 36/A 36M carbon steel.
 - 3. Washers: ASTM F 436, Type 1, hardened carbon steel.
 - 4. Finish: Plain.
- D. Threaded Rods: ASTM A 36/A 36M.
 - 1. Nuts: ASTM A 563 heavy-hex carbon steel.
 - 2. Washers: ASTM F 436, Type 1, hardened carbon steel.
 - 3. Finish: Plain.
- E. Post-installed Anchors: Chemical anchors.
 - 1. Material for Interior Locations: Carbon-steel components zinc plated to comply with ASTM B 633 Type III Fe/Zn 5 unless otherwise indicated.
 - 2. Material for Exterior Locations and Where Stainless Steel Is Indicated: Alloy Group 1 stainless-steel bolts, ASTM F 593, and nuts, ASTM F 594.
 - 3. Chemical Anchor Adhesives: Heavy duty, two component injectable adhesive designed to be dispensed using double chamber gun with mixing nozzle. Adhesives in capsule form will not be accepted.

- a. Products for anchoring into concrete and grout-filled masonry: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - 1) DeWalt; AC200+.
 - 2) Hilti, Inc.; HIT-HY 200R; HIT-HY 200A; HIT-ICE.
 - 3) ITW Redhead; A7+.
 - b. Products for anchoring into masonry other than grout-filled masonry: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - 1) DeWalt; AC100+ Gold.
 - 2) Hilti, Inc.; HIT-HY 270.
 - 3) ITW Redhead; A7+.
- F. Fire-Release Connectors: Connector that allows for movement and total disengagement of the failing structural member in the event of a fire without causing damage to the firewall, while providing structural support under normal service conditions.
 - 1. Basis of Design: Break-Away Fire-Release Connectors by Fero Corporation
 - a. Steel support angle:
 - 1) Yield strength 36 ksi (245MPa)
 - 2) Surface of angle in contact with the washer is grooved for maximum lateral load resistance.
 - b. Nylon Fusible washer:
 - 1) Melting point 500 degrees F (260 degrees C)
 - 2) Compressive Strength: 14.3 ksi (100 Mpa)
 - 3) Compressive Modulus: 420 ksi (2.9 GPa)
 - 4) Coefficient of Friction with steel: 0.4
 - c. Lateral Capacity – 2200lbs per clip

2.3 FIBERGLASS REINFORCED POLYMER STRUCTURAL SHAPES

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1. Fibergrate Composite Structures, Inc.
 - 2. Southwell Corporation.
 - 3. Strongwell Corporation.
 - 4. Structural Fiberglass, Inc.

B. General Material Properties:

1. All materials are to be manufactured by the pultrusion process with a glass content minimum of 45 percent, maximum of 55 percent by weight.
2. Fiberglass reinforcement shall be a combination of continuous roving, continuous strand mat, and surfacing veil in sufficient quantities as needed by the application and/or physical properties required.
3. Resins shall be non-fire retardant isophthalic polyester with chemical formulation necessary to provide the corrosion resistance, strength and other physical properties as required.
4. All finished surfaces of FRP shapes shall be smooth, resin rich, free of voids and without dry spots, cracks, crazes or unreinforced areas. All glass fibers shall be well covered with resin to protect against their exposure due to wear or weathering.
5. All material shall be further protected from ultraviolet (UV) attack with integral UV inhibitors in the resin and a synthetic surfacing veil to produce a resin rich surface.

C. Structural Properties: FRP material to meet the following minimum longitudinal mechanical properties:

Property	ASTM Method	Value
Tensile Strength	D 638	20,000 psi
Tensile Modulus	D 638	1.8×10^6 psi
Flexural Strength	D 790	24,000 psi
Flexural Modulus	D 790	2.0×10^6 psi
Coefficient of Thermal Expansion	D 696	8.0×10^{-6} in/in/deg F
Flame Spread	E 84	25 or less

2.4 PRIMER

- A. VOC Content: Products shall comply with VOC limits of authorities having jurisdiction.
- B. Provide primers that comply with Division 09 Section "High Performance Coatings" and the following:
 1. Interior Structural Steel: Refer to First Coat for Steel, Structural Steel in Interior High-Performance Coating Schedule: General Use.
 2. Exposed Exterior Structural Steel: Refer to First Coat for Steel Substrates in Exterior High-Performance Coating Schedule.
- C. Galvanizing Repair Paint: High-zinc-dust-content paint complying with SSPC-Paint 20 and compatible with paints specified to be used over it and meeting ASTM A 780.

2.5 NON-SHRINK GROUT

- A. Nonmetallic, Shrinkage-Resistant Grout: ASTM C 1107, factory-packaged, shrinkage-resistant, nonmetallic aggregate grout, noncorrosive and non-staining, mixed with water to consistency suitable for application and a 30-minute working time.

2.6 FABRICATION

- A. Structural Steel: Fabricate and assemble in shop to greatest extent possible. Fabricate according to ANSI/AISC's "Code of Standard Practice for Steel Buildings and Bridges" and ANSI/AISC 360.
 - 1. Camber structural-steel members where indicated.
 - 2. Fabricate beams with rolling camber up.
 - 3. Identify high-strength structural steel according to ASTM A 6/A 6M and maintain markings until structural steel has been erected.
 - 4. Mark and match-mark materials for field assembly.
 - 5. Complete structural-steel assemblies, including welding of units, before starting shop-priming operations.
- B. Thermal Cutting: Perform thermal cutting by machine to greatest extent possible.
 - 1. Plane thermally cut edges to be welded to comply with requirements in AWS D1.1/D1.1M.
- C. Bolt Holes: Cut, drill, or punch standard bolt holes perpendicular to metal surfaces. Holes to be standard holes unless shown otherwise on Drawings.
- D. Finishing: Accurately finish ends of columns and other members transmitting bearing loads.
- E. Cleaning: Clean and prepare steel surfaces that are to remain unpainted according to SSPC-SP 3, "Power Tool Cleaning."
- F. Shear Stud Connectors: Prepare steel surfaces as recommended by manufacturer of shear connectors. Use automatic end welding of headed-stud shear connectors according to AWS D1.1/D1.1M and manufacturer's written instructions.
- G. Holes: Provide holes required for securing other work to structural steel and for other work to pass through steel framing members.
 - 1. Cut, drill, or punch holes perpendicular to steel surfaces. Do not thermally cut bolt holes or enlarge holes by burning.
 - 2. Baseplate Holes: Cut, drill, mechanically thermal cut, or punch holes perpendicular to steel surfaces.
 - 3. Weld threaded nuts to framing and other specialty items indicated to receive other work.

H. Architecturally Exposed Structural Steel: Fabricate to the requirements of ANSI/AISC 303, "Code of Standard Practice for Steel Buildings and Bridges."

1. Category AESS 1:

- a. Comply with overall profile dimensions of AWS D1.1/D1.1M for welded built-up members. Keep appearance and quality of welds consistent. Maintain true alignment of members without warp exceeding specified tolerances.
- b. Prepare surfaces according to Part 2 "Shop Priming" Article and SSPC-SP 6 (WAB)/NACE WAB-3.
- c. Grind sheared, punched, and flame-cut edges to remove burrs and provide smooth surfaces and eased edges.
- d. Make intermittent welds appear continuous, using filler or additional welding.
- e. Seal weld open ends of hollow structural sections with 3/8-inch closure plates.
- f. Limit butt and plug weld projections to 1/16 inch.
- g. Install bolt heads on the same side of each connection and maintain orientation consistently from one connection to another.
- h. Remove weld spatter, slivers, and similar surface discontinuities.
- i. Remove blemishes and surface irregularities resulting from temporary braces or fixtures by filling or grinding, before cleaning, treating, and shop priming.
- j. Grind tack welds smooth unless incorporated into final welds.
- k. Remove backing and runoff tabs, and grind welds smooth.

I. FRP Structural Shapes:

1. Measurements: Structural Shapes supplied shall meet the minimum dimensional requirements as shown or specified. The Contractor shall provide and/or verify measurements in field for work fabricated to fit field conditions as required by manufacturer to complete the work. Determine correct size and locations of required holes or coping from field dimensions before structural shape fabrication.
2. Sealing: All shop fabricated cuts or drilling shall be coated with vinyl ester resin to provide maximum corrosion resistance.
3. All finished surfaces of FRP items and fabrications shall be smooth, resin rich, free of voids and without dry spots, cracks, crazes or unreinforced areas.

2.7 SHOP CONNECTIONS

- A. High-Strength Bolts: Shop install high-strength bolts according to RCSC's "Specification for Structural Joints Using High Strength Bolts" for type of bolt and type of joint specified.
 - 1. Joint Type: Snug tightened or pretensioned and slip critical where indicated on Drawings.
- B. Weld Connections: Comply with AWS D1.1/D1.1M for tolerances, appearances, welding procedure specifications, weld quality, and methods used in correcting welding work.
 - 1. Assemble and weld built-up sections by methods that will maintain true alignment of axes without exceeding tolerances in ANSI/AISC 303 for mill material.

2.8 SHOP PRIMING

- A. Shop prime the following structural steel members only:
 - 1. Interior structural steel exposed to view, and interior lintels.
 - 2. Structural steel in exterior walls and lintels in exterior walls.
 - 3. Exposed exterior structural steel.
- B. For members to receive primer leave following locations unprimed:
 - 1. Surfaces embedded in concrete or mortar. Extend priming of partially embedded members to a depth of 2 inches.
 - 2. Surfaces to be field welded.
 - 3. Surfaces to be high-strength bolted with slip-critical connections.
 - 4. Surfaces to receive sprayed fire-resistive materials (applied fireproofing).
 - 5. Galvanized surfaces unless noted to be primed.
- C. Surface Preparation: Clean surfaces to be painted. Remove loose rust and mill scale and spatter, slag, or flux deposits. Prepare surfaces according to Division 09 Section "High Performance Coatings".
 - 1. ASTM D 6386, "Standard Practice for Preparation of Zinc (Hot-Dip Galvanized) Coated Iron and Steel Product and Hardware Surfaces for Painting," for galvanized surfaces noted to be painted.
- D. Priming:
 - 1. Immediately after surface preparation, apply one coat of primer according to manufacturer's written instructions and at rate recommended by SSPC to provide a minimum dry film thickness of 1.5 mils. Use priming methods that result in full coverage of joints, corners, edges, and exposed surfaces.
 - a. Stripe paint corners, crevices, bolts, welds, and sharp edges.
 - b. Apply two coats of shop paint to surfaces that are inaccessible after assembly or erection. Change color of second coat to distinguish it from first.

2.9 GALVANIZING

- A. Hot-Dip Galvanized Finish: Apply zinc coating by the hot-dip process to structural steel according to ASTM A 123/A 123M.
 - 1. Fill vent and drain holes that will be exposed in the finished Work unless they will function as weep holes, by plugging with zinc solder and filing off smooth.

2.10 SOURCE QUALITY CONTROL

- A. Testing Agency: If fabricator is not designated an AISC-Certified Plant then the Contractor shall engage an independent testing and inspecting agency to perform shop tests and inspections and prepare test reports.
 - 1. Provide testing agency with access to places where structural-steel work is being fabricated or produced to perform tests and inspections.
- B. Correct deficiencies in Work that test reports and inspections indicate do not comply with the Contract Documents.
- C. Bolted Connections: Shop-bolted connections shall be tested and inspected according to RCSC's "Specification for Structural Joints Using High Strength Bolts."
- D. Welded Connections: Shop welds will be visually inspected according to AWS D1.1/D1.1M.
- E. In addition to visual inspection, shop-welded shear stud connectors shall be tested and inspected according to requirements in AWS D1.1/D1.1M for stud welding and as follows:
 - 1. Bend tests shall be performed if visual inspections reveal either a less-than-continuous 360-degree flash or welding repairs to any shear connector.
 - 2. Tests shall be conducted on additional shear connectors if weld fracture occurs on shear connectors already tested, according to requirements in AWS D1.1/D1.1M.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Verify, with steel Erector present, elevations of concrete- and masonry-bearing surfaces and locations of anchor rods, bearing plates, and other embedments for compliance with requirements.
 - 1. Prepare a certified survey of bearing surfaces, anchor rods, bearing plates, and other embedments showing dimensions, locations, angles, and elevations.
- B. Examine AESS for twists, kinks, warping, gouges, and other imperfections before erecting.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.
- D. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 PREPARATION

- A. Provide temporary shores, guys, braces, and other supports during erection to keep structural steel secure, plumb, and in alignment against temporary construction loads and loads equal in intensity to design loads. Remove temporary supports when permanent structural steel, connections, and bracing are in place unless otherwise indicated.

3.3 ERECTION

- A. Set structural steel accurately in locations and to elevations indicated and according to ANSI/AISC 303 and ANSI/AISC 360.
- B. Base Bearing and Leveling Plates: Clean concrete- and masonry-bearing surfaces of bond-reducing materials, and roughen surfaces prior to setting plates. Clean bottom surface of plates.
 - 1. Set plates for structural members on wedges, shims, or setting nuts as required.
 - 2. Weld plate washers to top of baseplate.
 - 3. Snug-tighten anchor rods after supported members have been positioned and plumbed. Do not remove wedges or shims but, if protruding, cut off flush with edge of plate before packing with non-shrink grout.
 - 4. Promptly pack non-shrink grout solidly between bearing surfaces and plates so no voids remain. Neatly finish exposed surfaces; protect non-shrink grout and allow to cure. Comply with manufacturer's written installation instructions for non-shrink grouts.
- C. Column Base Plates and Anchor Bolts: Not designed to resist lateral loads and overturning during erection; base plates and anchor bolts are designed only to comply with the minimum requirements of the OSHA "Safety Standards for Steel Erection".
- D. Maintain erection tolerances of structural steel within ANSI/AISC's "Code of Standard Practice for Steel Buildings and Bridges."
- E. Align and adjust various members that form part of complete frame or structure before permanently fastening. Before assembly, clean bearing surfaces and other surfaces that will be in permanent contact with members. Perform necessary adjustments to compensate for discrepancies in elevations and alignment.
 - 1. Level and plumb individual members of structure.
 - 2. Make allowances for difference between temperature at time of erection and mean temperature when structure is completed and in service.
- F. Splice members only where indicated.
- G. Do not use thermal cutting during erection.
- H. Do not enlarge unfair holes in members by burning or using drift pins. Ream holes that must be enlarged to admit bolts.

- I. Shear Stud Connectors: Prepare steel surfaces as recommended by manufacturer of shear stud connectors. Use automatic end welding of headed-stud shear connectors according to AWS D1.1/D1.1M and manufacturer's written instructions.
1. Ensure that metal deck rests tightly against beam flange.
 2. Place studs in location and spacing shown in Drawings and approved shear stud placement drawings.
 3. Do not lay out any more ferrules ahead of stud welder than can be welded in one production period.
- J. Architecturally Exposed Structural Steel: Erect to the requirements of ANSI/AISC 303, "Code of Standard Practice for Steel Buildings and Bridges."
1. Take special care during erection to avoid marking or distorting the AEES and to minimize damage to shop painting. Set AEES accurately in locations and to elevations indicated.
 - a. Remove welded tabs that were used for attaching temporary bracing and safety cabling and that are exposed to view in the completed Work. Take care to avoid any blemishes, holes, or unsightly surfaces resulting from the use or removal of temporary elements.
 - b. Grind tack welds smooth.
 - c. Remove backing and runoff tabs, and grind welds smooth.
 - d. Orient bolt heads on the same side of each connection and maintain orientation consistently from one connection to another.
 - e. Remove erection bolts, fill holes with weld metal or filler, and grind or sand smooth to achieve surface quality approved by Architect.
 - f. Fill weld access holes with weld metal or filler and grind, or sand smooth to achieve surface quality as approved by Architect.
 - g. Conceal fabrication and erection markings from view in the completed structure.
 - h. In addition to above, comply with the following for Category AEES 1:
 - 1) Erect AEES to the standard frame tolerances specified in ANSI/AISC 303 for non-AEES.
 - 2) Comply with AWS D1.1/D1.1M. Keep appearance and quality of welds consistent. Maintain true alignment of members without warp exceeding specified tolerances.
 - 3) Remove weld spatter, slivers, and similar surface discontinuities.
 - 4) Grind off butt and plug weld projections larger than 1/16 inch.
 - 5) Continuous welds are to be of uniform size and profile.

- 6) Ream holes that must be enlarged. Use of drift pins or burning is not permitted. Replace misaligned connection plates where holes cannot be aligned with acceptable appearance.
- 7) Splice members only where indicated on Drawings.
- 8) No torch cutting or field fabrication is permitted.

K. FRP Structural Shapes:

1. Provide anchorage devices and fasteners for securing FRP fabrications as shown on Drawings.
2. Perform cutting, drilling and fitting required for installation of FRP fabrications. Set FRP fabrication accurately in location, alignment and elevation; with edges and surfaces level, plumb, true and free of rack; measured from established lines and levels.

3.4 FIELD CONNECTIONS

- A. High-Strength Bolts: Install high-strength bolts according to RCSC's "Specification for Structural Joints Using High Strength Bolts" for type of bolt and type of joint specified.
1. Joint Type: Snug tightened or pretensioned and slip critical where indicated on Drawings.
- B. Weld Connections: Comply with AWS D1.1/D1.1M for tolerances, appearances, welding procedure specifications, weld quality, and methods used in correcting welding work.
1. Comply with ANSI/AISC 303 and ANSI/AISC 360 for bearing, alignment, adequacy of temporary connections, and removal of paint on surfaces adjacent to field welds.
 2. Assemble and weld built-up sections by methods that will maintain true alignment of axes without exceeding tolerances in ANSI/AISC's "Code of Standard Practice for Steel Buildings and Bridges" for mill material.

3.5 FIELD QUALITY CONTROL

- A. Testing Agency: Owner will engage a qualified independent testing and inspecting agency to perform tests and inspections as described below.
- B. Bolted Connections: Bolted connections will be tested and inspected according to RCSC's "Specification for Structural Joints Using High Strength Bolts."
- C. Welded Connections: Field welds will be visually inspected according to AWS D1.1/D1.1M.
- D. Shear Stud Connectors: In addition to visual inspection for installation, quantity and placement, test and inspect field-welded shear stud connectors according to requirements in AWS D1.1/D1.1M for stud welding and as follows:
1. Perform bend tests if visual inspections reveal either a less-than-continuous 360-degree flash or welding repairs to any shear connector.

2. Conduct tests on an additional ten, randomly selected shear connectors if weld fracture occurs on shear connectors already tested, according to requirements in AWS D1.1/D1.1M.
-
- E. Post-installed Chemical Anchors: Test 5% of all chemical anchors in tension, randomly selected but in varied locations. Testing to be in accordance with ASTM E 488 to the approved manufacturer's allowable loads. Concrete or masonry wall must cure a minimum of 3 days prior to testing. Do not test anchors until after the anchor manufacturer's recommended curing time. If an anchor fails during this test additional anchors may be requested to be tested as directed by the Architect.
 - F. Record position and alignment of erected steel. Compare with required tolerances.
 - G. Verify compliance with details shown on approved drawings such as bracing, stiffening, member location, and proper application of joint details at each connection.
 - H. Correct deficiencies in Work that test reports and inspections indicate does not comply with the Contract Documents.
 - I. Architect will observe AESS in place to determine acceptability relating to aesthetic effect.

3.6 CORRECTIONS AND PROTECTION

- A. Field Corrections: Do not field correct any framing member or connection without prior approval of Architect. Submit detail of proposed field correction to Architect including component sizes, dimensions, weld sizes, cut locations, etc.
- B. Galvanized Surfaces: Clean areas where galvanizing is damaged or missing and touchup galvanizing to comply with ASTM A 780.
- C. Touchup Priming: Cleaning and touchup priming are specified in "High Performance Coatings" section.
- D. FRP Structural Shape Sealing:
 1. All field fabricated cuts or drilling shall be coated with vinyl ester resin to provide maximum corrosion resistance in accordance with the manufacturer's instructions.

END OF SECTION 05 12 00

SECTION 05 21 00 - STEEL JOIST FRAMING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. K-series steel joists.
 - 2. KCS-type K-series steel joists.
 - 3. CJ-series composite steel joists.
 - 4. Joist girders.
 - 5. Joist accessories.

1.3 DEFINITIONS

- A. SJI's "Specifications": Steel Joist Institute's "Standard Specifications, Load Tables and Weight Tables for Steel Joists and Joist Girders."

1.4 PERFORMANCE REQUIREMENTS

- A. Delegated Design: Design composite steel joists, and connections, including comprehensive engineering analysis by a qualified professional engineer (licensed in the State of New York), using performance requirements and design criteria indicated and certifying that the design complies with the Building Code of New York.
- B. Structural Performance: Provide composite steel joists, and connections capable of withstanding applied design loads and all combinations of these loads, as required by applicable codes and as specified on Drawings, within limits and under conditions indicated.
 - 1. Design and fabricate to match top chord profile and web member configuration as shown on Drawings.
 - 2. Design composite steel joists, to support special loading conditions including non-uniform loads, concentrated loads and end moments as shown on Drawings with live-load deflections no greater than the following:
 - a. Floor Joists: Vertical deflection of 1/360 of the span, unless otherwise noted.
 - b. Roof Joists: Vertical deflection of 1/240 of the span, unless otherwise noted.
 - 3. Design joists and bridging for net uplift pressure where shown on Drawings.

1.5 SUBMITTALS

A. Action Submittals:

1. Product Data: For each type of joist, accessory, and product.
 - a. Submit description of shop primer.
2. Shop Drawings:
 - a. Include layout, designation, number, type, sizes, location, and spacing of joists.
 - b. Include joining and anchorage details, bracing, bridging, and joist accessories; splice and connection locations and details; and attachments to other construction.
 - c. CJ-Series:
 - 1) Submit drawings indicating loading used to design joists.
 - 2) Submit drawings indicating joist profile including size of top and bottom chord members, size and location of web members, and camber.
 - 3) Submit drawings indicating layout of shear studs, stud size, number, spacing and installation details and instructions.
3. Delegated Design Submittal: For composite steel joists, indicated to comply with performance requirements and design criteria, including structural analysis data signed and sealed by the qualified professional engineer responsible for their preparation. To include, but not limited to, the following:
 - a. Description of design criteria.
 - b. Structural analysis depicting stress and deflection requirements for each framing application.
 - c. Selection of framing components and accessories.
 - d. Design and verification of connection.

B. Informational Submittals

1. Mill Certificates: For each type of bolt.
2. Product Test Reports: For Shear Stud Connectors.

1.6 QUALITY ASSURANCE

- ### A. Manufacturer Qualifications: A manufacturer certified by SJI to manufacture joists complying with applicable standard specifications and load tables in SJI's "Specifications" and "Standard Specification for Composite Steel Joists, CJ-Series" in "Standard Specifications for Composite Steel Joists, Weight Tables and Bridging Tables, Code of Standard Practice."
1. Fabricator and Erector to have at least 5 years experience with projects of similar size and scope.
 2. Manufacturer's responsibilities include providing professional engineering services for designing Composite Steel Joists, to comply with performance requirements.

- B. Welding Qualifications: Qualify field-welding procedures and personnel according to AWS D1.1/D1.1M, "Structural Welding Code - Steel."
- C. Structural Preconstruction Conference: Attend conference at Project site.

1.7 DELIVERY, STORAGE, AND HANDLING

- A. Deliver, store, and handle joists as recommended in SJI's "Specifications" and "Standard Specification for Composite Steel Joists, CJ-Series" in "Standard Specifications for Composite Steel Joists, Weight Tables and Bridging Tables, Code of Standard Practice."
- B. Protect joists from corrosion, deformation, and other damage during delivery, storage, and handling.
- C. Store joist bundles off the ground.
- D. Do not place joist bundles on un-braced structural frame.

PART 2 - PRODUCTS

2.1 K-SERIES STEEL JOISTS

- A. Manufacture steel joists of type indicated according to "Standard Specifications for Open Web Steel Joists, K-Series" in SJI's "Specifications," with steel-angle top- and bottom-chord members, underslung ends, and parallel top chord.
 - 1. Joist Type: K-series steel joists and KCS-type K-series steel joists.
- B. Provide holes in chord members where shown on Drawings for securing other items to steel joists and deduct area of holes from chord when calculating member strength.
- C. Do not camber joists.
- D. Equip bearing ends of joists with manufacturer's standard beveled ends or sloped shoes if joist slope exceeds 1/4 inch per 12 inches.

2.2 COMPOSITE STEEL JOISTS

- A. Manufacture composite steel joists according to "Standard Specifications for Composite Steel Joists, CJ-Series" in SJI's "Standard Specifications for Composite Steel Joists, Weight Tables and Bridging Tables, Code of Standard Practice", with steel-angle top- and bottom-chord members; of joist type and end and top-chord arrangements as follows:
 - 1. Joist Type: CJ-series steel joists.
 - 2. End Arrangement: Underslung, unless otherwise indicated on Drawings.
 - 3. Top-chord Arrangement: As indicated on Drawings.
 - 4. Camber composite steel joists according to "Standard Specifications for Composite Steel Joists, CJ-Series".
 - 5. Web configuration: As shown on Contract Documents, including Vierendeel openings.

2.3 PRIMERS

- A. VOC Content: Products shall comply with VOC limits of authorities having jurisdiction.
- B. Standard Primer: SSPC-Paint 15, or manufacturer's standard shop primer complying with performance requirements in SSPC-Paint 15.

2.4 JOIST ACCESSORIES

- A. Bridging: Provide bridging anchors and number of rows of horizontal or diagonal bridging of material, size, and type required by SJI's "Specifications" and "Standard Specification for Composite Steel Joists, CJ-Series" in "Standard Specifications for Composite Steel Joists, Weight Tables and Bridging Tables, Code of Standard Practice" for type of joist, chord size, spacing, and span. Furnish additional erection bridging if required for stability.
 - 1. Provide bridging anchors for ends of bridging lines terminating at walls or beams.
 - 2. Provide additional bridging as required to stabilize joists when net uplift pressure is indicated on Drawings.
- B. Carbon-Steel Bolts and Threaded Fasteners: ASTM A 307, Grade A, carbon-steel, hex-head bolts and threaded fasteners; carbon-steel nuts; and flat, unhardened steel washers, complying with ANSI B27.2, Type B.
 - 1. Finish: Plain, uncoated, unless noted otherwise.
- C. High-Strength Bolts, Nuts, and Washers: ASTM F3125, Grade A325, Type 1, heavy hex steel structural bolts; ASTM A 563, Grade DH, heavy hex carbon-steel nuts; and ASTM F 436, Type 1, hardened carbon-steel washers.
 - 1. Finish: Plain.
- D. Composite Shear Stud Connectors: ASTM A108, Grade 1015 through 1020, headed-stud type, cold-finished carbon steel; AWS D1.1/D1.1M, Type B.
- E. Welding Electrodes: Comply with AWS standards.
- F. Furnish miscellaneous accessories including splice plates and bolts required by joist manufacturer to complete joist assembly.

2.5 CLEANING AND SHOP PAINTING

- A. Shop prime all steel joist members except for joists and accessories to receive sprayed fire-resistive materials.
- B. For members to receive primer leave following locations unprimed:
 - 1. Surfaces to be field welded, in particular top chords of CJ-series joists for shear stud attachment.
 - 2. Surfaces to be high-strength bolted with slip-critical connections.
 - 3. Surfaces to receive sprayed fire-resistive materials (applied fireproofing).

- C. Surface Preparation: Remove loose scale, heavy rust and other foreign materials from fabricated joists and accessories. Prepare surfaces according to the following specifications and standards:
1. SSPC-SP 3, "Power Tool Cleaning," unless noted otherwise below.
 2. SSPC-SP 6/NACE No. 3, "Commercial Blast Cleaning," for:
 - a. Steel joists to receive sprayed fire-resistive materials (applied fireproofing).
 3. ASTM D 6386, "Standard Practice for Preparation of Zinc (Hot-Dip Galvanized) Coated Iron and Steel Product and Hardware Surfaces for Painting," for galvanized surfaces noted to be painted.
- D. Priming:
1. Immediately after surface preparation, apply one coat of primer according to manufacturer's written instructions and at rate recommended by SSPC to provide a minimum dry film thickness as listed below. Use priming methods that result in full coverage of joints, corners, edges, and exposed surfaces.
 - a. Steel Joists to Receive Standard Primer: 1.0 mils.
 - b. Steel Joists to Receive sprayed fire-resistive materials (applied fireproofing): 2 to 3.5 mils.
 2. Stripe paint corners, crevices, bolts, welds, and sharp edges.
 3. Apply two coats of shop paint to surfaces that are inaccessible after assembly or erection. Change color of second coat to distinguish it from first.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine supporting substrates, embedded bearing plates, and abutting structural framing for compliance with requirements for installation tolerances and other conditions affecting performance.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.
- C. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 INSTALLATION

- A. Do not install joists until supporting construction is in place and secured.
- B. Install joists and accessories plumb, square, and true to line; securely fasten to supporting construction according to approved shop drawings and to SJI's "Specifications" and "Standard Specifications for Composite Steel Joists, CJ-Series" in "Standard Specifications for Composite Steel Joists, Weight Tables and Bridging Tables, Code of Standard Practice," joist manufacturer's written recommendations, and requirements in this Section.

1. Before installation, splice joists delivered to Project site in more than one piece.
 2. Space, adjust, and align joists accurately in location before permanently fastening.
 3. Install temporary bracing and erection bridging, connections, and anchors to ensure that joists are stabilized during construction.
 4. Delay rigidly connecting bottom-chord extensions to columns or supports until dead loads are applied.
- C. Field weld joists to supporting steel bearing plates and/or framework. Coordinate welding sequence and procedure with placement of joists. Comply with AWS requirements and procedures for welding, appearance and quality of welds, and methods used in correcting welding work.
- D. Bolt joists to supporting steel framework in accordance with AISC and SJI specifications for type of joists used. Bolt joists to supporting steel framework using high-strength structural bolts. Comply with Research Council on Structural Connection's "Specification for Structural Joints Using ASTM A 325 or ASTM A 490 Bolts" for high-strength structural bolt installation and tightening requirements.
- E. Install and connect bridging concurrently with joist erection, before construction loads are applied. Anchor ends of bridging lines at top and bottom chords if terminating at walls or beams.
- F. Shear Stud Connectors: Prepare steel surfaces as recommended by manufacturer of shear studs. Use automatic end welding of headed-stud shear connectors according to AWS D1.1/D1.1M and manufacturer's written instructions.
1. Ensure that metal deck rests tightly against joist top chord.
 2. Place studs in location and spacing shown in approved shear stud placement drawings.
 3. Do not lay out any more ferrules ahead of stud welder than can be welded in one production period.
- G. Field Modifications: Notify Architect if it becomes evident that field modifications to joists, joist girders and accessories are required during erection. Submit field modification proposed by joist manufacturer to Architect for review.
- H. Touchup Painting: After installation, promptly clean, prepare, and prime or re-prime field connections, rust spots, and abraded surfaces of prime-painted joists and accessories.
1. Clean and prepare surfaces by SSPC-SP11, "Power Tool Cleaning to Bare Metal," for:
 - a. Steel joists to receive sprayed fire-resistive materials (applied fireproofing).
- I. Concrete Placement at Composite Steel Joists: Place concrete over composite steel joists using the Constant Slab Thickness method. Refer to Division 03 Section "Cast-In-Place Concrete".
- J. Provide final protection and maintain conditions, in a manner acceptable to manufacturer and Installer that ensure that joists and accessories are without damage or deterioration at time of Substantial Completion.

3.3 FIELD QUALITY CONTROL

- A. Testing Agency: Owner will engage a qualified independent testing and inspecting agency to inspect joist materials, inspect field welds and bolted connections, and prepare test and inspection reports.
- B. Material Inspection: Inspect joists, joist girders and accessories for dents, bends and other damage that may compromise the structural integrity of the member.
 - 1. Contractor to remove, replace or repair joists found to be damaged to the satisfaction of the Architect at no additional cost to Owner.
- C. Visually inspect field welds according to AWS D1.1/D1.1M.
- D. Visually inspect bolted connections.
- E. Shear Stud Connectors: In addition to visual inspection for installation, quantity and placement, test and inspect field-welded shear stud connectors according to requirements in AWS D1.1/D1.1M for stud welding and as follows:
 - 1. Perform bend tests on a minimum of 1 out of every 100 shear studs.
- F. Correct deficiencies in Work that test and inspection reports have indicated are not in compliance with specified requirements. Contractor is responsible for cost of corrective action and repeated inspection caused by deficient work or materials.

END OF SECTION 05 21 00

SECTION 05 31 00 - STEEL DECKING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Roof deck.
 - 2. Acoustical cellular roof deck.
 - 3. Composite floor deck.
 - 4. Accessories.

1.3 SUBMITTALS, GENERAL

- A. General: Submit all action submittals and informational submittals required by this Section concurrently.

1.4 ACTION SUBMITTALS

- A. Product Data: Submit manufacturer's specifications and installation instructions for each type of deck, accessory, and product indicated.
 - 1. Deck Primer Test Reports: Provide documentation of primer compatibility with finish paint.
- B. Shop Drawings:
 - 1. Deck Placement Drawings: Include layout and types of deck panels, support locations, anchorage details, dimensions, panel lengths, edge of deck or pour stop distance and each condition requiring closure panels, reinforcing channels, cut deck openings, special jointing, accessories including rubber flute closure locations, and attachments to other construction.

1.5 INFORMATIONAL SUBMITTALS

- A. Product Certificates: For each type of steel deck.

- B. Product Test Reports: Based on evaluation of comprehensive tests performed by a qualified testing agency, indicating that each of the following complies with requirements:

- 1. Power-actuated mechanical fasteners.
- 2. Acoustical roof deck.

1.6 QUALITY ASSURANCE

- A. Welding Qualifications: Qualify procedures and personnel according to AWS D1.3, "Structural Welding Code - Sheet Steel."
- B. Qualifications:
 - 1. Fabricator:
 - a. Submit documentation showing at least 5 completed projects of similar size and scope.
 - b. Submit documentation showing current membership with Steel Deck Institute (SDI).
 - 2. Installer:
 - a. Submit documentation showing at least 5 completed projects of similar size and scope.
- C. Structural Preconstruction Conference: Attend conference at Project site.

1.7 DELIVERY, STORAGE, AND HANDLING

- A. Protect steel deck from corrosion, deformation, and other damage during delivery, storage, and handling.
- B. Stack steel deck off the ground on platforms or pallets and slope to provide drainage. Protect with a waterproof covering and ventilate to avoid condensation.
 - 1. Protect and ventilate acoustical cellular roof deck with factory-installed insulation to maintain insulation free of moisture.
- C. Do not place deck bundles on unbolted structural steel frames, or on unattached or unbridged joists. Do not place bundles on unbraced structural frame.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. AISI Specifications: Comply with calculated structural characteristics of steel deck according to AISI's "North American Specification for the Design of Cold-Formed Steel Structural Members."

- B. Fire-Resistance Ratings: Comply with ASTM E 119; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.
1. Indicate design designations from UL's "Fire Resistance Directory" or from the listings of another qualified testing agency.

2.2 ROOF DECK

- A. Roof Deck: Design and fabricate panels, without top-flange stiffening grooves, to comply with "SDI Specifications and Commentary for Steel Roof Deck," in SDI Publication No. 31, and with the following:
1. Galvanized-Steel Sheet: ASTM A 653/A 653M, Structural Steel (SS), Grade 33, G60 zinc coating.
 2. Deck Profile: Type WR, wide rib.
 3. Profile Depth: As indicated on Drawings.
 4. Design Uncoated-Steel Thickness: As indicated on Drawings.
 5. Span Condition: Triple span or more, unless otherwise shown on Drawings.
 6. Side Laps: Flat overlapped, except at areas where deck is exposed to public view, provide interlocking seam.

2.3 ACOUSTICAL ROOF DECK

- A. Acoustical Roof Deck: Fabricate panels, without top-flange stiffening grooves, to comply with "SDI Specifications and Commentary for Steel Roof Deck," in SDI Publication No. 31, and with the following:
1. Galvanized and Shop-Primed Steel Sheet: ASTM A 653/A 653M, Structural Steel (SS), Grade 33, G60 zinc coating; cleaned, pretreated, and primed with baked-on, rust-inhibitive primer.
 - a. Remove grease and oil residue from galvanized sheet metal fabricated from coil stock by mechanical methods to produce clean, lightly etched surfaces that promote adhesion of subsequently applied paints.
 - b. Primer to be compatible with finish paint. Primer to be approved for use with finish paint or be tested prior to use.
 - c. Color: Manufacturer's standard.
 2. Cellular Deck Profile: Type WR, wide rib.
 3. Profile Depth: As indicated on Drawings.
 4. Design Uncoated-Steel Thicknesses, Cellular Roof Deck Unit/Bottom Plate: As indicated on Drawings.
 5. Span Condition: Triple span or more, unless otherwise shown on Drawings.
 6. Side Laps: Interlocking seam.

7. Acoustical Perforations: Cellular deck units with manufacturer's standard perforated flat bottom plate welded to ribbed deck.
8. Sound-Absorbing Insulation: Manufacturer's standard premolded roll or strip of glass or mineral fiber.
 - a. Factory install sound absorbing insulation into cells of cellular deck.
9. Acoustical Performance: NRC 0.70, tested according to ASTM C 423.

2.4 COMPOSITE FLOOR DECK

- A. Composite Floor Deck: Fabricate panels, with integrally embossed or raised pattern ribs and interlocking side laps, to comply with "SDI Specifications and Commentary for Composite Steel Floor Deck," in SDI Publication No. 31, with the minimum section properties indicated, and with the following:
 1. Galvanized-Steel Sheet: ASTM A 653/A 653M, Structural Steel (SS), Grade 33, G90 zinc coating.
 2. Profile Depth: As indicated on Drawings.
 3. Design Uncoated-Steel Thickness: As indicated on Drawings.
 4. Span Condition: Triple span or more, unless otherwise shown on Drawings.

2.5 ACCESSORIES

- A. General: Provide manufacturer's standard accessory materials for deck that comply with requirements indicated.
- B. Mechanical Fasteners: Corrosion-resistant, low-velocity, carbon-steel, self-drilling, self-threading screws.
- C. Side-Lap Fasteners: Corrosion-resistant, hexagonal washer head; self-drilling, carbon-steel screws, No. 10 minimum diameter.
- D. Rubber Flute Closure Strips: Vulcanized, closed-cell, synthetic rubber to fit tightly between deck and supporting steel or wall.
- E. Miscellaneous Sheet Metal Deck Accessories: Steel sheet, minimum yield strength of 33,000 psi, not less than 20 gauge (0.0359-inch design uncoated thickness, of same material and finish as deck; of profile indicated or required for application.
- F. Pour Stops and Girder Fillers: Steel sheet, minimum yield strength of 33,000 psi, of same material and finish as deck, and of thickness and profile recommended by SDI Publication No. 31 for overhang and slab depth.
- G. Column Closures, End Closures, Z-Closures, and Cover Plates: Steel sheet, of same material, finish, and thickness as deck unless otherwise indicated.
- H. Galvanizing Repair Paint: ASTM A 780.
- I. Repair Paint: Manufacturer's standard rust-inhibitive primer of same color as primer.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine supporting frame and field conditions for compliance with requirements for installation tolerances and other conditions affecting performance.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.
- C. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 INSTALLATION, GENERAL

- A. Install deck panels and accessories according to applicable specifications and commentary in SDI Publication No. 31, manufacturer's written instructions, approved deck placement shop drawings and requirements in this Section.
- B. Locate deck bundles to prevent overloading of structural members.
- C. Do not use deck units for storage or working platforms until permanently secured in position.
- D. Place deck panels on supporting frame and adjust to final position with ends accurately aligned and bearing on supporting frame before being permanently fastened.
 - 1. Align cellular deck panels over full length of cell runs and align cells at ends of abutting panels.
- E. Place deck panels flat and square and fasten to supporting frame without warp or excessive deflection. Do not stretch or contract side lap interlocks.
- F. Cut and neatly fit deck panels and accessories around openings and other work projecting through or adjacent to deck. Provide neat, square and trim cuts.
- G. Comply with AWS requirements and procedures for manual shielded metal arc welding, appearance and quality of welds, and methods used for correcting welding work. Welding shall be in accordance with AWS D1.1 and D1.3.

3.3 ROOF-DECK INSTALLATION

- A. Permanently fasten roof-deck panels to steel supporting members by arc spot (puddle) welds of the surface diameter indicated or arc seam welds with an equal perimeter that is not less than 1-1/2 inches long, and as follows:
 - 1. Weld Diameter: 5/8 inch, nominal.
- B. Side-Lap and Perimeter Edge Fastening:
 - 1. Mechanically fasten with self-drilling, No. 10 diameter or larger, carbon-steel screws.
 - 2. Fasten with a minimum of 1-1/2-inch- long welds for deck is exposed to public view.

- C. Fastening Spacing: Provide fasteners at no greater than maximum spacing listed in the table below. Weld intermediate and end supports of deck units with a minimum of two welds per deck unit at each support. Fasten side-laps at intervals not exceeding the lesser of 1/2 of the span or per the table below.

	Deck Designation	Intermediate Supports (inches)	End Supports (inches)	Edge Supports (inches)	Side Laps (inches)
1.	WR.....	6	6	24	12

- D. End Bearing: Install deck ends over supporting frame with a minimum end bearing of 1-1/2 inches, with end joints as follows:

1. End Joints: Lapped 2 inches minimum for WR deck and Butted for cellular deck.

- E. Reinforcement at Openings: For openings less than 13 inches in any dimension not reinforced with supplemental structural framing, provide additional metal reinforcement and closure pieces as required for strength and continuity of decking, and support of other work.

1. Reinforce roof deck with flat sheet steel placed over opening and fastened to top of deck.
 - a. For openings up to 6 inches in diameter, no reinforcing is necessary.
 - b. For openings 6 inches to 8 inches in diameter, provide no less than nominal 0.045 inch (18 gauge) thick before coating, and at least 12 inches wider and longer than opening.
 - c. For openings 8 inches to 13 inches in diameter, provide no less than nominal 0.057 inch (16 gauge) thick before coating, and at least 12 inch wider and longer than opening.
2. Fasten using one No. 10 screw at each corner, at each up-flute and spaced not more than 12 inches along each side.

- F. Miscellaneous Roof-Deck Accessories: Install ridge and valley plates, flat plates at change of deck direction, butt strips, finish strips, end closures, and reinforcing channels and all other miscellaneous shapes as shown on plans according to deck manufacturer's written instructions, and as required to provide suitable surface for application of roof insulation and roof covering. Fasten with No. 10 screws at 12 inches maximum to provide a complete deck installation.

- G. Rubber Flute Closure Strips: Install flexible closure strips over partitions, walls, and where indicated. Install with adhesive according to manufacturer's written instructions to ensure complete closure.

- H. Sound-Absorbing Insulation: Furnish insulation for insertion between flutes of all acoustical deck unless otherwise noted. Refer to Div 07 roofing specification for installation.

- I. Roof Insulation Support: Provide and install metal accessories to provide suitable surface for application of insulation.

3.4 FLOOR-DECK INSTALLATION

- A. Place deck units in straight alignment for entire length of run of cells and with close alignment between cells at ends of abutting units.
- B. Fasten floor-deck panels to steel supporting members by arc spot (puddle) welds of the surface diameter indicated and as follows:
 - 1. Weld Diameter: 3/4 inch, nominal. Where two units abut, fasten each unit to steel framing separately.
 - 2. Weld Spacing: End and intermediate supports perpendicular to deck flutes: 12 inches o.c.
- C. Side-Lap and Perimeter Edge Fastening: Fasten side laps and perimeter edges of panels between supports, at intervals not exceeding the lesser of half of the span or 36 inches, and as follows:
 - 1. Mechanically fasten with self-drilling, No. 10 diameter or larger, carbon-steel screws.
 - 2. Mechanically clinch or button punch.
 - 3. Fasten with a minimum of 1-1/2-inch- long welds.
- D. End Bearing: Install deck ends over supporting frame with a minimum end bearing of 1-1/2 inches, with butted end joints.
- E. Pour Stops and Girder Fillers: Weld steel sheet pour stops and girder fillers to supporting structure according to SDI recommendations unless otherwise indicated.
- F. Floor-Deck Closures: Weld steel sheet column closures, cell closures, and Z-closures to deck, according to SDI recommendations, to provide tight-fitting closures at open ends of ribs and sides of deck.
- G. Deck Accessories to Supporting Members: Fasten in accordance with manufacturer's recommendations.
- H. Deck Openings: Cut and reinforce all holes or openings in floor as shown on manufacturer's placement drawings.

3.5 FIELD QUALITY CONTROL

- A. Testing Agency: Owner will engage a qualified testing agency to perform tests and inspections.
- B. Field Inspections:
 - 1. Material Inspection: Select six (6) random sheets for each type of deck used. Inspect for thickness, type and material.
 - 2. Fastening Inspection: Inspect welds and side lap fasteners over entire deck area for size and spacing and weld quality.
 - 3. Roof Deck Conditions Inspection: Before installation of roof insulation and roof covering, inspect the deck for tears, dents or other damage that may prevent the deck from supporting the required loads, or be visually objectionable in exposed deck areas. Report suspect areas to Architect to determine need for repair or replacement.

- 4. Floor Deck Conditions Inspection: Before concrete placement, inspect the deck for tears, dents or other damage that may prevent the deck from acting as a tight and substantial form. Inspect deck for dirt, ice, water, oils or other materials that could prevent or inhibit composite action forming between deck and hardened concrete. Report suspect areas to Architect to determine need for repair, replacement or cleaning.
- C. Testing agency will report inspection results promptly and in writing to Contractor and Architect.
- D. Remove and replace work that does not comply with specified requirements.
- E. Additional inspecting, at Contractor's expense, will be performed to determine compliance of corrected work with specified requirements.

3.6 PROTECTION

- A. Hanging Loads (All Contractors): Do not hang any concentrated loads from metal deck unless otherwise noted and detailed on Drawings.
- B. Galvanizing Repairs: Prepare and repair damaged galvanized coatings on both surfaces of deck with galvanized repair paint according to ASTM A 780 and manufacturer's written instructions.
- C. Repair Painting: Wire brush and clean rust spots, welds, and abraded areas on top surface of prime-painted deck immediately after installation, and apply repair paint.
 - 1. Wire brushing, cleaning, and repair painting of bottom deck surfaces are included in Division 09 Section.
- D. Provide final protection and maintain conditions to ensure that steel deck is without damage or deterioration at time of Substantial Completion.
- E. Do not use deck units for storage or working platforms until permanently secured.

END OF SECTION 05 31 00

SECTION 05 40 00 - COLD-FORMED METAL FRAMING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes the following cold-formed metal framing ("CFMF") elements:
 - 1. Exterior non-load-bearing wall framing.
 - 2. Ceiling/soffit joist framing.

1.3 PERFORMANCE REQUIREMENTS

- A. Delegated Design: Design cold-formed steel framing, including comprehensive engineering analysis by a qualified professional engineer (licensed in the State of New York), using performance requirements and design criteria indicated and certifying that the design complies with the Building Code of New York.
- B. Structural Performance: Provide cold-formed metal framing capable of withstanding applied design loads and all combinations of these loads, as required by applicable codes and as specified on Drawings, within limits and under conditions indicated.
 - 1. Design Loads: Dead, live, snow and snow drifting, ponding, wind, seismic and thermal loads, loads due to architectural and mechanical components.
 - 2. Deflection Limits: Design framing systems to withstand design loads without deflections greater than the following:
 - a. Exterior Non-Load-Bearing Framing: Horizontal deflection of the wall height of 1/240 for metal wall panels and 1/600 for masonry veneer.
 - b. Ceiling/Soffit Joist Framing: Vertical deflection of 1/240 of the span.
 - 3. Design framing systems to provide for movement of framing members without damage or overstressing, sheathing failure, connection failure, undue strain on fasteners and anchors, or other detrimental effects when subject to a maximum ambient temperature change of 120 deg F.
 - 4. Design framing system to maintain clearances at openings, to allow for construction tolerances, and to accommodate live load deflection of primary building structure as follows:
 - a. Upward and downward movement of 3/4 inch.

- C. Cold-Formed Steel Framing, General: Design according to AISI's "Standard for Cold-Formed Steel Framing - General Provisions."
 - 1. Headers: Design according to AISI's "Standard for Cold-Formed Steel Framing - Header Design."
 - 2. Design exterior non-load-bearing wall framing to accommodate horizontal deflection without regard for contribution of sheathing materials.
- D. Minimum Thickness and Maximum Spacing Requirements: Comply with the requirements of this specification for specific requirements for minimum thickness and maximum spacing for cold-formed metal framing components.

1.4 SUBMITTALS, GENERAL

- A. General: Submit all action submittals and informational submittals required by this Section concurrently.

1.5 ACTION SUBMITTALS

- A. Product Data: For each type of cold-formed metal framing product and accessory indicated.
- B. Shop Drawings: Show layout, spacings, sizes, thicknesses, and types of cold-formed metal framing; fabrication; and fastening and anchorage details, including mechanical fasteners. Show reinforcing channels, opening framing, supplemental framing, strapping, bracing, bridging, splices, accessories, connection details, and attachment to adjoining work.
- C. Delegated Design Submittal: For cold-formed metal framing indicated to comply with performance requirements and design criteria, including structural analysis data signed and sealed by the qualified professional engineer responsible for their preparation.
 - 1. Description of design criteria.
 - 2. Structural analysis depicting stress and deflection requirements for each framing application.
 - 3. Selection of framing components and accessories.
 - 4. Design and verification of connections.

1.6 INFORMATIONAL SUBMITTALS

- A. Product Test Reports: From a qualified testing agency, unless otherwise stated, indicating that each of the following complies with requirements, based on evaluation of comprehensive tests for current products:
 - 1. Expansion anchors.
 - 2. Power-actuated anchors.

1.7 QUALITY ASSURANCE

- A. Cold-formed Metal Framing Installer Qualifications: At least 5 years experience in construction of cold-formed metal framing systems similar in scope to application shown on Documents with record of successful in-service performance for prior projects.
- B. Product Tests: Mill certificates or data from a qualified independent testing agency indicating steel sheet complies with requirements, including base-metal thickness, yield strength, tensile strength, total elongation, chemical requirements, and metallic-coating thickness.
- C. Welding: Qualify procedures and personnel according to AWS D1.1/D1.1M, "Structural Welding Code-Steel," and AWS D1.3, "Structural Welding Code-Sheet Steel."
- D. AISI Specifications and Standards: Comply with AISI's "North American Specification for the Design of Cold-Formed Steel Structural Members" and its "Standard for Cold-Formed Steel Framing - General Provisions."
 - 1. Comply with AISI's "Standard for Cold-Formed Steel Framing - Header Design."
- E. Structural Preconstruction Conference: Attend conference at Project site.
- F. Preinstallation Conference: Conduct conference at Project site to comply with requirements in Division 01 Section "Project Management and Coordination."

1.8 DELIVERY, STORAGE, AND HANDLING

- A. Packing and Shipping: Deliver materials and components to Site in manufacturer's unopened packages, containers or bundles, fully identified with brand name, type, grade and identification of manufacturer or supplier.
- B. Protect cold-formed metal framing from corrosion, deformation, and other damage during delivery, storage, and handling.
- C. Store cold-formed metal framing, protect with a waterproof covering, and ventilate to avoid condensation.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering cold-formed metal framing that may be incorporated into the Work include, but are not limited to, the following:
 - 1. AllSteel Products, Inc.
 - 2. ClarkWestern Building Systems, Inc.
 - 3. Dietrich Metal Framing; a Worthington Industries Company.
 - 4. MarinoWare; a division of Ware Industries.
 - 5. MBA Building Supplies, Inc.

6. Super Stud Building Products, Inc.
7. United Metal Products, Inc.
8. Telling Industries, LLC.

2.2 MATERIALS

- A. Steel Sheet: ASTM A1003/A1003M, Structural Grade, Type H, metallic coated, of grade and coating weight as follows:
1. Grade: As required by structural performance.
 2. Coating: G60, A60, AZ50, or GF30.

2.3 EXTERIOR NON-LOAD-BEARING WALL FRAMING

- A. Steel Studs: Manufacturer's standard C-shaped steel studs, of web depths indicated, punched, with stiffened flanges, and as follows:
1. Minimum Base-Metal Thickness: 54 mils standard or.
 2. Minimum Flange Width: 1-5/8 inches.
- B. Steel Track: Manufacturer's standard U-shaped steel track, of web depths indicated, unpunched, with unstiffened flanges, and as follows:
1. Minimum Base-Metal Thickness: 54 mils or at least matching steel studs.
 2. Minimum Flange Width: 1-1/4 inches.
- C. Single Deflection Track: Manufacturer's single, deep-leg, U-shaped steel track; unpunched, with unstiffened flanges, of web depth to contain studs while allowing free vertical movement, with flanges designed to support horizontal and lateral loads and transfer them to the primary structure, and as follows:
1. Minimum Base-Metal Thickness: 54 mils.
 2. Flange Width: 1 inch plus twice the design gap.

2.4 CEILING/SOFFIT JOIST FRAMING

- A. Steel Ceiling Joists: Manufacturer's standard C-shaped steel sections, of web depths indicated, unpunched, with stiffened flanges, and as follows:
1. Minimum Base-Metal Thickness: 33 mils.
 2. Minimum Flange Width: 2 inches.

2.5 FRAMING ACCESSORIES

- A. Fabricate steel-framing accessories from steel sheet, ASTM A1003/A1003M, Structural Grade, Type H, metallic coated, of same grade and coating weight used for framing members.

- B. Provide accessories of manufacturer's standard thickness and configuration, unless otherwise indicated, as follows:
 - 1. Supplementary framing.
 - 2. Bracing, bridging, and solid blocking.
 - 3. Web stiffeners.
 - 4. Anchor clips.
 - 5. End clips.
 - 6. Foundation clips.
 - 7. Gusset plates.
 - 8. Stud kickers, knee braces, and girts.
 - 9. Hole reinforcing plates.
 - 10. Backer plates.

2.6 ANCHORS, CLIPS, AND FASTENERS

- A. Steel Shapes and Clips: ASTM A1003/A1003M, Structural Grade, Type H, metallic coated, of grade and coating weight matching associated member.
- B. Anchor Bolts: ASTM F1554, Grade 36, threaded carbon-steel hex-headed bolts and carbon-steel nuts; and flat, hardened-steel washers; zinc coated by hot-dip process according to ASTM A153/A153M, Class C.
- C. Expansion Anchors: Fabricated from corrosion-resistant materials, with capability to sustain, without failure, a load equal to 5 times design load, as determined by testing per ASTM E488 conducted by a qualified independent testing agency.
- D. Power-Actuated Anchors: Fastener system of type suitable for application indicated, fabricated from corrosion-resistant materials, with capability to sustain, without failure, a load equal to 10 times design load, as determined by testing per ASTM E1190 conducted by a qualified independent testing agency.
- E. Mechanical Fasteners: ASTM C1513, corrosion-resistant-coated, self-drilling, self-tapping steel drill screws.
 - 1. Head Type: Low-profile head beneath sheathing, manufacturer's standard elsewhere.
- F. Welding Electrodes: Comply with AWS standards.

2.7 MISCELLANEOUS MATERIALS

- A. Galvanizing Repair Paint: ASTM A780.
- B. Nonmetallic, Nonshrink Grout: Premixed, nonmetallic, noncorrosive, nonstaining grout containing selected silica sands, portland cement, shrinkage-compensating agents, and plasticizing and water-reducing agents, complying with ASTM C1107, with fluid consistency and 30-minute working time.

- C. Shims: Load bearing, high-density multimonomer plastic, nonleaching.
- D. Sealer Gaskets: Closed-cell neoprene foam, 1/4 inch thick, selected from manufacturer's standard widths to match width of bottom track or rim track members.

2.8 FABRICATION

- A. Fabricate cold-formed metal framing and accessories plumb, square, and true to line, and with connections securely fastened, according to referenced AISI specifications and standards, manufacturer's written instructions, and requirements in this Section.
 - 1. Fabricate framing assemblies using jigs or templates.
 - 2. Cut framing members by sawing or shearing; do not torch cut.
 - 3. Fasten cold-formed metal framing members by welding, screw fastening, clinch fastening, or riveting as standard with fabricator. Wire tying of framing members is not permitted.
 - a. Comply with AWS D1.3 requirements and procedures for welding, appearance and quality of welds, and methods used in correcting welding work.
 - b. Locate mechanical fasteners and install according to Shop Drawings, with screw penetrating joined members by not less than three exposed screw threads.
 - 4. Fasten other materials to cold-formed metal framing by welding, bolting, or screw fastening, according to Shop Drawings.
 - 5. Splices in axially loaded members not acceptable.
- B. Reinforce, stiffen, and brace framing assemblies to withstand handling, delivery, and erection stresses. Lift fabricated assemblies to prevent damage or permanent distortion.
- C. Fabrication Tolerances: Fabricate assemblies level, plumb, and true to line to a maximum allowable tolerance variation of 1/8 inch in 10 feet and as follows:
 - 1. Spacing: Space individual framing members no more than plus or minus 1/8 inch from plan location. Cumulative error shall not exceed minimum fastening requirements of sheathing or other finishing materials.
 - 2. Squareness: Fabricate each cold-formed metal framing assembly to a maximum out-of-square tolerance of 1/8 inch.
- D. Touch-up all welds with galvanizing primer.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine supporting substrates and abutting structural framing for compliance with requirements for installation tolerances and other conditions affecting performance.
 - 1. Proceed with installation only after unsatisfactory conditions have been corrected.
- B. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 PREPARATION

- A. Install load bearing shims or grout between the underside of wall bottom track or rim track and the top of foundation wall or slab at stud or joist locations to ensure a uniform bearing surface on supporting concrete or masonry construction.
- B. Install sealer gaskets to isolate the underside of wall bottom track or rim track and the top of foundation wall or slab at stud or joist locations.

3.3 INSTALLATION, GENERAL

- A. Cold-formed metal framing may be shop or field fabricated for installation, or it may be field assembled.
- B. Install cold-formed metal framing according to AISI's "Standard for Cold-Formed Steel Framing - General Provisions", manufacturer's written instructions, Drawings, and approved Shop Drawings unless more stringent requirements are indicated.
- C. Install shop- or field-fabricated, cold-formed framing and securely anchor to supporting structure.
 - 1. Screw, bolt, or weld wall panels at horizontal and vertical junctures to produce flush, even, true-to-line joints with maximum variation in plane and true position between fabricated panels not exceeding 1/16 inch.
- D. Install cold-formed metal framing and accessories plumb, square, and true to line, and with connections securely fastened.
 - 1. Cut framing members by sawing or shearing; do not torch cut.
 - 2. Fasten cold-formed metal framing members by welding, screw fastening, clinch fastening, or riveting. Wire tying of framing members is not permitted.
 - a. Comply with AWS D1.3 requirements and procedures for welding, appearance and quality of welds, and methods used in correcting welding work.
 - b. Locate mechanical fasteners and install according to Shop Drawings, and complying with requirements for spacing, edge distances, and screw penetration.

- E. Install framing members in one-piece lengths unless splice connections are indicated for track or tension members.
- F. Install temporary bracing and supports to secure framing and support loads comparable in intensity to those for which structure was designed. Maintain braces and supports in place, undisturbed, until entire integrated supporting structure has been completed and permanent connections to framing are secured.
- G. Do not bridge building expansion and control joints with cold-formed metal framing. Independently frame both sides of joints.
- H. Install insulation, specified in Division 07 Section "Thermal Insulation," in built-up exterior framing members, such as headers, sills, boxed joists, and multiple studs at openings, that are inaccessible on completion of framing work.
- I. Fasten hole reinforcing plate over web penetrations that exceed size of manufacturer's standard punched openings.
- J. Erection Tolerances: Install cold-formed metal framing level, plumb, and true to line to a maximum allowable tolerance variation of 1/8 inch in 10 feet and as follows:
 - 1. Space individual framing members no more than plus or minus 1/8 inch from plan location. Cumulative error shall not exceed minimum fastening requirements of sheathing or other finishing materials.

3.4 EXTERIOR NON-LOAD-BEARING WALL INSTALLATION

- A. Install continuous tracks sized to match studs. Align tracks accurately and securely anchor to supporting structure as indicated.
- B. Fasten both flanges of studs to bottom track, unless otherwise indicated. Space studs as follows:
 - 1. Maximum Stud Spacing: 16 inches.
- C. Set studs plumb, except as needed for diagonal bracing or required for nonplumb walls or warped surfaces and similar requirements.
- D. Isolate non-load-bearing steel framing from building structure to prevent transfer of vertical loads while providing lateral support.
 - 1. Install single deflection tracks and anchor to building structure. Do not fasten studs to deflection track.
- E. Install headers and sills for wall openings wider than stud spacing. Locate headers and sills at openings as indicated. Fabricate headers of compound shapes indicated or required to transfer load to supporting studs, complete with clip-angle connectors, web stiffeners, or gusset plates.
 - 1. Frame wall openings with not less than a double stud at each jamb of frame as indicated on approved Shop Drawings. Fasten jamb members together to uniformly distribute loads.

2. Install runner tracks and jack studs above and below wall openings. Anchor tracks to jamb studs with clip angles or by welding, and space jack studs same as full-height wall studs.
- F. Install horizontal bridging in wall studs, spaced in rows indicated on Shop Drawings but not more than 48 inches apart. Fasten at each stud intersection.
1. Top Bridging for Single Deflection Track: Install row of horizontal bridging within 12 inches of single deflection track. Install a combination of flat, taut, steel sheet straps of width and thickness indicated and stud or stud-track solid blocking of width and thickness matching studs. Fasten flat straps to stud flanges and secure solid blocking to stud webs or flanges.
 - a. Install solid blocking at centers indicated on approved Shop Drawings.
 2. Bridging may be one of the following types:
 - a. Cold-rolled steel channel, welded or mechanically fastened to webs of punched studs.
 - b. Combination of flat, taut, steel sheet straps of width and thickness indicated and stud-track solid blocking of width and thickness to match studs. Fasten flat straps to stud flanges and secure solid blocking to stud webs or flanges.
 - c. Proprietary bridging bars installed according to manufacturer's written instructions.
- G. Install miscellaneous framing and connections, including stud kickers, web stiffeners, clip angles, continuous angles, anchors, fasteners, and stud girts, to provide a complete and stable wall-framing system.

3.5 CEILING/SOFFIT JOIST INSTALLATION

- A. Install perimeter joist track sized to match joists. Align and securely anchor or fasten track to supporting structure at corners, ends, and spacings indicated on approved Shop Drawings.
- B. Install joists bearing on supporting frame, level, straight, and plumb; adjust to final position, brace, and reinforce. Fasten joists to both flanges of joist track.
1. Install joists over supporting frame with a minimum end bearing of 1-1/2 inches.
 2. Reinforce ends and bearing points of joists with web stiffeners, end clips, joist hangers, steel clip angles, or steel-stud sections as indicated on approved Shop Drawings.
- C. Space joists not more than 2 inches from abutting walls, and as follows:
1. Joist Spacing: As indicated on approved Shop Drawings.
- D. Frame openings with built-up joist headers consisting of joist and joist track, nesting joists, or another combination of connected joists as indicated on approved Shop Drawings.

- E. Install joist reinforcement at interior supports with single, short length of joist section located directly over interior support, with lapped joists of equal length to joist reinforcement, or as indicated on approved Shop Drawings.
 - 1. Install web stiffeners to transfer axial loads of walls above.
- F. Install bridging at intervals indicated on approved Shop Drawings. Install prior to application of loads. Fasten bridging at each joist intersection.
 - 1. Bridging may be one of the following:
 - a. Joist-track solid blocking of width and thickness indicated, secured to joist webs.
 - b. Combination of flat, taut, steel sheet straps of width and thickness indicated and joist-track solid blocking of width and thickness indicated. Fasten flat straps to bottom flange of joists and secure solid blocking to joist webs.
 - 2. Provide end blocking where joist/rafter ends are not restrained against rotation.
- G. Secure joists to load-bearing interior walls to prevent lateral movement of bottom flange.
- H. Provide additional joist under parallel, non-load bearing partitions when partition length exceeds one half span.
- I. Do not install web knock-outs within 1.5 times depth of member from edge of bearing, unless necessary. Where required, reinforce web.
- J. Install miscellaneous joist framing and connections, including web stiffeners, closure pieces, clip angles, continuous angles, hold-down angles, anchors, and fasteners, to provide a complete and stable joist-framing assembly.

3.6 FIELD QUALITY CONTROL

- A. Testing: Owner will engage a qualified independent testing and inspecting agency to perform field tests and inspections and prepare test reports. Contractor to provide access to construction for inspections to verify conformance with provisions of Contract Documents and approved Shop Drawings. Inspections to include but not limited to, the following:
 - 1. Verify member sizes, configuration and spacing.
 - 2. Inspect screwed and welded connections.
 - 3. Inspect weld quality.
 - 4. Verify field welder's certification.
 - 5. Verify galvanizing primer has been applied to all welds and damaged galvanized surfaces.
 - 6. Verify compliance with details shown on approved drawings such as bracing, stiffening, member location, and proper application of joint details at each connection.
- B. Field and shop welds will be subject to testing and inspecting.
- C. Testing agency will report test results promptly and in writing to Contractor and Architect.

- D. Remove and replace work where test results indicate that it does not comply with specified requirements.
- E. Additional testing and inspecting, at Contractor's expense, will be performed to determine compliance of replaced or additional work with specified requirements.

3.7 CORECTIONS AND PROTECTION

- A. Galvanizing Repairs: Prepare and correct damaged galvanized coatings on fabricated and installed cold-formed metal framing with galvanized repair paint according to ASTM A 780 and manufacturer's written instructions.
- B. Provide final protection and maintain conditions, in a manner acceptable to manufacturer and Installer, that ensure that cold-formed metal framing is without damage or deterioration at time of Substantial Completion.

END OF SECTION 05 40 00

SECTION 05 50 00 - METAL FABRICATIONS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:

1. Steel framing and supports for overhead doors.
2. Steel framing and supports for mechanical and electrical equipment.
3. Steel framing and supports for applications where framing and supports are not specified in other Sections.
4. Metal ladders.
5. Miscellaneous steel trim.
6. Loose bearing and leveling plates for applications where they are not specified in other Sections.

- B. Products furnished, but not installed, under this Section:

1. Anchor bolts indicated to be cast into concrete or built into unit masonry.

1.3 PERFORMANCE REQUIREMENTS

- A. Delegated Design: Design aluminum ladders, including comprehensive engineering analysis by a qualified professional engineer (licensed in the State of New York), using performance requirements and design criteria indicated and certifying that the design complies with the Building Code of New York.
- B. Structural Performance of Aluminum Ladders: Provide aluminum ladders capable of withstanding applied design loads and all combinations of these loads, as required by applicable codes and as specified on Drawings, within limits and under conditions indicated.
 1. Aluminum ladders shall withstand the effects of loads and stresses within limits and under conditions specified in ANSI A14.3.
- C. Thermal Movements: Allow for thermal movements from ambient and surface temperature changes acting on exterior metal fabrications by preventing buckling, opening of joints, overstressing of components, failure of connections, and other detrimental effects.

1.4 SUBMITTALS, GENERAL

- A. General: Submit all action submittals required by this Section concurrently.

1.5 ACTION SUBMITTALS

- A. Product Data: For the following:
 - 1. Slotted channel framing.
 - 2. Grout.
- B. Shop Drawings: Show fabrication and installation details for metal fabrications.
 - 1. Include plans, elevations, sections, and details of metal fabrications and their connections. Show anchorage and accessory items.
- C. Delegated-Design Submittal: For aluminum ladders indicated to comply with performance requirements and design criteria, including structural analysis data signed and sealed by the qualified professional engineer responsible for their preparation.

1.6 QUALITY ASSURANCE

- A. Welding Qualifications: Qualify procedures and personnel according to the following:
 - 1. AWS D1.1/D1.1M, "Structural Welding Code - Steel."
 - 2. AWS D1.2/D1.2M, "Structural Welding Code - Aluminum."

1.7 COORDINATION

- A. Coordinate installation of anchorages. Furnish setting drawings, templates, and directions for installing anchorages, including sleeves, concrete inserts, anchor bolts, and items with integral anchors, that are to be embedded in concrete or masonry. Deliver such items to Project site in time for installation.

PART 2 - PRODUCTS

2.1 METALS, GENERAL

- A. Metal Surfaces, General: Provide materials with smooth, flat surfaces unless otherwise indicated. For metal fabrications exposed to view in the completed Work, provide materials without seam marks, roller marks, rolled trade names, or blemishes.

2.2 FERROUS METALS

- A. Steel Channels and Angles: ASTM A 572/A 572M, Grade 50.
- B. Steel Plates and Bars: ASTM A36/A36M.
- C. Slotted Channel Framing: Cold-formed metal box channels (struts) complying with MFMA-4.
 - 1. Size of Channels: 1-5/8 by 1-5/8 inches or as indicated on drawings.

2. Material: Galvanized steel, ASTM A 653/A 653M, structural steel, Grade 33, with G90 coating; 0.108-inch nominal thickness.
3. Fasteners and Fittings: Appropriate to situation and as recommend by manufacturer.

2.3 NONFERROUS METALS

- A. Aluminum Plate and Sheet: ASTM B209, Alloy 6061-T6.
- B. Aluminum Bar and Rod: ASTM B211, Alloy 6061-T6.
- C. Aluminum Extrusions: ASTM B221, Alloy 6061-T6.

2.4 FASTENERS

- A. General: Unless otherwise indicated, provide Type 304 stainless-steel fasteners for exterior use and zinc-plated fasteners with coating complying with ASTM B633 or ASTM F1941, Class Fe/Zn 5, at exterior walls. Select fasteners for type, grade, and class required.
- B. Post-installed Anchors: Chemical anchors.
 1. Material for Interior Locations: Carbon-steel components zinc plated to comply with ASTM B633 or ASTM F1941, Class Fe/Zn 5 unless otherwise indicated.
 2. Material for Exterior Locations and Where Stainless Steel is Indicated: Alloy Group 1 stainless-steel bolts, ASTM F 593, and nuts, ASTM F 594.
 3. Chemical Anchor Adhesives: Heavy duty, two component injectable adhesive designed to be dispensed using double chamber gun with mixing nozzle. Adhesives in capsule form will not be accepted.
 - a. Products for anchoring into concrete and grout-filled masonry: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - 1) DeWalt; AC200+.
 - 2) Hilti, Inc.; HIT-HY 200R; HIT-HY 200A; HIT-ICE.
 - 3) ITW Redhead; A7+.
 - b. Products for anchoring into masonry other than grout-filled masonry: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - 1) DeWalt; AC100+ Gold.
 - 2) Hilti, Inc.; HIT-HY 270.
 - 3) ITW Redhead; A7+.

2.5 MISCELLANEOUS MATERIALS

- A. Welding Rods and Bare Electrodes: Select according to AWS specifications for metal alloy welded.

- B. Primer:
 - 1. VOC Content: Products shall comply with VOC limits of authorities having jurisdiction.
 - 2. Provide primers that comply with Division 09 Section "High Performance Coatings" and the following:
 - a. Interior Structural Steel: Refer to First Coat for Steel, Structural Steel in Interior High-Performance Coating Schedule: General Use.
- C. Galvanizing Repair Paint: High-zinc-dust-content paint complying with ASTM A780/A780M and compatible with paints specified to be used over it.
- D. Non-shrink, Nonmetallic Grout: Factory-packaged, non-staining, noncorrosive, nongaseous grout complying with ASTM C1107. Provide grout specifically recommended by manufacturer for interior and exterior applications.
- E. Concrete: Comply with requirements in Division 03 Section "Cast-in-Place Concrete" for normal-weight, air-entrained, concrete with a minimum 28-day compressive strength of 3000 psi.
- F. Isolation Barrier Membrane: Self-adhering, high-temperature sheet, minimum 15 mils thick, consisting of cross-laminated polyethylene-film top surface laminated to layer of butyl adhesive, with release-liner backing; cold applied, in roll width to match or exceed width of area to be protected. Provide primer when recommended by membrane manufacturer.
 - 1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Grace Construction Products, a unit of W. R. Grace & Co.; "Vycor Pro".
 - b. Equivalents meeting requirements of specified products.

2.6 FABRICATION, GENERAL

- A. Shop Assembly: Preassemble items in the shop to greatest extent possible. Disassemble units only as necessary for shipping and handling limitations. Use connections that maintain structural value of joined pieces. Clearly mark units for reassembly and coordinated installation.
- B. Cut, drill, and punch metals cleanly and accurately. Remove burrs and ease edges to a radius of approximately 1/32 inch unless otherwise indicated. Remove sharp or rough areas on exposed surfaces.
- C. Form bent-metal corners to smallest radius possible without causing grain separation or otherwise impairing work.
- D. Form exposed work with accurate angles and surfaces and straight edges.

- E. Weld corners and seams continuously to comply with the following:
1. Use materials and methods that minimize distortion and develop strength and corrosion resistance of base metals.
 2. Obtain fusion without undercut or overlap.
 3. Remove welding flux immediately.
 4. At exposed connections, finish exposed welds and surfaces smooth and blended so no roughness shows after finishing.
- F. Form exposed connections with hairline joints, flush and smooth, using concealed fasteners or welds where possible. Where exposed fasteners are required, use Phillips flat-head (countersunk) fasteners unless otherwise indicated. Locate joints where least conspicuous.
- G. Fabricate seams and other connections that will be exposed to weather in a manner to exclude water. Provide weep holes where water may accumulate.
- H. Cut, reinforce, drill, and tap metal fabrications as indicated to receive finish hardware, screws, and similar items.
- I. Provide for anchorage of type indicated; coordinate with supporting structure. Space anchoring devices to secure metal fabrications rigidly in place and to support indicated loads.
1. Where units are indicated to be cast into concrete or built into masonry, equip with integrally welded steel strap anchors, 1/8 by 1-1/2 inches, with a minimum 6-inch embedment and 2-inch hook, not less than 8 inches from ends and corners of units and 24 inches o.c., unless otherwise indicated.

2.7 MISCELLANEOUS FRAMING AND SUPPORTS

- A. General: Provide steel framing and supports not specified in other Sections as needed to complete the Work.
- B. Fabricate units from steel shapes, plates, and bars of welded construction unless otherwise indicated. Fabricate to sizes, shapes, and profiles indicated and as necessary to receive adjacent construction.
1. Fabricate units from slotted channel framing where indicated.
 2. Furnish inserts for units installed after concrete is placed.

2.8 METAL LADDERS

- A. General:
1. Comply with ANSI A14.3 unless otherwise indicated.
 2. For elevator pit ladders, comply with ASME A17.1.

B. Aluminum Ladders:

1. Fabricators: Subject to compliance with requirements, available fabricators offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Roof Lines, waterfrontdocks@gmail.com
2. Space siderails 24 inches apart unless otherwise indicated.
3. Siderails: Continuous extruded-aluminum tubes, not less than 3 inches deep, 1 inch wide, and 1/8 inch thick.
4. Rungs: Solid knurled aluminum round bars, 1" inch in diameter.
5. Fit rungs in centerline of siderails; fasten by welding.
6. Support each ladder at top and bottom and not more than 48 inches o.c. with welded aluminum brackets. Brackets are to be 1/4 inch thick by 3 inches wide.
7. Top grab rails (for exterior): Extruded aluminum tube, not less than 1 inch in diameter, fully welded. Miter or radius all corners.
8. All connections to be fully welded continuous and ground smooth.
9. All open tube ends to be capped/sealed closed.

2.9 MISCELLANEOUS STEEL TRIM

- A. Unless otherwise indicated, fabricate units from steel shapes, plates, and bars of profiles shown with continuously welded joints and smooth exposed edges. Miter corners and use concealed field splices where possible.
- B. Provide cutouts, fittings, and anchorages as needed to coordinate assembly and installation with other work.
 1. Provide with integrally welded steel strap anchors for embedding in concrete or masonry construction.

2.10 LOOSE BEARING AND LEVELING PLATES

- A. Provide loose bearing and leveling plates for steel items bearing on masonry or concrete construction. Drill plates to receive anchor bolts and for grouting.

2.11 STEEL WELD PLATES AND ANGLES

- A. Provide steel weld plates and angles not specified in other Sections, for items supported from concrete construction as needed to complete the Work. Provide each unit with no fewer than two integrally welded steel strap anchors for embedding in concrete.

2.12 FINISHES, GENERAL

- A. Comply with NAAMM's "Metal Finishes Manual for Architectural and Metal Products" for recommendations for applying and designating finishes.
- B. Finish metal fabrications after assembly.
- C. Finish exposed surfaces to remove tool and die marks and stretch lines, and to blend into surrounding surface.

2.13 STEEL AND IRON FINISHES

- A. Surface Preparation: Clean surfaces to be painted. Remove loose rust and mill scale and spatter, slag, or flux deposits. Prepare surfaces according to Division 09 Section "High Performance Coatings".
 - 1. For galvanized surfaces noted to be painted, comply with ASTM D6386, "Standard Practice for Preparation of Zinc (Hot-Dip Galvanized) Coated Iron and Steel Product and Hardware Surfaces for Painting".
- B. Galvanizing: Hot-dip galvanize items as indicated to comply with ASTM A153/A153M for steel and iron hardware and with ASTM A123/A123M for other steel and iron products.
 - 1. Do not quench or apply post galvanizing treatments that might interfere with paint adhesion.
- C. Shop prime iron and steel items not indicated to be galvanized unless they are to be embedded in concrete, sprayed-on fireproofing, or masonry, or unless otherwise indicated.
 - 1. Metal Fabrications: For all iron and steel items (except those noted below), shop prime with alkyd primer.
 - 2. Exterior Wall Metal Fabrications: For all iron and steel items occurring in exterior walls, shop prime with urethane primer.
- D. Shop Priming: Immediately after surface preparation, apply one coat of primer according to manufacturer's written instructions and at rate recommended by SSPC to provide a minimum dry film thickness as listed below. Use priming methods that result in full coverage of joints, corners, edges, and exposed surfaces.
 - 1. Stripe paint corners, crevices, bolts, welds, and sharp edges.
 - 2. Apply two coats of shop paint to surfaces that are inaccessible after assembly or erection. Change color of second coat to distinguish it from first.

2.14 ALUMINUM FINISHES

- A. Finish designations prefixed by AA comply with the system established by the Aluminum Association for designating aluminum finishes.
- B. As-Fabricated Finish: AA-M10 (Mechanical Finish: as fabricated, unspecified).

PART 3 - EXECUTION

3.1 INSTALLATION, GENERAL

- A. Beginning installation constitutes Contractor's acceptance of substrates and conditions.
- B. Cutting, Fitting, and Placement: Perform cutting, drilling, and fitting required for installing metal fabrications. Set metal fabrications accurately in location, alignment, and elevation; with edges and surfaces level, plumb, true, and free of rack; and measured from established lines and levels.
- C. Fit exposed connections accurately together to form hairline joints. Weld connections that are not to be left as exposed joints but cannot be shop welded because of shipping size limitations. Do not weld, cut, or abrade surfaces of exterior units that have been hot-dip galvanized after fabrication and are for bolted or screwed field connections.
- D. Field Welding: Comply with the following requirements:
 - 1. Use materials and methods that minimize distortion and develop strength and corrosion resistance of base metals.
 - 2. Obtain fusion without undercut or overlap.
 - 3. Remove welding flux immediately.
 - 4. At exposed connections, finish exposed welds and surfaces smooth and blended so no roughness shows after finishing and contour of welded surface matches that of adjacent surface.
- E. Fastening to In-Place Construction: Provide anchorage devices and fasteners where metal fabrications are required to be fastened to in-place construction. Provide threaded fasteners for use with concrete and masonry inserts, toggle bolts, through bolts, lag screws, wood screws, and other connectors.
- F. Provide temporary bracing or anchors in formwork for items that are to be built into concrete, masonry, or similar construction.
- G. Corrosion Protection: Protect concealed surfaces of aluminum that will come into contact with grout, concrete, masonry, wood, or dissimilar metals with the following:
 - 1. Isolation barrier membrane.

3.2 INSTALLING MISCELLANEOUS FRAMING AND SUPPORTS

- A. General: Install framing and supports to comply with requirements of items being supported, including manufacturers' written instructions and requirements indicated on Shop Drawings.
- B. Install slotted channel framing with manufacturer recommended fasteners and fittings and follow manufacturer recommended instructions.
- C. Install auxiliary joist web members to reinforce joists at all components that impose a 100 lb point load or more to the joist chord as shown on Drawings.

3.3 INSTALLING BEARING AND LEVELING PLATES

- A. Clean concrete and masonry bearing surfaces of bond-reducing materials, and roughen to improve bond to surfaces. Clean bottom surface of plates.
- B. Set bearing and leveling plates on wedges, shims, or leveling nuts. After bearing members have been positioned and plumbed, tighten anchor bolts. Do not remove wedges or shims but, if protruding, cut off flush with edge of bearing plate before packing with grout.
 - 1. Use non-shrink, nonmetallic grout in exposed locations unless otherwise indicated.
 - 2. Pack grout solidly between bearing surfaces and plates to ensure that no voids remain.

3.4 ADJUSTING AND CLEANING

- A. Touchup Painting: Cleaning and touchup painting of field welds, bolted connections, and abraded areas of shop paint are specified in Division 09 Section "High-Performance Coatings."
- B. Galvanized Surfaces: Clean field welds, bolted connections, and abraded areas and restore galvanizing to comply with ASTM A780.

END OF SECTION 05 50 00

SECTION 05 51 13 - METAL PAN STAIRS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Preassembled steel stairs with concrete-filled treads.

1.3 COORDINATION

- A. Coordinate installation of anchorages for metal stairs.
 - 1. Furnish setting drawings, templates, and directions for installing anchorages, including sleeves, concrete inserts, anchor bolts, and items with integral anchors, that are to be embedded in concrete or masonry.
 - 2. Deliver such items to Project site in time for installation.
- B. Coordinate locations of hanger rods and struts with other work so they do not encroach on required stair width and are within fire-resistance-rated stair enclosure.

1.4 SUBMITTALS, GENERAL

- A. General: Submit all action submittals required by this Section and by Division 05 Section "Tube Railings (Steel)" concurrently.

1.5 ACTION SUBMITTALS

- A. Product Data: For the following:
 - 1. Prefilled metal-pan-stair treads.
- B. Shop Drawings:
 - 1. Include plans, elevations, sections, details, and attachments to other work.
 - 2. Indicate sizes of metal sections, thickness of metals, profiles, holes, and field joints.
 - 3. Include plan at each level.

1.6 QUALITY ASSURANCE

A. Welding Qualifications: Qualify procedures and personnel according to the following:

1. AWS D1.1/D1.1M, "Structural Welding Code - Steel."
2. AWS D1.3/D1.3M, "Structural Welding Code - Sheet Steel."

1.7 DELIVERY, STORAGE, AND HANDLING

A. Store materials to permit easy access for inspection and identification.

1. Keep steel members off ground and spaced by using pallets, dunnage, or other supports and spacers.
2. Protect steel members and packaged materials from corrosion and deterioration.
3. Do not store materials on structure in a manner that might cause distortion, damage, or overload to members or supporting structures.
 - a. Restore or replace damaged materials or structures as directed.

PART 2 - PRODUCTS

2.1 METALS

- A. Metal Surfaces: Provide materials with smooth, flat surfaces unless otherwise indicated. For components exposed to view in the completed Work, provide materials without seam marks, roller marks, rolled trade names, or blemishes.
- B. Steel Shapes: ASTM A 992/A 992M.
- C. Steel Plates, and Bars: ASTM A36/A36M.
- D. Cold-Formed Hollow Structural Sections: ASTM A 500, Grade C, structural tubing.
- E. Uncoated, Cold-Rolled Steel Sheet: ASTM A1008/A1008M, structural steel, Grade 25, unless another grade is required by design loads; exposed.
- F. Galvanized-Steel Sheet: ASTM A653/A653M, G90 coating, structural steel, Grade 33, unless another grade is required by design loads.

2.2 FASTENERS

- A. General: Provide zinc-plated fasteners with coating complying with ASTM B633 or ASTM F1941/F1941M, Class Fe/Zn 5 where built into exterior walls.
 1. Select fasteners for type, grade, and class required.

- B. Bolts and Nuts: Regular hexagon-head bolts, ASTM A307, Grade A; with hex nuts, ASTM A563; and, where indicated, flat washers.
- C. Anchor Bolts: ASTM F1554, Grade 36, of dimensions indicated; with nuts, ASTM A563; and, where indicated, flat washers.
 - 1. Provide mechanically deposited or hot-dip, zinc-coated anchor bolts for stairs indicated to be galvanized.
- D. Post-Installed Anchors: chemical anchors capable of sustaining, without failure, a load equal to six times the load imposed when installed in unit masonry and four times the load imposed when installed in concrete, as determined by testing according to ASTM E488/E488M, conducted by a qualified independent testing agency.
 - 1. Material for Interior Locations: Carbon-steel components zinc plated to comply with ASTM B633 or ASTM F1941/F1941M, Class Fe/Zn 5, unless otherwise indicated.
 - 2. Material Where Stainless Steel Is Indicated: Alloy Group 1 stainless-steel bolts, ASTM F593, and nuts, ASTM F594.

2.3 MISCELLANEOUS MATERIALS

- A. Welding Electrodes: Comply with AWS requirements.
- B. Primer:
 - 1. VOC Content: Products shall comply with VOC limits of authorities having jurisdiction.
 - 2. Provide primers that comply with Division 09 Section "High Performance Coatings" and the following:
 - a. Interior Structural Steel: Refer to First Coat for Steel, Structural Steel in Interior High-Performance Coating Schedule: General Use.
- C. Galvanizing Touch-up Paint: High-zinc-dust-content paint complying with ASTM A780/A780M and compatible with paints specified to be used over it.
- D. Concrete Treads:
 - 1. Concrete Materials and Properties: Comply with requirements in Division 03 Section "Cast-in-Place Concrete" for normal-weight, air-entrained, ready-mix concrete with minimum 28-day compressive strength of 3000 psi and maximum aggregate size of 1/2 inch unless otherwise indicated.
 - 2. Plain Steel Welded-Wire Reinforcement: ASTM A1064/A10645M, steel, 6 by 6 inches, W1.4 by W1.4, unless otherwise indicated on Drawings.

3. Reinforcement Supports: Bolsters, chairs, spacers, and other devices for spacing, supporting, and fastening welded-wire reinforcement in place.
 - a. Manufacture bar supports from steel wire, plastic, or precast concrete according to CRSI's "Manual of Standard Practice," of greater compressive strength than concrete.

2.4 FABRICATION, GENERAL

- A. Provide complete stair assemblies, including metal framing, hangers, struts, clips, brackets, bearing plates, and other components necessary to support and anchor stairs and platforms on supporting structure.
 1. Join components by welding unless otherwise indicated.
 2. Use connections that maintain structural value of joined pieces.
- B. Assemble stairs in shop to greatest extent possible.
 1. Disassemble units only as necessary for shipping and handling limitations.
 2. Clearly mark units for reassembly and coordinated installation.
- C. Cut, drill, and punch metals cleanly and accurately.
 1. Remove burrs and ease edges to a radius of approximately 1/32 inch unless otherwise indicated.
 2. Remove sharp or rough areas on exposed surfaces.
- D. Form bent-metal corners to smallest radius possible without causing grain separation or otherwise impairing work.
- E. Form exposed work with accurate angles and surfaces and straight edges.
- F. Weld connections to comply with the following:
 1. Use materials and methods that minimize distortion and develop strength and corrosion resistance of base metals.
 2. Obtain fusion without undercut or overlap.
 3. Remove welding flux immediately.
 4. Weld exposed corners and seams continuously unless otherwise indicated.
 5. At exposed connections, finish exposed welds to comply with NOMMA's "Voluntary Joint Finish Standards" for Finish #1 - No evidence of welded joint.
- G. Form exposed connections with hairline joints, flush and smooth, using concealed fasteners where possible.
 1. Where exposed fasteners are required, use Phillips flat-head (countersunk) screws or bolts unless otherwise indicated.
 2. Locate joints where least conspicuous.
 3. Provide weep holes where water may accumulate internally.

2.5 FABRICATION OF STEEL-FRAMED STAIRS

- A. NAAMM Stair Standard: Comply with NAAMM AMP 510, "Metal Stairs Manual," for Commercial Class, unless more stringent requirements are indicated.
- B. Stair Framing:
 - 1. Fabricate stringers steel rectangular tubes as indicated on Drawings.
 - a. Stringer Size: As indicated on Drawings.
 - b. Provide closures for exposed ends of channel and rectangular tube stringers.
 - c. Finish: Shop primed.
 - 2. Construct platforms of steel channel or rectangular tube headers and miscellaneous framing members as indicated on Drawings.
 - a. Provide closures for exposed ends of channel and rectangular tube framing.
 - b. Finish: Shop primed.
 - 3. Weld stringers to headers; weld framing members to stringers and headers.
 - 4. Where stairs are enclosed by gypsum board assemblies, provide hanger rods or struts to support landings from floor construction above or below.
 - a. Locate hanger rods and struts where they do not encroach on required stair width and are within the fire-resistance-rated stair enclosure.
 - 5. Where masonry walls support metal stairs, provide temporary supporting struts designed for erecting steel stair components before installing masonry.
- C. Metal Pan Stairs: Form risers, subtread pans, and subplatforms to configurations shown from steel sheet of thickness needed to comply with performance requirements, but not less than 0.067 inch.
 - 1. Steel Sheet: Uncoated, cold-rolled steel sheet.
 - 2. Steel Sheet: Galvanized-steel sheet, where indicated.
 - 3. Directly weld metal pans to stringers; locate welds on top of subtreads where they will be concealed by concrete fill. Do not weld risers to stringers.
 - 4. Attach risers and subtreads to stringers with brackets made of steel angles or bars. Weld brackets to stringers and attach metal pans to brackets by welding.
 - 5. Shape metal pans to include nosing integral with riser.
 - 6. Provide subplatforms of configuration indicated or, if not indicated, the same as subtreads. Weld subplatforms to platform framing.
 - a. Smooth Soffit Construction: Construct subplatforms with flat metal under surfaces to produce smooth soffits.

2.6 FABRICATION OF STAIR RAILINGS AND GUARDS

- A. Comply with applicable requirements in Division 05 Section " "Tube Railings (Steel)".

2.7 FINISHES

- A. Finish metal stairs after assembly.
- B. Surface Preparation: Clean surfaces to be painted. Remove loose rust and mill scale and spatter, slag, or flux deposits. Prepare surfaces according to Division 09 Section "High Performance Coatings".
 - 1. For galvanized surfaces noted to be painted, comply with ASTM D6386, "Standard Practice for Preparation of Zinc (Hot-Dip Galvanized) Coated Iron and Steel Product and Hardware Surfaces for Painting".
- C. Galvanizing: Hot-dip galvanize items as indicated to comply with ASTM A153/A153M for steel and iron hardware and with ASTM A123/A123M for other steel and iron products.
 - 1. Do not quench or apply post-galvanizing treatments that might interfere with paint adhesion.
 - 2. Fill vent and drain holes that are exposed in the finished Work, unless indicated to remain as weep holes, by plugging with zinc solder and filing off smooth.
- D. Shop prime iron and steel items not indicated to be galvanized unless they are to be embedded in concrete, sprayed-on fireproofing, or masonry, or unless otherwise indicated.
 - 1. Metal Fabrications: For all iron and steel items (except those noted below), shop prime with alkyd primer.
 - 2. Exterior Wall Metal Fabrications: For all iron and steel items occurring in exterior walls, shop prime with urethane primer.
- E. Shop Priming: Immediately after surface preparation, apply one coat of primer according to manufacturer's written instructions and at rate recommended by SSPC to provide a minimum dry film thickness as listed below. Use priming methods that result in full coverage of joints, corners, edges, and exposed surfaces.
 - 1. Stripe paint corners, crevices, bolts, welds, and sharp edges.
 - 2. Apply two coats of shop paint to surfaces that are inaccessible after assembly or erection. Change color of second coat to distinguish it from first.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Verify elevations of floors, bearing surfaces and locations of bearing plates, and other embedments for compliance with requirements.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.
- C. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 INSTALLATION OF METAL PAN STAIRS

- A. Fastening to In-Place Construction: Provide anchorage devices and fasteners where necessary for securing metal stairs to in-place construction.
 - 1. Include threaded fasteners for concrete and masonry inserts, through-bolts, lag bolts, and other connectors.
- B. Cutting, Fitting, and Placement: Perform cutting, drilling, and fitting required for installing metal stairs. Set units accurately in location, alignment, and elevation, measured from established lines and levels and free of rack.
- C. Install metal stairs by welding stair framing to steel structure or to weld plates cast into concrete unless otherwise indicated.
- D. Provide temporary bracing or anchors in formwork for items that are to be built into concrete, masonry, or similar construction.
- E. Fit exposed connections accurately together to form hairline joints.
 - 1. Weld connections that are not to be left as exposed joints but cannot be shop welded because of shipping size limitations.
 - 2. Comply with requirements for welding in "Fabrication, General" Article.
- F. Place and finish concrete fill for treads and platforms to comply with Division 03 Section "Cast-in-Place Concrete."

3.3 RESTORATION

- A. Touchup Painting: Cleaning and touchup painting of field welds, bolted connections, and abraded areas of shop paint are specified in Division 09 Section "High-Performance Coatings."
- B. Galvanized Surfaces: Clean field welds, bolted connections, and abraded areas and restore galvanizing to comply with ASTM A780/A780M.

END OF SECTION 05 51 13

SECTION 05 52 16 - TUBE RAILINGS (STEEL)**PART 1 - GENERAL****1.1 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Steel tube railings.
 - 2. Steel fittings, brackets, and other railing accessories.

1.3 COORDINATION

- A. Coordinate installation of anchorages for railings. Furnish setting drawings, templates, and directions for installing anchorages, including sleeves, concrete inserts, anchor bolts, and items with integral anchors, that are to be embedded in concrete or masonry. Deliver such items to Project site in time for installation.
- B. Schedule installation so wall attachments are made only to completed walls. Do not support railings temporarily by any means that do not satisfy structural performance requirements.

1.4 SUBMITTALS, GENERAL

- A. General: Submit all action submittals required by this Section concurrently.

1.5 ACTION SUBMITTALS

- A. Product Data: For the following:
 - 1. Fasteners.
 - 2. Railing brackets, flanges, fittings, and anchors.
- B. Shop Drawings: Include plans, elevations, sections, details, and attachments to other work.

1.6 QUALITY ASSURANCE

- A. Welding Qualifications: Qualify procedures and personnel according to the following:
 - 1. AWS D1.1/D1.1M, "Structural Welding Code - Steel."

1.7 FIELD CONDITIONS

- A. Field Measurements: Verify actual locations of walls and other construction contiguous with metal fabrications by field measurements before fabrication.

PART 2 - PRODUCTS

2.1 METALS, GENERAL

- A. Metal Surfaces, General: Provide materials with smooth surfaces, without seam marks, roller marks, rolled trade names, stains, discolorations, or blemishes.
- B. Brackets, Flanges, and Anchors: Cast or formed metal of same type of material and finish as supported rails unless otherwise indicated.
 - 1. Provide type of bracket with flange tapped for concealed anchorage to threaded hanger bolt and that provides minimum 1-1/2-inch clearance from inside face of handrail to finished wall surface.

2.2 STEEL AND IRON

- A. Tubing: ASTM A 500 (cold formed).
- B. Plates, Shapes, and Bars: ASTM A 36/A 36M.
- C. Cast Iron: Either gray iron, ASTM A 48/A 48M, or malleable iron, ASTM A 47/A 47M, unless otherwise indicated.

2.3 FASTENERS

- A. General: Provide the following:
 - 1. Ungalvanized-Steel Railings: Plated steel fasteners complying with ASTM B 633 or ASTM F 1941, Class Fe/Zn 5 for zinc coating.
- B. Fasteners for Anchoring Railings to Other Construction: Select fasteners of type, grade, and class required to produce connections suitable for anchoring railings to other types of construction indicated and capable of withstanding design loads.
- C. Fasteners for Interconnecting Railing Components:
- D. Post-Installed Anchors: Chemical anchors capable of sustaining, without failure, a load equal to 6 times the load imposed when installed in unit masonry and 4 times the load imposed when installed in concrete, as determined by testing according to ASTM E 488/E 488M, conducted by a qualified independent testing agency.

1. Material for Interior Locations, unless Otherwise Indicated: Carbon-steel components zinc-plated to comply with ASTM B 633 or ASTM F 1941, Class Fe/Zn 5, unless otherwise indicated.
2. Material Where Indicated: Alloy Group 2 stainless-steel bolts, ASTM F 593, and nuts, ASTM F 594.

2.4 MISCELLANEOUS MATERIALS

- A. Welding Rods and Bare Electrodes: Select according to AWS specifications for metal alloy welded.
- B. Shop Primers: Provide primers that comply with Division 09 Section "High-Performance Coatings."
- C. Nonshrink, Nonmetallic Grout: Factory-packaged, nonexpanding, nonstaining, noncorrosive, nongaseous grout complying with ASTM C 1107/C 1107M. Provide grout specifically recommended by manufacturer for interior and exterior applications.

2.5 FABRICATION

- A. General: Fabricate railings to comply with requirements indicated for design, dimensions, member sizes and spacing, details, finish, and anchorage, but not less than that required to support structural loads.
 1. Shop assemble railings to greatest extent possible to minimize field splicing and assembly. Disassemble units only as necessary for shipping and handling limitations. Clearly mark units for reassembly and coordinated installation. Use connections that maintain structural value of joined pieces.
- B. Cut, drill, and punch metals cleanly and accurately. Remove burrs and ease edges to a radius of approximately 1/32 inch unless otherwise indicated. Remove sharp or rough areas on exposed surfaces.
- C. Form work true to line and level with accurate angles and surfaces.
- D. Cut, reinforce, drill, and tap as indicated to receive finish hardware, screws, and similar items.
- E. Connections: Fabricate railings with welded connections unless otherwise indicated.
- F. Welded Connections: Cope components at connections to provide close fit, or use fittings designed for this purpose. Weld all around at connections, including at fittings.
 1. Use materials and methods that minimize distortion and develop strength and corrosion resistance of base metals.
 2. Obtain fusion without undercut or overlap.
 3. Remove flux immediately.
 4. At exposed connections, finish exposed surfaces smooth and blended so no roughness shows after finishing and welded surface matches contours of adjoining surfaces.

G. Form Changes in Direction as Follows:

1. By bending or by inserting prefabricated elbow fittings.

H. For changes in direction made by bending, use jigs to produce uniform curvature for each repetitive configuration required. Maintain cross section of member throughout entire bend without buckling, twisting, cracking, or otherwise deforming exposed surfaces of components.

I. Close exposed ends of railing members with prefabricated end fittings.

J. Provide wall returns at ends of wall-mounted handrails unless otherwise indicated. Close ends of returns.

K. Brackets, Flanges, Fittings, and Anchors: Provide wall brackets, flanges, miscellaneous fittings, and anchors to interconnect railing members to other work unless otherwise indicated.

1. Concealed Anchorage Brackets (Cast Type):

a. Basis-of-Design Product: Subject to compliance with requirements, provide R & B Wagner, Inc.; Handrail Bracket 1701-2, or comparable product.

1) Description: Cast round saddle with tapped mounting hole, unfinished.

a) Secure handrail to bracket with countersunk, tamper-resistant screws.

2.6 STEEL AND IRON FINISHES

A. For nongalvanized-steel railings, provide nongalvanized ferrous-metal fittings, brackets, fasteners, and sleeves; however, galvanize anchors to be embedded in exterior concrete or masonry.

B. Shop Priming: Comply with requirements in Division 09 Section "High-Performance Coatings."

PART 3 - EXECUTION

3.1 EXAMINATION

A. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 INSTALLATION, GENERAL

A. Fit exposed connections together to form tight, hairline joints.

B. Perform cutting, drilling, and fitting required for installing railings. Set railings accurately in location, alignment, and elevation; measured from established lines and levels and free of rack.

1. Do not weld, cut, or abrade surfaces of railing components that are coated or finished after fabrication and that are intended for field connection by mechanical or other means without further cutting or fitting.
 2. Set posts plumb within a tolerance of 1/16 inch in 3 feet.
 3. Align rails so variations from level for horizontal members and variations from parallel with rake of steps and ramps for sloping members do not exceed 1/4 inch in 12 feet.
- C. Control of Corrosion: Prevent galvanic action and other forms of corrosion by insulating metals and other materials from direct contact with incompatible materials.
- D. Adjust railings before anchoring to ensure matching alignment at abutting joints.
- E. Fastening to In-Place Construction: Use anchorage devices and fasteners where necessary for securing railings and for properly transferring loads to in-place construction.

3.3 RAILING CONNECTIONS

- A. Welded Connections: Use fully welded joints for permanently connecting railing components, unless otherwise indicated. Comply with requirements for welded connections in "Fabrication" Article whether welding is performed in the shop or in the field.

3.4 ANCHORING POSTS

- A. Anchor posts to metal surfaces with oval flanges, angle type, or floor type as required by conditions, connected to posts and to metal supporting members as indicated.

3.5 ATTACHING RAILINGS

- A. Return railing ends at walls to within 1/2 inch of wall; provide fully-welded end closure of railings, ground smooth.
- B. Return railing ends to posts; fully welded to posts, ground smooth.
- C. Attach railings to wall with wall brackets. Provide brackets with minimum 1-1/2 inch clearance from inside face of handrail and finished wall surface.
1. Locate brackets as indicated or, if not indicated, at spacing required to support structural loads.
- D. Secure wall brackets to building construction as follows:
1. For concrete and solid masonry anchorage, use drilled-in expansion shields and hanger or lag bolts.
 2. For hollow masonry anchorage, use toggle bolts.

3. For steel-framed partitions, use self-tapping screws fastened to steel framing or to concealed steel reinforcements.
4. For steel-framed partitions, use toggle bolts installed through flanges of steel framing or through concealed steel reinforcements.

3.6 ADJUSTING AND CLEANING

- A. Touchup Painting: Cleaning and touchup painting of field welds, bolted connections, and abraded areas of shop paint are specified in Division 09 Section "High-Performance Coatings."

3.7 PROTECTION

- A. Protect finishes of railings from damage during construction period with temporary protective coverings approved by railing manufacturer.

END OF SECTION 05 52 16

SECTION 06 10 00 - ROUGH CARPENTRY**PART 1 - GENERAL****1.1 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:

- 1. Fire-retardant-treated materials, including plywood backing panels.

1.3 DEFINITIONS

- A. Boards or Strips: Lumber of less than 2 inches nominal size in least dimension.
- B. Dimension Lumber: Lumber of 2 inches nominal size or greater but less than 5 inches nominal size in least dimension.

1.4 SUBMITTALS, GENERAL

- A. General: Submit all action submittals required by this Section concurrently.

1.5 ACTION SUBMITTALS

- A. Product Data: For each type of process and factory-fabricated product. Indicate component materials and dimensions and include construction and application details.

- 1. Fire-Retardant-Treated Materials:

- a. Include data for fire-retardant treatment from chemical treatment manufacturer and certification by treating plant that treated materials comply with requirements. Include physical properties of treated materials based on testing by a qualified independent testing agency.
 - b. For fire-retardant treatments, include physical properties of treated lumber both before and after exposure to elevated temperatures, based on testing by a qualified independent testing agency according to ASTM D5664.
 - c. For fire-retardant treatments, include physical properties of treated plywood both before and after exposure to elevated temperatures, based on testing by a qualified independent testing agency according to ASTM D5516.

- 2. Metal framing anchors.

1.6 QUALITY ASSURANCE

- A. Testing Agency Qualifications: For testing agency providing classification marking for fire-retardant treated material, an inspection agency acceptable to authorities having jurisdiction that periodically performs inspections to verify that the material bearing the classification marking is representative of the material tested.

1.7 DELIVERY, STORAGE, AND HANDLING

- A. Stack wood products flat with spacers beneath and between each bundle to provide air circulation. Protect wood products from weather by covering with waterproof sheeting, securely anchored. Provide for air circulation around stacks and under coverings.

PART 2 - PRODUCTS

2.1 WOOD PRODUCTS, GENERAL

- A. Lumber: DOC PS 20 and applicable rules of grading agencies indicated. If no grading agency is indicated, comply with the applicable rules of any rules-writing agency certified by the ALSC Board of Review. Grade lumber by an agency certified by the ALSC Board of Review to inspect and grade lumber under the rules indicated.
 - 1. Factory mark each piece of lumber with grade stamp of grading agency.
 - 2. Dress lumber, S4S, unless otherwise indicated.
- B. Maximum Moisture Content of Lumber: 19 percent unless otherwise indicated.

2.2 FIRE-RETARDANT-TREATED MATERIALS

- A. General: Where fire-retardant-treated materials are indicated, materials shall comply with requirements in this article, that are acceptable to authorities having jurisdiction, and with fire-test-response characteristics specified as determined by testing identical products per test method indicated by a qualified testing agency.
- B. Fire-Retardant-Treated Lumber and Plywood by Pressure Process: Products with a flame-spread index of 25 or less when tested according to ASTM E84, and with no evidence of significant progressive combustion when the test is extended an additional 20 minutes, and with the flame front not extending more than 10.5 feet beyond the centerline of the burners at any time during the test.
 - 1. Treatment shall not promote corrosion of metal fasteners.
 - 2. Exterior Type: Treated materials shall comply with requirements specified above for fire-retardant-treated lumber and plywood by pressure process after being subjected to accelerated weathering according to ASTM D2898. Use for exterior locations and where indicated.

3. Interior Type A: Treated materials shall have a moisture content of 28 percent or less when tested according to ASTM D3201 at 92 percent relative humidity. Use where exterior type is not indicated.
- C. Kiln-dry lumber after treatment to maximum moisture content of 19 percent. Kiln-dry plywood after treatment to maximum moisture content of 15 percent.
- D. Identify fire-retardant-treated wood with appropriate classification marking of qualified testing agency.
- E. Dimension Lumber Items: Select Structural No. 1 grade.
 1. Species:
 - a. Hem-fir (north); NLGA.
 - b. Southern pine; SPIB.
 - c. Douglas fir-larch; WCLIB or WWP.
 - d. Spruce-pine-fir; NLGA.
 - e. Douglas fir-south; WWP.
 - f. Hem-fir; WCLIB or WWP.
 - g. Douglas fir-larch (north); NLGA.
 - h. Spruce-pine-fir (south); NeLMA, WCLIB, or WWP.
 2. For blocking and nailers used for attachment of other construction, select and cut lumber to eliminate knots and other defects that will interfere with attachment of other work.
- F. Equipment Backing Panels: Plywood, DOC PS 1, Exposure 1, C-D Plugged, in thickness indicated or, if not indicated, not less than 3/4-inch nominal thickness.
- G. Application: Treat items indicated on Drawings, and the following:
 1. Plywood backing panels.

2.3 FASTENERS

- A. General: Fasteners shall be of size and type indicated and shall comply with requirements specified in this article for material and manufacture.
 1. Provide fasteners of Type 304 stainless steel.
- B. Nails, Brads, and Staples: ASTM F1667.
- C. Power-Driven Fasteners: Fastener systems with an evaluation report acceptable to authorities having jurisdiction, based on ICC-ES AC70.
- D. Post-Installed Anchors: Fastener systems with an evaluation report acceptable to authorities having jurisdiction, based on ICC-ES AC01 as appropriate for the substrate.
 1. Material: Stainless steel with bolts and nuts complying with ASTM F593 and ASTM F594, Alloy Group 1 or 2.

2.4 METAL FRAMING ANCHORS

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1. Cleveland Steel Specialty Company.
 - 2. Simpson Strong-Tie Company Inc.
- B. Allowable design loads, as published by manufacturer, shall meet or exceed those of products of manufacturers listed. Manufacturer's published values shall be determined from empirical data or by rational engineering analysis and demonstrated by comprehensive testing performed by a qualified independent testing agency. Framing anchors shall be punched for fasteners adequate to withstand same loads as framing anchors.

PART 3 - EXECUTION

3.1 INSTALLATION, GENERAL

- A. Beginning installation constitutes Contractor's acceptance of substrates and conditions.
- B. Framing Standard: Comply with AF&PA's WCD 1, "Details for Conventional Wood Frame Construction," unless otherwise indicated.
- C. Set rough carpentry to required levels and lines, with members plumb, true to line, cut, and fitted. Fit rough carpentry accurately to other construction. Locate furring, nailers, blocking, grounds, and similar supports to comply with requirements for attaching other construction.
- D. Install plywood backing panels by fastening to studs; coordinate locations with utilities requiring backing panels. Install fire-retardant-treated plywood backing panels with classification marking of testing agency exposed to view.
- E. Install metal framing anchors to comply with manufacturer's written instructions. Install fasteners through each fastener hole.
- F. Provide blocking and framing as indicated and as required to support facing materials, fixtures, specialty items, and trim.
 - 1. Provide metal clips for fastening gypsum board or lath at corners and intersections where framing or blocking does not provide a surface for fastening edges of panels. Space clips not more than 16 inches o.c.
- G. Provide fire blocking in furred spaces, stud spaces, and other concealed cavities as indicated and as follows:
 - 1. Fire block furred spaces of walls, at each floor level, at ceiling, and at not more than 96 inches o.c. with solid wood blocking or noncombustible materials accurately fitted to close furred spaces.

2. Fire block concealed spaces between floor sleepers with same material as sleepers to limit concealed spaces to not more than 100 sq. ft. and to solidly fill space below partitions.
- H. Sort and select lumber so that natural characteristics do not interfere with installation or with fastening other materials to lumber. Do not use materials with defects that interfere with function of member or pieces that are too small to use with minimum number of joints or optimum joint arrangement.
- I. Securely attach rough carpentry work to substrate by anchoring and fastening as indicated, complying with the following:
 1. Table 2304.10.1, "Fastening Schedule," in New York State Building Code.
 2. ICC-ES evaluation report for fastener.
- J. Use stainless steel common nails unless otherwise indicated. Select fasteners of size that will not fully penetrate members where opposite side will be exposed to view or will receive finish materials. Make tight connections between members. Install fasteners without splitting wood. Drive nails snug but do not countersink nail heads unless otherwise indicated.

3.2 INSTALLATION OF WOOD BLOCKING AND NAILERS

- A. Install where indicated and where required for screeding or attaching other work. Form to shapes indicated and cut as required for true line and level of attached work. Coordinate locations with other work involved.
 1. Provide 1/4-inch vent space between each length of blocking.
- B. Attach items to substrates to support applied loading. Recess bolts and nuts flush with surfaces unless otherwise indicated.

3.3 INSTALLATION OF WOOD FURRING

- A. Install level and plumb with closure strips at edges and openings. Shim with wood as required for tolerance of finish work.

3.4 FIELD QUALITY CONTROL

- A. Special Inspections: Special Inspections are required for the work of this Section. Refer to Division 01 Section "Quality Requirements" and its attachments.

END OF SECTION 06 10 00

SECTION 06 10 26 - ROOFING ROUGH CARPENTRY**PART 1 - GENERAL****1.1 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Wood-preservative-treated materials.

1.3 DEFINITIONS

- A. Dimension Lumber: Lumber of 2 inches nominal size or greater but less than 5 inches nominal size in least dimension.

1.4 SUBMITTALS, GENERAL

- A. General: Submit all action submittals required by this Section concurrently.

1.5 ACTION SUBMITTALS

- A. Product Data: For each type of process and factory-fabricated product. Indicate component materials and dimensions and include construction and application details.
 - 1. Wood preservative treated materials.
 - a. Lumber.
 - b. Plywood.
 - 2. Fasteners.
 - 3. Adhesives.
 - 4. Isolation barrier membrane.

1.6 DELIVERY, STORAGE, AND HANDLING

- A. Stack wood products flat with spacers beneath and between each bundle to provide air circulation. Protect wood products from weather by covering with waterproof sheeting, securely anchored. Provide for air circulation around stacks and under coverings.

PART 2 - PRODUCTS

2.1 WOOD PRODUCTS, GENERAL

- A. Lumber: DOC PS 20 and applicable rules of grading agencies indicated. If no grading agency is indicated, comply with the applicable rules of any rules-writing agency certified by the ALSC Board of Review. Grade lumber by an agency certified by the ALSC Board of Review to inspect and grade lumber under the rules indicated.
 - 1. Factory mark each piece of lumber with grade stamp of grading agency.
 - 2. Dress lumber, S4S, unless otherwise indicated.
- B. Maximum Moisture Content of Lumber: 19 percent unless otherwise indicated.
- C. Plywood: DOC PS 1, Exterior A-C, unless otherwise indicated.

2.2 WOOD-PRESERVATIVE-TREATED MATERIALS

- A. Preservative Treatment by Pressure Process: AWP A U1; Use Category UC3b.
 - 1. Preservative Chemicals: Acceptable to authorities having jurisdiction and containing no arsenic or chromium.
- B. Kiln-dry lumber after treatment to a maximum moisture content of 19 percent. Do not use material that is warped or that does not comply with requirements for untreated material.
- C. Mark lumber with treatment quality mark of an inspection agency approved by the ALSC Board of Review.
- D. Mark plywood with appropriate classification marking of an inspection agency acceptable to authorities having jurisdiction.
- E. Application: Treat items indicated on Drawings, and the following:
 - 1. Wood nailers, curbs, equipment support bases, blocking, and similar members in connection with roofing.

2.3 FASTENERS

- A. General: Fasteners shall be of size and type indicated and shall comply with requirements specified in this article for material and manufacture.
 - 1. Provide fasteners of Type 304 stainless steel.
- B. Wood Screws for Attachment of Roof Blocking: Screws complying with ASME B18.6.1. Series 300 stainless steel, non-magnetic, torx or square drive, #10, length as required to provide minimum embedment of 1-1/2-inches into substrate.

- C. Screws for Attachment to Metal Deck: Self drilling screws complying with ASME B18.6.1. Series 300 stainless steel, non-magnetic, torx or square drive, #10, 2-1/2-inch length (unless otherwise noted).
- D. Screws for Attachment to Steel Angles or Framing: Self drilling screws complying with ASME B18.6.1. Series 300 stainless steel, non-magnetic, #12, 2-1/2-inch length minimum (unless otherwise noted).
 - 1. With Winged Reamers: Wings designed to break off at contact with steel.
- E. Lag Bolts: ASME B18.2.1.
- F. Bolts: Steel bolts complying with ASTM A 307, Grade A; with ASTM A 563 hex nuts and, where indicated, flat washers.
- G. Expansion Anchors: Anchor bolt and sleeve assembly of material indicated below with capability to sustain, without failure, a load equal to 6 times the load imposed when installed in unit masonry assemblies and equal to 4 times the load imposed when installed in concrete as determined by testing per ASTM E 488 conducted by a qualified independent testing and inspecting agency. Anchor expands by tightening or hammering a pin after insertion into pre-drilled hole.
 - 1. Material: Stainless steel with bolts and nuts complying with ASTM F593 and ASTM F594, Alloy Group 1 or 2.

2.4 MISCELLANEOUS MATERIALS

- A. Adhesives: Low odor, low VOC (less than 2 percent by weight), high-strength polyurethane formulation complying with ASTM D3498 that is approved for use indicated by adhesive manufacturer.
 - 1. Basis-of-Design Product: Subject to compliance with requirements, provide Henkel Corporation; Loctite PL Premium Fast Grab, or a comparable product.
- B. Isolation Barrier Membrane: 40-mil-thick, self-adhering sheet consisting of rubberized asphalt laminated to a cross-laminated polyethylene film with release liner on adhesive side.
 - 1. Basis-of-Design Product: Subject to compliance with requirements, provide Carlisle Coatings & Waterproofing, Incorporated; CCW-705, or comparable product.

PART 3 - EXECUTION

3.1 INSTALLATION, GENERAL

- A. Beginning installation constitutes Contractor's acceptance of substrates and conditions.
- B. Set roofing rough carpentry to required levels and lines, with members plumb, true to line, cut, and fitted. Fit roofing rough carpentry accurately to other construction. Locate nailers, blocking, and similar supports to comply with requirements for attaching other construction.

- C. Sort and select lumber so that natural characteristics do not interfere with installation or with fastening other materials to lumber. Do not use materials with defects that interfere with function of member or pieces that are too small to use with minimum number of joints or optimum joint arrangement.
- D. Comply with AWP A M4 for applying field treatment to cut surfaces of preservative-treated lumber.
- E. Where wood-preservative-treated lumber is installed adjacent to metal decking, install continuous isolation barrier membrane between wood and metal decking.

3.2 INSTALLATION OF WOOD BLOCKING, NAILERS AND PLYWOOD

- A. Install where indicated and where required for screeding or attaching other work. Form to shapes indicated and cut as required for true line and level of attached work. Coordinate locations with other work involved.
 - 1. Provide 1/4-inch vent space between each length of blocking.
- B. Attach items to substrates to support applied loading. Recess bolts and nuts flush with surfaces unless otherwise indicated.
- C. Securely attach carpentry work to substrate by anchoring and fastening as indicated, complying with recommendations of FM Global Loss Prevention Data Sheet 1-49 and the following:
 - 1. Anchor bottom blocking to steel angles with minimum 3/8-inch stainless steel bolts with washers, at maximum 24 inches on center, or self-drilling screws in two rows, spaced not more than 24 inches on center and 6 inches from ends of blocking lengths.
 - 2. At locations where bottom blocking is to be attached directly to metal decking, provide isolation barrier membrane between deck and blocking, install wrinkle free. Apply primer if required by membrane manufacturer. Use primer rather than nails for installing membrane at low temperatures, overlap edges not less than 3-1/2 inches, roll laps with roller, cover membrane within 14 days. Attach bottom blocking with stainless steel self-drilling screws, penetrating metal decking at least 1 inch in two rows, spaced not more than 24 inches on center and 6 inches from ends of blocking lengths.
 - 3. Attach subsequent blocking to bottom blocking with stainless steel screws, penetrating at least 1-1/4 inches in two rows, spaced not more than 24 inches on center and 6 inches from ends of blocking lengths.
 - 4. Attach plywood to substrate with stainless steel screws spaced at 12 inches on center maximum. Where more than one layer of plywood is being attached, attach subsequent plywood to base layer of plywood/substrate with polyurethane construction adhesive beads spaced at 6 inches on center maximum and stainless-steel screws, penetrating at least 3/4 inch in two rows, spaced not more than 12 inches on center and within 4 inches from end of panel lengths.

5. At outside building corners, locate fasteners at 12 inches on center and 6 inches from corner, unless closer spacing is required to meet minimum 100 lb per fastener withdrawal force in any direction, or to comply with FM 1-49 recommendations.

END OF SECTION 06 10 26

SECTION 06 16 00 - SHEATHING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Wall and soffit sheathing.
 - 2. Sheathing joint and penetration treatment.

1.3 SUBMITTALS, GENERAL

- A. General: Submit all action submittals required by this Section concurrently.

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of process and factory-fabricated product. Indicate component materials and dimensions and include construction and application details.
 - 1. Glass-mat gypsum wall and soffit sheathing.
 - 2. Screws for fastening foam sheathing to cold-formed metal framing.

1.5 DELIVERY, STORAGE, AND HANDLING

- A. Stack panels flat with spacers beneath and between each bundle to provide air circulation. Protect sheathing from weather by covering with waterproof sheeting, securely anchored. Provide for air circulation around stacks and under coverings.

PART 2 - PRODUCTS

2.1 WALL AND SOFFIT SHEATHING

- A. Retain one of four options in "Span Rating" Subparagraph below.
 - 1. Span Rating: Not less than 16/0.

B. Glass-Mat Gypsum Sheathing: ASTM C1177/C1177M.

1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. CertainTeed Gypsum, Saint-Gobain; GlassRoc Sheathing Type X.
 - b. Georgia-Pacific Gypsum, LLC; DensGlass Fireguard Sheathing.
 - c. USG Corporation; USG Securock Brand Glass-Mat Sheathing Firecode X.
2. Type and Thickness: Type X, 5/8 inch thick.
3. Flame Propagation Test: Materials and construction shall be as tested according to NFPA 285.

2.2 FASTENERS

- A. General: Provide fasteners of size and type indicated that comply with requirements specified in this article for material and manufacture.
 1. For wall and soffit sheathing, provide fasteners of Type 304 stainless steel.
- B. Screws for Fastening Gypsum Sheathing to Cold-Formed Metal Framing: Steel drill screws, in length recommended by sheathing manufacturer for thickness of sheathing to be attached.
 1. For steel framing from 0.033 to 0.112 inch thick, use screws that comply with ASTM C954.

2.3 SHEATHING JOINT-AND-PENETRATION TREATMENT MATERIALS

- A. Sealant for Glass-Mat Gypsum Sheathing: Silicone emulsion sealant complying with ASTM C834, compatible with sheathing tape and sheathing and recommended by tape and sheathing manufacturers for use with glass-fiber sheathing tape and for covering exposed fasteners.
 1. Sheathing Tape: Self-adhering glass-fiber tape, minimum 2 inches wide, 10 by 10 or 10 by 20 threads/inch, of type recommended by sheathing and tape manufacturers for use with silicone emulsion sealant in sealing joints in glass-mat gypsum sheathing and with a history of successful in-service use.
 2. Verify sheathing joint and penetration treatment materials are compatible with specified air barrier product.

PART 3 - EXECUTION

3.1 INSTALLATION, GENERAL

- A. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

- B. Do not use materials with defects that impair quality of sheathing or pieces that are too small to use with minimum number of joints or optimum joint arrangement. Arrange joints so that pieces do not span between fewer than three support members.
- C. Cut panels at penetrations, edges, and other obstructions of work; fit tightly against abutting construction unless otherwise indicated.
- D. Securely attach to substrate by fastening as indicated, complying with the following:
 - 1. Table 2304.10.1, "Fastening Schedule," in the New York State Building Code.
 - 2. ICC-ES evaluation report for fastener.
- E. Coordinate wall and soffit sheathing installation with flashing and joint-sealant installation so these materials are installed in sequence and manner that prevent exterior moisture from passing through completed assembly.
- F. Do not bridge building expansion joints; cut and space edges of panels to match spacing of structural support elements.
- G. Coordinate sheathing installation with installation of materials installed over sheathing so sheathing is not exposed to precipitation or left exposed at end of the workday when rain is forecast.

3.2 GYPSUM SHEATHING INSTALLATION

- A. Comply with GA-253 and with manufacturer's written instructions.
 - 1. Fasten gypsum sheathing to cold-formed metal framing with screws.
 - 2. Install panels with a 3/8-inch gap where non-load-bearing construction abuts structural elements.
 - 3. Install panels with a 1/4-inch gap where they abut masonry or similar materials that might retain moisture, to prevent wicking.
- B. Apply fasteners so heads bear tightly against face of sheathing, but do not cut into facing.
- C. Vertical Installation: Install vertical edges centered over studs. Abut ends and edges with those of adjacent panels. Attach at perimeter and within field of panel to each stud.
 - 1. Space fasteners approximately 8 inches o.c. and set back a minimum of 3/8 inch from edges and ends of panels.
- D. Seal sheathing joints according to sheathing manufacturer's written instructions.
 - 1. Apply glass-fiber sheathing tape to glass-mat gypsum sheathing joints and apply and trowel sealant to embed entire face of tape in sealant. Apply sealant to exposed fasteners with a trowel so fasteners are completely covered. Seal other penetrations and openings.

3.3 FIELD QUALITY CONTROL

- A. Special Inspections: Special Inspections are required for the work of this Section. Refer to Division 01 Section “Quality Requirements” and its attachments.
- B. Testing and Inspecting Agency: Owner may engage a qualified testing agency to perform tests and inspections.
- C. Inspections: Air-barrier and water-resistant glass-mat gypsum sheathing, accessories, and installation are subject to inspection for compliance with requirements. Inspections may include, but not be limited to, the following:
 - 1. Continuity of air-barrier system has been achieved throughout the building envelope with no gaps or holes.
 - 2. Compatible materials have been used.
 - 3. All penetrations have been sealed.
- D. Tests: As determined by testing agency.
- E. Air barriers will be considered defective if they do not pass tests and inspections.
- F. Correct damage to air barriers caused by testing; follow manufacturer's written instructions.

END OF SECTION 06 16 00

SECTION 06 40 23 - INTERIOR ARCHITECTURAL WOODWORK

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Fire-retardant-treated wood material.

1.3 COORDINATION

- A. Coordinate sizes and locations of framing, blocking, furring, reinforcements, and other related units of Work specified in other Sections, to ensure that interior architectural woodwork can be supported and installed as indicated.

1.4 SUBMITTALS, GENERAL

- A. General: Submit all action submittals required by this Section concurrently.

1.5 ACTION SUBMITTALS

- A. Shop Drawings:
 - 1. Include the following:
 - a. Dimensioned plans, elevations, and sections.
 - b. Attachment details.
 - 2. Show large-scale details.
 - 3. Show locations and sizes of furring, blocking, and hanging strips, including blocking and reinforcement concealed by construction and specified in other Sections.
- B. Samples:
 - 1. Lumber for Transparent Finish (Stain or Clear Finish): Not less than 5 inches wide by 12 inches long, for each species and cut, finished on one side and one edge.
 - a. Finish: Comply with Division 09 Section "Painting."

2. Panel Products with Factory-Applied Finish: 12 by 12 inches.
3. Veneer-Faced Panel Products for Transparent Finish (Stain or Clear Finish): 12 by 12 inches, for each species and cut. Include at least one face-veneer seam and finish as specified.
 - a. Finish: Comply with Division 09 Section "Painting."

1.6 QUALITY ASSURANCE

- A. Manufacturer's Qualifications: Employs skilled workers who custom fabricate products similar to those required for this Project and whose products have a record of successful in-service performance.

1.7 DELIVERY, STORAGE, AND HANDLING

- A. Do not deliver interior architectural woodwork until painting and similar finish operations that might damage woodwork have been completed in installation areas.
- B. Store woodwork in installation areas or in areas where environmental conditions comply with requirements specified in "Field Conditions" Article.
 1. Handle and store fire-retardant-treated wood to comply with chemical treatment manufacturer's written instructions.

1.8 FIELD CONDITIONS

- A. Environmental Limitations: Do not deliver or install interior architectural woodwork until building is enclosed, wet-work is complete, and HVAC system is operating and maintaining temperature and relative humidity at levels designed for building occupants for the remainder of the construction period.
- B. Field Measurements: Where interior architectural woodwork is indicated to fit to other construction, verify dimensions of other construction by field measurements before fabrication, and indicate measurements on Shop Drawings. Coordinate fabrication schedule with construction progress.
 1. Locate concealed framing, blocking, and reinforcements that support woodwork by field measurements before being concealed by construction, and indicate measurements on Shop Drawings.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Fire-Rated Frames: Complying with NFPA 80 and listed and labeled by a qualified testing agency acceptable to authorities having jurisdiction for fire-protection ratings indicated on Drawings, based on testing at positive pressure in accordance with NFPA 252 or UL 10C.
 - 1. Smoke- and Draft-Control Assemblies: Listed and labeled for smoke and draft control by a qualified testing agency acceptable to authorities having jurisdiction, based on testing in accordance with UL 1784 and installed in compliance with NFPA 105.
- B. Fire-Rated, Borrowed-Lite Assemblies: Complying with NFPA 80 and listed and labeled by a qualified testing agency acceptable to authorities having jurisdiction, for fire-protection ratings indicated, based on testing in accordance with NFPA 257 or UL 9.

2.2 ARCHITECTURAL WOODWORK, GENERAL

- A. Quality Standard: Unless otherwise indicated, comply with the Architectural Woodwork Standards for grades of interior architectural woodwork indicated for construction, finishes, installation, and other requirements.
 - 1. The Contract Documents contain requirements that are more stringent than the Architectural Woodwork Standards. Comply with Contract Documents and Architectural Woodwork Standards.

2.3 SHEET MATERIALS

- A. Composite Wood Products: Provide materials that comply with requirements of the Architectural Woodwork Standards for each type of interior architectural woodwork and quality grade specified unless otherwise indicated.
 - 1. Composite Wood Products: Verify products are made without added urea formaldehyde.
 - 2. Veneer-Faced Panel Products (Hardwood Plywood): HPVA HP-1.

2.4 FIRE-RETARDANT-TREATED WOOD MATERIAL

- A. Fire-Retardant-Treated Wood Materials: Where fire-retardant-treated materials are indicated, use materials complying with requirements that are acceptable to authorities having jurisdiction and with fire-test-response characteristics specified as determined by testing identical products in accordance with test method indicated by a qualified testing agency.
 - 1. Use treated materials that comply with requirements of the Architectural Woodwork Standards. Do not use materials that are warped, discolored, or otherwise defective.
 - 2. Use fire-retardant-treatment formulations that do not bleed through or otherwise adversely affect finishes. Do not use colorants to distinguish treated materials from untreated materials.

3. Identify fire-retardant-treated materials with appropriate classification marking of qualified testing agency in the form of removable paper label or imprint on surfaces that will be concealed from view after installation.
- B. Fire-Retardant-Treated Lumber and Plywood: Products with a flame-spread index of 25 or less when tested in accordance with ASTM E84, with no evidence of significant progressive combustion when the test is extended an additional 20 minutes, and with the flame front not extending more than 10.5 feet beyond the centerline of the burners at any time during the test.
1. Kiln-dry lumber and plywood after treatment to a maximum moisture content of 19 and 15 percent, respectively.
 2. For items indicated to receive a stained, transparent, or natural finish, use organic resin chemical formulation.
 3. Mill lumber before treatment, and implement procedures during treatment and drying processes that prevent lumber from warping and developing discolorations from drying sticks or other causes, marring, and other defects affecting appearance of treated woodwork.

2.5 MISCELLANEOUS MATERIALS

- A. Anchors: Select material, type, size, and finish required for each substrate for secure anchorage.
1. Provide metal expansion sleeves or expansion bolts for post-installed anchors.
 2. Use nonferrous-metal or hot-dip galvanized anchors and inserts at inside face of exterior walls and at floors.
- B. Installation Adhesive: Product recommended by fabricator for each substrate for secure anchorage.
1. Verify adhesives have a VOC content of [70] <Insert value> g/L or less.

2.6 FABRICATION

- A. Sand fire-retardant-treated wood lightly to remove raised grain on exposed surfaces before fabrication.
- B. Fabricate interior architectural woodwork to dimensions, profiles, and details indicated.
1. Ease edges to radius indicated for the following:
 - a. Edges of Solid-Wood (Lumber) Members: 1/16 inch unless otherwise indicated.
- C. Complete fabrication, including assembly, to maximum extent possible before shipment to Project site.
1. Disassemble components only as necessary for shipment and installation.
 2. Where necessary for fitting at site, provide allowance for scribing, trimming, and fitting.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Before installation, condition interior architectural woodwork to humidity conditions in installation areas for not less than 72 hours prior to beginning of installation.
- B. Before installing interior architectural woodwork, examine shop-fabricated work for completion and complete work as required, including removal of packing and backpriming of concealed surfaces.
- C. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 INSTALLATION

- A. Grade: Install interior architectural woodwork to comply with same grade as item to be installed.
- B. Assemble interior architectural woodwork and complete fabrication at Project site to the extent that it was not completed during shop fabrication.
- C. Install interior architectural woodwork level, plumb, true in line, and without distortion.
 - 1. Shim as required with concealed shims.
 - 2. Install level and plumb to a tolerance of 1/8 inch in 96 inches.
- D. Scribe and cut interior architectural woodwork to fit adjoining work, refinish cut surfaces, and repair damaged finish at cuts.
- E. Fire-Retardant-Treated Wood: Install fire-retardant-treated wood to comply with chemical treatment manufacturer's written instructions, including those for adhesives used to install woodwork.
- F. Anchor interior architectural woodwork to anchors or blocking built in or directly attached to substrates.
 - 1. Secure with countersunk, concealed fasteners and blind nailing.
 - 2. Use fine finishing nails or finishing screws for exposed fastening, countersunk and filled flush with interior architectural woodwork.
 - 3. For shop-finished items, use filler matching finish of items being installed.

3.3 RESTORATION

- A. Restore damaged and defective interior architectural woodwork, where possible, to eliminate functional and visual defects and to result in interior architectural woodwork being in compliance with requirements of Architectural Woodwork Standards for the specified grade.

- B. Where not possible to restore, replace defective woodwork.
- C. Field Finish: See Division 09 Section " Painting" for final finishing of installed interior architectural woodwork.

3.4 CLEANING

- A. Clean interior architectural woodwork on exposed and semiexposed surfaces.

END OF SECTION 06 40 23

SECTION 06 61 16 – SOLID SURFACING FABRICATIONS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Solid-surface-material window stools and aprons.

1.3 SUBMITTALS, GENERAL

- A. General: Submit all action submittals (except Samples for Verification) required by this Section concurrently.

1.4 ACTION SUBMITTALS

- A. Product Data: For the following:
 - 1. Solid-surfacing materials.
 - 2. Adhesives
- B. Sustainable Design Submittals:
 - 1. Product Data: For adhesives, documentation indicating that product contains no urea formaldehyde.
- C. Shop Drawings: Show location of each item, dimensioned plans and elevations, large-scale details, attachment, and other components.
- D. Samples for Initial Selection: For each type of material exposed to view.
- E. Samples for Verification: For the following products:
 - 1. Solid-surfacing material, 6 inches square.
- F. Warranty: Sample of special warranty specified in this Section.

1.5 CLOSEOUT SUBMITTALS

- A. Maintenance Data: For solid-surfacing fabrications to include in maintenance manuals.
- B. Warranty: Executed special warranty specified in this Section.

1.6 PROJECT CONDITIONS

- A. Field Measurements: Where solid-surfacing fabrications are indicated to fit to other construction, verify dimensions of other construction by field measurements before fabrication, and indicate measurements on Shop Drawings.

1.7 COORDINATION

- A. Coordinate sizes and locations of framing, blocking, furring, reinforcements, and other related units of Work specified in other Sections to ensure that solid-surfacing fabrications can be supported and installed as indicated.

1.8 WARRANTY

- A. Special Warranty: Manufacturer's standard form in which manufacturer agrees to repair or replace solid-surfacing fabrications that fail in materials or workmanship within specified warranty period.
 - 1. Warranty Period: 10 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 FABRICATION, GENERAL

- A. Fabricate solid-surfacing fabrications to dimensions, profiles, and details indicated.
- B. Complete fabrication to maximum extent possible before shipment to Project site. Disassemble components only as necessary for shipment and installation. Where necessary for fitting at site, provide ample allowance for scribing, trimming, and fitting.

2.2 SOLID-SURFACE-MATERIAL WINDOW STOOLS AND APRONS

- A. Countertop Solid Surface Material: Provide countertops with the following front and backsplash style: 1/2-inch thick, solid surface material Splashes: 1/2-inch thick, solid surface material. Fabrication: Fabricate tops in one piece on marine grade plywood with shop-applied edges unless otherwise indicated. Comply with solid-surface-material manufacturer's written instructions for adhesives, sealers, fabrication, and finishing. Solid Surface Material: Homogeneous solid sheets of filled plastic resin complying with ANSI SS1, Class A.
 - 1. Fabricate with loose splashes for field assembly.
 - 2. Adhesives: Adhesives shall not contain urea formaldehyde.
 - 3. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

- a. Hanex Solid Surfaces.
 - b. Corian
 - c. Formica Corporation.
 - d. Wilsonart International.
- 4. Colors and Patterns: As selected by Architect from manufacturer's full range.
- B. Fabrication: Fabricate stools and aprons in one piece, unless otherwise indicated. Comply with solid-surface-material manufacturer's written instructions for adhesives, sealers, fabrication, and finishing.

2.3 MATERIALS

- A. Adhesives: Adhesives shall not contain urea formaldehyde.
- B. Adhesives: Adhesives shall comply with the testing and product requirements of the California Department of Health Services' "Standard Practice for the Testing of Volatile Organic Emissions from Various Sources Using Small-Scale Environmental Chambers."
- C. Solid Surface Material: Homogeneous solid sheets of filled plastic resin complying with ANSI SS1.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Before installing solid-surfacing fabrications, examine shop-fabricated work for completion and complete work as required.
- B. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 INSTALLATION

- A. Install solid-surfacing fabrications level, plumb, true, and straight. Shim as required with concealed shims.
- B. Scribe and cut solid-surfacing fabrications to fit adjoining work.
- C. Stools and Aprons: Install with minimum number of joints possible, using full-length pieces (from maximum length of material available) to greatest extent possible.
 - 1. Provide a continuous bead of adhesive on underside of entire perimeter of each section of material. Attach reinforcing strip under each joint.
 - 2. Align adjacent solid-surfacing-material units and form seams to comply with manufacturer's written recommendations using adhesive in color to match solid-surfacing material. Keep components and hands clean when making joints. Carefully dress joints smooth, remove surface scratches, and clean entire surface.

3. Install units with no more than 1/8 inch in 96-inch sag, bow, or other variation from a straight line.
4. Secure aprons to walls with adhesive.
5. Seal space between units and surrounding construction with manufacturer's recommended sealant.

3.3 ADJUSTING AND CLEANING

- A. Repair damaged and defective solid-surfacing fabrications, where possible, to eliminate functional and visual defects; where not possible to repair, replace. Adjust joinery for uniform appearance.
 1. Clean solid-surfacing fabrications on exposed and semiexposed surfaces.

END OF SECTION 06 61 16

SECTION 06 64 00 - PLASTIC PANELING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes glass-fiber reinforced plastic (FRP) wall paneling and trim accessories.

1.3 SUBMITTALS, GENERAL

- A. General: Submit all action submittals (except Samples for Verification) and informational submittals required by this Section concurrently.

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated.
 - 1. Plastic sheet paneling.
 - 2. Trim accessories.
 - 3. Concealed mounting splines.
- B. Shop Drawings: For plastic sheet paneling.
 - 1. Include plans, elevations, sections, and attachment details.
- C. Samples for Initial Selection: For plastic paneling and trim accessories.
- D. Samples for Verification: For plastic paneling, in manufacturer's standard sizes.

1.5 QUALITY ASSURANCE

- A. Source Limitations: Obtain plastic paneling and trim accessories from single manufacturer.
- B. Surface-Burning Characteristics: As determined by testing identical products according to ASTM E 84 by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.
 - 1. Flame-Spread Index: 25 or less.
 - 2. Smoke-Developed Index: 450 or less.
 - 3. Testing Agency: Acceptable to authorities having jurisdiction.

1.6 PROJECT CONDITIONS

- A. Environmental Limitations: Do not deliver or install plastic paneling until spaces are enclosed and weathertight and temporary HVAC system is operating and maintaining ambient temperature and humidity conditions at occupancy levels during the remainder of the construction period.

PART 2 - PRODUCTS

2.1 PLASTIC SHEET PANELING

- A. General: Gelcoat-finished, glass-fiber reinforced plastic panels complying with ASTM D 5319.
 - 1. Basis-of-Design Product: Subject to compliance with requirements, provide Marlite; Standard FRP Wall Panels or comparable product by one of the following:
 - a. Glasteel.
 - b. Kemlite Company Inc.
 - c. Nudo Products, Inc.
 - 2. Nominal Thickness: Not less than 0.09 inch.
 - 3. Surface Finish: Molded pebble texture.
 - 4. Color: As selected by Architect from manufacturer's full range.

2.2 ACCESSORIES

- A. Trim Accessories: Manufacturer's standard one-piece vinyl extrusions designed to retain and cover edges of panels. Provide division bars, inside corners, **[outside corners,]** and caps as needed to conceal edges.
 - 1. Color: As selected by Architect from manufacturer's full range.
- B. Exposed Fasteners: Nylon drive rivets recommended by panel manufacturer.
- C. Concealed Mounting Splines: Continuous, H-shaped aluminum extrusions designed to fit into grooves routed in edges of factory-laminated panels and to be fastened to substrate.
- D. Adhesive: As recommended by plastic paneling manufacturer.
 - 1. Adhesive shall have a VOC content of 50 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).
- E. Sealant: Single-component, mildew-resistant, acid-curing silicone sealant recommended by plastic paneling manufacturer and complying with requirements in Division 07 Section "Joint Sealants."
 - 1. Sealant shall have a VOC content of 250 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates and conditions, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.
- C. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 PREPARATION

- A. Remove materials that might interfere with adhesive bond.
- B. Prepare substrate by sanding high spots and filling low spots as needed to provide flat, even surface for panel installation.
- C. Clean substrates of substances that could impair bond of adhesive, including oil, grease, dirt, and dust.
- D. Condition panels by unpacking and placing in installation space before installation according to manufacturer's written recommendations.
- E. Lay out paneling before installing. Locate panel joints to provide equal panels at ends of walls not less than half the width of full panels.
 - 1. Mark plumb lines on substrate at panel joint locations for accurate installation.
 - 2. Locate trim accessories to allow clearance at panel edges according to manufacturer's written instructions.

3.3 INSTALLATION

- A. Install plastic paneling according to manufacturer's written instructions.
- B. Install panels in a full spread of adhesive.
- C. Install panels with fasteners. Layout fastener locations and mark on face of panels so that fasteners are accurately aligned.
 - 1. Drill oversized fastener holes in panels and center fasteners in holes.
 - 2. Apply sealant to fastener holes before installing fasteners.
- D. Install trim accessories with. Do not fasten through panels.
- E. Fill grooves in trim accessories with sealant before installing panels and bed inside corner trim in a bead of sealant.
- F. Maintain uniform space between panels and wall fixtures. Fill space with sealant.

- G. Maintain uniform space between adjacent panels and between panels and floors, ceilings, and fixtures. Fill space with sealant.
- H. Remove excess sealant and smears as paneling is installed. Clean with solvent recommended by sealant manufacturer and then wipe with clean dry cloths until no residue remains.

END OF SECTION 06 64 00

SECTION 07 01 50.19 - PREPARATION FOR RE-ROOFING**PART 1 - GENERAL****1.1 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Roof tear-off.
 - 2. Removal of base flashings.

1.3 DEFINITIONS

- A. Roofing Terminology: Refer to ASTM D 1079 and glossary in NRCA's "The NRCA Roofing and Waterproofing Manual" for definition of terms related to roofing work in this Section.
- B. Existing Membrane Roofing System: EPDM roofing membrane, roof insulation, surfacing, and components and accessories between deck and roofing membrane.
- C. Roof Tear-Off: Removal of existing membrane roofing system from deck.
- D. Remove: Detach items from existing construction and legally dispose of them off-site unless indicated to be removed and reinstalled.
- E. Existing to Remain: Existing items of construction that are not indicated to be removed.

1.4 SUBMITTALS, GENERAL

- A. General: Submit all informational submittals required by this Section concurrently.

1.5 INFORMATIONAL SUBMITTALS

- A. Photographs or Videotape: Show existing conditions of adjoining construction and site improvements, including exterior and interior finish surfaces, that might be misconstrued as having been damaged by reroofing operations. Submit before Work begins.

1.6 CLOSEOUT SUBMITTALS

- A. Landfill Records: Indicate receipt and acceptance of hazardous wastes, such as asbestos-containing material, by a landfill facility licensed to accept hazardous wastes.
- B. Existing Roofing System Warranty Documentation: Documentation verifying that existing roofing system has been inspected and warranty remains in effect.

1.7 QUALITY ASSURANCE

- A. Installer Qualifications: Installer of new membrane roofing system, licensed to perform asbestos abatement in the State or jurisdiction where Project is located.
- B. Regulatory Requirements: Comply with governing EPA notification regulations before beginning membrane roofing removal. Comply with hauling and disposal regulations of authorities having jurisdiction.
- C. Reroofing Conference: Conduct conference at Project site.
 - 1. Meet with Owner; Architect; testing and inspecting agency representative; roofing system manufacturer's representative; deck Installer; roofing Installer including project manager, superintendent, and foreman; and installers whose work interfaces with or affects reroofing including installers of roof accessories and roof-mounted equipment.
 - 2. Review methods and procedures related to roofing system tear-off and replacement including, but not limited to, the following:
 - a. Reroofing preparation, including membrane roofing system manufacturer's written instructions.
 - b. Temporary protection requirements for existing roofing system that is to remain during and after installation.
 - c. Existing roof drains and roof drainage during each stage of reroofing, and roof drain plugging and plug removal requirements.
 - d. Construction schedule and availability of materials, Installer's personnel, equipment, and facilities needed to make progress.
 - e. Existing deck removal procedures and Owner notifications.
 - f. Condition and acceptance of existing roof deck and base flashing substrate for reuse.
 - g. Structural loading limitations of deck during reroofing.
 - h. Base flashings, special roofing details, drainage, penetrations, equipment curbs, and condition of other construction that will affect reroofing.
 - i. HVAC shutdown and sealing of air intakes.
 - j. Shutdown of fire-suppression, -protection, and -alarm and -detection systems.
 - k. Asbestos removal and discovery of asbestos-containing materials.
 - l. Governing regulations and requirements for insurance and certificates if applicable.
 - m. Existing conditions that may require notification of Architect before proceeding.

1.8 PROJECT CONDITIONS

- A. Owner will occupy portions of building immediately below reroofing area. Conduct reroofing so Owner's operations will not be disrupted. Provide Owner with not less than 72 hours' notice of activities that may affect Owner's operations.
- B. Protect building to be reroofed, including but not limited to: interior surfaces, adjacent buildings, walkways, site improvements, exterior plantings, and landscaping from damage or soiling from reroofing operations.

- C. Maintain access to existing walkways, corridors, and other adjacent occupied or used facilities.
- D. Conditions existing at time of inspection for bidding will be maintained by Owner as far as practical.
 - 1. The results of an analysis of test cores from existing membrane roofing system are available for Contractor's reference.
- E. Handle and store materials and place equipment in a manner to avoid deflection of deck, overloading, and possible disturbance to the building structure.
- F. Weather Limitations: Proceed with reroofing preparation only when existing and forecasted weather conditions permit Work to proceed without water entering existing roofing system or building.
- G. Hazardous Materials: Present in building to be reroofed. A report on the presence of hazardous materials is on file for review and use. Examine report to become aware of locations where hazardous materials are present.
 - 1. Hazardous material remediation is specified elsewhere in the Contract Documents.
 - 2. Do not disturb hazardous materials or items suspected of containing hazardous materials except according to procedures specified elsewhere in the Contract Documents.
 - 3. Coordinate with hazardous material remediation subcontractor to prevent water from entering existing roofing system or building.

PART 2 - PRODUCTS

2.1 AUXILIARY REROOFING MATERIALS

- A. General: Auxiliary reroofing preparation materials recommended by roofing system manufacturer for intended use and compatible with components of new membrane roofing system.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Protect existing membrane roofing system that is indicated not to be reroofed.
 - 1. Limit traffic and material storage to areas of existing roofing membrane that have been protected.
- B. Protect interior surfaces and equipment.
 - 1. Maintain temporary protection and leave in place until replacement roofing has been completed. Remove temporary protection on completion of reroofing.

- C. Coordinate with Owner to shut down air-intake equipment in the vicinity of the Work. Cover air-intake louvers before proceeding with reroofing work that could affect indoor air quality or activate smoke detectors in the ductwork.
- D. During removal operations, have sufficient and suitable materials on-site to facilitate rapid installation of temporary protection in the event of unexpected rain.
 - 1. Test, verify and confirm existing roof drains are operational and document conditions at each roof drain in writing prior to beginning work.
- E. Maintain roof drains in functioning condition to ensure roof drainage at end of each workday. Prevent debris from entering or blocking roof drains and conductors. Use roof-drain plugs specifically designed for this purpose. Remove roof-drain plugs at end of each workday, when no work is taking place, or when rain is forecast.
 - 1. If roof drains are temporarily blocked or unserviceable due to roofing system removal or partial installation of new membrane roofing system, provide alternative drainage method to remove water and eliminate ponding. Do not permit water to enter into or under existing membrane roofing system components that are to remain.
- F. Verify that rooftop utilities and service piping have been shut off before beginning the Work.
- G. Beginning reproofing preparation constitutes Contractor's acceptance of substrates and conditions.

3.2 ROOF TEAR-OFF

- A. General: Notify Owner each day of extent of roof tear-off proposed for that day.
- B. Roof Tear-Off: Remove existing roofing membrane and other membrane roofing system components down to the deck.
 - 1. Remove cover boards, roof insulation, and substrate boards.
 - 2. Remove wood blockings.
 - 3. Remove excess asphalt from steel deck. A maximum of 15 lb/100 sq. ft. of asphalt is permitted to remain on steel decks.
 - 4. Remove fasteners from deck by backing out and not pulling.

3.3 DECK PREPARATION

- A. Inspect deck after tear-off of membrane roofing system.
- B. If broken or loose fasteners that secure deck panels to one another or to structure are observed or if deck appears or feels inadequately attached, immediately notify Architect. Do not proceed with installation until directed by Architect.
- C. If deck surface is not suitable for receiving new roofing or if structural integrity of deck is suspect, immediately notify Architect. Do not proceed with installation until directed by Architect.

3.4 EXISTING BASE FLASHINGS

- A. Remove existing base flashings and counter flashings around parapets, curbs, walls, and penetrations.
 - 1. Clean substrates of contaminants such as asphalt, sheet materials, dirt, and debris.

3.5 DISPOSAL

- A. Collect demolished materials and place in containers. Promptly dispose of demolished materials. Do not allow demolished materials to accumulate on-site.
 - 1. Storage or sale of demolished items or materials on-site is not permitted.
- B. Transport and legally dispose of demolished materials off Owner's property.

END OF SECTION 07 01 50.19

SECTION 07 11 13 - BITUMINOUS DAMPPROOFING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Cold-applied, emulsified-asphalt dampproofing.

1.3 SUBMITTALS, GENERAL

- A. General: Submit all action submittals required by this Section concurrently.

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated.
 - 1. Patching compound.
 - 2. Cold-applied, emulsified asphalt dampproofing.

1.5 FIELD CONDITIONS

- A. Weather Limitations: Proceed with application only when existing and forecasted weather conditions permit dampproofing to be performed according to manufacturers' written instructions.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Source Limitations: Obtain primary dampproofing materials and primers from single source from single manufacturer. Provide auxiliary materials recommended in writing by manufacturer of primary materials.

2.2 PERFORMANCE REQUIREMENTS

- A. VOC Content: Products shall comply with VOC content limits of authorities having jurisdiction unless otherwise required.

2.3 COLD-APPLIED, EMULSIFIED-ASPHALT DAMPPROOFING

- A. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - 1. Henry Company; 789 Fibered Asphalt Emulsion Damp Proofing.
 - 2. Karnak; 920 Fibered Emulsion Mastic.
 - 3. Master Builders Solutions Construction Systems US, LLC; MasterSeal 614.
- B. Trowel Coats: ASTM D1227, Type II, Class 1.
 - 1. VOC Content: 30 g/L or less.

2.4 AUXILIARY MATERIALS

- A. Furnish auxiliary materials recommended in writing by dampproofing manufacturer for intended use and compatible with bituminous dampproofing.
- B. Patching Compound: Type recommended in writing by dampproofing manufacturer.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, areas, and conditions with Applicator present, for compliance with requirements for surface smoothness, maximum surface moisture content, and other conditions affecting performance of the Work.
- B. Proceed with application only after substrate construction and penetrating work have been completed and unsatisfactory conditions have been corrected.
- C. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 PREPARATION

- A. Clean, prepare, and treat substrates according to manufacturer's written instructions. Provide clean, dust-free, and dry substrates for dampproofing application.
- B. Mask or otherwise protect adjoining exposed surfaces from being stained, spotted, or coated with dampproofing. Prevent dampproofing materials from entering and clogging weep holes and drains.

- C. Clean substrates of projections and substances detrimental to the dampproofing work; fill voids, seal joints, and remove bond breakers if any.
- D. Apply patching compound to patch and fill tie holes, honeycombs, reveals, and other imperfections.

3.3 APPLICATION, GENERAL

- A. Comply with manufacturer's written instructions for dampproofing application, cure time between coats, and drying time before backfilling unless otherwise indicated.
 - 1. Apply dampproofing to provide continuous plane of protection.
 - 2. Apply additional coats if recommended in writing by manufacturer or to achieve a smooth surface and uninterrupted coverage.
- B. Where dampproofing footings and foundation walls, apply from finished-grade line to top of footing; extend over top of footing and down a minimum of 6 inches over outside face of footing.
 - 1. Extend dampproofing 12 inches onto intersecting walls and footings, but do not extend onto surfaces exposed to view when Project is completed.

3.4 COLD-APPLIED, EMULSIFIED-ASPHALT DAMPPROOFING

- A. Concrete Foundations: Apply one trowel coat at not less than 4 gal./100 sq. ft.

3.5 PROTECTION

- A. Correct dampproofing that does not comply with requirements; correct substrates and reapply dampproofing.

3.6 CLEANING

- A. Clean spillage and soiling from adjacent construction using cleaning agents and procedures recommended in writing by manufacturer of affected construction.

END OF SECTION 07 11 13

SECTION 07 21 00 - THERMAL INSULATION

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Semi-Rigid Mineral Wool Insulation
 - 2. Extruded polystyrene foam-plastic board.
 - 3. Glass-fiber blanket.
 - 4. Closed-cell spray polyurethane foam.
 - 5. Insulation for miscellaneous voids.

1.3 SUBMITTALS, GENERAL

- A. General: Submit all action submittals and informational submittals required by this Section concurrently.

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of product.
 - 1. Adhesive for bonding insulation.
 - 2. Semi-Rigid Mineral Wool
 - 3. Extruded polystyrene board, Type IV, 25-psi.
 - 4. Extruded polystyrene board, Type V, 100-psi.
 - 5. Glass-fiber blanket, unfaced.
 - 6. Closed-cell spray polyurethane foam.
 - 7. Insulation for miscellaneous voids.
- B. Sustainable Design Submittals:
 - 1. Product Data: For adhesives, indicating VOC content.

1.5 INFORMATIONAL SUBMITTALS

- A. Evaluation Reports: For closed-cell, spray polyurethane foam insulation.

1.6 QUALITY ASSURANCE

- A. Spray Polyurethane Foam Installer Qualifications: An authorized representative who is trained and approved by manufacturer.
- B. Identification: Identify product R-values with manufacturer's markings, or certification, in accordance with requirements of building Code in effect for the Project.

1.7 DELIVERY, STORAGE, AND HANDLING

- A. Protect insulation materials from physical damage and from deterioration due to moisture, soiling, and other sources. Store inside and in a dry location. Comply with manufacturer's written instructions for handling, storing, and protecting during installation.
- B. Protect foam-plastic board insulation as follows:
 - 1. Do not expose to sunlight except to necessary extent for period of installation and concealment.
 - 2. Protect against ignition at all times. Do not deliver foam-plastic board materials to Project site until just before installation time.
 - 3. Quickly complete installation and concealment of foam-plastic board insulation in each area of construction.

PART 2 - PRODUCTS

2.1 SEMI-RIGID MINERAL WOOL INSULATION

- A. Basis of Design: Provide semi-rigid Mineral Wool Insulation conforming to ASTM c612 Type II, maximum flame spread of 0 per ASTM E84 equal to "Thermafiber Rainbarrier Dark" made by Thermafiber Inc. or equal manufactured by:
 - 1. Fibrex
 - 2. Rockwool
- B. Insulation shall have an R value of not less than 4.3/inch with nominal density of 6lbs/cu ft.
- C. Facing: Black fiberglass facing.
- D. Conform to ASTM C612 Type II.

2.2 EXTRUDED POLYSTYRENE BOARD INSULATION

- A. Extruded Polystyrene Board, Type IV: ASTM C 578, Type IV, 25-psi minimum compressive strength; unfaced; maximum flame-spread and smoke-developed indexes of 25 and 450, respectively, per ASTM E 84.

1. Products: Subject to compliance with requirements, available products that may be incorporated in the Work, include, but are not limited to:
 - a. DuPont; Styrofoam Brand Square Edge and Cavitymate Plus XPS Foam Insulation (Reduced GWP).
 - b. Owens Corning; Foamular NGX 250 and NGX CW25 Extruded Polystyrene (XPS) Insulation (Square Edge).
 2. Thermal Resistance: R-value of 5.0 per inch.
 3. Fire Propagation Characteristics: Passes NFPA 285 testing as part of an approved assembly.
- B. Extruded Polystyrene Board, Type V: ASTM C 578, Type VI, 100-psi minimum compressive strength; maximum flame-spread and smoke-developed indexes of 25 and 450, respectively, per ASTM E 84.
1. Products: Subject to compliance with requirements, available products that may be incorporated in the Work, include, but are not limited to:
 - a. DuPont; Styrofoam Brand Highload 100 psi Extruded Polystyrene Foam Insulation (Reduced GWP).
 - b. Owens Corning; Foamular NGX 1000 Extruded Polystyrene (XPS) Insulation (Square Edge).
 2. Thermal Resistance: R-value of 5.0 per inch.

2.3 GLASS-FIBER BLANKET

- A. Glass-Fiber Blanket, Unfaced: ASTM C 665, Type I; with maximum flame-spread and smoke-developed indexes of 25 and 50, respectively, per ASTM E 84; passing ASTM E 136 for combustion characteristics.
1. Products: Subject to compliance with requirements, available products that may be incorporated in the Work, include, but are not limited to:
 - a. CertainTeed Corporation; Sustainable Insulation Fiber Glass Building.
 - b. Owens Corning; EcoTouch Pink Fiberglas Insulation.

2.4 CLOSED-CELL SPRAY POLYURETHANE FOAM

- A. Closed-Cell Spray Polyurethane Foam: ASTM C 1029, Type II, minimum density of 2 lb/cu. ft. and minimum aged R-value at 1-inch thickness of 6.2 deg F x h x sq. ft./Btu at 75 deg F.
1. Products: Subject to compliance with requirements, available products that may be incorporated in the Work, include, but are not limited to:
 - a. Gaco Western LLC; GacoWallFoam 183M.
 - b. Lapolla Industries, Inc.; Foam-Lok 2000-4G.

2. Surface-Burning Characteristics: Comply with ASTM E 84; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.
 - a. Flame-Spread Index: 25 or less.
 - b. Smoke-Developed Index: 450 or less.

B. Miscellaneous Materials:

1. Primer: Material recommended by insulation manufacturer where required for adhesion of insulation to substrates.
2. Membrane at Transitions: Provide membrane at transitions in substrate and connections to adjacent elements acceptable to the spray polyurethane foam manufacturer.
3. Thermal Barrier Intumescent Coating: Intumescent water-based, spray-applied coating that has been tested and approved for use in a building interior as a 15-minute alternative thermal barrier complying with New York State Code and New York State VOC regulations. Use only products that have been tested and approved for use with spray polyurethane foam to be used; provide primer as required.
 - a. Basis-of-Design Product: Subject to compliance with requirements, provide International Fireproof Technology, Inc.; DC315, or comparable product.

2.5 ACCESSORIES

A. Insulation for Miscellaneous Voids:

1. Spray Polyurethane Foam Insulation for Miscellaneous Voids: ASTM C 1029, Type II, closed cell, minimum density of 1.75 lb/cu. ft. and minimum aged R-value at 1-inch thickness of 6.0 deg F x h x sq. ft./Btu at 75 deg F, with maximum flame-spread and smoke-developed indexes of 25 and 400, respectively, per ASTM E 84.
 - a. Basis-of-Design Product: Subject to compliance with requirements, provide DuPont; Froth-Pak Foam Insulation, or comparable product.

B. Adhesive for Bonding Insulation: Product compatible with insulation and air and water barrier materials, and with demonstrated capability to bond insulation securely to substrates without damaging insulation and substrates.

1. Adhesives shall have a VOC content of [70] <Insert value> g/L or less.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, areas, and conditions, with Installer present, for compliance with requirements for conditions affecting performance of the Work.
- B. Clean substrates of substances that are harmful to insulation, including removing projections capable of puncturing insulation, or that interfere with insulation attachment.

- C. Proceed with installation only after unsatisfactory conditions have been corrected.
- D. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 INSTALLATION, GENERAL

- A. Comply with insulation manufacturer's written instructions applicable to products and applications.
- B. Install insulation that is undamaged, dry, and unsoiled and that has not been left exposed to ice, rain, or snow at any time.
- C. Extend insulation to envelop entire area to be insulated. Fit tightly around obstructions and fill voids with insulation. Remove projections that interfere with placement.
- D. Provide sizes to fit applications and selected from manufacturer's standard thicknesses, widths, and lengths. Apply single layer of insulation units unless multiple layers are otherwise shown or required to make up total thickness or to achieve R-value.
- E. Install insulation so that manufacturer's R-value mark is readily observable, in accordance with requirements of building Code in effect for the Project.

3.3 INSTALLATION OF SLAB INSULATION

- A. On vertical slab edge surfaces, set extruded polystyrene board (Type IV, 25-psi) insulation units using manufacturer's recommended adhesive according to manufacturer's written instructions.
- B. On horizontal surfaces, loosely lay extruded polystyrene board (Type VI, 40-psi) insulation units according to manufacturer's written instructions. Stagger end joints and tightly abut insulation units.
 - 1. Where indicated, install extruded polystyrene board (Type V, 100-psi) insulation units.

3.4 INSTALLATION OF FOUNDATION WALL INSULATION

- A. Butt extruded polystyrene board (Type IV, 25-psi) panels together for tight fit.
- B. Adhesive Installation: Install with adhesive according to manufacturer's written instructions.

3.5 INSTALLATION OF CAVITY-WALL INSULATION

- A. Foam-Plastic Board Insulation: Install pads of adhesive spaced approximately 24 inches o.c. both ways on inside face and as recommended by manufacturer. Fit courses of extruded polystyrene board (Type IV, 25-psi) insulation between wall ties and other obstructions, with edges butted tightly in both directions. Press units firmly against inside substrates.
 - 1. Supplement adhesive attachment of insulation by securing boards with two-piece wall ties designed for this purpose and specified in Division 04 Section "Unit Masonry."

3.6 INSTALLATION OF INSULATION IN FRAMED CONSTRUCTION

- A. Blanket Insulation: Install in cavities formed by framing members according to the following requirements:
 - 1. Use insulation widths and lengths that fill the cavities formed by framing members. If more than one length is required to fill the cavities, provide lengths that will produce a snug fit between ends.
 - 2. Place insulation in cavities formed by framing members to produce a friction fit between edges of insulation and adjoining framing members.
 - 3. Maintain 3-inch clearance of insulation around recessed lighting fixtures not rated for or protected from contact with insulation.
 - 4. For metal-framed wall cavities where cavity heights exceed 96 inches, support unfaced blankets mechanically and support faced blankets by taping flanges of insulation to flanges of metal studs.
- B. Miscellaneous Voids: Install insulation in miscellaneous voids and cavity spaces where required to prevent gaps in insulation using the following materials:
 - 1. Spray Polyurethane Insulation for Miscellaneous Voids: Apply according to manufacturer's written instructions.

3.7 INSTALLATION OF SPRAY FOAM INSULATION

- A. Verify that substrates are clean, dry, and free of substances that are harmful to insulation.
- B. Priming: Prime substrates where recommended by insulation manufacturer. Apply primer to comply with insulation manufacturer's written instructions. Confine primers to areas to be insulated; do not allow spillage or migration onto adjoining surfaces.
- C. Comply with insulation manufacturer's written instructions applicable to products and applications.
- D. Prior to application, bridge gaps in construction at changes in substrate plane or changes in adjoining materials as recommended by manufacturer.
- E. Spray insulation to envelop entire area to be insulated and fill voids.
- F. Apply in multiple passes to not exceed maximum thicknesses recommended by manufacturer.
- G. Apply thermal barrier intumescent coating in accordance with manufacturer's written instructions and at the required dry film thickness per the applicable spray foam evaluation report.

3.8 PROTECTION

- A. Protect installed insulation from damage due to harmful weather exposures, physical abuse, and other causes. Provide temporary coverings or enclosures where insulation is subject to abuse and cannot be concealed and protected by permanent construction immediately after installation.

END OF SECTION 07 21 00

SECTION 07 24 19 - WATER-DRAINAGE EXTERIOR INSULATION AND FINISH SYSTEM (EIFS)**PART 1 - GENERAL****1.1 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. EIFS-clad drainage-wall assemblies, including EIFS manufacturer's air and water-resistive barrier system, that are field applied over substrate.

1.3 DEFINITIONS

- A. Definitions in ASTM E2110 apply to Work of this Section.
- B. EIFS: Exterior insulation and finish system(s).
- C. Polymer-Based Exterior Insulation and Finish System: Class PB EIFS, as defined in ASTM E2568.

1.4 SUBMITTALS, GENERAL

- A. General: Submit all action submittals and informational submittals required by this Section concurrently.

1.5 ACTION SUBMITTALS

- A. Product Data: For each EIFS component indicated.
 - 1. Air and water-resistive barrier system.
 - 2. Flexible-membrane flashing.
 - 3. Insulation adhesive.
 - 4. Molded, (expanded) rigid cellular polystyrene board insulation.
 - 5. Reinforcing mesh.
 - 6. Base coat.
 - 7. Water-resistant base coat.
 - 8. Primer.
 - 9. Finish coat.
 - 10. Sealer.
 - 11. Trim accessories.

- B. Shop Drawings: Include plans, elevations, sections, details of components, details of penetrations and terminations, flashing details, joint locations and configurations, air and water-resistive barrier system details, and connections and attachments to other work.
- C. Samples: For each type of finish-coat color and texture indicated.
 - 1. Include similar Samples of exposed accessories involving color selection.
- D. Sample Warranties: For special warranties.

1.6 INFORMATIONAL SUBMITTALS

- A. Manufacturer Certificates: Signed by EIFS manufacturer, certifying the following:
 - 1. EIFS complies with requirements.
 - 2. EIFS substrate is acceptable to EIFS manufacturer.
 - 3. Accessory products installed with EIFS, including joint sealants, flashing, air and water-resistive barrier systems, and trim, whether or not furnished by EIFS manufacturer and whether or not specified in this Section, are acceptable to EIFS manufacturer.

1.7 CLOSEOUT SUBMITTALS

- A. Maintenance Data: For EIFS to include in maintenance manuals.
- B. Executed Warranties: For special warranties.

1.8 QUALITY ASSURANCE

- A. Installer Qualifications: An installer who is currently listed in the AWCI International database, is certified in writing by EIFS manufacturer as qualified to install Class PB EIFS using trained workers, and who has successfully completed a minimum of three comparable projects.
- B. Identification: Identify product R-values with manufacturer's markings, or certification, in accordance with requirements of building Code in effect for the Project.

1.9 DELIVERY, STORAGE, AND HANDLING

- A. Deliver materials in original, unopened packages with manufacturers' labels intact and clearly identifying products.
- B. Store materials inside and under cover; keep them dry and protected from weather, direct sunlight, surface contamination, aging, corrosion, damaging temperatures, construction traffic, and other causes.
 - 1. Stack insulation board flat and off the ground.
 - 2. Protect plastic insulation against ignition at all times. Do not deliver plastic insulating materials to Project site before installation time.

3. Complete installation and concealment of plastic materials as rapidly as possible in each area of construction.

1.10 FIELD CONDITIONS

- A. Weather Limitations: Proceed with installation only when existing and forecasted weather conditions and ambient outdoor air, humidity, and substrate temperatures permit EIFS to be applied, dried, and cured according to manufacturers' written instructions and warranty requirements.

1.11 WARRANTY

- A. Manufacturer's Special Warranty: Manufacturer agrees to correct or replace components of EIFS-clad drainage-wall assemblies that fail in materials within specified warranty period.

1. Failures include, but are not limited to, the following:
 - a. Bond integrity and weathertightness.
 - b. Deterioration of EIFS finishes and other EIFS materials beyond normal weathering.
2. Warranty coverage includes the following components of EIFS-clad drainage-wall assemblies:
 - a. EIFS finish, including base coats, finish coats, and reinforcing mesh.
 - b. Insulation installed as part of EIFS.
 - c. Insulation adhesive.
 - d. Flashing.
 - e. Air and water-resistive barrier systems.
 - f. EIFS drainage components.

3. Warranty Period: Minimum 10 years from date of Substantial Completion.

- B. Special Project Warranty: Installer agrees to restore or replace EIFS work as necessary to correct faulty and defective work and as necessary to maintain work in a weathertight condition. This warranty, signed by the Installer, covers the Work of this Section, including all components of the EIFS system for the following warranty period:

1. Warranty Period: Two years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 1. Dryvit Systems, Inc.
 2. Sto Corp.

- B. Source Limitations: Obtain EIFS from single source from single EIFS manufacturer and from sources approved by EIFS manufacturer as compatible with EIFS components.

2.2 PERFORMANCE REQUIREMENTS

- A. EIFS Performance: Comply with ASTM E2568 and with the following:
 - 1. Weathertightness: Resistant to uncontrolled water penetration from exterior, with a means to drain water entering EIFS to the exterior.
 - 2. Structural Performance of Assembly and Components:
 - a. Wind Loads: As indicated on Drawings.
 - 3. Impact Performance: ASTM E2568, Standard impact resistance unless otherwise indicated.
 - a. Provide Ultra-High impact resistance where indicated.
 - 4. Abrasion Resistance of Finish Coat: Sample consisting of 1-inch-thick EIFS mounted on 1/2-inch-thick gypsum board; cured for a minimum of 28 days and shows no cracking, checking, or loss of film integrity after exposure to 528 quarts of sand when tested according to ASTM D968, Method A.
 - 5. Mildew Resistance of Finish Coat: Sample applied to 2-by-2-inch clean glass substrate; cured for 28 days and shows no growth when tested according to ASTM D3273 and evaluated according to ASTM D3274.
 - 6. Drainage Efficiency: 90 percent average minimum when tested according to ASTM E2273.

2.3 EIFS MATERIALS

- A. Air and Water-Resistive Barrier System: EIFS manufacturer's standard formulation and accessories for use as air and water-resistive barrier system; vapor-permeable type; compatible with substrate.
 - 1. Water-Resistance: Comply with physical and performance criteria of ASTM E2570/E2570M.
- B. Flexible-Membrane Flashing: Cold-applied, self-adhering, self-healing, rubberized-asphalt, and polyethylene-film composite sheet or tape and primer; EIFS manufacturer's standard or product recommended in writing by EIFS manufacturer.
- C. Insulation Adhesive: EIFS manufacturer's standard formulation designed for indicated use; specifically formulated to be applied to back side of insulation in a manner that creates open vertical channels designed to serve as an integral part of the water-drainage system of the EIFS-clad drainage-wall assembly; compatible with substrate; and complying with one of the following:

1. Job-mixed formulation of portland cement complying with ASTM C150/C150M, Type I, and polymer-based adhesive specified for base coat.
 2. Factory-blended dry formulation of portland cement, dry polymer admixture, and fillers specified for base coat.
- D. Drainage Strip: EIFS manufacturer's standard or product recommended in writing by EIFS manufacturer.
- E. Molded, (Expanded) Rigid Cellular Polystyrene Board Insulation: Comply with ASTM E2430/E2430M, unless otherwise noted, and the following:
1. Flame-Spread and Smoke-Developed Indexes: 25 and 450 or less, respectively, according to ASTM E84.
 2. Dimensions: Provide insulation boards of not more than 24 by 48 inches, with thickness indicated on Drawings.
 3. Foam Buildouts: Provide with profiles and dimensions indicated on Drawings.
- F. Reinforcing Mesh: Balanced, alkali-resistant, open-weave, glass-fiber mesh treated for compatibility with other EIFS materials, made from continuous multiend strands with retained mesh tensile strength of not less than 120 lbf/in. according to ASTM E2098/E2098M and the following:
1. Reinforcing Mesh for EIFS, General: Not less than weight required to comply with impact-performance level specified in "Performance Requirements" Article.
 2. Detail-Reinforcing Mesh: Not less than 4.0 oz./sq. yd.
- G. Base Coat: EIFS manufacturer's standard mixture complying with one of the following:
1. Job-mixed formulation of portland cement complying with ASTM C150/C150M, Type I, white or natural color; and manufacturer's standard polymer-emulsion adhesive designed for use with portland cement.
 2. Factory-blended dry formulation of portland cement, dry polymer admixture, and inert fillers to which only water is added at Project site.
- H. Water-Resistant Base Coat: EIFS manufacturer's standard water-resistant formulation complying with one of the following:
1. Job-mixed formulation of portland cement complying with ASTM C150/C150M, Type I, white or natural color; and manufacturer's standard polymer-emulsion adhesive designed for use with portland cement.
 2. Job-combined formulation of manufacturer's standard polymer-emulsion adhesive and manufacturer's standard dry mix containing portland cement.
- I. Primer: EIFS manufacturer's standard factory-mixed, elastomeric-polymer primer for preparing base-coat surface for application of finish coat.

- J. Finish Coat: EIFS manufacturer's standard acrylic-based coating complying with the following:
 - 1. Factory-mixed formulation of polymer-emulsion binder, colorfast mineral pigments, sound stone particles, and fillers.
 - 2. Colors: As selected by Architect from manufacturer's full range.
 - 3. Textures: As selected by Architect from manufacturer's full range.
- K. Sealer: Manufacturer's waterproof, clear acrylic-based sealer for protecting finish coat.
- L. Water: Potable.
- M. Trim Accessories: Type as designated or required to suit conditions indicated and to comply with EIFS manufacturer's written instructions; manufactured from UV-stabilized PVC; and complying with ASTM D1784, manufacturer's standard cell class for use intended, and ASTM C1063, including, but not limited to, the following:
 - 1. Weep Screed/Track: Prefabricated, one-piece type for attachment behind insulation with perforated face leg extended to form a drip and weep holes in track bottom, of depth required to suit thickness of coating and insulation, with face leg perforated for bonding to coating and back leg; designed to drain incidental moisture that gets into wall construction to the exterior at terminations of EIFS with drainage.

2.4 MIXING

- A. Comply with EIFS manufacturer's requirements for combining and mixing materials. Do not introduce admixtures, water, or other materials, except as recommended by EIFS manufacturer. Mix materials in clean containers. Use materials within time period specified by EIFS manufacturer or discard.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, areas, and conditions, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.
- B. Examine roof edges, wall framing, flashings, openings, substrates, and junctures at other construction for suitable conditions where EIFS will be installed.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.
 - 1. Begin coating application only after surfaces are dry.
- D. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 PREPARATION

- A. Protect contiguous work from moisture deterioration and soiling caused by application of EIFS. Provide temporary covering and other protection needed to prevent spattering of exterior finish coats on other work.
- B. Protect EIFS, substrates, and wall construction behind them from inclement weather during installation. Prevent penetration of moisture behind drainage plane of EIFS and deterioration of substrates.
- C. Prepare and clean substrates to comply with EIFS manufacturer's written instructions to obtain optimum bond between substrate and adhesive for insulation.

3.3 EIFS INSTALLATION, GENERAL

- A. Comply with ASTM C1397, ASTM E2511, and EIFS manufacturer's written instructions for installation of EIFS as applicable to each type of substrate indicated.

3.4 SUBSTRATE PROTECTION APPLICATION

- A. Air and Water-Resistive Barrier System: Apply over sheathing to provide an air and water-resistive barrier.
 - 1. Tape and seal joints, exposed edges, terminations, and inside and outside corners of sheathing unless otherwise indicated by EIFS manufacturer's written instructions.
- B. Flexible-Membrane Flashing: Install over water-resistive barrier coating, applied and lapped to shed water; seal at openings, penetrations, and terminations. Prime substrates with flashing primer if required and install flashing.

3.5 TRIM INSTALLATION

- A. Trim: Apply trim accessories as indicated, and as accepted by EIFS manufacturer. Coordinate with installation of insulation.
 - 1. Weep Screed/Track: Use at finished grade bottom termination edges of water-drainage EIFS unless otherwise indicated.

3.6 INSULATION INSTALLATION

- A. Board Insulation: Adhesively attach insulation to substrate in compliance with ASTM C1397 and the following:
 - 1. Apply adhesive to insulation by notched-trowel method, with notches oriented vertically to produce drainage channels that remain functional after the insulation is adhered to substrate.

2. Press and slide insulation into place. Apply pressure over entire surface of insulation to accomplish uniform contact, high initial grab, and overall level surface.
3. Allow adhered insulation to remain undisturbed for not less than 24 hours, before beginning rasping and sanding insulation or applying base coat and reinforcing mesh.
4. Apply insulation over substrates in courses with long edges of boards oriented horizontally.
5. Begin first course of insulation from a level base line and work upward.
6. Begin first course of insulation from screed/track and work upward.
7. Stagger vertical joints of insulation boards in successive courses to produce running bond pattern. Locate joints, so no piece of insulation is less than 12 inches wide or 6 inches high. Offset joints not less than 6 inches from corners of window and door openings and not less than 4 inches from aesthetic reveals.
 - a. Adhesive Attachment: Offset joints of insulation not less than 6 inches from horizontal and 4 inches from vertical joints in sheathing.
8. Interlock ends at internal and external corners.
9. Abut insulation tightly at joints within and between each course to produce flush, continuously even surfaces without gaps or raised edges between boards. If gaps greater than 1/16 inch occur, fill with insulation cut to fit gaps exactly; insert insulation without using adhesive or other material.
10. Cut insulation to fit openings, corners, and projections precisely and to produce edges and shapes complying with details indicated.
11. Rasp or sand flush entire surface of insulation to remove irregularities projecting more than 1/32 inch from surface of insulation and to remove yellowed areas due to sun exposure; do not create depressions deeper than 1/16 inch. Prevent airborne dispersal and immediately collect insulation raspings or sandings.
12. Interrupt insulation for expansion joints where indicated.
13. Form joints for sealant application by leaving gaps between adjoining insulation edges and between insulation edges and dissimilar adjoining surfaces. Make gaps wide enough to produce joint widths indicated after encapsulating joint substrates with base coat and reinforcing mesh.
14. Before installing insulation and before applying field-applied reinforcing mesh, fully wrap board edges. Cover edges of board and extend encapsulating mesh not less than 2-1/2 inches over front and back face unless otherwise indicated on Drawings.
15. Treat exposed edges of insulation as follows:
 - a. Except for edges forming substrates of sealant joints, encapsulate with base coat, reinforcing mesh, and finish coat.

- b. Encapsulate edges forming substrates of sealant joints within EIFS or between EIFS and other work with base coat and reinforcing mesh. Treat edges as recommended by EIFS manufacturer for proper sealant installation.
 - c. At edges trimmed by accessories, extend base coat, reinforcing mesh, and finish coat over face leg of accessories.
- 16. Coordinate installation of flashing and insulation to produce wall assembly that does not allow water to penetrate behind flashing and water-resistive barrier coating.
- B. Expansion Joints: Install at locations indicated, where required by EIFS manufacturer, and as follows:
 - 1. At expansion joints in substrates behind EIFS.
 - 2. Where EIFS adjoin dissimilar substrates, materials, and construction, including other EIFS.
 - 3. Where wall height or building shape changes.
 - 4. Where EIFS manufacturer requires joints in long continuous elevations.

3.7 BASE-COAT APPLICATION

- A. Water-Resistant Base Coat: Apply full-thickness coverage to exposed insulation and to exposed surfaces of window sills and to other surfaces indicated on Drawings.
- B. Base Coat: Apply full coverage to exposed insulation with not less than 1/16-inch dry-coat thickness.
- C. Reinforcing Mesh: Embed reinforcing mesh in wet base coat to produce wrinkle-free installation with mesh continuous at corners, overlapped not less than 2-1/2 inches or otherwise treated at joints to comply with ASTM C1397. Do not lap reinforcing mesh within 8 inches of corners. Completely embed mesh, applying additional base-coat material if necessary, so reinforcing-mesh color and pattern are invisible.
- D. Double-Layer Reinforcing-Mesh Application: Where indicated or required, apply second base coat and second layer of reinforcing mesh, overlapped not less than 2-1/2 inches or otherwise treated at joints to comply with ASTM C1397 in same manner as first application. Do not apply until first base coat has cured.
- E. Additional Reinforcing Mesh: Apply detail-reinforcing mesh around openings, extending 4 inches beyond perimeter. Apply additional 9-by-12-inch detail-reinforcing mesh diagonally at corners of openings (re-entrant corners). Apply 8-inch-wide, detail-reinforcing mesh at both inside and outside corners unless base layer of mesh is lapped not less than 4 inches on each side of corners.
 - 1. Embed detail-reinforcing mesh in base coat before applying first layer of reinforcing mesh.
- F. Double Base-Coat Application: Where indicated, apply second base coat in same manner as first application, except without reinforcing mesh. Do not apply until first base coat has cured, or as recommended by manufacturer.

3.8 FINISH-COAT APPLICATION

- A. Primer: Apply over dry base coat.
- B. Finish Coat: Apply full-thickness coverage over dry primed base coat, maintaining a wet edge at all times for uniform appearance, to produce a uniform finish of color and texture matching approved sample and free of cold joints, shadow lines, and texture variations.
- C. Sealer Coat: Apply over dry finish coat, in number of coats and thickness required by EIFS manufacturer.

3.9 FIELD QUALITY CONTROL

- A. Special Inspections: Owner will engage a qualified special inspector to perform the following special inspections:
 - 1. Air and water-resistive barrier systems applied over sheathing.
- B. Testing Agency: Owner will engage a qualified testing agency to perform tests and inspections.
- C. EIFS Tests and Inspections: According to ASTM E2359/E2359M.
- D. EIFS will be considered defective if it does not pass tests and inspections.

3.10 CLEANING AND PROTECTION

- A. Remove temporary covering and protection of other work. Promptly remove coating materials from window and door frames and other surfaces outside areas indicated to receive EIFS coatings.

END OF SECTION 07 24 19

SECTION 07 27 26 - FLUID-APPLIED MEMBRANE AIR BARRIERS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Vapor-retarding, fluid-applied air barriers.

1.3 DEFINITIONS

- A. Air-Barrier Material: A primary element that provides a continuous barrier to the movement of air.
- B. Air-Barrier Accessory: A transitional component of the air barrier that provides continuity.
- C. Air-Barrier Assembly: The collection of air-barrier materials and accessories applied to an opaque wall, including joints and junctions to abutting construction, to control air movement through the wall.

1.4 PREINSTALLATION MEETINGS

- A. Preinstallation Conference: Conduct conference at Project site.
 - 1. Review air-barrier requirements and installation, special details, mockups, air-leakage and bond testing, air-barrier protection, and work scheduling that covers air barriers.

1.5 SUBMITTALS, GENERAL

- A. General: Submit all action submittals and informational submittals required by this Section concurrently.

1.6 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated. Include manufacturer's written instructions for evaluating, preparing, and treating each substrate; technical data; dry film thickness; and tested physical and performance properties of products.
 - 1. Accessory materials.

2. Stainless-steel sheet.
3. High build, vapor retarding air barrier.

B. Shop Drawings: For air-barrier assemblies.

1. Show locations and extent of air-barrier materials, accessories, and assemblies specific to Project conditions.
2. Include details for substrate joints and cracks, counterflashing strips, penetrations, inside and outside corners, terminations, and tie-ins with adjoining construction.
3. Include details of interfaces with other materials that form part of air barrier.

1.7 INFORMATIONAL SUBMITTALS

- A. Product Certificates, Compatibility: From air-barrier manufacturer, certifying compatibility of air barriers and accessory materials with Project materials that connect to or that come in contact with the barrier.
- B. Product Certificates, Fire Propagation Characteristics: From a qualified testing agency, documenting that air barrier system as a component of the indicated wall assembly has been tested and passed NFPA 285.

1.8 QUALITY ASSURANCE

- A. Installer Qualifications: An entity that employs installers and supervisors who are trained and approved by manufacturer.

1.9 DELIVERY, STORAGE, AND HANDLING

- A. Remove and replace liquid materials that cannot be applied within their stated shelf life.
- B. Protect stored materials from direct sunlight.

1.10 FIELD CONDITIONS

- A. Environmental Limitations: Apply air barrier within the range of ambient and substrate temperatures recommended in writing by air-barrier manufacturer.
 1. Protect substrates from environmental conditions that affect air-barrier performance.
 2. Do not apply air barrier to a damp or wet substrate or during snow, rain, fog, or mist.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Source Limitations: Obtain primary air-barrier materials and air-barrier accessories from single source from single manufacturer.
- B. VOC Content: 100 g/L or less.

2.2 PERFORMANCE REQUIREMENTS

- A. Air-Barrier Performance: Air-barrier assembly and seals with adjacent construction shall be capable of performing as a continuous air barrier and as a liquid-water drainage plane flashed to discharge to the exterior incidental condensation or water penetration. Air-barrier assemblies shall be capable of accommodating substrate movement and of sealing substrate expansion and control joints, construction material changes, penetrations[, **tie-ins to installed waterproofing**], and transitions at perimeter conditions without deterioration and air leakage exceeding specified limits.
- B. Air-Barrier Assembly Air Leakage: Maximum 0.04 cfm/sq. ft. of surface area at 1.57 lbf/sq. ft., when tested according to ASTM E2357.

2.3 HIGH-BUILD AIR BARRIERS, VAPOR RETARDING

- A. High-Build, Vapor-Retarding Air Barrier: Synthetic polymer membrane with an installed dry film thickness, according to manufacturer's written instructions, of 40 mils or thicker over smooth, void-free substrates.
 - 1. Products: Subject to compliance with requirements, available products that may be incorporated in the Work, include, but are not limited to:
 - a. Carlisle Coatings & Waterproofing; Fire Resist Barritech NP.
 - b. Henry Company; Air-Bloc 16MR.
 - c. Meadows, W. R., Inc.; Air-Shield LSR.
 - d. Tremco, Inc., Commercial Sealants and Waterproofing Division, an RPM company; ExoAir 130.
 - 2. Physical and Performance Properties:
 - a. Air Permeance: Maximum 0.004 cfm/sq. ft. of surface area at 1.57-lbf/sq. ft. pressure difference; ASTM E2178.
 - b. Vapor Permeance: Maximum 0.1 perm; ASTM E96/E96M, Desiccant Method.
 - c. Ultimate Elongation: Minimum 270 percent; ASTM D412, Die C.
 - d. Adhesion to Substrate: Minimum 16 lbf/sq. in. when tested according to ASTM D4541.
 - e. Fire Propagation Characteristics: Passes NFPA 285 testing as part of an approved assembly.

2.4 ACCESSORY MATERIALS

- A. Requirement: Provide primers, transition strips, termination strips, joint reinforcing fabric and strips, joint sealants, counterflashing strips, flashing sheets and metal termination bars, termination mastic, substrate patching materials, adhesives, tapes, foam sealants, lap sealants, and other accessory materials that are recommended in writing by air-barrier manufacturer to produce a complete air-barrier assembly and that are compatible with primary air-barrier material and adjacent construction to which they may seal.

- B. Primer: Liquid waterborne primer recommended for substrate by air-barrier material manufacturer.
- C. Stainless-Steel Sheet: ASTM A240/A240M, Type 304, 0.0187 inch thick, and Series 300 stainless-steel fasteners.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, areas, and conditions, with Installer present, for compliance with requirements and other conditions affecting performance of the Work.
 - 1. Verify that substrates are sound and free of oil, grease, dirt, excess mortar, or other contaminants.
 - 2. Verify that substrates have cured and aged for minimum time recommended in writing by air-barrier manufacturer.
 - 3. Verify that substrates are visibly dry and free of moisture. Test concrete substrates for capillary moisture by plastic sheet method according to ASTM D4263.
 - 4. Verify that masonry joints are flush and completely filled with mortar.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.
- C. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 SURFACE PREPARATION

- A. Clean, prepare, treat, fill, and seal substrate and joints and cracks in substrate according to manufacturer's written instructions and details. Provide clean, dust-free, and dry substrate for air-barrier application.
- B. Mask off adjoining surfaces not covered by air barrier to prevent spillage and overspray affecting other construction.
- C. Remove grease, oil, bitumen, form-release agents, paints, curing compounds, and other penetrating contaminants or film-forming coatings from concrete.
- D. Remove fins, ridges, mortar, and other projections and fill honeycomb, aggregate pockets, holes, and other voids in concrete with substrate-patching material.
- E. Remove excess mortar from masonry ties, shelf angles, and other obstructions.
- F. At changes in substrate plane, apply sealant or termination mastic beads at sharp corners and edges to form a smooth transition from one plane to another.
- G. Cover gaps in substrate plane and form a smooth transition from one substrate plane to another with stainless-steel sheet mechanically fastened to structural framing to provide continuous support for air barrier.

- H. Bridge isolation joints expansion joints and discontinuous wall-to-wall, deck-to-wall, and deck-to-deck joints with air-barrier accessory material that accommodates joint movement according to manufacturer's written instructions and details.

3.3 ACCESSORIES INSTALLATION

- A. Install accessory materials according to air-barrier manufacturer's written instructions and details to form a seal with adjacent construction and ensure continuity of air and water barrier.
 - 1. Coordinate the installation of air barrier with installation of roofing membrane and base flashing to ensure continuity of air barrier with roofing membrane.
 - 2. Install transition strip on roofing membrane or base flashing so that a minimum of 3 inches of coverage is achieved over each substrate.
 - 3. Unless manufacturer recommends in writing against priming, apply primer to substrates at required rate and allow it to dry.
 - 4. Apply primer to substrates at required rate and allow it to dry. Limit priming to areas that will be covered by air-barrier material on same day. Reprime areas exposed for more than 24 hours.
- B. Connect and seal exterior wall air-barrier material continuously to roofing-membrane air barrier, concrete below-grade structures, floor-to-floor construction, exterior glazing and window systems, glazed curtain-wall systems, storefront systems, exterior louvers, exterior door framing, and other construction used in exterior wall openings, using accessory materials.
- C. At end of each working day, seal top edge of strips and transition strips to substrate with termination mastic.
- D. Apply joint sealants forming part of air-barrier assembly within manufacturer's recommended application temperature ranges. Consult manufacturer when sealant cannot be applied within these temperature ranges.
- E. Wall Openings: Prime concealed, perimeter frame surfaces of windows, curtain walls, storefronts, and doors. Apply transition strip so that a minimum of 3 inches of coverage is achieved over each substrate. Maintain 3 inches of full contact over firm bearing to perimeter frames, with not less than 1 inch of full contact.
 - 1. Transition Strip: Roll firmly to enhance adhesion.
- F. Fill gaps in perimeter frame surfaces of windows, curtain walls, storefronts, and doors, and miscellaneous penetrations of air-barrier material with foam sealant.
- G. Seal strips and transition strips around masonry reinforcing or ties and penetrations with termination mastic.
- H. Seal top of through-wall flashings to air barrier with an additional 6-inch-wide, transition strip.
- I. Seal exposed edges of strips at seams, cuts, penetrations, and terminations not concealed by metal counterflashings or ending in reglets with termination mastic.

- J. Correct punctures, voids, and deficient lapped seams in strips and transition strips. Slit and flatten fishmouths and blisters. Patch with transition strips extending 6 inches beyond corrected areas in strip direction.

3.4 PRIMARY AIR-BARRIER MATERIAL INSTALLATION

- A. Apply air-barrier material to form a seal with strips and transition strips and to achieve a continuous air barrier according to air-barrier manufacturer's written instructions and details. Apply air-barrier material within manufacturer's recommended application temperature ranges.
 - 1. Unless manufacturer recommends in writing against priming, apply primer to substrates at required rate and allow it to dry.
 - 2. Limit priming to areas that will be covered by air-barrier material on same day. Reprime areas exposed for more than 24 hours.
 - 3. Where multiple prime coats are needed to achieve required bond, allow adequate drying time between coats.
- B. High-Build Air Barriers: Apply continuous unbroken air-barrier material to substrates according to the following thickness. Apply air-barrier material in full contact around protrusions such as masonry ties.
 - 1. Vapor-Retarding, High-Build Air Barrier: Total dry film thickness not less than 40 mils.
- C. Do not cover air barrier until it has been tested and inspected by testing agency.
- D. Correct deficiencies in or remove air barrier that does not comply with requirements; correct substrates and reapply air-barrier components.

3.5 FIELD QUALITY CONTROL

- A. Testing Agency: Owner may engage a qualified testing agency to perform tests and inspections.
- B. Inspections: Air-barrier materials, accessories, and installation are subject to inspection for compliance with requirements. Inspections may include the following:
 - 1. Continuity of air-barrier system has been achieved throughout the building envelope with no gaps or holes.
 - 2. Air-barrier dry film thickness.
 - 3. Continuous structural support of air-barrier system has been provided.
 - 4. Masonry and concrete surfaces are smooth, clean, and free of cavities, protrusions, and mortar droppings.
 - 5. Site conditions for application temperature and dryness of substrates have been maintained.
 - 6. Maximum exposure time of materials to UV deterioration has not been exceeded.

7. Surfaces have been primed, if applicable.
 8. Laps in strips and transition strips have complied with minimum requirements and have been shingled in the correct direction (or mastic has been applied on exposed edges), with no fishmouths.
 9. Termination mastic has been applied on cut edges.
 10. Strips and transition strips have been firmly adhered to substrate.
 11. Compatible materials have been used.
 12. Transitions at changes in direction and structural support at gaps have been provided.
 13. Connections between assemblies (air-barrier and sealants) have complied with requirements for cleanliness, surface preparation and priming, structural support, integrity, and continuity of seal.
 14. All penetrations have been sealed.
- C. Tests: As determined by testing agency from among the following tests:
1. Air-Leakage-Volume Testing: Air-barrier assemblies will be tested for air-leakage rate according to ASTM E783.
 2. Adhesion Testing: Air-barrier assemblies will be tested for required adhesion to substrate according to ASTM D4541 for each 600 sq. ft. of installed air barrier or part thereof.
- D. Air barriers will be considered defective if they do not pass tests and inspections.
1. Apply additional air-barrier material, according to manufacturer's written instructions, where inspection results indicate insufficient thickness.
 2. Remove and replace deficient air-barrier components for retesting as specified above.
- E. Correct damage to air barriers caused by testing; follow manufacturer's written instructions.
- F. Prepare test and inspection reports.

3.6 CLEANING AND PROTECTION

- A. Protect air-barrier system from damage during application and remainder of construction period, according to manufacturer's written instructions.
1. Protect air barrier from exposure to UV light and harmful weather exposure as recommended in writing by manufacturer. If exposed to these conditions for longer than recommended, remove and replace air barrier or install additional, full-thickness, air-barrier application after correcting and preparing the overexposed materials according to air-barrier manufacturer's written instructions.
 2. Protect air barrier from contact with incompatible materials and sealants not approved by air-barrier manufacturer.

- B. Clean spills, stains, and soiling from construction that would be exposed in the completed work using cleaning agents and procedures recommended in writing by manufacturer of affected construction.
- C. Remove masking materials after installation.

END OF SECTION 07 27 26

SECTION 07 42 11 – RAIN SCREEN SECUREMENT SYSTEM

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Rain Screen Securement System.
 - 2. Thermal insulation.

1.3 PREINSTALLATION MEETINGS

- A. Preinstallation Conference: Conduct conference at Project site.
 - 1. Meet with Owner, Architect, ci cladding support system Installer, ci cladding support system manufacturer's representative, and installers whose work interfaces with or affects ci cladding support system.
 - 2. Review and finalize construction schedule and verify availability of materials, Installer's personnel, equipment, and facilities needed to make progress.
 - 3. Review methods and procedures related ci cladding support system installation, including manufacturer's written instructions.
 - 4. Examine support conditions for compliance with requirements, including alignment between and attachment to structural support system.
 - 5. Review flashings, wall cladding details, wall penetrations, openings, and condition of other construction that affect ci cladding support system.
 - 6. Review temporary protection requirements for during and after installation.

1.4 SUBMITTALS, GENERAL

- A. General: Submit all action submittals and informational submittals required by this Section and by Division 07 Section "Exterior Solid Phenolic Rain Screen Panels" and "Thermal Insulation" concurrently.

1.5 ACTION SUBMITTALS

- A. Product Data: For each type of product. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes.
 - 1. Rain Screen Securement System.
 - 2. Accessories.
- B. Shop Drawings:
 - 1. Include layout, spacings, sizes, thicknesses, and types of cladding support systems; and fastening and anchorage details, including mechanical fasteners.
 - 2. Indicate accessories, connection and special details, and attachment to adjoining work.
 - 3. Indicate coordination with substrate, thermal insulation, cladding sub-framing, and wall cladding.
- C. Delegated-Design Submittal: For rain screen support system indicated to comply with performance requirements and design criteria, including analysis data signed and sealed by the qualified professional engineer responsible for their preparation.
- D. Sample Warranty: For special warranty.

1.6 INFORMATIONAL SUBMITTALS

- A. Product Test Reports: For each product, for tests performed by a qualified testing agency.

1.7 CLOSEOUT SUBMITTALS

- A. Executed Warranty: For special warranty.

1.8 QUALITY ASSURANCE

- A. Installer Qualifications: An entity that employs installers and supervisors who are trained and approved by manufacturer.
- B. Identification: Identify product R-values with manufacturer's markings, or certification, in accordance with requirements of Code in effect for the Project.
- C. Design furring system to withstand:
 - 1. Movement caused by an ambient temperature range of 120 degrees F and a surface temperature range of 160 degrees F
 - 2. Live and dead loads in accordance with Building Code.

1.9 DELIVERY, STORAGE, AND HANDLING

- A. Deliver components so as not to be damaged or deformed. Package components for protection during transportation and handling.

- B. Unload, store, and erect components in a manner to prevent bending, warping, twisting, and surface damage.
- C. Protect materials from physical damage and from deterioration due to moisture, soiling, and other sources.
 - 1. Store insulation inside and in a dry location.
- D. Comply with manufacturer's written instructions for handling, storing, and protecting during installation.

1.10 FIELD CONDITIONS

- A. Weather Limitations: Proceed with installation only when existing and forecasted weather conditions permit assembly of ci cladding support system to be performed according to manufacturers' written instructions and warranty requirements.

1.11 COORDINATION

- A. Coordination: Coordinate construction of ci cladding support system and cladding over substrate indicated for proper drainage, flashing, trim, back-up support, and other related Work.

1.12 WARRANTY

- A. Special Warranty: Manufacturer agrees to correct or replace components of rain screen securement system that fail in materials within specified warranty period.
 - 1. Warranty Period: 10 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. System Thermal Design: Ensure installed ci cladding support system, insulation, sub-framing, and cladding attachment are designed to limit thermal bridging of fasteners or framing.
 - 1. System thermal design shall meet or exceed thermal design requirements in compliance with Code in effect for Project.
- B. Structural Performance: Provide rain screen securement systems capable of withstanding the effects of the following loads:
 - 1. Wind Loads: As indicated on Drawings.
 - 2. Other Design Loads: As indicated on Drawings.
 - 3. Deflection Limits: For wind loads, no greater than 1/180 of the span.

- C. Thermal Movements: Allow for thermal movements from ambient and surface temperature changes by preventing buckling, opening of joints, overstressing of components, failure of joint sealants, failure of connections, and other detrimental effects.
- D. Fire-Test-Response Characteristics: Provide ci cladding support system with fire-test results indicated as determined by test standard indicated and applied by UL or other testing and inspection agency acceptable to authorities having jurisdiction.
 - 1. Surface Burning Characteristics: Provide components with flame-spread index of 25 or less and smoke-developed index of 450 or less, per ASTM E84.
 - 2. Fire Propagation Characteristics: Passes NFPA 285 testing as part of an approved assembly.

2.2 RAIN SCREEN SECUREMENT SYSTEM, GENERAL

- A. General: Provide support system in conjunction with thermal insulation over substrate, for use with exterior wall cladding in a rainscreen configuration.
 - 1. Substrate: Exterior sheathing over metal stud framing, with fluid-applied membrane air barrier.
 - 2. Thermal Insulation: Mineral-wool board, type as specified in Division 07 section "Thermal Insulation".
 - 3. Drainage Cavity: Between thermal insulation and exterior wall cladding.
 - 4. Exterior Wall Cladding: Exterior Solid Phenolic Rain Screen Panels, as specified in Division 07 Section "Exterior Solid Phenolic Rain Screen Panels."
- B. Rain Screen Securement System Type: Provide one of the following:
 - 1. Composite clip system.

2.3 COMPOSITE CLIP SYSTEM

- A. Composite Clip System: Thermal spacer clip system of pultruded glass fiber and thermoset polyester resin, with continuous thermal insulation, for mounting of sub-framing provided by wall cladding manufacturer.
 - 1. Basis-of-Design Product: Subject to compliance with requirements, provide Knight Wall Systems; MFI System Cladding Support with use of THERMABRACKET S-Series or comparable product.
 - 2. Depth of Clips: Varies, reference drawings KA353, KA700, KA701.
 - 3. Thermal Insulation: Mineral-wool board, black fiberglass facing.
 - a. Depth of Thermal Insulation: varies, reference drawings
 - 1) See division 07 section "Thermal Insulation".

4. Cladding Sub-framing: Basis-of-Design: provide Knight Wall Systems PANELRAIL.

- a. Orientation of Cladding Sub-framing: Vertical.
- b. Depth of rail system: Varies, reference drawings.

2.4 ACCESSORIES

- A. General: Provide accessories necessary for complete rain screen panel securement system.
- B. Fasteners: Corrosion-resistant, self-tapping and self-drilling screws, bolts, nuts, and other fasteners of type, material, size, corrosion resistance, holding power, and other properties as recommended by ci cladding support system manufacturer for Project application and performance requirements.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, areas, and conditions, with Installer present, for compliance with requirements for installation tolerances, substrates, rain screen securement system conditions, and other conditions affecting performance of the Work.
 - 1. Examine structural wall framing to ensure that angles, channels, studs, and other structural support members have been installed within alignment tolerances required by ci cladding support system manufacturer.
 - 2. Examine rough-in for components and systems penetrating system to coordinate actual locations of penetrations relative to rain screen securement system locations prior to installation.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.
- C. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 PREPARATION

- A. Clean surfaces thoroughly prior to installation.
- B. Prepare surfaces using methods recommended by rain screen securement system manufacturer.

3.3 INSTALLATION

- A. Comply with manufacturer's written installation instructions.
- B. Install ci cladding support system in compliance with system orientation, sizes, and locations as indicated on Drawings.
- C. Install system to fill-in exterior spaces without gaps or voids, and do not compress insulation.

- D. Trim insulation neatly to fit spaces, secure to substrate, and insulate miscellaneous gaps and voids.
- E. Ensure rainscreen cavity remains clear and free from air flow and drainage obstructions.

3.4 ERECTION TOLERANCES

- A. Erection Tolerances: Install rain screen securement system to comply with the following maximum tolerances:
 - 1. Maximum Tolerances: 1/4 inch in 20 feet, non-cumulative, level, plumb, and on location lines as indicated.

3.5 PROTECTION

- A. Protect installed products from damage due to harmful weather exposures, physical abuse, and other causes. Provide temporary coverings or enclosures where insulation is subject to abuse and cannot be concealed and protected by permanent construction immediately after installation.

END OF SECTION 07 42 11

SECTION 07 42 33 - EXTERIOR SOLID PHENOLIC RAIN SCREEN PANELS**PART 1 - GENERAL****1.1 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes phenolic composite wall panels and attachment assembly.

1.3 PREINSTALLATION MEETINGS

- A. Preinstallation Conference: Conduct conference at Project site.
 - 1. Meet with Owner, Architect, composite panel Installer, composite panel manufacturer's representative, and installers whose work interfaces with or affects composite panels.
 - 2. Review methods and procedures related to composite panel installation, including manufacturer's written instructions.
 - 3. Examine support conditions for compliance with requirements.
 - 4. Review special details, wall penetrations, openings, and condition of other construction that affect composite panels.
 - 5. Review temporary protection requirements for composite panel assembly during and after installation.
 - 6. Review procedures for correction of panels damaged after installation.

1.4 SUBMITTALS, GENERAL

- A. General: Submit all action submittals (except Samples for Verification) and informational submittals required by this Section and by Division 07 Section "Continuous Insulation (CI) Cladding Support Systems" concurrently.

1.5 ACTION SUBMITTALS

- A. Product Data: For each type of product. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes for each type of panel and accessory.
 - 1. Composite wall panels.
 - 2. Attachment assembly.
 - 3. Miscellaneous accessories and materials.

B. Shop Drawings:

1. Include fabrication and installation layouts of composite panels; details of edge conditions, joints, panel profiles, corners, anchorages, attachment assembly, accessories, vent screens and special details.
2. Accessories: Include details of anchorage, at a scale of not less than 1-1/2 inches per 12 inches.
3. Indicate coordination with substrate, thermal insulation, and continuous insulation (CI) cladding system.

C. Samples for Initial Selection: For each type of exposed finish required, provide samples of size and type indicated below for approval:

1. Rainscreen wall panels: Minimum of 4"x4" or manufacturer standard sample size per color specified.
2. Substructure: 12" long including fasteners and other accessories. Submit samples demonstrating materials, colors, and fastener attachment type.
3. For exposed fastening systems submit color matched exterior rivets for each panel color specified.

D. Delegated-Design Submittal: For Solid Phenolic wall panel system indicated to comply with performance requirements and design criteria, including analysis data signed and sealed by the qualified professional engineer responsible for their preparation.

1. Delegated design work must be performed by a NYS Licensed design professional as required by NYSED MPS S13c.

E. Sample Warranties: For special warranties.

1.6 INFORMATIONAL SUBMITTALS

- A. Product Test Reports: For each product, tests performed by a qualified testing agency.

1.7 CLOSEOUT SUBMITTALS

- A. Maintenance Data: For composite panels to include in maintenance manuals.
B. Warranties: Executed special warranties.

1.8 QUALITY ASSURANCE

- A. Installer Qualifications: An entity that employs installers and supervisors who are trained and approved by manufacturer.

- B. Source Limitations: Obtain solid phenolic rainscreen wall panels and all auxillary materials from a single source Manufacturer who has a minimum of 25 years of experience in the manufacturing of exterior high pressure phenolic rainscreen panels or an accessory manufacturer who is certified by the solid phenolic rainscreen panel manufacturer. Panels are to be manufactured by a Manufacturer with ISO9001 and ISO14001 certification of standards.

1.9 DELIVERY, STORAGE, AND HANDLING

- A. Deliver components, composite panels, and other manufactured items so as not to be damaged or deformed. Package composite panels for protection during transportation and handling.
- B. Unload, store, and erect composite panels in a manner to prevent bending, warping, twisting, and surface damage.
- C. Cover panels with suitable weathertight and ventilated covering. Store composite panels to ensure dryness, with positive slope for drainage of water. Do not store composite panels in contact with other materials that might cause staining, denting, or other surface damage.

1.10 FIELD CONDITIONS

- A. Weather Limitations: Proceed with installation only when existing and forecasted weather conditions permit assembly of composite panels to be performed according to manufacturers' written instructions and warranty requirements.

1.11 COORDINATION

- A. Coordinate composite panel installation with ci cladding support system and other adjoining work.

1.12 WARRANTY

- A. Special Warranty: Manufacturer's standard form in which manufacturer agrees to repair or replace components of composite panel systems that fail in materials or workmanship including color fastness conforming to EN438-2-29, that a min. value of 4 on the five-part grey scale conforming to EN2015-A02 is to be tolerated. Warranty to include labor for removal, replacement and reinstallation within specified warranty period
 - 1. Failures include, but are not limited to, the following:
 - a. Structural failures including rupturing, cracking, or puncturing.
 - b. Deterioration of materials beyond normal weathering.
 - 2. Warranty Period: 10 years from date of Substantial Completion.
 - 3. Pro-rated warranties will not be accepted.
 - 4. Material Only warranties will not be accepted.

- B. Special Project Warranty: Submit exterior phenolic panel systems Installer's warranty, covering the Work of this Section, including all components of composite panel system such as composite panels, support system products and accessories, against faulty or defective materials and workmanship, and to repair or replace work, without monetary limitation, for the following warranty period:
 - 1. Warranty Period: 2 years from Date of Substantial Completion.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Structural Performance: Provide composite panel systems capable of withstanding the effects of the following loads:
 - 1. Wind Loads: As indicated on Drawings.
 - 2. Other Design Loads: As indicated on Drawings.
 - 3. Deflection Limits: For wind loads, no greater than 1/180 of the span.
- B. Thermal Movements: Allow for thermal movements from ambient and surface temperature changes by preventing buckling, opening of joints, overstressing of components, failure of connections, and other detrimental effects.
- C. Surface Burning Characteristics: Provide components with flame-spread index of 25 or less and smoke-developed index of 450 or less, per ASTM E84.
- D. Fire-Test-Response Characteristics:
 - 1. Burning extent of 1 inch or less when tested according to ASTM D635 on sheets in thicknesses indicated for the Work.
 - 2. Self-ignition temperature of 650 deg F or higher when tested according to ASTM D1929 on sheets in thicknesses indicated for the Work.
- E. Fire Propagation Characteristics: Composite wall panel system passes NFPA 285 testing.

2.2 EXTERIOR SOLID PHENOLIC RAIN SCREEN PANELS

- A. Exterior Solid Phenolic Rain Screen Panel Systems: Provide factory-formed and -assembled, phenolic wall panels; formed into profile for installation method indicated. Include attachment assembly components, and accessories required for concealed anchorage rainscreen system.
 - 1. Basis-of-Design Product: Subject to compliance with requirements, provide FunderMax Max Compact Exterior F Quality Large Format high pressure phenolic rainscreen wall panels manufactured by FunderMax GmbH, FunderMax North America on PanelRail attachment assembly by Knight Wall Systems, or comparable product.

B. Phenolic Composite Wall Panels: Formed of high-pressure compact laminates.

1. Panel Joint tolerance:

- a. Joint width 5/16" with a +/- 1/8" tolerance
- b. Joints should be visibly plumb, true, and straight as viewed from a minimum distance of 10'.

2. Type: P1

- a. Panel Thickness: 8 mm.
- b. Rainscreen Panel Surface: NT
- c. Core: Brown
- d. Fastener Type: Exposed Color Matched rivets shall be SFS AP16
- e. Colors: As selected by Architect from manufacturer's full range of solid colors.

3. Type: P2

- a. Basis of design: Fundermax Exterior Modulo Plank Phenolic Rain Screen Panels
- b. Panel Thickness: 8mm
- c. Rainscreen Panel Surface: NT
- d. Core: Brown
- e. Fastener Type: Concealed, Modulo system
- f. Colors: As selected by Architect from manufacturer's full range, including wood grains and solid colors.

C. Attachment Assembly: PanelRail system by Knight Wall Systems

1. Secondary Vertical Rails:

- a. Profile: PanelRail, square hat channel with stiffening lips, with weep drains and attachment holes
 - b. Thickness: minimum 18 gauge.
 - c. Web perforations: 3/4-inch diameter holes at maximum 4-inches on center.
 - d. Fastening face width: 2 inches
 - e. Depth: Varies, see architectural drawings
 - f. Finish: Black
- 1) Rainscreen substructure Color: Concealed items to be mill finish, exposed items such as rails to be painted, powder coated, or anodized black

2.3 MISCELLANEOUS MATERIALS

- A. Panel Accessories: Provide components required for a complete panel system including trim, corner units, clips, gaskets, fillers, closure strips, and similar items. Match material and finish of composite panels unless otherwise indicated.
- B. Fasteners: Self-tapping screws and masonry anchors designed to withstand design loads.

2.4 FABRICATION

- A. General: Fabricate composite panels and accessories at the factory, by manufacturer's standard procedures and processes, as necessary to fulfill indicated performance requirements demonstrated by laboratory testing. Comply with indicated profiles and with dimensional and structural requirements.

2.5 FINISHES

- A. Protect finishes on exposed surfaces from damage by applying a strippable, temporary protective covering before shipping.
- B. Appearance of Finished Work: Variations in appearance of abutting or adjacent pieces are acceptable if they are within one-half of the range of approved Samples. Noticeable variations in same piece are not acceptable. Variations in appearance of other components are acceptable if they are within the range of approved Samples and are assembled or installed to minimize contrast.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, areas, and conditions, with Installer present, for compliance with requirements for installation tolerances, composite panel supports, and other conditions affecting performance of the Work.
 - 1. Examine wall framing to verify that girts, angles, channels, studs, and other structural panel support members and anchorage have been installed within alignment tolerances required by composite wall panel manufacturer.
 - 2. Examine wall sheathing to verify that sheathing joints are supported by framing or blocking and that installation is within flatness tolerances required by composite wall panel manufacturer.
 - 3. Examine masonry wall substrate to verify that surface is secure and within flatness tolerances required by composite wall panel manufacturer.
 - a. Verify that air- or water-resistive barriers have been installed over sheathing or wall substrate to prevent air infiltration or water penetration.

- B. Examine roughing-in for components and assemblies penetrating composite panels to verify actual locations of penetrations relative to seam locations of composite panels before installation.
 - 1. Electrical devices.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.
- D. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 PHENOLIC PANEL INSTALLATION

- A. General: Install phenolic panels according to manufacturer's written instructions in orientation, sizes, and locations indicated on Drawings. Install panels perpendicular to supports unless otherwise indicated. Anchor composite panels and other components of the Work securely in place, with provisions for thermal and structural movement.
 - 1. Shim or otherwise plumb substrates receiving composite panels.
 - 2. Locate and space fastenings in uniform vertical and horizontal alignment.
 - 3. Provide for routed letter signage and backup as indicated on Drawings.
- B. Metal Protection: Where dissimilar metals contact each other or corrosive substrates, protect against galvanic action as recommended in writing by composite panel manufacturer.
- C. Attachment Assembly, General: Install attachment assembly required to support composite wall panels and to provide a complete wall system.
- D. Rainscreen-Principle Installation: Install using manufacturer's standard assembly with vertical channel that provides support and secondary drainage assembly, draining at base of wall. Install horizontal rails to support panel brackets. Leave horizontal and vertical joints with open reveal.
 - 1. Install wall panels to allow individual panels to be installed and removed without disturbing adjacent panels.
 - 2. Install panels with joint spacing of 3/8" unless indicated otherwise by manufacturer.
- E. Accessory Installation: Install accessories with positive anchorage to building and weathertight mounting, and provide for thermal expansion.
 - 1. Install components required for a complete composite panel assembly including trim, corners, fillers, vent screens and similar items. Provide types indicated by composite panel manufacturer; or, if not indicated, provide types recommended in writing by composite panel manufacturer.

3.3 ERECTION TOLERANCES

- A. Installation Tolerances: Shim and align composite wall panel units within installed tolerance of 1/4 inch in 20 feet, non-accumulative, on level, plumb, and location lines as indicated, and within 1/8-inch offset of adjoining faces and of alignment of matching profiles.

3.4 CLEANING AND PROTECTION

- A. Remove temporary protective coverings and strippable films, if any, as composite panels are installed, unless otherwise indicated in manufacturer's written installation instructions. On completion of composite panel installation, clean finished surfaces as recommended by composite panel manufacturer. Maintain in a clean condition during construction.
- B. Replace composite panels that have been damaged or have deteriorated beyond successful restoration by finish touchup or similar minor repair procedures.

END OF SECTION 07 42 43

SECTION 07 53 23 - EPDM ROOFING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Adhered ethylene-propylene-diene-terpolymer (EPDM) roofing system.
 - 2. Roof insulation.
 - 3. Cover board.
 - 4. Walkway pads.

1.3 DEFINITIONS

- A. Roofing Terminology: Definitions in ASTM D1079 and glossary of NRCA's "The NRCA Roofing Manual: Membrane Roof Systems" apply to work of this Section.

1.4 PREINSTALLATION MEETINGS

- A. Preinstallation Roofing Conference: Conduct conference at Project site.
 - 1. Meet with Owner, Architect, Construction Manager, testing and inspecting agency representative, roofing Installer, roofing Installer's superintendent, roofing system manufacturer's technical representative, deck Installer, and installers whose work interfaces with or affects roofing, including installers of roof accessories and roof-mounted equipment.
 - 2. Review methods and procedures related to roofing installation, including manufacturer's written instructions.
 - 3. Review and finalize construction schedule, and verify availability of materials, Installer's personnel, equipment, and facilities needed to make progress.
 - 4. Examine deck substrate conditions and finishes, including flatness and fastening.
 - 5. Review structural loading limitations of roof deck during and after roofing.
 - 6. Review base flashings, special roofing details, roof drainage, roof penetrations, equipment curbs, and condition of other construction that affects roofing system.

7. Review temporary protection requirements for roofing system during and after installation.
8. Review building occupancy, safety, HVAC and equipment shut-downs, noise levels and other items that will affect the building occupants and those on or near the site.
9. Review roof observation and repair procedures after roofing installation.

1.5 SUBMITTALS, GENERAL

- A. General: Submit all action submittals and informational submittals (except field quality-control reports) required by this Section concurrently.

1.6 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated.

1. EPDM sheet.
2. Sheet flashing.
3. Bonding adhesive.
4. Adhesive/primer.
5. Seaming material.
6. Lap sealant.
7. Water cutoff mastic.
8. Metal termination bars.
9. Fasteners.
10. Miscellaneous accessories.
11. Polyisocyanurate board insulation.
12. Tapered insulation.
13. Insulation fasteners.
14. Insulation adhesive.
15. Cover board.
16. Walkway pads.
17. Insulation for miscellaneous voids.

- B. Sustainable Design Submittals:

1. Product Data: For applicable adhesives and sealants, indicating VOC content.

- C. Shop Drawings: Include roof plans, sections, details, and attachments to other work, including the following:

1. Layout, R-values and thickness of insulation.
2. Base flashings and membrane terminations.
3. Flashing details at penetrations.
4. Tapered insulation, thickness, R-values and slopes.
5. Insulation fastening patterns for corner, perimeter, and field-of-roof locations.
6. Walkway pad layout.

- D. Wind Uplift Resistance Submittal: For roofing system, indicating compliance with wind uplift performance requirements.
- E. Sample Warranties: For manufacturer's special warranties and special Project warranties.

1.7 INFORMATIONAL SUBMITTALS

- A. Manufacturer Certificates:
 - 1. Performance Requirement Certificate: Signed by roof membrane manufacturer, identifying all roof system components and certifying that roofing system complies with requirements specified in "Performance Requirements" Article.
 - a. Submit evidence of complying with performance requirements.
 - 2. Special Warranty Certificate: Signed by roof membrane manufacturer, certifying that all materials supplied under this Section are acceptable for special warranty.
- B. Field quality-control reports.

1.8 CLOSEOUT SUBMITTALS

- A. Maintenance Data: For roofing system to include in maintenance manuals.
- B. Warranty: Executed special warranties and special Project warranties.

1.9 QUALITY ASSURANCE

- A. Manufacturer Qualifications: A qualified manufacturer that is UL listed listed in FM Approvals' RoofNav listed in SPRI's Directory of Roof Assemblies for roofing system identical to that used for this Project.
 - 1. Manufacturer's Technical Representative: A non-sales technical representative who shall, at a minimum:
 - a. Participate in the Preinstallation Roofing Conference.
 - b. Witness start of roofing membrane installation.
 - c. Inspect the roofing membrane installation when work is approximately 50 percent complete to ascertain that procedures being followed are proper and to determine whether any corrective work will be required.
 - d. Inspect the roofing membrane installation at completion to determine whether any corrective work will be required prior to issuing the warranty. Notify the Owner and Architect a minimum of 72 hours before said inspection.

- B. Installer Qualifications: A qualified firm that is approved, authorized, or licensed by roofing system manufacturer to install manufacturer's product and that is eligible to receive manufacturer's special warranty, and has successfully completed a minimum of three similar-sized projects in the last five years.
 - 1. Installer's Superintendent Qualifications: An experienced superintendent who is trained and approved by roofing system manufacturer, to oversee installation on-site of roofing system at all times roofing work is in progress.
 - 2. Provide adequate number of experienced workers regularly engaged in this type of work who are skilled in the application techniques of the materials specified.
- C. Identification: Identify product R-values with manufacturer's markings, or certification, in accordance with requirements of building Code in effect for the Project.

1.10 DELIVERY, STORAGE, AND HANDLING

- A. Deliver roofing materials to Project site in original containers with seals unbroken and labeled with manufacturer's name, product brand name and type, date of manufacture, approval or listing agency markings, and directions for storing and mixing with other components.
- B. Store liquid materials in their original undamaged containers in a clean, dry, protected location and within the temperature range required by roofing system manufacturer. Protect stored liquid material from direct sunlight.
 - 1. Discard and legally dispose of liquid material that cannot be applied within its stated shelf life.
- C. Protect roof insulation materials from physical damage and from deterioration by sunlight, moisture, soiling, and other sources. Store in a dry location. Comply with insulation manufacturer's written instructions for handling, storing, and protecting during installation.
 - 1. Do not install materials that are wet or moisture damaged; remove from Project site.
- D. Handle and store roofing materials, and place equipment in a manner to avoid permanent deflection of deck.

1.11 FIELD CONDITIONS

- A. Weather Limitations: Proceed with installation only when existing and forecasted weather conditions permit roofing system to be installed according to manufacturer's written instructions and warranty requirements.
- B. Proceed with work such that recently completed roof areas are not subjected to construction traffic. Protect recently completed roof areas and inspect for possible damage.

1.12 COORDINATION

- A. Coordinate construction operations on or adjacent to roof, included in different Sections, which depend on each other for proper installation, connection, and operation.

1.13 WARRANTY

- A. Special Warranty: Manufacturer's total system "edge-to-edge" warranty, without monetary limitation, in which manufacturer agrees to repair or replace components of roofing system that fail in materials or workmanship within specified warranty period. Pro-rated warranties are not acceptable.
 - 1. Special warranty includes roof membrane, base flashings, roof insulation, fasteners, cover boards, and other components of roofing system.
 - 2. Special warranty includes roof specialties specified in Division 07 Section "Roof Specialties."
 - 3. Special warranty includes coverage for wind damage sustained up to wind speed requirements specified in "Performance Requirements" Article.
 - 4. Special warranty includes coverage for hail resistance.
 - 5. Warranty Period: 20 years (Base Bid), 30 years (Alternate 1A-1) from Date of Substantial Completion.
- B. Special Project Warranty: Submit roofing Installer's warranty, covering the Work of this Section, including all components of roofing system such as roof membrane, base flashing, roof insulation, fasteners, cover boards, and walkway products, against leaks and faulty or defective materials and workmanship, and to repair or replace work, without monetary limitation, for the following warranty period:
 - 1. Warranty Period: 2 years from Date of Substantial Completion.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. General Performance: Installed roofing system and base flashings shall withstand specified uplift pressures, thermally induced movement, and exposure to weather without failure due to defective manufacture, fabrication, installation, or other defects in construction. Roofing and flashings shall remain watertight.
 - 1. Accelerated Weathering: Roof membrane shall withstand 2000 hours of exposure when tested according to ASTM G152, ASTM G154, or ASTM G155.
 - 2. Impact Resistance: Roof membrane shall resist impact damage when tested according to ASTM D3746, ASTM D4272, or the Resistance to Foot Traffic Test in FM Approvals 4470.

- B. Material Compatibility: Roofing materials shall be compatible with one another and adjacent materials under conditions of service and application required, as demonstrated by roof membrane manufacturer based on testing and field experience. Materials shall comply with the Building Code of New York State.
- C. Wind Uplift Resistance: Design roofing system to resist the following wind uplift pressures calculated according to the requirements of the Building Code of New York State, which references ASCE/SEI 7:
 - 1. Wind Speed: As indicated on Drawings.
 - 2. Wind Uplift Pressures: As indicated on Drawings.
- D. FM Approvals' RoofNav Listing: Roof membrane, base flashings, and component materials shall comply with requirements in FM Approvals 4450 or FM Approvals 4470 as part of a roofing system, and shall be listed in FM Approvals' RoofNav for Class 1 or noncombustible construction, as applicable. Identify materials with FM Approvals Certification markings.
 - 1. Fire/Windstorm Classification: Class 1A-90.
 - 2. Hail-Resistance Rating: FM Global Property Loss Prevention Data Sheet 1-34 MH.
- E. SPRI's Directory of Roof Assemblies Listing: Roof membrane, base flashings, and component materials shall comply with requirements in FM Approvals 4450 or FM Approvals 4470 as part of a roofing system, and shall be listed in SPRI's Directory of Roof Assemblies for roof assembly identical for that specified for this Project.
- F. Exterior Fire-Test Exposure: ASTM E108 or UL 790, Class A; for application and roof slopes indicated; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.

2.2 MANUFACTURERS

- A. Source Limitations: Obtain components for roofing system from roof membrane manufacturer or manufacturers approved by roof membrane manufacturer.

2.3 ETHYLENE-PROPYLENE-DIENE-TERPOLYMER (EPDM) ROOFING

- A. EPDM Sheet: ASTM D4637/D4637M, Type I, nonreinforced, fire-retardant EPDM sheet.
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Carlisle SynTec Incorporated.
 - b. Elevate.
 - c. Johns Manville; a Berkshire Hathaway company.
 - 2. Thickness: 60 mils (Base Bid), 90 mils (Alternate 1A-1), nominal.

3. Sheet Width: Maximum allowable for applicable installation.
4. Exposed Face Color: Black.

2.4 AUXILIARY ROOFING MATERIALS

- A. General: Auxiliary materials recommended by roofing system manufacturer for intended use and compatible with other roofing components.
 1. Adhesive and Sealants: Comply with VOC limits of authorities having jurisdiction.
 2. Adhesives and sealants on the interior side of weather barrier shall comply with the following limits for VOC content:
 - a. Plastic Foam Adhesives: 50 g/L.
 - b. Panel Adhesives: 50 g/L.
 - c. Multipurpose Construction Adhesives: 70 g/L.
 - d. Fiberglass Adhesives: 80 g/L.
 - e. Other Adhesives: 250 g/L.
 - f. Single-Ply Roof Membrane Sealants: 450 g/L.
 - g. Nonmembrane Roof Sealants: 300 g/L.
 - h. Sealant Primers for Nonporous Substrates: 250 g/L.
 - i. Sealant Primers for Porous Substrates: 775 g/L.
- B. Sheet Flashing: 60-mil-thick EPDM, partially cured or cured, according to application.
- C. Bonding Adhesive: Manufacturer's standard, low-VOC type.
- D. Adhesive/Primer: Manufacturer's standard, low-VOC type.
 1. Basis-of-Design Product: Subject to compliance with requirements, provide Carlisle SynTec Incorporated; Cav-Grip III Low-VOC Adhesive/Primer, or comparable product.
- E. Membrane Cleaner: Manufacturer's standard.
- F. Seaming Material: Manufacturer's standard, synthetic-rubber polymer primer and 6-inch-wide minimum, butyl splice tape with release film.
 1. At Contractor's option, seam tape may be factory-applied type.
- G. Lap Sealant: Manufacturer's standard, single-component sealant, colored to match membrane roofing.
- H. Water Cutoff Mastic: Manufacturer's standard butyl mastic sealant.
- I. Metal Termination Bars: Manufacturer's standard, predrilled at 6-inch centers aluminum bars, approximately 1 by 1/8 inch thick; with sealant ledge.
 1. Fasteners: Series 300 stainless steel drive pin fasteners for masonry substrate embedment, Series 300 stainless steel screw-type fasteners at wood substrate embedment.

- J. Fasteners: Factory-coated steel fasteners and metal plates complying with corrosion-resistance provisions in FM Approvals 4470, designed for fastening components to substrate, and acceptable to roofing system manufacturer.
 - 1. Fasteners at Wood-Preservative-Treated Lumber: Screws complying with ASME B18.6.1. Series 300 stainless steel, non-magnetic, torx or square drive, #10, length as required to provide minimum embedment of 1-1/2-inches into substrate.
- K. Miscellaneous Accessories: Provide pourable sealers, preformed cone and vent sheet flashings, molded pipe boot flashings, preformed inside and outside corner sheet flashings, reinforced EPDM securement strips, T-joint covers, in-seam sealants, termination reglets, cover strips, and other accessories.

2.5 ROOF INSULATION

- A. General: Preformed roof insulation boards manufactured or approved by EPDM roof membrane manufacturer, and in compliance with “Performance Requirements” Article.
 - 1. Minimum Total System R-Value: 30.
- B. Polyisocyanurate Board Insulation: ASTM C1289, Type II, Class 2, Grade 2, coated glass-fiber mat facer on both major surfaces.
 - 1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Carlisle SynTec Incorporated; SecurShield Polyiso.
 - b. Elevate; ISOGARD CG.
 - c. Johns Manville; a Berkshire Hathaway company; ENRGY 3 CGF.
 - 2. Provide insulation tested as part of an assembly that satisfactorily passes UL 1256.
 - 3. Compressive Strength: 20 psi.
 - 4. Size: 48 by 48 inches, for adhered installation and 48 by 96 inches, for mechanical attachment.
 - 5. Thickness:
 - a. Base Layer: Not less than 2.4 inches.
 - b. Upper Layer: Not less than 2.4 inches.
- C. Tapered Insulation: Provide factory-tapered insulation boards.
 - 1. Material: Match roof insulation.
 - 2. Minimum Thickness: 1/2 inch.

3. Slope:
 - a. Roof Field: 1/8 inch per foot at existing building areas unless otherwise indicated on Drawings. 1/4" per foot at new building areas as shown on Drawings.
 - b. Saddles, Crickets and Primary Drain Sumps: 1/2 inch per foot unless otherwise indicated on Drawings. Typical drain sump dimension is 4' x 4', unless otherwise indicated on plan. Provide 'snub-nose' saddles and crickets to match width of tapered drain sump as shown on Drawings.
 - c. Do NOT provide tapered sumps at overflow drain locations.
4. Provide fiber board tapered edge strips to transition from 1/2-inch to 0-inch.

2.6 INSULATION ACCESSORIES

- A. General: Roof insulation accessories recommended by insulation manufacturer for intended use and compatibility with other roofing system components.
- B. Fasteners: Factory-coated steel fasteners and metal plates complying with corrosion-resistance provisions in FM Approvals 4470, designed for fastening roof insulation to substrate, and acceptable to roofing system manufacturer.
- C. Insulation Adhesive: Insulation manufacturer's recommended adhesive formulated to attach roof insulation to substrate or to another insulation layer as follows:
 1. Bead-applied, low-rise, multicomponent urethane adhesive.
 2. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Carlisle SynTec Incorporated; FAST Dual Cartridge Adhesive.
 - b. Elevate; I.S.O. Twin Pack Insulation Adhesive.
 - c. Johns Manville; a Berkshire Hathaway company; JM Two-Part Urethane Insulation Adhesive.
- D. Cover Board: ASTM C1289 Type II, Class 4, Grade 1, 1/2-inch-thick polyisocyanurate, coated glass-mat facer on both major surfaces, with a minimum compressive strength of 80 psi.
 1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Carlisle SynTec Incorporated; SecurShield HD Polyiso.
 - b. Elevate; Isogard HD Cover Board.
 - c. Johns Manville; a Berkshire Hathaway company; ProtectoR HD.

E. Insulation for Miscellaneous Voids:

1. Spray Polyurethane Foam Insulation for Miscellaneous Voids: ASTM C 1029, Type II, closed cell, minimum density of 1.75 lb/cu. ft. and minimum aged R-value at 1-inch thickness of 6.0 deg F x h x sq. ft./Btu at 75 deg F, with maximum flame-spread and smoke-developed indexes of 25 and 400, respectively, per ASTM E 84.
 - a. Basis-of-Design Product: Subject to compliance with requirements, provide DuPont; Froth-Pak Foam Insulation, or comparable product.
2. Mineral Wool Insulation for Miscellaneous Voids: Mineral wool batt insulation designed for thermal resistance. ASTM C665, Flame Spread Index = 0, Smoke Developed Index = 0, ASTM E84 (UL 723), Non-Combustible, ASTM E136.
 - a. Basis-of-Design Product: Subject to compliance with requirements, provide Rockwool; Comfortbatt Thermal Batt Insulation, or comparable product.

2.7 WALKWAY PADS

- A. Walkway Pads: Factory-formed, nonporous, heavy-duty, slip-resisting, self-adhering, molded surface-textured flexible EPDM walkway pads, not less than 0.30-inch thick and acceptable to roofing system manufacturer.
1. Size: Approximately 30 by 30 inches.
 2. Color: To match roof membrane.

2.8 ROOF INFORMATION DECALS

- A. Roofing manufacturer's roof information decal including the following information clearly printed in permanent ink:
1. Name of roofing manufacturer.
 2. Name of roofing installer.
 3. Type of roofing system including membrane type and thickness.
 4. Date of substantial completion.
 5. Manufacturer's project identification number.
 6. Roofing system warranty duration.
 7. Telephone number for reporting warranty-related questions.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, areas, and conditions, with Installer present, for compliance with requirements and other conditions affecting performance of the Work.

1. Verify that roof openings and penetrations are in place, curbs are set and braced, and roof-drain bodies are securely clamped in place.
 2. Verify that wood blocking, curbs, and nailers are securely anchored to roof deck at penetrations and terminations and that nailers match thicknesses of insulation.
 3. Verify that steel roof deck is solid and securely attached.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.
- C. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 PREPARATION

- A. Clean substrate of dust, debris, moisture, and other substances detrimental to roofing system installation according to roofing system manufacturer's written instructions. Remove sharp projections.
- B. Prevent materials from entering and clogging roof drains and conductors and from spilling or migrating onto surfaces of other construction or into building interior. Remove roof-drain plugs when no work is taking place or when rain is forecast.

3.3 INSTALLATION OF ROOFING, GENERAL

- A. Install roofing system according to roofing system manufacturer's written instructions, in compliance with "Performance Requirements" Article assembly requirements, and FM Global Property Loss Prevention Data Sheet 1-29.
- B. Complete terminations and base flashings and provide temporary seals to prevent water from entering completed sections of roofing system at end of workday or when rain is forecast. Remove and discard temporary seals before beginning work on adjoining roofing.

3.4 INSTALLATION OF INSULATION

- A. Coordinate installing roofing system components so insulation is not exposed to precipitation or left exposed at end of workday.
- B. Comply with roofing system and insulation manufacturer's written instructions for installing roof insulation.
- C. Insulation Installation, General:
1. Trim insulation neatly to fit around penetrations and projections, and to fit tight to intersecting sloping roof decks.
 2. Make joints between adjacent insulation boards not more than 1/8 inch in width.
 3. Fill gaps exceeding 1/8 inch with insulation.
 4. Cut and fit insulation within 1/8 inch of nailers, projections, and penetrations.
 5. Keep manufacturer's R-value markings readily observable in accordance with building Code in effect for Project.
 6. Construct tapered sumps at primary drain locations as shown on Drawings.
 7. Do not provide tapered sumps at overflow drain locations.

8. Install fiber board tapered edge strips to transition from 1/2-inch to 0-inch.
9. Trim insulation so that water flow is unrestricted.

D. Installation Directly Over Metal Decking:

1. Mechanically Attached Base Layer: Install base layer of insulation with end joints staggered not less than 12 inches in adjacent rows and with long joints continuous at right angle to flutes of decking.
 - a. Locate end joints over crests of decking.
 - b. Mechanically attach base layer of insulation using mechanical fasteners specifically designed and sized for fastening specified board-type roof insulation to metal decks.
 - 1) Fasten insulation to resist specified uplift pressure in compliance with "Performance Requirements" Article; minimum quantity: one fastener per 2 square feet at field and perimeter, one fastener per square foot at corners.
 - 2) Fasten into top flutes only; with fastener length not to exceed elevation of bottom flute.
2. Adhered Upper Layers: Install upper layers of insulation and tapered insulation with joints of each layer offset not less than 12 inches from previous layer of insulation.
 - a. Stagger end joints within each layer not less than 24 inches in adjacent rows.
 - b. Adhere each layer of insulation to substrate using adhesive in compliance with "Performance Requirements" Article and FM Global Property Loss Prevention Data Sheet 1-29, as follows:
 - 1) Set each layer of insulation in ribbons of bead-applied insulation adhesive, applied at a maximum of 4 inches on center at all field, perimeter, and corner roof areas, firmly pressing and maintaining insulation in place.
 - 2) When installing the adhesive, do not allow the adhesive installation pattern to exceed the width of the board being installed. Exceeding the width of the roof board may cause an uneven application of the adjacent board due to the rising adhesive. Remove any excess adhesive from adjacent surfaces immediately prior to rising and curing.
 - 3) Walk the boards into the adhesive and roll with a 30-inch wide, 150-pound weighted steel roller to ensure full embedment.

E. Installation Over Concrete, Gypsum or Other Types of Plank Decks:

1. Adhered Base Layer: Thoroughly clean and prime deck surface, install base layer of insulation with joints staggered not less than 24 inches in adjacent rows.

- a. Adhere base layer of insulation to concrete, gypsum or plank deck in compliance with “Performance Requirements” Article and FM Global Property Loss Prevention Data Sheet 1-29, as follows:
 - 1) Set insulation in ribbons of bead-applied insulation adhesive, applied at a maximum of 4 inches on center at all field, perimeter, and corner roof areas, firmly pressing and maintaining insulation in place.
 - 2) When installing the adhesive, do not allow the adhesive installation pattern to exceed the width of the board being installed. Exceeding the width of the roof board may cause an uneven application of the adjacent board due to the rising adhesive. Remove any excess adhesive from adjacent surfaces immediately prior to rising and curing.
 - 3) Walk the boards into the adhesive and roll with a 30-inch wide, 150-pound weighted steel roller to ensure full embedment.
- 2. Adhered Upper Layers: Install upper layers of insulation and tapered insulation with joints of each layer offset not less than 12 inches from previous layer of insulation.
 - a. Stagger end joints within each layer not less than 24 inches in adjacent rows.
 - b. Adhere each layer of insulation to substrate using adhesive in compliance with “Performance Requirements” Article and FM Global Property Loss Prevention Data Sheet 1-29, as follows:
 - 1) Set each layer of insulation in ribbons of bead-applied insulation adhesive, applied at a maximum of 4 inches on center at all field, perimeter, and corner roof areas, firmly pressing and maintaining insulation in place.
 - 2) When installing the adhesive, do not allow the adhesive installation pattern to exceed the width of the board being installed. Exceeding the width of the roof board may cause an uneven application of the adjacent board due to the rising adhesive. Remove any excess adhesive from adjacent surfaces immediately prior to rising and curing.
 - 3) Walk the boards into the adhesive and roll with a 30-inch wide, 150-pound weighted steel roller to ensure full embedment.

3.5 INSTALLATION OF COVER BOARDS

- A. Install cover boards over insulation with long joints in continuous straight lines with end joints staggered between rows. Offset joints of insulation below a minimum of 6 inches in each direction.
 - 1. Trim cover board neatly to fit around penetrations and projections, and to fit tight to intersecting sloping roof decks. Cut or score boards at angle changes to avoid bridging.
 - 2. Cut and fit cover board tight to nailers, projections, and penetrations.

3. Adhere cover board to substrate using adhesive in compliance with “Performance Requirements” Article and FM Global Property Loss Prevention Data Sheet 1-29, as follows:
 - a. Set cover board in ribbons of bead-applied insulation adhesive, applied at a maximum of 4 inches on center at all field, perimeter, and corner roof areas, firmly pressing and maintaining insulation in place.
 - b. When installing the adhesive, do not allow the adhesive installation pattern to exceed the width of the board being installed. Exceeding the width of the cover board may cause an uneven application of the adjacent board due to the rising adhesive. Remove any excess adhesive from adjacent surfaces immediately prior to rising and curing.
 - c. Walk the boards into the adhesive and roll with a 30-inch wide, 150-pound weighted steel roller to ensure full embedment.

3.6 INSTALLATION OF ADHERED ROOF MEMBRANE

- A. Thoroughly clean substrate of all debris, projections, and substances detrimental to membrane installation, including stray projections of adhesive.
- B. Adhere roof membrane over area to receive roofing according to roofing system manufacturer's written instructions.
- C. Unroll roof membrane and allow to relax before installing.
- D. Start installation of roofing in presence of roofing system manufacturer's technical personnel.
- E. Accurately align roof membrane and maintain uniform side and end laps of minimum dimensions required by manufacturer. Stagger end laps.
- F. Bonding Adhesive: Apply 100 percent coverage to substrate and underside of roof membrane at rate required by manufacturer and allow to partially dry before installing roof membrane. Do not apply to splice area of roof membrane.
- G. In addition to adhering, mechanically fasten roof membrane securely at terminations, penetrations, and perimeters.
- H. Apply roof membrane with side laps shingled with slope of roof deck where possible.
- I. Apply pressure to the membrane surface in accordance with manufacturer's instructions to obtain maximum contact between the membrane and substrate.
- J. Tape Seam Installation: Clean and prime both faces of splice areas, apply splice tape.
 1. Firmly roll side and end laps of overlapping roof membrane to ensure a watertight seam installation.
 2. Apply lap sealant and seal exposed edges of roofing terminations.
 3. At Contractor's option, use manufacturer's factory-applied seam tape installation system.

- K. Repair tears, voids, and lapped seams in roof membrane that do not comply with requirements.
- L. Spread sealant or mastic bed over deck-drain flange at roof drains, and securely seal roof membrane in place with clamping ring.

3.7 INSTALLATION OF BASE FLASHING

- A. Install sheet flashings and preformed flashing accessories and adhere to substrates according to roofing system manufacturer's written instructions.
- B. Apply bonding adhesive to substrate and underside of sheet flashing at required rate and allow to partially dry. Do not apply to seam area of flashing.
- C. Flash penetrations and field-formed inside and outside corners with cured or uncured sheet flashing.
- D. Clean splice areas, apply splicing cement, and firmly roll side and end laps of overlapping sheets to ensure a watertight seam installation. Apply lap sealant and seal exposed edges of sheet flashing terminations.
- E. Terminate and seal top of sheet flashings and mechanically anchor to substrate through termination bars.

3.8 INSTALLATION OF WALKWAY PADS

- A. Walkway pads: Install walkway pads according to manufacturer's written instructions.
 - 1. Install walkway pads at the following locations:
 - a. Perimeter of each rooftop unit.
 - b. Top and bottom of each roof access ladder.
 - c. Roof access doors.
 - d. Locations indicated on Drawings.
 - e. As required by roof membrane manufacturer's warranty requirements.
 - 2. Adhere walkway pads to cleaned and primed roof membrane according to roofing system manufacturer's written instructions.
 - 3. Space walkway pads 1 ½" max from each other and 1" min. to field seams.
 - 4. Cut walkway pads around penetrations, field seams, etc. Do not install walk pads over field seams.

3.9 ROOF INFORMATION DECAL INSTALLATION

- A. Adhesively attach roofing manufacturer's Roof Information Decal at all roof access points (i.e. inside face of hatches, doors, etc. leading to the roof).

3.10 FIELD QUALITY CONTROL

- A. Final Roof Inspection: Arrange for roofing system manufacturer's technical personnel to inspect roofing installation on completion, in presence of Architect, and to prepare inspection report.
- B. Correct or remove and replace components of roofing system where inspections indicate that they do not comply with specified requirements.
- C. Additional testing and inspecting, at Contractor's expense, will be performed to determine if replaced or additional work complies with specified requirements.

3.11 PROTECTING AND CLEANING

- A. Protect roofing system from damage and wear during remainder of construction period. When remaining construction does not affect or endanger roofing system, inspect roofing system for deterioration and damage, describing its nature and extent in a written report, with copies to Architect and Owner.
- B. Correct deficiencies in or remove roofing system that does not comply with requirements, correct substrates, and correct or reinstall roofing system to a condition free of damage and deterioration at time of Substantial Completion and according to warranty requirements.
- C. Thoroughly clean all roof, interior and ground areas of dust, debris, excess materials and equipment.
- D. Clean overspray and spillage from adjacent construction using cleaning agents and procedures recommended by manufacturer of affected construction.

END OF SECTION 07 53 23

SECTION 07 71 00 - ROOF SPECIALTIES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:

- 1. Copings.
 - 2. Roof-edge specialties.
 - 3. Counterflashings.

- B. Preinstallation Conference: Conduct conference at Project site.

- 1. Meet with Owner, Architect, Installer, and installers whose work interfaces with or affects roof specialties.
 - 2. Examine substrate conditions for compliance with requirements, including flatness and attachment to structural members.
 - 3. Review special roof details, roof drainage, and condition of other construction that will affect roof specialties.

1.3 SUBMITTALS, GENERAL

- A. General: Submit all action submittals and informational submittals required by this Section and by Division 07 Section "EPDM Roofing" concurrently.

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes.

- 1. Fasteners.
 - 2. Copings.
 - 3. Canted roof-edge fascia and fascia extenders.
 - 4. One-piece counterflashings.
 - 5. Two-piece counterflashings.

- B. Shop Drawings: For roof specialties.

- 1. Include plans, elevations, expansion-joint locations, keyed details, and attachments to other work. Distinguish between plant- and field-assembled work.

2. Include details for expansion and contraction; locations of expansion joints, including direction of expansion and contraction.
 3. Indicate profile and pattern of seams and layout of fasteners, cleats, clips, and other attachments.
 4. Detail termination points and assemblies, including fixed points.
 5. Include details of special conditions.
- C. Samples for Initial Selection: For each type of roof specialty indicated with factory-applied color finishes.
- D. Samples for Verification: For each type of roof specialty indicated with factory-applied color finishes.
- E. Sample Warranty: For manufacturer's special warranty.

1.5 INFORMATIONAL SUBMITTALS

- A. Manufacturer Certificates: For each type of roof specialty, as required by Division 07 Section "EPDM Roofing" certifying that each item complies with requirements specified in "Performance Requirements" Article.

1.6 CLOSEOUT SUBMITTALS

- A. Maintenance Data: For roofing specialties to include in maintenance manuals.
- B. Warranty: Executed special warranty.

1.7 QUALITY ASSURANCE

- A. Manufacturer Qualifications: A qualified manufacturer offering products meeting requirements that are FM Approvals listed for specified class and ANSI/SPRI ES-1 tested to specified design pressure.
- B. Source Limitations: Obtain roof specialties approved by manufacturer providing roofing-system warranty specified in Division 07 Section "EPDM Roofing".

1.8 DELIVERY, STORAGE, AND HANDLING

- A. Do not store roof specialties in contact with other materials that might cause staining, denting, or other surface damage. Store roof specialties away from uncured concrete and masonry.
- B. Protect strippable protective covering on roof specialties from exposure to sunlight and high humidity, except to extent necessary for the period of roof-specialty installation.

1.9 FIELD CONDITIONS

- A. Field Measurements: Verify profiles and tolerances of roof-specialty substrates by field measurements before fabrication, and indicate measurements on Shop Drawings.

- B. Coordination: Coordinate roof specialties with flashing, trim, and construction of parapets, roof deck, roof and wall panels, and other adjoining work to provide a leakproof, secure, and noncorrosive installation.

1.10 WARRANTY

- A. Roofing-System Warranty: Roof specialties are included in warranty provisions in Division 07 Section "EPDM Roofing".
- B. Special Warranty on Painted Finishes: Manufacturer agrees to repair finish or replace roof specialties that show evidence of deterioration of factory-applied finishes within specified warranty period.
 - 1. Fluoropolymer Finish: Deterioration includes, but is not limited to, the following:
 - a. Color fading more than 5 Delta E units when tested according to ASTM D2244.
 - b. Chalking in excess of a No. 8 rating when tested according to ASTM D4214.
 - c. Cracking, checking, peeling, or failure of paint to adhere to bare metal.
 - 2. Finish Warranty Period: 20 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. General Performance: Roof specialties shall withstand exposure to weather and resist thermally induced movement without failure, rattling, leaking, or fastener disengagement due to defective manufacture, fabrication, installation, or other defects in construction.
- B. FM Approvals' Listing: Manufacture and install roof-edge specialties that are listed in FM Approvals' "RoofNav" and approved for windstorm classification, Class 1-90. Identify materials with FM Approvals' markings.
- C. SPRI Wind Design Standard: Manufacture and install roof-edge specialties tested and certified according to ANSI/SPRI ES-1 (Test Methods RE-1, RE-2, and RE-3, as applicable) to comply with the Building Code of New York State which references ASCE/SEI 7, and capable of meeting the wind load design criteria indicated on the Drawings.
- D. Thermal Movements: Allow for thermal movements from ambient and surface temperature changes to prevent buckling, opening of joints, hole elongation, overstressing of components, failure of joint sealants, failure of connections, and other detrimental effects. Provide clips that resist rotation and avoid shear stress as a result of thermal movements. Base calculations on surface temperatures of materials due to both solar heat gain and nighttime-sky heat loss.
 - 1. Temperature Change (Range): 120 deg F, ambient; 180 deg F, material surfaces.

2.2 COPINGS

- A. Metal Copings: Manufactured coping system consisting of metal coping cap in longest uniform section lengths not exceeding 12 feet, concealed anchorage; with corner units, end cap units, and concealed splice plates with finish matching coping caps.
1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Carlisle SynTec Systems; SecurEdge 200 Coping.
 - b. Elevate; Elevate Coping.
 - c. Johns Manville; Presto Lock Coping System.
 2. Formed Aluminum Sheet Coping Caps: Aluminum sheet, 0.063 inch thick.
 - a. Surface: Smooth, flat finish.
 - b. Finish: Two-coat fluoropolymer or clear anodized as selected by Architect.
 - c. Color: As selected by Architect from manufacturer's standard range to match existing color.
 3. Corners and End Caps: Factory mitered and continuously welded, not less than 2 feet long in each direction.
 4. Coping-Cap Attachment Method: Snap-on.
 - a. Snap-on Coping Anchor Plates: Concealed, galvanized-steel sheet, not less than 0.040 inch thick (20 gage), 12 inches wide, with integral cleats and factory-applied stainless steel spring clips.

2.3 ROOF-EDGE SPECIALTIES

- A. Canted Roof-Edge Fascia: Manufactured, roof-edge fascia system with a snap-on metal fascia cover in longest uniform section lengths not exceeding 12 feet. Provide matching corner units.
1. Provide one of the following types of canted roof-edge fascia systems to meet wind speed requirements or to comply with roofing system manufacturer's warranty requirements:
 - a. Two-Piece Canted Roof-Edge Fascia: Two-piece fascia system with a continuous formed galvanized steel sheet cant, 0.028 inch thick (24 gage), minimum, with extended vertical leg terminating in a drip edge cleat.
 - 1) Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a) Carlisle SynTec Systems; SecurEdge 200 Fascia System.
 - b) Elevate; EdgeGard +.
 - c) Johns Manville; Fascia System 200.

- b. Three-Piece Canted Roof Edge Fascia: Three-piece fascia system with a continuous extruded aluminum anchor bar with extended vertical leg terminating in a drip edge cleat and continuous formed galvanized steel sheet canted waterdam, 0.028 inch thick (24 gage), minimum.
 - 1) Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a) Carlisle SynTec Systems; SecurEdge EX Canted Fascia.
 - b) Elevate; AnchorGard Canted WD Fascia.
 - c) Johns Manville; Presto-Tite Fascia Galvanized Waterdam.
- 2. Formed Aluminum Sheet Fascia Covers: Aluminum sheet, not less than 0.050 inch thick and as required to meet performance requirements.
 - a. Surface: Smooth, flat finish.
 - b. Finish: Two-coat fluoropolymer or clear anodized as selected by Architect.
 - c. Color: As selected by Architect from manufacturer's standard range to match existing color.
- 3. Corners: Factory mitered and continuously welded, not less than 2 feet long in each direction.
- 4. Splice Plates: Concealed, of same material, finish, and shape as fascia cover.
- 5. Fascia Accessories: Provide the following from the fascia system manufacturer:
 - a. Fascia Extenders: Manufactured, two-piece fascia extender with metal fascia extension in longest uniform section lengths practical not exceeding 12 feet and continuous formed galvanized steel sheet hold-down cleats, 0.028 inch thick (24 gage), minimum, with extended vertical leg terminating in a drip edge cleat. Provide matching corner units.
 - 1) Formed Aluminum: Not less than 0.050 inch thick, with pre-punched slotted holes at 12 inches o.c. at top edge, finished to match fascia cover.
 - 2) Corners: Factory mitered and continuously welded, not less than 2 feet long in each direction.
 - 3) Splice Plates: Concealed, of same material, finish, and shape as fascia extension.
 - b. Soffit Trim: Manufactured metal trim as indicated on Drawings, of same material and finish as fascia cover.
- B. Aluminum Finish: Two-coat fluoropolymer or clear anodized as selected by Architect.
 - 1. Color: As selected by Architect from manufacturer's standard range to match existing color.

2.4 COUNTERFLASHINGS

- A. One-Piece Counterflashings: Manufactured units formed of single counterflashing sections.
 - 1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Carlisle SynTec Systems; SecurEdge Counter Flashing 1 Pc. Reglet.
 - b. Elevate; 1 Piece Counter Flashing Reglet Version.
 - c. Metal-Era LLC; 1 Piece Counter Flashing Reglet Version.
 - 2. Formed Aluminum: Not less than 0.050 inch thick.
 - 3. Counterflashings: Manufactured units of heights to overlap top edges of base flashings by 4 inches and in longest uniform section lengths not exceeding 12 feet and compress against base flashings with joints lapped.
 - a. Reglet Type: For embedment in masonry mortar joints.
- B. Two-Piece Counterflashings: Manufactured units formed to provide secure interlocking of separate receiver and counterflashing pieces.
 - 1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Carlisle SynTec Systems; SecurEdge 2 Pc. Counter Flashing Reglet.
 - b. Elevate; 2 Piece Counter Flashing Reglet Version.
 - c. Metal-Era LLC; 2 Piece Counter Flashing Reglet Version.
 - 2. Formed Copper: Not less than 16 oz. thick.
 - 3. Embedded Receivers: For embedment in masonry mortar joints.
 - 4. Counterflashings: Manufactured units of heights to overlap top edges of base flashings by 4 inches and in longest uniform section lengths not exceeding 12 feet designed to snap into receiver and compress against base flashings with joints lapped.
- C. Aluminum Finish: Two-coat fluoropolymer or clear anodized as selected by Architect.
 - 1. Color: As selected by Architect from manufacturer's standard range to match existing color.

2.5 MATERIALS

- A. Zinc-Coated (Galvanized) Steel Sheet: ASTM A653/A653M, G90 coating designation.
- B. Aluminum Sheet: ASTM B209, alloy as standard with manufacturer for finish required, with temper to suit forming operations and performance required.
- C. Copper Sheet: ASTM B370, cold-rolled copper sheet, H00 or H01 temper.
- D. Aluminum Extrusions: ASTM B221, alloy and temper recommended by manufacturer for type of use and finish indicated.

2.6 MISCELLANEOUS MATERIALS

- A. Fasteners: Manufacturer's recommended fasteners, suitable for application and designed to meet performance requirements. Furnish the following unless otherwise indicated:
 - 1. Exposed Penetrating Fasteners: Not permitted.
 - 2. Fasteners for Aluminum: Series 300 stainless steel.
 - 3. Fasteners for Zinc-Coated (Galvanized) Steel Sheet: Series 300 stainless steel.
 - 4. Fasteners for Copper Sheet: Copper, hardware bronze or passivated Series 300 stainless steel.
- B. Elastomeric Sealant: ASTM C920, elastomeric polymer sealant of type, grade, class, and use classifications required by roofing-specialty manufacturer for each application.

2.7 FINISHES

- A. Comply with NAAMM's "Metal Finishes Manual for Architectural and Metal Products" for recommendations for applying and designating finishes.
- B. Protect mechanical and painted finishes on exposed surfaces from damage by applying a strippable, temporary protective covering before shipping.
- C. Appearance of Finished Work: Noticeable variations in same piece are unacceptable. Variations in appearance of adjoining components are acceptable if they are within the range of approved Samples and are assembled or installed to minimize contrast.
- D. Coil-Coated Aluminum Sheet Finishes:
 - 1. High-Performance Organic Finish: Prepare, pretreat, and apply coating to exposed metal surfaces to comply with coating and resin manufacturers' written instructions.
 - a. Two-Coat Fluoropolymer: AAMA 2605. Fluoropolymer finish containing not less than 70 percent polyvinylidene fluoride (PVDF) resin by weight in color coat. Prepare, pretreat, and apply coating to exposed metal surfaces to comply with coating and resin manufacturers' written instructions.
 - b. Concealed Surface Finish: Apply pretreatment and manufacturer's standard acrylic or polyester backer finish consisting of prime coat and wash coat with a minimum total dry film thickness of 0.5 mil.
 - 2. Clear Anodic Finish: AAMA 611, AA-M12C22A41, Class I, 0.018 mm or thicker.
- E. Copper Sheet Finishes:
 - 1. Nonpatinated, Exposed Finish: Mill.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, areas, and conditions, with Installer present, to verify actual locations, dimensions, and other conditions affecting performance of the Work.
- B. Examine walls, parapets, and roof edges for suitable conditions for roof specialties.
- C. Verify that substrate is sound, dry, smooth, clean, sloped for drainage where applicable, and securely anchored.
- D. Proceed with installation only after unsatisfactory conditions have been corrected.
- E. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 INSTALLATION, GENERAL

- A. Install roof specialties according to manufacturer's written instructions. Anchor roof specialties securely in place, with provisions for thermal and structural movement. Use fasteners, protective coatings, separators, underlayments, sealants, and other miscellaneous items as required to complete roof-specialty systems.
 - 1. Install roof specialties level, plumb, true to line and elevation; with limited oil-canning and without warping, jogs in alignment, buckling, or tool marks.
 - 2. Provide uniform, neat seams with minimum exposure of sealant.
 - 3. Install roof specialties to fit substrates and to result in weathertight performance. Verify shapes and dimensions of surfaces to be covered before manufacture.
 - 4. Torch cutting of roof specialties is not permitted.
 - 5. Do not use graphite pencils to mark metal surfaces.
- B. Metal Protection: Protect metals against galvanic action by separating dissimilar metals from contact with each other or with corrosive substrates by installing over EPDM roof membrane or self-adhering sheet underlayment to create a permanent separation as recommended by manufacturer.
 - 1. Underlayment: Where installing metal directly on cementitious or wood substrates, install a course EPDM roof membrane or of self-adhering sheet underlayment.
- C. Expansion Provisions: Allow for thermal expansion of exposed roof specialties.
 - 1. Space movement joints at a maximum of 12 feet with no joints within 24 inches of corners or intersections unless otherwise indicated on Drawings.
 - 2. When ambient temperature at time of installation is between 40 and 70 deg F, set joint members for 50 percent movement each way. Adjust setting proportionately for installation at higher ambient temperatures.
 - 3. Loose-nail fascia extender at center of pre-punched slotted hole; do not draw nail tight.
 - 4. Stagger joints in fascia from those in fascia extender by not less than 24 inches.

- D. Fastener Sizes: Use fasteners of sizes that penetrate substrate not less than recommended by fastener manufacturer to achieve maximum pull-out resistance.
- E. Seal joints as required for weathertight construction. Place sealant to be completely concealed in joint. Do not install sealants at temperatures below 40 deg F.

3.3 INSTALLATION OF COPINGS

- A. Install cleats, anchor plates, and other anchoring and attachment accessories and devices with concealed fasteners.
- B. Anchor copings with manufacturer's required devices, fasteners, and fastener spacing to meet performance requirements.
 - 1. Interlock face and back leg drip edges and end caps of snap-on coping cap into cleated anchor plates anchored to substrate at manufacturer's required spacing that meets performance requirements.

3.4 INSTALLATION OF ROOF-EDGE SPECIALITIES

- A. Install cleats, cants, and other anchoring and attachment accessories and devices with concealed fasteners.
- B. Anchor roof edgings with manufacturer's required devices, fasteners, and fastener spacing to meet performance requirements.
- C. Install roof-edge fascia similar to Carlisle Detail Q-1A.1 or Elevate Detail RE-9 and as shown on Drawings, other details are not acceptable.
- D. Strip-in cleat as indicated on Drawings.

3.5 INSTALLATION OF COUNTERFLASHINGS

- A. Coordinate installation of counterflashings with installation of base flashings and masonry work.
- B. Reglets: Install reglets to receive flashings where flashing with embedded reglets is indicated on Drawings. Install at height so that inserted counterflashings overlap 4 inches over top edge of base flashings.
- C. Counterflashings: Insert counterflashings into reglets or other indicated receivers; ensure that counterflashings overlap 4 inches over top edge of base flashings. Lap counterflashing joints a minimum of 4 inches and bed with butyl sealant. Fit counterflashings tightly to base flashings.
- D. Two-Piece Counterflashings: Coordinate installation of two-piece counter flashings with Division 04 Sections and Masonry Installer.

3.6 CLEANING AND PROTECTION

- A. Clean and neutralize flux materials. Clean off excess sealants.

- B. Remove temporary protective coverings and strippable films as roof specialties are installed. On completion of installation, clean finished surfaces, including removing unused fasteners, metal filings, pop rivet stems, and pieces of flashing. Maintain roof specialties in a clean condition during construction.
- C. Replace roof specialties that have been damaged or that cannot be successfully restored by finish touchup or similar minor restoration procedures.

END OF SECTION 07 71 00

SECTION 07 72 00 - ROOF ACCESSORIES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Roof hatches.
 - 2. Vent pipe extensions.
 - 3. Storm collars.
 - 4. Isolation barrier membrane.

1.3 PREINSTALLATION MEETINGS

- A. Preinstallation Conference: Conduct conference at Project site.
 - 1. Meet with Owner, Architect, roofing Installer, Installer, and installers whose work interfaces with or affect roof accessories.
 - 2. Review special roof details, roof drainage, and conditions of other construction that will affect roof accessories.

1.4 COORDINATION

- A. Coordinate layout and installation of roof accessories with roofing membrane and base flashing and interfacing and adjoining construction to provide a leakproof, weathertight, secure, and noncorrosive installation.
- B. Coordinate dimensions with rough-in information or Shop Drawings of equipment to be supported.
- C. Coordinate construction operations on or adjacent to roof, included in different Sections, which depend on each other for proper installation, connection, and operation.

1.5 SUBMITTALS, GENERAL

- A. General: Submit all action submittals required by this Section concurrently.

1.6 ACTION SUBMITTALS

- A. Product Data: For each type of roof accessory. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes.
 - 1. Roof hatches.
 - 2. Vent pipe extensions.
 - 3. Storm collars.
 - 4. Isolation barrier membrane.
- B. Shop Drawings: For roof accessories.
 - 1. Include plans, elevations, keyed details, and attachments to other work. Indicate dimensions, loadings, and special conditions.

1.7 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Data: For roof accessories to include in operation and maintenance manuals.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. General Performance: Roof accessories shall withstand exposure to weather and resist thermally induced movement without failure, rattling, leaking, or fastener disengagement due to defective manufacture, fabrication, installation, or other defects in construction.

2.2 ROOF HATCHES

- A. Roof Hatches: Thermally enhanced metal roof-hatch units with double-wall **translucent** polycarbonate dome cover lid and insulated single-walled curbs, welded or mechanically fastened and sealed corner joints, continuous lid-to-curb counterflashing and weathertight perimeter gasketing, and integrally formed deck-mounting flange at perimeter bottom.
 - 1. Basis-of-Design Product: Subject to compliance with requirements, provide Bilco Company (The); Type GS-50TB or comparable product by the following:
 - a. Babcock-Davis.
 - b. Nystrom.
- B. Type and Size: Single-leaf lid, 30 by 36 inches (at existing locations, verify existing opening size in field).
- C. Loads: Minimum 40-lbf/sq. ft. external live load and 20-lbf/sq. ft. internal uplift load.

- D. Material: Aluminum sheet, 0.090 inch thick.
1. Finish: Mill.
- E. Construction:
1. Insulation: 3-inch-thick polyisocyanurate board at curb.
 2. Hatch Lid: Double UV-resistant, **translucent**, coated polycarbonate dome cover, insulated, and double walled, with manufacturer's standard metal liner of same material and finish as outer metal lid.
 3. Fabricate curbs to minimum height of 12 inches unless otherwise indicated.
- F. Hardware: Stainless-steel spring latch with turn handles, butt- or pintle-type hinge system, and padlock hasps inside and outside.
- G. Warranty: provide manufacturer's standard 5-year warranty.
- H. Roof-Hatch Safety Railing System: Roof-hatch manufacturer's standard system including rails, clamps, fasteners, safety barrier at railing opening, and accessories required for a complete installation; attached to roof hatch and complying with OSHA requirements and authorities having jurisdiction.
1. Products: Subject to compliance with requirements, available products that may be incorporated in the Work, include, but are not limited to:
 - a. Bilco Company (The); BIL-Guard 2.0, RL2-STB.
 - b. Babcock-Davis, SRBAY36X36FG.
 - c. Nystrom; SRBAY36X36FG.
 2. Height: 42 inches above finished roof deck.
 3. Dimensions: Match hatch size.
 4. Posts and Rails: Aluminum pipe, Schedule 40, 1-1/4 inches in diameter.
 5. Maximum Opening Size: System constructed to prevent passage of a sphere 21 inches in diameter.
 6. Self-Latching Gate: Fabricated of same materials and rail spacing as safety railing system. Provide manufacturer's standard hinges and self-latching mechanism.
 7. Post and Rail Tops and Ends: Weather resistant, closed or plugged with prefabricated end fittings.
 8. Provide weep holes or another means to drain entrapped water in hollow sections of handrail and railing members.
 9. Fabricate joints exposed to weather to be watertight.

10. Fasteners: Manufacturer's standard.

11. Finish: Powder-coat finish.

a. Color: Safety yellow.

2.3 VENT PIPE EXTENSIONS

A. Vent Pipe Extensions: Prefabricated plumbing vent pipe extensions. Solid-wall PVC pipe with integral six-inch-long joint splice sleeve insert at each end. Verify existing pipe size in field.

1. Basis-of-Design Product: Subject to compliance with requirements, provide Tubos, Inc.; TUBOS Vent Pipe Extensions, or a comparable product.

2.4 STORM COLLARS

A. Storm Collars: Not less than 0.0188-inch-thick (26 gage), stainless-steel sheet umbrella with stainless-steel band clamp, installed with heat-resistant sealant.

1. Basis-of-Design Product: Subject to compliance with requirements, provide SBC Industries; Clamp Umbrella (Storm Collar) – Model UMB, or a comparable product.

2.5 METAL MATERIALS

A. Zinc-Coated (Galvanized) Steel Sheet: ASTM A653/A653M, G90 coating designation.

B. Aluminum Sheet: ASTM B209, manufacturer's standard alloy for finish required, with temper to suit forming operations and performance required.

1. Mill Finish: As manufactured.

C. Aluminum Extrusions and Tubes: ASTM B221, manufacturer's standard alloy and temper for type of use, finished as indicated; otherwise mill finished.

1. Powder-Coat Finish: AAMA 2603 except with a minimum dry film thickness of 1.5 mils. Comply with coating manufacturer's written instructions for cleaning, conversion coating, and applying and baking finish.

D. Stainless Steel Sheet and Shapes: ASTM A240/A240M or ASTM A666, Type 304.

2.6 MISCELLANEOUS MATERIALS

A. Provide materials and types of fasteners, protective coatings, sealants, and other miscellaneous items required by manufacturer for a complete installation.

B. Glass-Fiber Board Insulation: ASTM C726, nominal density of 3 lb/cu. ft., thermal resistivity of 4.3 deg F x h x sq. ft./Btu x in. at 75 deg F, thickness as indicated.

- C. Polyisocyanurate Board Insulation: ASTM C1289, thickness and thermal resistivity as indicated.
- D. Wood Nailers: Softwood lumber, pressure treated with waterborne preservatives for aboveground use, acceptable to authorities having jurisdiction, containing no arsenic or chromium, and complying with AWPAC2; not less than 1-1/2 inches thick.
- E. Isolation Barrier Membrane: Composite, self-adhesive, flashing product consisting of a pliable, butyl rubber compound, bonded to a polypropylene film to produce an overall thickness of not less than 0.014 inch.
 - 1. Basis-of-Design Product: Subject to compliance with requirements, provide GCP Applied Technologies, Inc.; Vycor PRO, or comparable product.
- F. Fasteners: Roof accessory manufacturer's recommended fasteners suitable for application and metals being fastened. Match finish of exposed fasteners with finish of material being fastened. Provide nonremovable fastener heads to exterior exposed fasteners. Furnish the following unless otherwise indicated:
 - 1. Fasteners for Zinc-Coated Steel: Series 300 stainless steel.
 - 2. Fasteners for Aluminum Sheet: Series 300 stainless steel.
- G. Gaskets: Manufacturer's standard tubular or fingered design of neoprene, EPDM, PVC, or silicone or a flat design of foam rubber, sponge neoprene, or cork.
- H. Elastomeric Sealant: ASTM C920, elastomeric silicone polymer sealant as recommended by roof accessory manufacturer for installation indicated; low modulus; of type, grade, class, and use classifications required to seal joints and remain watertight.

2.7 GENERAL FINISH REQUIREMENTS

- A. Comply with NAAMM's "Metal Finishes Manual for Architectural and Metal Products" for recommendations for applying and designating finishes.
- B. Appearance of Finished Work: Noticeable variations in same piece are not acceptable. Variations in appearance of adjoining components are acceptable if they are within the range of approved Samples and are assembled or installed to minimize contrast.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, areas, and conditions, with Installer present, to verify actual locations, dimensions, and other conditions affecting performance of the Work.
- B. Verify that substrate is sound, dry, smooth, clean, and securely anchored.
- C. Verify dimensions of roof openings for roof accessories.
- D. Proceed with installation only after unsatisfactory conditions have been corrected.
- E. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 INSTALLATION

- A. Install roof accessories according to manufacturer's written instructions.
 - 1. Install roof accessories level; plumb; true to line and elevation; and without warping, jogs in alignment, buckling, or tool marks.
 - 2. Anchor roof accessories securely in place so they are capable of resisting indicated loads.
 - 3. Use fasteners, separators, sealants, and other miscellaneous items as required to complete installation of roof accessories and fit them to substrates.
 - 4. Install roof accessories to resist exposure to weather without failing, rattling, leaking, or loosening of fasteners and seals.
- B. Metal Protection: Protect metals against galvanic action by separating dissimilar metals from contact with each other or with corrosive substrates by painting contact surfaces with bituminous coating or by other permanent separation as recommended by manufacturer.
 - 1. Install isolation barrier membrane between metal and wood blocking, wrinkle free. Apply primer if required by membrane manufacturer. Use primer rather than nails for installing membrane at low temperatures. Overlap edges not less than 3-1/2 inches. Roll laps with roller. Cover membrane within 14 days.
- C. Roof-Hatch Installation:
 - 1. Verify that roof hatch operates properly. Clean, lubricate, and adjust operating mechanism and hardware.
 - 2. Attach safety railing system to roof-hatch curb.
- D. Vent Pipe Extension Installation: Install prefabricated vent pipe extensions to minimum 18" above roof elevation according to manufacturer's written installation instructions.
- E. Storm Collar Installation: Install storm collars according to manufacturer's written installation instructions.
- F. Seal joints with elastomeric sealant as required by roof accessory manufacturer.

3.3 CORRECTION AND CLEANING

- A. Galvanized Surfaces: Clean field welds, bolted connections, and abraded areas and repair galvanizing according to ASTM A780/A780M.
- B. Clean exposed surfaces according to manufacturer's written instructions.
- C. Clean off excess sealants.
- D. Replace roof accessories that have been damaged or that cannot be successfully restored by finish touchup or similar minor correction procedures.

END OF SECTION 07 72 00

SECTION 07 81 00 - APPLIED FIRE PROTECTION**PART 1 - GENERAL****1.1 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Sprayed fire-resistive materials (SFRM).

1.3 COORDINATION

- A. Comply with SFRM and topcoat manufacturers' written recommendations to ensure SFRM and topcoat are compatible with one another.

1.4 PREINSTALLATION MEETINGS

- A. Preinstallation Conference: Conduct conference at Project site.
 - 1. Review products, design ratings, restrained and unrestrained conditions, densities, thicknesses, bond strengths, and other performance requirements.

1.5 SUBMITTALS, GENERAL

- A. General: Submit all action submittals and informational submittals required by this Section concurrently.

1.6 ACTION SUBMITTALS

- A. Product Data: For the following:
 - 1. Substrate primers.
 - 2. Bonding agent.
 - 3. Metal lath.
 - 4. Reinforcing fabric.
 - 5. Reinforcing mesh.
 - 6. Sealer.
 - 7. Low-density sprayed fire-resistive material.
 - 8. Medium-density sprayed fire-resistive material.

- B. Sustainable Design Submittals:
 - 1. Product Data: For paints and coatings, indicating VOC content.
- C. Shop Drawings: Framing plans or schedules, or both, indicating the following:
 - 1. Extent of fire protection for each construction and fire-resistance rating.
 - 2. Applicable fire-resistance design designations of a qualified testing and inspecting agency acceptable to authorities having jurisdiction.
 - 3. Minimum sprayed fire-resistive material thicknesses needed to achieve required fire-resistance rating of each structural component and assembly.
 - 4. Treatment of sprayed fire-resistive material after application.
- D. Samples: For each exposed product and for each color and texture specified, not less than 3 inches square in size.

1.7 INFORMATIONAL SUBMITTALS

- A. Compatibility Certificates: From SFRM manufacturer, certifying compatibility of SFRM and topcoats.
- B. Product Certificates: For each type of sprayed fire-resistive material.
- C. Preconstruction Test Reports: For fire protection.

1.8 QUALITY ASSURANCE

- A. Installer Qualifications: A firm or individual certified, licensed, or otherwise qualified by sprayed fire-resistive material manufacturer as experienced and with sufficient trained staff to install manufacturer's products according to specified requirements.

1.9 PRECONSTRUCTION TESTING

- A. Preconstruction Testing Service: Engage a qualified testing agency to perform preconstruction testing for fire protection.
- B. Preconstruction Adhesion and Compatibility Testing: Test for compliance with requirements for specified performance and test methods.
 - 1. Bond Strength: Test for cohesive and adhesive strength according to ASTM E736. Provide bond strength indicated in referenced fire-resistance design, but not less than minimum specified in Part 2.
 - 2. Verify that manufacturer, through its own laboratory testing or field experience, attests that primers or coatings are compatible with sprayed fire-resistive material.
 - 3. For materials failing tests, obtain sprayed fire-resistive material manufacturer's written instructions for corrective measures including the use of specially formulated bonding agents or primers.

1.10 FIELD CONDITIONS

- A. Environmental Limitations: Do not apply fire protection when ambient and substrate temperature is 44 deg F or lower unless temporary protection and heat are provided to maintain temperature at or above this level for 24 hours before, during, and for 24 hours after product application.
- B. Ventilation: Ventilate building spaces during and after application of fire protection until sprayed fire-resistive materials are dried and cured, providing complete air exchanges according to manufacturer's written instructions. Use natural means or, if they are inadequate, forced-air circulation until fire protection dries thoroughly.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Assemblies: Provide fire protection, including auxiliary materials, according to requirements of each fire-resistance design and manufacturer's written instructions.
- B. Source Limitations: Obtain fire protection from single SFRM manufacturer or manufacturer approved by SFRM manufacturer.
- C. Fire-Resistance Design: Indicated on Drawings, tested according to ASTM E119 or UL 263; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.
 - 1. Steel members are to be considered unrestrained unless specifically noted otherwise.
- D. Material Compatibility: Materials for use within each system shall be compatible with one another and substrates indicated, under conditions of service and application as demonstrated by manufacturer, based on testing and experience.
 - 1. Verify topcoats comply with required surface-burning characteristics.
 - a. Surface-Burning Characteristics: Comply with ASTM E84; testing by a qualified testing agency.
 - 1) Flame-Spread Index: 25 or less.
 - 2) Smoke-Developed Index: 200 or less.
- E. VOC Content: For field applications, coatings shall comply with VOC content limits of authorities having jurisdiction and the following VOC content limits:
 - 1. Flat Paints and Coatings: 50 g/L.
 - 2. Nonflat Paints and Coatings: 100 g/L.
 - 3. Primers, Sealers, and Undercoaters: 100 g/L.
- F. Asbestos: Provide products containing no asbestos.

2.2 SPRAYED FIRE-RESISTIVE MATERIALS

- A. Low-Density Sprayed Fire-Resistive Material: Manufacturer's standard, factory-mixed, lightweight, dry formulation, complying with indicated fire-resistance design, and mixed with water at Project site to form a slurry or mortar before conveyance and application.
1. Products: Subject to compliance with requirements, available products that may be incorporated in the Work, include, but are not limited to:
 - a. GCP Applied Technologies Inc.; Monokote MK-6 series.
 - b. Isolatek International; Cafco 300 series.
 2. Application: Apply to surfaces that are concealed from view behind other construction when the Work is completed.
 3. Bond Strength: Minimum 200-lbf/sq. ft. cohesive and adhesive strength based on field testing according to ASTM E736.
 4. Density: Not less than 15 pcf and as specified in the approved fire-resistance design, according to ASTM E605.
 5. Thickness: As required for fire-resistance design indicated, measured according to requirements of fire-resistance design or ASTM E605, whichever is thicker, but not less than 0.375 inch.
 6. Surface-Burning Characteristics: Comply with ASTM E84; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.
 - a. Flame-Spread Index: 0.
 - b. Smoke-Developed Index: 0.
 7. Compressive Strength: Minimum 10 lbf/sq. in. according to ASTM E761.
 8. Corrosion Resistance: No evidence of corrosion according to ASTM E937.
 9. Deflection: No cracking, spalling, or delamination according to ASTM E759.
 10. Air Erosion: Maximum weight loss of 0.000 g/sq. ft. in 24 hours according to ASTM E859.
 11. Finish: Spray-textured finish.
- B. Medium-Density Sprayed Fire-Resistive Material: Manufacturer's standard, factory-mixed, lightweight, dry formulation, complying with indicated fire-resistance design, and mixed with water at Project site to form a slurry or mortar before conveyance and application.
1. Products: Subject to compliance with requirements, available products that may be incorporated in the Work, include, but are not limited to:
 - a. GCP Applied Technologies Inc.; Monokote Z-106/HY.
 - b. Isolatek International; Cafco 400.

2. Application: Apply to surfaces that are exposed to view when the Work is completed, that are accessible through suspended ceilings, or that are in mechanical rooms and other locations indicated.
3. Bond Strength: Minimum 2000-lbf/sq. ft. cohesive and adhesive strength based on field testing according to ASTM E736.
4. Density: Not less than 22 pcf and as specified in the approved fire-resistance design, according to ASTM E605.
5. Thickness: As required for fire-resistance design indicated, measured according to requirements of fire-resistance design or ASTM E605, whichever is thicker, but not less than 0.375 inch.
6. Surface-Burning Characteristics: Comply with ASTM E84; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.
 - a. Flame-Spread Index: 0
 - b. Smoke-Developed Index: 0.
7. Compressive Strength: Minimum 100 lbf/sq. in. according to ASTM E761.
8. Corrosion Resistance: No evidence of corrosion according to ASTM E937.
9. Deflection: No cracking, spalling, or delamination according to ASTM E759.
10. Effect of Impact on Bonding: No cracking, spalling, or delamination according to ASTM E760.
11. Air Erosion: Maximum weight loss of 0.000 g/sq. ft. in 24 hours according to ASTM E859.
12. Finish: Rolled, spray-textured finish.

2.3 AUXILIARY MATERIALS

- A. Provide auxiliary materials that are compatible with sprayed fire-resistive material and substrates and are approved by UL or another testing and inspecting agency acceptable to authorities having jurisdiction for use in fire-resistance designs indicated.
- B. Substrate Primers: Primers approved by sprayed fire-resistive material manufacturer and complying with one or both of the following requirements:
 1. Primer and substrate are identical to those tested in required fire-resistance design by UL or another testing and inspecting agency acceptable to authorities having jurisdiction.
 2. Primer's bond strength in required fire-resistance design complies with specified bond strength for sprayed fire-resistive material and with requirements in UL's "Fire Resistance Directory" or in the listings of another qualified testing agency acceptable to authorities having jurisdiction, based on a series of bond tests according to ASTM E736.

- C. Bonding Agent: Product approved by sprayed fire-resistive material manufacturer and complying with requirements in UL's "Fire Resistance Directory" or in the listings of another qualified testing agency acceptable to authorities having jurisdiction.
- D. Metal Lath: Expanded metal lath fabricated from material of weight, configuration, and finish required, according to fire-resistance designs indicated and sprayed fire-resistive material manufacturer's written instructions. Include clips, lathing accessories, corner beads, and other anchorage devices required to attach lath to substrates and to receive sprayed fire-resistive material.
- E. Reinforcing Fabric: Glass- or carbon-fiber fabric of type, weight, and form required to comply with fire-resistance designs indicated; approved and provided by sprayed fire-resistive material manufacturer.
- F. Reinforcing Mesh: Metallic mesh reinforcement of type, weight, and form required to comply with fire-resistance design indicated; approved and provided by sprayed fire-resistive material manufacturer. Include pins and attachment.
- G. Sealer: Transparent-drying, water-dispersible, tinted protective coating recommended in writing by sprayed fire-resistive material manufacturer for each fire-resistance design.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, areas, and conditions, with Installer present, for compliance with requirements for substrates and other conditions affecting performance of the Work and according to each fire-resistance design.
 - 1. Verify that substrates are free of dirt, oil, grease, release agents, rolling compounds, mill scale, loose scale, incompatible primers, paints, and encapsulants, or other foreign substances capable of impairing bond of fire protection with substrates under conditions of normal use or fire exposure.
 - 2. Verify that objects penetrating fire protection, including clips, hangers, support sleeves, and similar items, are securely attached to substrates.
 - 3. Verify that substrates receiving fire protection are not obstructed by ducts, piping, equipment, or other suspended construction that will interfere with fire protection application.
- B. Verify that roof construction, installation of rooftop HVAC equipment, and other related work are complete before beginning Work.
- C. Conduct tests according to sprayed fire-resistive material manufacturer's written instructions to verify that substrates are free of substances capable of interfering with bond.
- D. Proceed with installation only after unsatisfactory conditions have been corrected.
- E. Beginning application constitutes Contractor's acceptance of substrates and conditions.

3.2 PREPARATION

- A. Cover other work subject to damage from fallout or overspray of fire protection materials during application.
- B. Clean substrates of substances that could impair bond of fire protection.
- C. Prime substrates where included in fire-resistance design and where recommended in writing by sprayed fire-resistive material manufacturer unless compatible shop primer has been applied and is in satisfactory condition to receive fire protection.
- D. For applications visible on completion of Project, repair substrates to remove surface imperfections that could affect uniformity of texture and thickness in finished surface of fire protection. Remove minor projections and fill voids that would telegraph through fire-resistive products after application.

3.3 APPLICATION

- A. Construct fire protection assemblies that are identical to fire-resistance design indicated and products as specified, tested, and substantiated by test reports; for thickness, primers, sealers, topcoats, finishing, and other materials and procedures affecting fire protection Work.
- B. Comply with sprayed fire-resistive material manufacturer's written instructions for mixing materials, application procedures, and types of equipment used to mix, convey, and apply fire protection; as applicable to particular conditions of installation and as required to achieve fire-resistance ratings indicated.
- C. Coordinate application of fire protection with other construction to minimize need to cut or remove fire protection.
 - 1. Do not begin applying fire protection until clips, hangers, supports, sleeves, and other items penetrating fire protection are in place.
 - 2. Defer installing ducts, piping, and other items that would interfere with applying fire protection until application of fire protection is completed.
- D. Metal Decks:
 - 1. Do not apply fire protection to underside of metal deck substrates until concrete topping, if any, is completed.
 - 2. Do not apply fire protection to underside of metal roof deck until roofing is completed; prohibit roof traffic during application and drying of fire protection.
- E. Install auxiliary materials as required, as detailed, and according to fire-resistance design and sprayed fire-resistive material manufacturer's written instructions for conditions of exposure and intended use. For auxiliary materials, use attachment and anchorage devices of type recommended in writing by sprayed fire-resistive material manufacturer.
- F. Spray apply fire protection to maximum extent possible. After the spraying operation in each area, complete the coverage by trowel application or other placement method recommended in writing by sprayed fire-resistive material manufacturer.

- G. Extend fire protection in full thickness over entire area of each substrate to be protected.
- H. Install body of fire protection in a single course unless otherwise recommended in writing by sprayed fire-resistive material manufacturer.
- I. Where sealers are used, apply products that are tinted to differentiate them from fire protection over which they are applied.
- J. Provide a uniform finish complying with description indicated for each type of fire protection material and matching finish approved for required mockups.
- K. Cure fire protection according to sprayed fire-resistive material manufacturer's written instructions.
- L. Do not install enclosing or concealing construction until after fire protection has been applied, inspected, and tested and corrections have been made to deficient applications.
- M. Finishes: Where indicated, apply fire protection to produce the following finishes:
 - 1. Spray-Textured Finish: Finish left as spray applied with no further treatment.
 - 2. Rolled, Spray-Textured Finish: Even finish produced by rolling spray-applied finish with a damp paint roller to remove drippings and excessive roughness.
- N. Apply topcoats according to manufacturer's written instructions.

3.4 FIELD QUALITY CONTROL

- A. Special Inspections: Special Inspections are required for the work of this Section. Refer to Division 01 Section "Quality Requirements" and its attachments.
- B. Perform the tests and inspections of completed Work in successive stages. Do not proceed with application of fire protection for the next area until test results for previously completed applications of fire protection show compliance with requirements. Tested values must equal or exceed values as specified and as indicated and required for approved fire-resistance design.
- C. Fire protection will be considered defective if it does not pass tests and inspections.
 - 1. Remove and replace fire protection that does not pass tests and inspections, and retest.
 - 2. Apply additional fire protection, per manufacturer's written instructions, where test results indicate insufficient thickness, and retest.
- D. Prepare test and inspection reports.

3.5 CLEANING

- A. Cleaning: Immediately after completing spraying operations in each containable area of Project, remove material overspray and fallout from surfaces of other construction and clean exposed surfaces to remove evidence of soiling.

3.6 PROTECTION

- A. Protect fire protection, according to advice of manufacturer and Installer, from damage resulting from construction operations or other causes, so fire protection is without damage or deterioration at time of Substantial Completion.

3.7 RESTORATION

- A. As installation of other construction proceeds, inspect fire protection and restore damaged areas and fire protection removed due to work of other trades.
- B. Restore fire protection damaged by other work before concealing it with other construction.
- C. Restore fire protection by reapplying it using same method as original installation or using manufacturer's recommended trowel-applied product.

END OF SECTION 07 81 00

SECTION 07 84 13 - PENETRATION FIRESTOPPING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Penetrations in fire-resistance-rated walls.
 - 2. Penetrations in horizontal assemblies.
 - 3. Penetrations in smoke barriers.

1.3 SUBMITTALS, GENERAL

- A. General: Submit all action submittals required by this Section concurrently.

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of product.
 - 1. Penetrations in fire-resistance-rated walls.
 - 2. Penetrations in horizontal assemblies.
 - 3. Penetrations in smoke barriers.
- B. Product Schedule: For each penetration firestopping system. Include type of penetration, illustration of firestopping system, and design designation of qualified testing and inspecting agency.

1.5 CLOSEOUT SUBMITTALS

- A. Installer Certificates: From Installer indicating that penetration firestopping systems have been installed in compliance with requirements and manufacturer's written instructions.

1.6 QUALITY ASSURANCE

- A. Installer Qualifications: A firm that has been approved by FM Approvals according to FM Approvals 4991, "Approval Standard for Firestop Contractors," or been evaluated by UL and found to comply with its "Qualified Firestop Contractor Program Requirements."

1.7 PROJECT CONDITIONS

- A. Environmental Limitations: Do not install penetration firestopping system when ambient or substrate temperatures are outside limits permitted by penetration firestopping system manufacturers or when substrates are wet because of rain, frost, condensation, or other causes.
- B. Install and cure penetration firestopping materials per manufacturer's written instructions using natural means of ventilations or, where this is inadequate, forced-air circulation.

1.8 COORDINATION

- A. Coordinate construction of openings and penetrating items to ensure that penetration firestopping systems can be installed according to specified firestopping system design.
- B. Coordinate sizing of sleeves, openings, core-drilled holes, or cut openings to accommodate penetration firestopping systems.

PART 2 - PRODUCTS

2.1 SOURCE LIMITATIONS

- A. Obtain joint firestop systems for each type of joint opening indicated from single manufacturer.

2.2 PERFORMANCE REQUIREMENTS

- A. Fire-Test-Response Characteristics:
 - 1. Perform penetration firestopping system tests by a qualified testing agency acceptable to authorities having jurisdiction.
 - 2. Test per testing standards referenced in "Penetration Firestopping Systems" Article. Provide rated systems complying with the following requirements:
 - a. Penetration firestop systems installed with products bearing the classification marking of a qualified product certification agency in accordance with listed system designs published by a qualified testing agency.
 - 1) UL in its online directory "Product iQ."

2.3 PENETRATION FIRESTOPPING SYSTEMS

- A. Penetration Firestopping Systems: Systems that resist spread of fire, passage of smoke and other gases, and maintain original fire-resistance rating of construction penetrated. Penetration firestopping systems are to be compatible with one another, with the substrates forming openings, and with penetrating items if any.

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. 3M Fire Protection Products.
 - b. Hilti, Inc.
 - c. RectorSeal, a CSW Industrials company.
- B. Penetrations in Fire-Resistance-Rated Walls: Penetration firestopping systems with ratings determined per ASTM E814 or UL 1479.
 1. F-Rating: Not less than the fire-resistance rating of the wall penetrated.
 2. Membrane Penetrations: Install recessed fixtures such that the required fire resistance will not be reduced.
- C. Penetrations in Horizontal Assemblies: Penetration firestopping systems with ratings determined per ASTM E814 or UL 1479.
 1. F-Rating: At least one hour, but not less than the fire-resistance rating of the floor penetrated.
 2. T-Rating: At least one hour, but not less than the fire-resistance rating of the floor. The following floor penetrations do not require a T-rating:
 - a. Those within the cavity of a wall.
 - b. Floor, tub, or shower drains within a concealed space.
 - c. 4-inch or smaller metal conduit penetrating directly into metal-enclosed electrical switchgear.
- D. Penetrations in Smoke Barriers: Penetration firestopping systems with ratings determined per UL 1479.
 1. L-Rating: Not exceeding 5.0 cfm/sq. ft. of penetration opening and no more than 50-cfm cumulative total for any 100 sq. ft. at both ambient and elevated temperatures.
- E. Exposed Penetration Firestopping Systems: Flame-spread and smoke-developed indexes of less than 25 and 450, respectively, per ASTM E84.
 1. Verify sealant has a VOC content of 250 g/L or less.
- F. Accessories: Provide components for each penetration firestopping system that are needed to install fill materials and to maintain ratings required. Use only those components specified by penetration firestopping system manufacturer and approved by qualified testing and inspecting agency for conditions indicated.
 1. Permanent forming/damming/backing materials.
 2. Substrate primers.
 3. Collars.
 4. Steel sleeves.

2.4 FILL MATERIALS

- A. Cast-in-Place Firestop Devices: Factory-assembled devices for use in cast-in-place concrete floors and consisting of an outer sleeve lined with an intumescent strip, a flange attached to one end of the sleeve for fastening to concrete formwork, and a neoprene gasket.
- B. Latex Sealants: Single-component latex formulations that do not re-emulsify after cure during exposure to moisture.
- C. Firestop Devices: Factory-assembled collars formed from galvanized steel and lined with intumescent material sized to fit specific diameter of penetrant.
- D. Intumescent Composite Sheets: Rigid panels consisting of aluminum-foil-faced intumescent elastomeric sheet bonded to galvanized-steel sheet.
- E. Intumescent Putties: Nonhardening, water-resistant, intumescent putties containing no solvents or inorganic fibers.
- F. Intumescent Wrap Strips: Single-component intumescent elastomeric strips for use around combustible penetrants.
- G. Mortars: Prepackaged dry mixes consisting of a blend of inorganic binders, hydraulic cement, fillers and lightweight aggregate formulated for mixing with water at Project site to form a nonshrinking, homogeneous mortar.
- H. Pillows/Bags: Compressible, removable, and reusable intumescent pillows encased in fire-retardant polyester or glass-fiber cloth. Where exposed, cover openings with steel-reinforcing wire mesh to protect pillows/bags from being easily removed.
- I. Silicone Foams: Multicomponent, silicone-based liquid elastomers that, when mixed, expand and cure in place to produce a flexible, nonshrinking foam.
- J. Silicone Sealants: Single-component, silicone-based, neutral-curing elastomeric sealants.
- K. Fire-Rated Cable Sleeve Kits: Complete kits designed for new or existing cable penetrations through walls to accept standard accessories.
- L. Thermal Wrap: Flexible protective wrap tested and listed for up to 2-hour fire ratings in accordance with ASTM E814/UL 1479 for membrane penetrations or ASTM E1725/UL 1724 for thermal barrier and circuit integrity protection.
- M. Fire-Rated Cable Pathways: Single or gangable device modules composed of a steel raceway with integral intumescent material and requiring no additional action in the form of plugs, twisting closure, putty, pillows, sealant, or otherwise to achieve fire and air-leakage ratings.
- N. Retrofit Device for Cable Bundles: Factory-made, intumescent, collar-like device for firestopping existing over-filled cable sleeves and capable of being installed around projecting sleeves and cable bundles.
- O. Wall-Opening Protective Materials: Intumescent, non-curing putty pads or self-adhesive inserts for protection of electrical switch and receptacle boxes.

- P. Fire-Rated HVAC Retaining Angles: Steel angle system with integral intumescent firestop gasket for use around rectangular steel HVAC ducts without fire dampers.
- Q. Firestop Plugs: Flexible, re-enterable, intumescent, foam-rubber plug for use in blank round openings and cable sleeves.
- R. Fire-Rated Cable Grommet: Molded two-piece grommet made of plenum-grade polymer and foam inner core for sealing small cable penetrations in gypsum walls up to 1/2 inch diameter.
- S. Closet Flange Gasket: Molded, single-component, flexible, intumescent gasket for use beneath a water closet (toilet) flange in floor applications.
- T. Endothermic Wrap: Flexible, insulating, fire-resistant, endothermic wrap for protecting membrane penetrations of utility boxes, critical electrical circuits, communications lines, and fuel lines.

2.5 MIXING

- A. Penetration Firestopping Materials: For those products requiring mixing before application, comply with penetration firestopping system manufacturer's written instructions for accurate proportioning of materials, water (if required), type of mixing equipment, selection of mixer speeds, mixing containers, mixing time, and other items or procedures needed to produce products of uniform quality with optimum performance characteristics for application indicated.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates and conditions, with Installer present, for compliance with requirements for opening configurations, penetrating items, substrates, and other conditions affecting performance of the Work.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.
- C. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 PREPARATION

- A. Surface Cleaning: Before installing penetration firestopping systems, clean out openings immediately to comply with manufacturer's written instructions and with the following requirements:
 - 1. Remove from surfaces of opening substrates and from penetrating items foreign materials that could interfere with adhesion of penetration firestopping materials.
 - 2. Clean opening substrates and penetrating items to produce clean, sound surfaces capable of developing optimum bond with penetration firestopping materials. Remove loose particles remaining from cleaning operation.
 - 3. Remove laitance and form-release agents from concrete.

- B. Prime substrates where recommended in writing by manufacturer using that manufacturer's recommended products and methods. Confine primers to areas of bond; do not allow spillage and migration onto exposed surfaces.

3.3 INSTALLATION OF PENETRATION FIRESTOPPING SYSTEMS

- A. General: Install penetration firestopping systems to comply with manufacturer's written installation instructions and published drawings for products and applications.
- B. Install forming materials and other accessories of types required to support fill materials during their application and in the position needed to produce cross-sectional shapes and depths required to achieve fire ratings.
 - 1. After installing fill materials and allowing them to fully cure, remove combustible forming materials and other accessories not forming permanent components of firestopping.
- C. Install fill materials by proven techniques to produce the following results:
 - 1. Fill voids and cavities formed by openings, forming materials, accessories and penetrating items to achieve required fire-resistance ratings.
 - 2. Apply materials so they contact and adhere to substrates formed by openings and penetrating items.
 - 3. For fill materials that will remain exposed after completing the Work, finish to produce smooth, uniform surfaces that are flush with adjoining finishes.

3.4 IDENTIFICATION

- A. Wall Identification: Permanently label walls containing penetration firestopping systems with the words "FIRE AND/OR SMOKE BARRIER - PROTECT ALL OPENINGS," using lettering not less than 3 inches high and with minimum 0.375-inch strokes.
 - 1. Locate in accessible concealed floor, floor-ceiling, or attic space at 15 feet from end of wall and at intervals not exceeding 30 feet.
- B. Penetration Identification: Identify each penetration firestopping system with legible metal or plastic labels. Attach labels permanently to surfaces adjacent to and within 6 inches of penetration firestopping system edge so labels are visible to anyone seeking to remove penetrating items or firestopping systems. Use mechanical fasteners or self-adhering-type labels with adhesives capable of permanently bonding labels to surfaces on which labels are placed. Include the following information on labels:
 - 1. The words "Warning - Penetration Firestopping - Do Not Disturb. Notify Building Management of Any Damage."
 - 2. Contractor's name, address, and phone number.
 - 3. Designation of applicable testing and inspecting agency.
 - 4. Date of installation.
 - 5. Manufacturer's name.
 - 6. Installer's name.

3.5 FIELD QUALITY CONTROL

- A. Special Inspections: Special Inspections are required for the work of this Section. Refer to Division 01 Section “Quality Requirements” and its attachments.
 - 1. Owner will engage a qualified testing agency to perform tests and inspections according to ASTM E2174.
- B. Where deficiencies are found or penetration firestopping system is damaged or removed because of testing, repair or replace penetration firestopping system to comply with requirements.
- C. Proceed with enclosing penetration firestopping systems with other construction only after inspection reports are issued and installations comply with requirements.

3.6 CLEANING AND PROTECTION

- A. Clean off excess fill materials adjacent to openings as the Work progresses by methods and with cleaning materials that are approved in writing by penetration firestopping system manufacturers and that do not damage materials in which openings occur.
- B. Provide final protection and maintain conditions during and after installation that ensure that penetration firestopping systems are without damage or deterioration at time of Substantial Completion. If, despite such protection, damage or deterioration occurs, immediately cut out and remove damaged or deteriorated penetration firestopping material and install new materials to produce systems complying with specified requirements.

3.7 PENETRATION FIRESTOPPING SYSTEM SCHEDULE

- A. Where UL-classified systems are indicated, they refer to UL system numbers in its online directory "Product iQ" under product Category XHEZ.
- B. For each location where a penetration occurs, provide a firestopping system selected from the floor and wall system below that complies with this Section and is suitable for the penetration conditions indicated for the Project.

FLOOR Firestopping Systems Listed Using the Alpha-Alpha-Numeric Identification System Published in UL's <i>Fire Resistance Directory</i> , Vols. 2a - 2b				
TYPE OF PENETRANT	FLOOR PENETRATION SYSTEMS (First Alpha Component = C or F)			
	Concrete Floors with a Minimum Thick- ness Less Than or Equal to 5 Inches (127 MM)	Concrete Floors with a Minimum Thick- ness OF MORE Than 5 Inches (127 MM)	Framed Floors	Floor-ceiling assem- blies consisting of concrete with mem- brane protection
NO PENETRATING ITEMS	C-AJ-0001-0999 or F-A-0001-0999	C-BJ-0001-0999 or F-B-0001-0999	F-C-1001-1999	
METALLIC PIPE, CONDUIT, OR TUBING	C-AJ-1001-1999 or F-A-1001-1999	C-BJ-1001-1999, C-BK-1001-1999, or F-B-1001-1999	F-C-1001-1999	F-E-1001-1999
NONMETALLIC PIPE, CONDUIT, OR TUBING	C-AJ-2001-2999 or F-A-2001-2999	C-BJ-2001-2999, C-BK-2001-2999, or F-B-2001-2999	F-C-2001-2999	F-E-2001-2999
ELECTRICAL CABLES	C-AJ-3001-3999 or F-A-3001-3999	C-BJ-3001-3999, C-BK-3001-3999, or F-B-3001-3999	F-C-3001-3999	F-E-3001-3999
CABLE TRAYS WITH ELECTRICAL CABLES	C-AJ-4001-4999 or F-A-4001-4999	C-BJ-4001-4999 or F-B-4001-4999		
INSULATED PIPES	C-AJ-5001-5999	C-BJ-5001-5999,	F-C-5001-5999	F-E-5001-5999

FLOOR Firestopping Systems Listed Using the Alpha-Alpha-Numeric Identification System Published in UL's <i>Fire Resistance Directory</i> , Vols. 2a - 2b				
TYPE OF PENETRANT	FLOOR PENETRATION SYSTEMS (First Alpha Component = C or F)			
	Concrete Floors with a Minimum Thick- ness Less Than or Equal to 5 Inches (127 MM)	Concrete Floors with a Minimum Thick- ness OF MORE Than 5 Inches (127 MM)	Framed Floors	Floor-ceiling assem- blies consisting of concrete with mem- brane protection
	or F-A-5001-5999	C-BK-5001-5999, or F-B-5001-5999		
MISCELLANEOUS ELECTRICAL PENETRANTS	C-AJ-6001-6999 or F-A-6001-6999	C-BJ-6001-6999		
MISCELLANEOUS MECHANICAL PENETRANTS	C-AJ-7001-7999 or F-A-7001-7999	C-BJ-7001-7999 or F-B-7001-7999	F-C-7001-7999	F-E-7001-7999
GROUPINGS OF PENETRATIONS	C-AJ-8001-8999 or F-A-8001-8999	C-BJ-8001-8999 or F-B-8001-8999	F-C-8001-8999	F-E-8001-8999

WALL Firestopping Systems Listed Using the Alpha-Alpha-Numeric Identification System Published in UL's <i>Fire Resistance Directory</i> , Vols. 2a - 2b				
TYPE OF PENETRANT	Wall PENETRATION SYSTEMS (First Alpha Component = C or W)			
	Concrete or Masonry Walls with a Mini- mum Thickness Less Than or Equal to 8 Inches (203 MM)	Concrete or Masonry Walls with a Mini- mum Thickness OF MORE Than 8 Inch- es (203 MM)	Framed Walls	Composite panel walls
NO PENETRATING ITEMS	C-AJ-0001-0999, C-BJ-0001-0999, or W-J-0001-0999		W-L-000-1-0999	
METALLIC PIPE, CONDUIT, OR TUBING	C-AJ-1001-1999, C-BJ-1001-1999, or W-J-1001-1999	C-BK-1001-1999 or W-K-1001-1999	W-L-1001-1999	W-N-1001-1999
NONMETALLIC PIPE, CONDUIT, OR TUBING	C-AJ-2001-2999, C-BJ-2001-2999, or W-J-2001-2999	C-BK-2001-2999 or W-K-2001-2999	W-L-2001-2999	W-N-2001-2999
ELECTRICAL CABLES	C-AJ-3001-3999, C-BJ-3001-3999, or W-J-3001-3999	C-BK-3001-3999 or WK-3001-3999	W-L-3001-3999	
CABLE TRAYS WITH ELECTRICAL CABLES	C-AJ-4001-4999, C-BJ-4001-4999, or W-J-4001-4999	W-K-4001-4999	W-L-4001-4999	

WALL Firestopping Systems Listed Using the Alpha-Alpha-Numeric Identification System Published in UL's <i>Fire Resistance Directory</i> , Vols. 2a - 2b				
TYPE OF PENETRANT	Wall PENETRATION SYSTEMS (First Alpha Component = C or W)			
	Concrete or Masonry Walls with a Mini- mum Thickness Less Than or Equal to 8 Inches (203 MM)	Concrete or Masonry Walls with a Mini- mum Thickness OF MORE Than 8 Inch- es (203 MM)	Framed Walls	Composite panel walls
INSULATED PIPES	C-AJ-5001-5999, C-BJ-5001-5999, or W-J-5001-5999	C-BK-5001-5999	W-L-5001-5999	W-N-5001-5999
MISCELLANEOUS ELECTRICAL PENETRANTS	C-AJ-6001-6999, C-BJ-6001-6999, or W-BJ-6001-6999		W-L-6001-6999	
MISCELLANEOUS MECHANICAL PENETRANTS	C-AJ-7001-7999, C-BJ-7001-7999, or W-J-7001-7999		W-L-7001-7999	W-N-7001-7999
GROUPINGS OF PENETRATIONS	C-AJ-8001-8999, C-BJ-8001-8999, or W-J-8001-8999		W-L-8001-8999	

END OF SECTION 07 84 13

SECTION 07 84 43 - JOINT FIRESTOPPING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Joints in or between fire-resistance-rated constructions.
 - 2. Joints at exterior curtain-wall/floor intersections.
 - 3. Joints in smoke barriers.

1.3 PREINSTALLATION MEETINGS

- A. Preinstallation Conference: Conduct conference at Project site.

1.4 SUBMITTALS, GENERAL

- A. General: Submit all action submittals and informational submittals required by this Section concurrently.

1.5 ACTION SUBMITTALS

- A. Product Data: For each type of product.
 - 1. Joints in or between fire-resistance-rated constructions.
 - 2. Joints at exterior curtain-wall/floor intersections.
 - 3. Joints in smoke barriers.
- B. Sustainable Design Submittals:
 - 1. Product Data: For sealants, indicating VOC content.
- C. Product Schedule: For each joint firestopping system. Include location, illustration of firestopping system, and design designation of qualified testing agency.

1.6 CLOSEOUT SUBMITTALS

- A. Installer Certificates: From Installer indicating that joint firestopping systems have been installed in compliance with requirements and manufacturer's written instructions.

1.7 QUALITY ASSURANCE

- A. Installer Qualifications: A firm that has been approved by FM Approvals according to FM Approvals 4991, "Approval of Firestop Contractors," or been evaluated by UL and found to comply with UL's "Qualified Firestop Contractor Program Requirements."

1.8 PROJECT CONDITIONS

- A. Environmental Limitations: Do not install joint firestopping systems when ambient or substrate temperatures are outside limits permitted by joint firestopping system manufacturers or when substrates are wet due to rain, frost, condensation, or other causes.
- B. Install and cure joint firestopping systems per manufacturer's written instructions using natural means of ventilation or, where this is inadequate, forced-air circulation.

1.9 COORDINATION

- A. Coordinate construction of joints to ensure that joint firestopping systems can be installed according to specified firestopping system design.
- B. Coordinate sizing of joints to accommodate joint firestopping systems.

PART 2 - PRODUCTS

2.1 SOURCE LIMITATIONS

- A. Obtain joint firestop systems for each type of joint opening indicated from single manufacturer.

2.2 PERFORMANCE REQUIREMENTS

- A. Fire-Test-Response Characteristics:
 - 1. Perform joint firestopping system tests by a qualified testing agency acceptable to authorities having jurisdiction.
 - 2. Test per testing standards referenced in "Joint Firestopping Systems" Article. Provide rated systems complying with the following requirements:
 - a. Joint firestop systems installed with products bearing the classification marking of a qualified product certification agency in accordance with Listed System Designs published by a qualified testing agency.
 - 1) UL in its online directory "Product iQ."
- B. Rain/Water Resistance: For perimeter fire-barrier system applications, where inclement weather or greater-than-transient water exposure is expected, use products that dry rapidly and cure in the presence of atmospheric moisture sufficient to pass ASTM D6904 early rain-resistance test (24-hour exposure).

2.3 JOINT FIRESTOPPING SYSTEMS

- A. Joint Firestopping Systems: Systems that resist spread of fire, passage of smoke and other gases, and maintain original fire-resistance rating of assemblies in or between which joint firestopping systems are installed. Joint firestopping systems must accommodate building movements without impairing their ability to resist the passage of fire and hot gases.
 - 1. Joint firestopping systems that are compatible with one another, with the substrates forming openings, and with penetrating items, if any.
 - 2. Provide products that, upon curing, do not re-emulsify, dissolve, leach, breakdown, or otherwise deteriorate over time from exposure to atmospheric moisture, sweating pipes, ponding water or other forms of moisture.
 - 3. Provide firestop products that do not contain ethylene glycol.
 - 4. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. 3M Fire Protection Products.
 - b. Hilti, Inc.
 - c. RectorSeal, a CSW Industrials company.
- B. Intumescent Gypsum Wall Framing Gaskets (Applied to Steel Tracks, Runners and Studs prior to Framing Installation): Provide products with fire, smoke, and acoustical ratings that allow movement up to 100 percent compression and/or extension in accordance with UL 2079 or ASTM E1966; have an L Rating less than 1 cfm/ft. in accordance with UL 2079; and a minimum Sound Transmission Class (STC) rating of 56 in accordance with ASTM E90 or ASTM C919.
- C. For aluminum curtain-wall assemblies with one- or two-piece rectangular mullions at least 2-1/2 by 5 inches, provide perimeter fire-barrier system that does not require direct screw attachment to mullions and transoms to support and fasten curtain-wall insulation. System to be tested in accordance with ASTM E2307 for up to 2-hour fire resistance and with ASTM E1233 for wind cycling equivalent to 108 mph wind for 500 cycles.
- D. Joints in or between Fire-Resistance-Rated Construction: Provide joint firestopping systems with ratings determined per ASTM E1966 or UL 2079.
 - 1. Fire-Resistance Rating: Equal to or exceeding the fire-resistance rating of the wall, floor, or roof in or between which it is installed.
- E. Joints at Exterior Curtain-Wall/Floor Intersections: Provide joint firestopping systems with rating determined per ASTM E2307.
 - 1. F-Rating: Equal to or exceeding the fire-resistance rating of the floor assembly.

- F. Joints in Smoke Barriers: Provide joint firestopping systems with ratings determined per UL 2079 based on testing at a positive pressure differential of 0.30-inch wg.
 - 1. L-Rating: Not exceeding 5.0 cfm/ft. of joint at both ambient and elevated temperatures.
- G. Exposed Joint Firestopping Systems: Flame-spread and smoke-developed indexes of less than 25 and 450, respectively, as determined per ASTM E84.
 - 1. Verify sealant has a VOC content of 250 g/L or less.

2.4 ACCESSORIES

- A. Provide components of joint firestopping systems, including primers and forming materials, that are needed to install elastomeric fill materials and to maintain ratings required. Use only components specified by joint firestopping system manufacturer and approved by the qualified testing agency for conditions indicated.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates and conditions, with Installer present, for compliance with requirements for joint configurations, substrates, and other conditions affecting performance of the Work.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.
- C. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 PREPARATION

- A. Surface Cleaning: Before installing joint firestopping systems, clean joints immediately to comply with fire-resistive joint system manufacturer's written instructions and the following requirements:
 - 1. Remove from surfaces of joint substrates foreign materials that could interfere with adhesion of elastomeric fill materials or compromise fire-resistive rating.
 - 2. Clean joint substrates to produce clean, sound surfaces capable of developing optimum bond with elastomeric fill materials. Remove loose particles remaining from cleaning operation.
 - 3. Remove laitance and form-release agents from concrete.
- B. Prime substrates where recommended in writing by joint firestopping system manufacturer using that manufacturer's recommended products and methods. Confine primers to areas of bond; do not allow spillage and migration onto exposed surfaces.

- C. Apply a suitable bond-breaker to prevent three-sided adhesion in applications where this condition occurs, such as the intersection of a gypsum wall to floor or roof assembly where the joint is backed by a steel ceiling runner or track.

3.3 INSTALLATION

- A. General: Install joint firestopping systems to comply with manufacturer's written installation instructions and published drawings for products and applications indicated.
- B. Install forming materials and other accessories of types required to support elastomeric fill materials during their application and in position needed to produce cross-sectional shapes and depths required to achieve fire ratings indicated.
 - 1. After installing elastomeric fill materials and allowing them to fully cure, remove combustible forming materials and other accessories not indicated as permanent components of fire-resistive joint system.
- C. Install elastomeric fill materials for joint firestopping systems by proven techniques to produce the following results:
 - 1. Elastomeric fill voids and cavities formed by joints and forming materials as required to achieve fire-resistance ratings indicated.
 - 2. Apply elastomeric fill materials so they contact and adhere to substrates formed by joints.
 - 3. For elastomeric fill materials that will remain exposed after completing the Work, finish to produce smooth, uniform surfaces that are flush with adjoining finishes.

3.4 IDENTIFICATION

- A. Wall Identification: Permanently label walls containing firestopping systems with the words "FIRE AND/OR SMOKE BARRIER - PROTECT ALL OPENINGS," using lettering not less than 3 inches high and with minimum 0.375-inch strokes.
 - 1. Locate in accessible concealed floor, floor-ceiling, or attic space at 15 ft. from end of wall and at intervals not exceeding 30 ft.
- B. Joint Identification: Identify joint firestopping systems with legible metal or plastic labels. Attach labels permanently to surfaces adjacent to and within 6 inches of joint edge so labels are visible to anyone seeking to remove or joint firestopping system. Use mechanical fasteners or self-adhering-type labels with adhesives capable of permanently bonding labels to surfaces on which labels are placed. Include the following information on labels:
 - 1. The words "Warning - Joint Firestopping - Do Not Disturb. Notify Building Management of Any Damage."
 - 2. Contractor's name, address, and phone number.
 - 3. Designation of applicable testing agency.
 - 4. Date of installation.
 - 5. Manufacturer's name.
 - 6. Installer's name.

3.5 FIELD QUALITY CONTROL

- A. Special Inspections: Special Inspections are required for the work of this Section. Refer to Division 01 Section "Quality Requirements" and its attachments.
 - 1. Owner will engage a qualified testing agency to perform tests and inspections according to ASTM E2393.
- B. Where deficiencies are found or joint firestopping systems are damaged or removed due to testing, repair or replace joint firestopping systems so they comply with requirements.
- C. Proceed with enclosing joint firestopping systems with other construction only after inspection reports are issued and installations comply with requirements.

3.6 CLEANING AND PROTECTION

- A. Clean off excess elastomeric fill materials adjacent to joints as the Work progresses by methods and with cleaning materials that are approved in writing by joint firestopping system manufacturers and that do not damage materials in which joints occur.
- B. Provide final protection and maintain conditions during and after installation that ensure joint firestopping systems are without damage or deterioration at time of Substantial Completion. If damage or deterioration occurs despite such protection, cut out and remove damaged or deteriorated joint firestopping systems immediately and install new materials to produce joint firestopping systems complying with specified requirements.

3.7 JOINT FIRESTOPPING SYSTEM SCHEDULE

- A. Where UL-classified systems are indicated, they refer to system numbers in UL's online directory "Product iQ" under product Category XHBN or Category XHDG.
- B. Floor-to-Floor, Joint Firestopping Systems:
 - 1. UL-Classified Systems:
 - a. FF-D- 0000-0999.
 - 2. Assembly Rating: 2 hours.
 - 3. Nominal Joint Width: As indicated.
 - 4. W-Rating: No leakage of water at completion of water leakage testing.
- C. Wall-to-Wall, Joint Firestopping Systems:
 - 1. UL-Classified Systems:
 - a. WW-D- 0000-0999.

2. Assembly Rating: 2 hours.
 3. Nominal Joint Width: As indicated.
- D. Floor-to-Wall, Joint Firestopping Systems:
1. UL-Classified Systems:
 - a. FW-D- 0000-0999.
- E. Head-of-Wall, Fire-Resistive Joint Firestopping Systems:
1. UL-Classified Systems:
 - a. HW-D- 0000-0999.

END OF SECTION 07 84 43

SECTION 07 92 00 - JOINT SEALANTS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Silicone joint sealants.
 - 2. Latex joint sealants.
 - 3. Acoustical joint sealants.

1.3 SUBMITTALS, GENERAL

- A. General: Submit all action submittals required by this Section concurrently.

1.4 ACTION SUBMITTALS

- A. Product Data: For each joint-sealant product indicated.
 - 1. Cylindrical sealant backings.
 - 2. Bond-breaker tape.
 - 3. Primers.
- B. As-Specified Data: If the product to be incorporated into Project is as specified by manufacturer name and product designation in Part 2 of this Specification Section, submit the “**As-Specified Verification Form**” (attached to Division 01 Section “Submittal Procedures”) for each item listed below, otherwise submit full Product Data for the following:
 - 1. Silicone joint sealants.
 - 2. Latex joint sealants.
 - 3. Acoustical joint sealants.
- C. Samples for Initial Selection: Manufacturer's color charts showing the full range of colors available for each product exposed to view.
- D. Samples for Verification: For each kind and color of joint sealant required, provide Samples with joint sealants in 1/2-inch-wide joints formed between two 6-inch-long strips of material matching the appearance of exposed surfaces adjacent to joint sealants.

E. Joint-Sealant Schedule: Include the following information:

1. Joint-sealant application, joint location, and designation.
2. Joint-sealant manufacturer and product name.
3. Joint-sealant formulation.

1.5 MOCKUPS

- A. Install sealant in mockups of assemblies specified in other Sections that are indicated to receive joint sealants specified in this Section. Use materials and installation methods specified in this Section.

1.6 FIELD CONDITIONS

- A. Do not proceed with installation of joint sealants under the following conditions:

1. When ambient and substrate temperature conditions are outside limits permitted by joint-sealant manufacturer or are below 40 deg F.
2. When joint substrates are wet.
3. Where joint widths are less than those allowed by joint-sealant manufacturer for applications indicated.
4. Where contaminants capable of interfering with adhesion have not yet been removed from joint substrates.

PART 2 - PRODUCTS

2.1 JOINT SEALANTS, GENERAL

- A. Compatibility: Provide joint sealants, backings, and other related materials that are compatible with one another and with joint substrates under conditions of service and application, as demonstrated by joint-sealant manufacturer, based on testing and field experience.
- B. VOC Content: Sealants and sealant primers shall comply with the following:
1. Architectural sealants shall have a VOC content of 250 g/L or less.
 2. Sealants and sealant primers for nonporous surfaces shall have a VOC content of 250 g/L or less.
 3. Sealants and sealant primers for porous substrates shall have a VOC content of 775 g/L or less.
- C. Colors of Exposed Joint Sealants: As selected by Architect from manufacturer's full range. Multiple colors may be selected.

2.2 SILICONE JOINT SEALANTS

- A. Silicone Joint Sealants: Single-component, nonsag, plus 100 percent and minus 50 percent movement capability, nontraffic-use, neutral-curing silicone joint sealant; ASTM C920, Type S, Grade NS, Class 100/50, Use NT.
1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Dow Chemical Company (The); DOWSIL790 Silicone Building Sealant.
 - b. GE/Momentive Performance Materials Inc.; SCS2700 SilPruf LM.
 - c. Pecora Corporation; 890NST.
 - d. Tremco Incorporated; Spectrem 1.
 2. Joint-Sealant Application: Joints in vertical surfaces.
 - a. Exterior Joint Locations:
 - 1) Construction joints in cast-in-place concrete.
 - 2) Joints between plant-precast architectural concrete units.
 - 3) Control and expansion joints in unit masonry.
 - 4) Joints in exterior insulation and finish systems.
 - 5) Joints between different materials listed above.
 - 6) Perimeter joints between materials listed above and frames of exterior openings.
 - 7) Other joints as indicated.
 - b. Interior Joint Locations:
 - 1) Control and expansion joints on exposed interior surfaces of exterior walls.
 - 2) Perimeter joints of exterior openings.
 - 3) Other joints as indicated.

2.3 LATEX JOINT SEALANTS

- A. Acrylic Latex Joint Sealants: Acrylic latex or siliconized acrylic latex, ASTM C834, Type OP.
1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Pecora Corporation; AC-20 +Silicone.
 - b. Tremco Incorporated; Tremflex 834.
 2. Joint-Sealant Application: Interior joints in vertical surfaces not subject to significant movement.
 - a. Joint Locations:
 - 1) Vertical joints on exposed surfaces of interior unit masonry concrete gypsum board

- 2) Perimeter joints between interior wall surfaces and frames of openings.
- 3) Other joints as indicated.

2.4 ACOUSTICAL JOINT SEALANTS

- A. Acoustical Joint Sealants for Exposed and Concealed Joints: Manufacturer's standard nonsag, paintable, nonstaining latex acoustical sealant complying with ASTM C834.
 1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Grabber Construction Products; Grabber Acoustical Sound Sealant.
 - b. Pecora Corporation; AC-20 FTR.
 - c. USG Corporation; Sheetrock Brand Acoustical Sealant.

2.5 JOINT-SEALANT BACKING

- A. Sealant Backing Material, General: Nonstaining; compatible with joint substrates, sealants, primers, and other joint fillers; and approved for applications indicated by sealant manufacturer based on field experience and laboratory testing.
- B. Cylindrical Sealant Backings: ASTM C1330, Type C (closed-cell material with a surface skin), Type O (open-cell material) or either of the preceding types, as approved in writing by joint-sealant manufacturer for joint application indicated, and of size and density to control sealant depth and otherwise contribute to producing optimum sealant performance.
- C. Bond-Breaker Tape: Polyethylene tape or other plastic tape recommended by sealant manufacturer for preventing sealant from adhering to rigid, inflexible joint-filler materials or joint surfaces at back of joint. Provide self-adhesive tape where applicable.

2.6 MISCELLANEOUS MATERIALS

- A. Primer: Material recommended by joint-sealant manufacturer where required for adhesion of sealant to joint substrates indicated, as determined from preconstruction joint-sealant-substrate tests and field tests.
- B. Cleaners for Nonporous Surfaces: Chemical cleaners acceptable to manufacturers of sealants and sealant backing materials, free of oily residues or other substances capable of staining or harming joint substrates and adjacent nonporous surfaces in any way, and formulated to promote optimum adhesion of sealants to joint substrates.
- C. Masking Tape: Nonstaining, nonabsorbent material compatible with joint sealants and surfaces adjacent to joints.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine joints indicated to receive joint sealants, with Installer present, for compliance with requirements for joint configuration, installation tolerances, and other conditions affecting performance of the Work.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.
- C. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 PREPARATION

- A. Surface Cleaning of Joints: Clean out joints immediately before installing joint sealants to comply with joint-sealant manufacturer's written instructions and the following requirements:
 - 1. Remove all foreign material from joint substrates that could interfere with adhesion of joint sealant, including dust, paints (except for permanent, protective coatings tested and approved for sealant adhesion and compatibility by sealant manufacturer), old joint sealants, oil, grease, waterproofing, water repellents, water, surface dirt, and frost.
 - 2. Clean porous joint substrate surfaces by brushing, grinding, mechanical abrading, or a combination of these methods to produce a clean, sound substrate capable of developing optimum bond with joint sealants. Remove loose particles remaining after cleaning operations above by vacuuming or blowing out joints with oil-free compressed air.
 - 3. Remove laitance and form-release agents from concrete.
 - 4. Clean nonporous joint substrate surfaces with chemical cleaners or other means that do not stain, harm substrates, or leave residues capable of interfering with adhesion of joint sealants.
- B. Joint Priming: Prime joint substrates where recommended by joint-sealant manufacturer or as indicated by preconstruction joint-sealant-substrate tests or prior experience. Apply primer to comply with joint-sealant manufacturer's written instructions. Confine primers to areas of joint-sealant bond; do not allow spillage or migration onto adjoining surfaces.
- C. Masking Tape: Use masking tape where required to prevent contact of sealant or primer with adjoining surfaces that otherwise would be permanently stained or damaged by such contact or by cleaning methods required to remove sealant smears. Remove tape immediately after tooling without disturbing joint seal.

3.3 INSTALLATION OF JOINT SEALANTS

- A. General: Comply with joint-sealant manufacturer's written installation instructions for products and applications indicated, unless more stringent requirements apply.

- B. Sealant Installation Standard: Comply with recommendations in ASTM C1193 for use of joint sealants as applicable to materials, applications, and conditions indicated.
- C. Install sealant backings of kind indicated to support sealants during application and at position required to produce cross-sectional shapes and depths of installed sealants relative to joint widths that allow optimum sealant movement capability.
 - 1. Do not leave gaps between ends of sealant backings.
 - 2. Do not stretch, twist, puncture, or tear sealant backings.
 - 3. Remove absorbent sealant backings that have become wet before sealant application, and replace them with dry materials.
- D. Install bond-breaker tape behind sealants where sealant backings are not used between sealants and backs of joints.
- E. Install sealants using proven techniques that comply with the following and at the same time backings are installed:
 - 1. Place sealants so they directly contact and fully wet joint substrates.
 - 2. Completely fill recesses in each joint configuration.
 - 3. Produce uniform, cross-sectional shapes and depths relative to joint widths that allow optimum sealant movement capability.
- F. Tooling of Nonsag Sealants: Immediately after sealant application and before skinning or curing begins, tool sealants according to requirements specified in subparagraphs below to form smooth, uniform beads of configuration indicated; to eliminate air pockets; and to ensure contact and adhesion of sealant with sides of joint.
 - 1. Remove excess sealant from surfaces adjacent to joints.
 - 2. Use tooling agents that are approved in writing by sealant manufacturer and that do not discolor sealants or adjacent surfaces.
 - 3. Provide concave joint profile per Figure 8A in ASTM C1193 unless otherwise indicated.

3.4 INSTALLATION OF ACOUSTICAL JOINT SEALANTS

- A. Comply with acoustical joint-sealant manufacturer's written installation instructions unless more stringent requirements apply.
- B. Stud Partition Assemblies: Seal construction at perimeters, behind control joints, and at openings and penetrations with a continuous bead of acoustical joint sealant. Install acoustical joint sealants at both faces of partitions, at perimeters, and through penetrations. Comply with ASTM C919, ASTM C1193, and manufacturer's written recommendations for closing off sound-flanking paths around or through assemblies, including sealing partitions to underside of floor slabs above acoustical ceilings.
- C. Acoustical Ceiling Areas: Apply acoustical joint sealant at perimeter edge moldings of acoustical ceiling areas in a continuous ribbon concealed on back of vertical legs of moldings before they are installed.

3.5 INSTALLATION OF PREFORMED JOINT SEALS

- A. General: Comply with preformed joint seal manufacturer's written installation instructions for products and applications indicated unless more stringent requirements apply.
- B. Installation of Preformed Joint Seals:
 - 1. Install each length of seal immediately after removing protective wrapping.
 - 2. Firmly secure compressed joint seals to joint gap side to obtain full bond as recommended by manufacturer.
 - 3. Do not pull or stretch material. Produce seal continuity at splices, ends, turns, and intersections of joints.
 - 4. For applications at low ambient temperatures, heat foam joint seal material in compliance with manufacturer's written instructions.

3.6 CLEANING

- A. Clean off excess sealant or sealant smears adjacent to joints as the Work progresses by methods and with cleaning materials approved in writing by manufacturers of joint sealants and of products in which joints occur.

3.7 PROTECTION

- A. Protect joint sealants during and after curing period from contact with contaminating substances and from damage resulting from construction operations or other causes so sealants are without deterioration or damage at time of Substantial Completion. If, despite such protection, damage or deterioration occurs, cut out, remove, and correct damaged or deteriorated joint sealants immediately so installations with corrected areas are indistinguishable from original work.

END OF SECTION 07 92 00

SECTION 07 95 13.13 - INTERIOR EXPANSION JOINT COVER ASSEMBLIES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes interior expansion joint cover assemblies.

1.3 PREINSTALLATION MEETINGS

- A. Preinstallation Conference: Conduct conference at Project site.

1.4 SUBMITTALS, GENERAL

- A. General: Submit all action submittals and informational submittals required by this Section concurrently.

1.5 ACTION SUBMITTALS

- A. Product Data: For each type of product.
 - 1. Include construction details, material descriptions, dimensions of individual components and profiles, accessories, and finishes for expansion joint cover assemblies.
- B. As-Specified Data: If the product to be incorporated into Project is as specified by manufacturer name and product designation in Part 2 of this Specification Section, submit the “**As-Specified Verification Form**” (attached to Division 01 Section “Submittal Procedures”) for each item listed below, otherwise submit full Product Data for the following:
 - 1. Glide-plate floor joint covers with serrated cap plates.
 - 2. Glide-plate floor joint covers recessed for finish flooring.
 - 3. Glide-plate wall joint covers.
 - 4. Elastomeric-seal wall joint covers.
 - 5. Elastomeric-seal acoustical ceiling joint covers.
- C. Shop Drawings: For each expansion joint cover assembly.
 - 1. Include plans, elevations, sections, details, splices, block-out requirement, attachments to other work, and line diagrams showing entire route of each expansion joint.
 - 2. Where expansion joint cover assemblies change planes, provide isometric or clearly detailed drawing depicting how components interconnect.

- D. Samples: For each type of exposed finish.
 - 1. Include manufacturer's color charts showing the full range of colors and finishes available for each exposed metal and elastomeric-seal material.
- E. Expansion Joint Cover Assembly Schedule: Include the following information in tabular form:
 - 1. Manufacturer and model number for each expansion joint cover assembly.
 - 2. Expansion joint cover assembly location cross-referenced to Drawings.
 - 3. Nominal joint width.
 - 4. Materials, colors, and finishes.
 - 5. Fire-resistance ratings.

1.6 INFORMATIONAL SUBMITTALS

- A. Engineering Judgments: Where Project conditions require modification to a particular fire-resistance-rated interior expansion joint assembly condition shown in the Drawings, submit illustration, with modifications marked, approved by fire-resistance-rated interior expansion joint assembly manufacturer's fire-protection engineer as an engineering judgment or equivalent fire-resistance-rated assembly.

PART 2 - PRODUCTS

2.1 ASSEMBLY DESCRIPTION

- A. Furnish units in longest practicable lengths to minimize field splicing.
- B. Include factory-fabricated closure materials and transition pieces, T-joints, corners, curbs, cross-connections, and other accessories as required to provide continuous expansion joint cover assemblies.
- C. Source Limitation: Obtain expansion control systems from single source from single manufacturer.

2.2 PERFORMANCE REQUIREMENTS

- A. Fire-Resistance Ratings: Provide expansion joint cover assemblies with fire barriers identical to those of systems tested for fire resistance according to UL 2079 or ASTM E1966 by a qualified testing agency.
 - 1. Hose Stream Test: Wall-to-wall and wall-to-ceiling assemblies shall be subjected to hose stream testing.

2.3 FLOOR EXPANSION JOINT COVERS

- A. Glide-Plate Floor Joint Cover with Serrated Cap Plates: Assembly consisting of center plate that slides in and out of slots in metal frames fixed to sides of joint gap, with serrated cap plates.

1. Floor-to-Floor Type EJ<KA750>:
 - a. Products: Subject to compliance with requirements, available products that may be incorporated in the Work include, but are not limited to:
 - 1) Balco; a CSW Industrials Company; (Glide Plate) 6000 Series, 6FS-1m.
 - 2) Construction Specialties, Inc.; Allway Metal ALS-100.
 - 3) MM Systems Corporation; Classic Cover System HFX-1-1.
 - b. Nominal Joint Width: One inch.
 - c. Fire-Resistance Rating: Not less than that of adjacent construction.
 - d. Exposed Metal:
 - 1) Aluminum: Mill.
 2. Floor-to-Wall Type EJ<KA750>:
 - a. Products: Subject to compliance with requirements, available products that may be incorporated in the Work include, but are not limited to:
 - 1) Balco; a CSW Industrials Company; (Glide Plate) 6000 Series, 6FVS-1m.
 - 2) Construction Specialties, Inc.; Allway Metal ALSW-100.
 - 3) MM Systems Corporation; Classic Cover System HFXE-1-0.5.
 - b. Nominal Joint Width: One inch.
 - c. Fire-Resistance Rating: Not less than that of adjacent construction.
 - d. Exposed Metal:
 - 1) Aluminum: Mill.
- B. Glide-Plate Floor Joint Cover Recessed for Finish Flooring: Assembly consisting of center plate that slides in and out of slots in metal frames fixed to sides of joint gap, recessed to accept finish flooring.
1. Floor-to-Floor Type EJ<KA750>:
 - a. Products: Subject to compliance with requirements, available products that may be incorporated in the Work include, but are not limited to:
 - 1) Balco; a CSW Industrials Company; (Glide Plate) 6000 Series, 6FTP-1m.
 - 2) Construction Specialties, Inc.; Allway Metal ALR-100.
 - 3) MM Systems Corporation; Classic Cover System HFXR-1-1.
 - b. Nominal Joint Width: One inch.
 - c. Fire-Resistance Rating: Not less than that of adjacent construction.

- d. Exposed Metal:
 - 1) Aluminum: Mill.
- 2. Floor-to-Wall Type EJ<KA750>:
 - a. Products: Subject to compliance with requirements, available products that may be incorporated in the Work include, but are not limited to:
 - 1) Balco; a CSW Industrials Company; (Glide Plate) 6000 Series, 6FVTP-1m.
 - 2) Construction Specialties, Inc.; Allway Metal ALRW-100.
 - 3) MM Systems Corporation; Classic Cover System HFXRE-1-.5.
 - b. Nominal Joint Width: One inch.
 - c. Fire-Resistance Rating: Not less than that of adjacent construction.
 - d. Exposed Metal:
 - 1) Aluminum: Mill.

2.4 WALL EXPANSION JOINT COVERS

- A. Glide-Plate Wall Joint Cover: Recessed assembly consisting of center plate that slides in and out of slots in metal frames fixed to sides of joint gap.

- 1. Wall-to-Wall Type EJ<KA750>:
 - a. Products: Subject to compliance with requirements, available products that may be incorporated in the Work include, but are not limited to:
 - 1) Balco; a CSW Industrials Company; (Glide Plate) 6000 Series, 6GW-1.
 - 2) Construction Specialties, Inc.; Allway Metal AFW-100.
 - 3) MM Systems Corporation; Metal Wall & Ceiling System FX-K-1-1.
 - b. Nominal Joint Width: One inch.
 - c. Fire-Resistance Rating: Not less than that of adjacent construction.
 - d. Exposed Metal:
 - 1) Aluminum: Clear anodic, Class II finish.
- 2. Wall-to-Corner Type EJ<KA750>:
 - a. Products: Subject to compliance with requirements, available products that may be incorporated in the Work include, but are not limited to:
 - 1) Balco; a CSW Industrials Company; (Glide Plate) 6000 Series, 6GWC-1.
 - 2) Construction Specialties, Inc.; Allway Metal AFWC-100.

- 3) MM Systems Corporation; Metal Wall & Ceiling System FX-L-1-.5.
 - b. Nominal Joint Width: One inch.
 - c. Fire-Resistance Rating: Not less than that of adjacent construction.
 - d. Exposed Metal:
 - 1) Aluminum: Clear anodic, Class II finish.
- B. Elastomeric-Seal Wall Joint Cover: Assembly consisting of elastomeric seal anchored to frames fixed to sides of joint gap.
1. Wall-to-Wall Type EJ<KA750>:
 - a. Products: Subject to compliance with requirements, available products that may be incorporated in the Work include, but are not limited to:
 - 1) Balco; a CSW Industrials Company; Elastomeric Seal Series, 75FWG-1.
 - 2) Construction Specialties, Inc.; Flush Thinline FWF-100.
 - 3) MM Systems Corporation; Flushline System FSW-100.
 - b. Nominal Joint Width: One inch.
 - c. Fire-Resistance Rating: Not less than that of adjacent construction.
 - d. Exposed Metal:
 - 1) Aluminum: Clear anodic, Class II finish.
 - e. Seal: Preformed elastomeric membranes or extrusions.
 - 1) Color: As selected by Architect from manufacturer's full range.
 2. Wall-to-Corner Type EJ<KA750>:
 - a. Products: Subject to compliance with requirements, available products that may be incorporated in the Work include, but are not limited to:
 - 1) Balco; a CSW Industrials Company; Elastomeric Seal Series, 75FWGC-1.
 - 2) Construction Specialties, Inc.; Flush Thinline FWFC-100.
 - 3) MM Systems Corporation; Flushline System FSWL-100.
 - b. Nominal Joint Width: One inch.
 - c. Fire-Resistance Rating: Not less than that of adjacent construction.
 - d. Exposed Metal:
 - 1) Aluminum: Clear anodic, Class II finish.

- e. Seal: Preformed elastomeric membranes or extrusions.
 - 1) Color: As selected by Architect from manufacturer's full range.

2.5 CEILING EXPANSION JOINT COVERS

- A. Elastomeric-Seal Acoustical Ceiling Joint Cover: Elastomeric-seal assembly designed for use in acoustical ceilings.

- 1. Ceiling-to-Ceiling Type EJ<KA750>:

- a. Products: Subject to compliance with requirements, available products that may be incorporated in the Work include, but are not limited to:
 - 1) Balco; a CSW Industrials Company; Face Seal System, AC-1.
 - 2) Construction Specialties, Inc.; Flush Thinline HC-100.
 - 3) MM Systems Corporation; Flexible Wall & Ceiling System CX-100.
- b. Nominal Joint Width: One inch.
- c. Exposed Metal:
 - 1) Aluminum: Mill.
- d. Seal: Preformed elastomeric membranes or extrusions.
 - 1) Color: As selected by Architect from manufacturer's full range.

- 2. Ceiling-to-Wall Type EJ<KA750>:

- a. Products: Subject to compliance with requirements, available products that may be incorporated in the Work include, but are not limited to:
 - 1) Balco; a CSW Industrials Company; Face Seal System, ACL-1.
 - 2) Construction Specialties, Inc.; Flush Thinline HCW-100.
- b. Nominal Joint Width: One inch.
- c. Exposed Metal:
 - 1) Aluminum: Mill.
- d. Seal: Preformed elastomeric membranes or extrusions.
 - 1) Color: As selected by Architect from manufacturer's full range

2.6 MATERIALS

- A. Aluminum: ASTM B221, Alloy 6063-T5 for extrusions; ASTM B209, Alloy 6061-T6 for sheet and plate.
 - 1. Apply manufacturer's standard protective coating on aluminum surfaces to be placed in contact with cementitious materials.
- B. Elastomeric Seals: Manufacturer's standard preformed elastomeric membranes or extrusions to be installed in metal frames.
- C. Fire Barriers: Any material or material combination, when fire tested after cycling, designated to resist the passage of flame and hot gases through a movement joint and to comply with performance criteria for required fire-resistance rating.
- D. Nonmetallic, Shrinkage-Resistant Grout: ASTM C1107/C1107M, factory-packaged, nonmetallic aggregate grout, noncorrosive, nonstaining, mixed with water to consistency suitable for application and a 30-minute working time.

2.7 ALUMINUM FINISHES

- A. Mill finish.
- B. Clear Anodic Finish: AAMA 611, AA-M12C22A31, Class II, 0.010 mm or thicker.

2.8 ACCESSORIES

- A. Moisture Barriers: Manufacturer's standard continuous, waterproof membrane within joint and attached to substrate on sides of joint.
 - 1. Provide where indicated on Drawings.
- B. Manufacturer's stainless-steel attachment devices. Include anchors, clips, fasteners, set screws, spacers, and other accessories compatible with material in contact, as indicated or required for complete installations.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine surfaces where expansion joint cover assemblies will be installed for installation tolerances and other conditions affecting performance of the Work.
- B. Notify Architect where discrepancies occur that will affect proper expansion joint cover assembly installation and performance.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.
- D. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 PREPARATION

- A. Prepare substrates according to expansion joint cover assembly manufacturer's written instructions.
- B. Coordinate and furnish anchorages, setting drawings, and instructions for installing expansion joint cover assemblies. Provide fasteners of metal, type, and size to suit type of construction indicated and to provide for secure attachment of expansion joint cover assemblies.

3.3 INSTALLATION

- A. Comply with manufacturer's written instructions for storing, handling, and installing expansion joint cover assemblies and materials unless more stringent requirements are indicated.
- B. Metal Frames: Perform cutting, drilling, and fitting required to install expansion joint cover assemblies.
 - 1. Correct or grout block out as required for continuous frame support using nonmetallic, shrinkage-resistant grout.
 - 2. Install frames in continuous contact with adjacent surfaces.
 - a. Shimming is not permitted.
 - 3. Install in true alignment and proper relationship to joints and adjoining finished surfaces measured from established lines and levels.
 - 4. Adjust for differences between actual structural gap and nominal design gap due to ambient temperature at time of installation.
 - 5. Cut and fit ends to accommodate thermal expansion and contraction of metal without buckling of frames.
 - 6. Locate anchors at interval recommended by manufacturer, but not less than 3 inches from each end and not more than 24 inches o.c.
- C. Seals: Install elastomeric seals and membranes in frames to comply with manufacturer's written instructions. Install with minimum number of end joints.
 - 1. Provide in continuous lengths for straight sections.
 - 2. Seal transitions. Vulcanize or heat-weld field-spliced joints as recommended by manufacturer.
 - 3. Installation: Mechanically lock seals into frames or adhere to frames with adhesive or pressure-sensitive tape as recommended by manufacturer.
- D. Install with hairline mitered corners where expansion joint cover assemblies change direction or abut other materials.
- E. Terminate exposed ends of expansion joint cover assemblies with field- or factory-fabricated termination devices.

- F. Fire-Resistance-Rated Assemblies: Coordinate installation of expansion joint cover assembly materials and associated work so complete assemblies comply with performance requirements.
 - 1. Fire Barriers: Install fire barriers to provide continuous, uninterrupted fire resistance throughout length of joint, including transitions and field splices.
- G. Moisture Barrier Drainage: If indicated, provide drainage fittings and connect to drains.

3.4 FIELD QUALITY CONTROL

- A. Where deficiencies are found or fire barriers are damaged or removed due to testing, correct or replace installations to comply with requirements.
- B. Proceed with enclosing fire barriers of interior expansion joint cover assemblies only after inspection reports are issued and installations comply with requirements.

3.5 PROTECTION

- A. Do not remove protective covering until finish work in adjacent areas is complete. When protective covering is removed, clean exposed metal surfaces to comply with manufacturer's written instructions.
- B. Protect the installation from damage by work of other Sections. Where necessary due to heavy construction traffic, remove and properly store cover plates or seals and install temporary protection over expansion joint cover assemblies. Reinstall cover plates or seals prior to Substantial Completion.

END OF SECTION 07 95 13.13

SECTION 08 11 13 - HOLLOW METAL DOORS AND FRAMES**PART 1 - GENERAL****1.1 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes:
 - 1. Interior standard steel doors and frames.
 - 2. Exterior standard steel doors and frames.

1.3 DEFINITIONS

- A. Minimum Thickness: Minimum thickness of base metal without coatings according to ANSI/SDI A250.8. (Nominal gage equivalents are listed in parentheses.)

1.4 COORDINATION

- A. Coordinate anchorage installation for hollow-metal frames. Furnish setting drawings, templates, and directions for installing anchorages, including sleeves, concrete inserts, anchor bolts, and items with integral anchors. Deliver such items to Project site in time for installation.
- B. Coordinate requirements for installation of door hardware, electrified door hardware, and access control and security systems.

1.5 SUBMITTALS, GENERAL

- A. General: Submit all action submittals and informational submittals (except field quality-control reports) required by this Section and by Division 08 Sections "Door Hardware" and "Glazing" concurrently.

1.6 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated. Include construction details, material descriptions, core descriptions, fire-resistance ratings, and finishes.
 - 1. Interior standard steel doors and frames.
 - 2. Exterior standard steel doors and frames.
 - 3. Borrowed lights.
 - 4. Frame anchors.

B. Shop Drawings: Include the following:

1. Elevations of each door type.
2. Details of doors, including vertical- and horizontal-edge details and metal thicknesses.
3. Frame details for each frame type, including dimensioned profiles and metal thicknesses.
4. Locations of reinforcement and preparations for hardware.
5. Details of each different wall opening condition.
6. Details of electrical raceway and preparation for electrified hardware, access control systems, and security systems.
7. Details of anchorages, joints, field splices, and connections.
8. Details of accessories.
9. Details of moldings, removable stops, and glazing. Indicate which side of each door or frame has a removable stop.

C. Product Schedule: For hollow-metal doors and frames, prepared by or under the supervision of supplier, using same reference numbers for details and openings as those on Drawings. Coordinate with final door hardware schedule.

1.7 INFORMATIONAL SUBMITTALS

- A. Energy Performance Certification: For each type of thermally-rated door assembly for tests performed by a qualified testing agency indicating compliance with performance requirements.
- B. Field quality control reports.

1.8 CLOSEOUT SUBMITTALS

- A. Record Documents: For fire-rated doors, list of door numbers and applicable room name and number to which door accesses.

1.9 DELIVERY, STORAGE, AND HANDLING

- A. Deliver hollow-metal doors and frames palletized, packaged, or crated to provide protection during transit and Project-site storage. Do not use nonvented plastic.
- B. Deliver welded frames with two removable spreader bars across bottom of frames.
- C. Store hollow-metal doors and frames vertically under cover at Project site with head up. Place on minimum 4-inch-high wood blocking. Provide minimum 1/4-inch space between each stacked door to permit air circulation.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

1. Ceco Door; ASSA ABLOY.
 2. Curries Company; ASSA ABLOY.
 3. Pioneer Industries.
 4. Steelcraft; an Allegion brand.
- B. Source Limitations for Attack-Resistance-Rated Assemblies: Obtain attack-resistance-rated doors and framing from single source from single manufacturer and glazing from single manufacturer acceptable to the attack-resistant-rated door and framing manufacturer.

2.2 PERFORMANCE REQUIREMENTS

- A. Fire-Rated Door Assemblies: Assemblies complying with NFPA 80 that are listed and labeled by a qualified testing agency acceptable to authorities having jurisdiction for fire-protection ratings indicated on Drawings, based on testing at positive pressure according to NFPA 252 or UL 10C.
1. Smoke- and Draft-Control Door Assemblies: Listed and labeled for smoke and draft control by a qualified testing agency acceptable to authorities having jurisdiction, based on testing according to UL 1784 and installed in compliance with NFPA 105.
- B. Fire-Rated, Borrowed-Lite Assemblies: Assemblies complying with NFPA 80 and listed and labeled by a qualified testing agency acceptable to authorities having jurisdiction, for fire-protection ratings indicated, based on testing according to NFPA 257 or UL 9.
- C. Thermally Rated Door Assemblies: Provide door assemblies with U-factor of not more than 0.37 deg Btu/F x h x sq. ft. when tested according to ASTM C1363.
- D. Air Infiltration: Provide exterior door assemblies with air leakage of not more than 0.20 cfm/sq. ft. when tested according to NFRC 400.

2.3 INTERIOR STANDARD STEEL DOORS AND FRAMES

- A. Construct hollow-metal doors and frames to comply with standards indicated for materials, fabrication, hardware locations, hardware reinforcement, tolerances, and clearances, and as specified.
- B. Heavy-Duty Doors and Frames: ANSI/SDI A250.8, Level 2; ANSI/SDI A250.4, Level B. At all interior locations .
1. Doors:
 - a. Type: As indicated in the Door and Frame Schedule.
 - b. Thickness: 1-3/4 inches.
 - c. Face: Uncoated steel sheet, minimum thickness of 0.042 inch (18-gage).
 - d. Edge Construction: Model 2, Seamless, continuously welded seam dressed smooth.

- e. Edge Bevel: Bevel lock edge 1/8 inch in 2 inches.
 - f. Core: Vertical steel stiffener. Fill space between stiffeners with glass- or mineral-fiber insulation.
 - g. Fire-Rated Core: Manufacturer's vertical steel stiffener, with space between stiffeners filled with glass- or mineral-fiber insulation or laminated mineral board core for fire-rated doors.
2. Frames:
- a. Materials: Uncoated steel sheet, minimum thickness of 0.053 inch (16-gage).
 - b. Sidelite and Transom Frames: Fabricated from same thickness material as adjacent door frame.
 - c. Construction: Full profile welded in factory.
3. Exposed Finish: Prime.

2.4 EXTERIOR STANDARD STEEL DOORS AND FRAMES

- A. Construct hollow-metal doors and frames to comply with standards indicated for materials, fabrication, hardware locations, hardware reinforcement, tolerances, and clearances, and as specified.
- B. Extra-Heavy-Duty Doors and Frames: ANSI/SDI A250.8, Level 3; ANSI/SDI A250.4, Level A. At exterior locations.

1. Doors:
- a. Type: As indicated in the Door and Frame Schedule.
 - b. Thickness: 1-3/4 inches.
 - c. Face: Metallic-coated steel sheet, minimum thickness of 0.053 inch (16-gage), with minimum A60 coating.
 - d. Edge Construction: Model 2, Seamless, continuously welded seam dressed smooth.
 - e. Edge Bevel: Bevel lock edge 1/8 inch in 2 inches.
 - f. Top Edge Closures: Close top edges of doors with flush closures of same material as face sheets. Seal joints against water penetration.
 - g. Bottom Edges: Close bottom edges of doors with end closures or channels of same material as face sheets. Provide weep-hole openings in bottoms of exterior doors to permit moisture to escape.
 - h. Core: Polyurethane, or polyurethane with vertical steel stiffeners, to comply with required U-factor.

2. Frames:
 - a. Materials: Metallic-coated steel sheet, minimum thickness of 0.067 inch (14-gage), with minimum A60 coating.
 - b. Construction: Full profile welded in factory, thermally broken.
3. Exposed Finish: Prime.

2.5 BORROWED LITES

- A. Fabricate of uncoated steel sheet, minimum thickness of 0.053 inch (16-gage).
- B. Construction: Full profile welded in factory.
- C. Fabricate in one piece except where handling and shipping limitations require multiple sections. Where frames are fabricated in sections due to shipping or handling limitations, provide alignment plates or angles at each joint, fabricated of metal of same or greater thickness as metal as frames.
- D. Provide countersunk, flat- or oval-head exposed screws and bolts for exposed fasteners unless otherwise indicated.

2.6 FRAME ANCHORS

- A. Jamb Anchors:
 1. Type: Anchors of minimum size and type required by applicable door and frame standard, and suitable for performance level indicated.
 2. Quantity: Minimum of three anchors per jamb, with one additional anchor for frames with no floor anchor. Provide one additional anchor for each 24 inches of frame height above 7 feet.
 3. Postinstalled Expansion Anchor: Minimum 3/8-inch-diameter bolts with expansion shields or inserts, with manufacturer's standard pipe spacer.
- B. Floor Anchors: Provide floor anchors for each jamb and mullion that extends to floor.
- C. Floor Anchors for Concrete Slabs with Underlayment: Adjustable-type anchors with extension clips, allowing not less than 2-inch height adjustment. Terminate bottom of frames at top of underlayment.
- D. Material: ASTM A879/A879M, Commercial Steel (CS), 04Z coating designation; mill phosphatized.
 1. For anchors built into exterior walls, steel sheet complying with ASTM A1008/A1008M or ASTM A1011/A1011M; hot-dip galvanized according to ASTM A153/A153M, Class B.

2.7 MATERIALS

- A. Cold-Rolled Steel Sheet: ASTM A1008/A1008M, Commercial Steel (CS), Type B; suitable for exposed applications.
- B. Hot-Rolled Steel Sheet: ASTM A1011/A1011M, Commercial Steel (CS), Type B; free of scale, pitting, or surface defects; pickled and oiled.
- C. Metallic-Coated Steel Sheet: ASTM A653/A653M, Commercial Steel (CS), Type B.
- D. Inserts, Bolts, and Fasteners: Hot-dip galvanized according to ASTM A153/A153M.
- E. Power-Actuated Fasteners in Concrete: Fastener system of type suitable for application indicated, fabricated from corrosion-resistant materials, with clips or other accessory devices for attaching hollow-metal frames of type indicated.
- F. Mineral-Fiber Insulation: ASTM C665, Type I (blankets without membrane facing); consisting of fibers manufactured from slag or rock wool; with maximum flame-spread and smoke-developed indexes of 25 and 50, respectively; passing ASTM E136 for combustion characteristics.
- G. Glazing: Comply with requirements in Division 08 Section "Glazing" and with hollow-metal manufacturer's requirements.
- H. Corrosion-Resistant Coating: Cold-applied asphalt mastic, compounded for 15-mil dry film thickness per coat. Provide inert-type noncorrosive compound free of asbestos fibers, sulfur components, and other deleterious impurities.

2.8 FABRICATION

- A. Door Astragals: Provide overlapping astragal on one leaf of pairs of doors where required by NFPA 80 for fire-performance rating or where indicated. Extend minimum 3/4 inch beyond edge of door on which astragal is mounted or as required to comply with published listing of qualified testing agency.
- B. Hollow-Metal Frames: Fabricate in one piece except where handling and shipping limitations require multiple sections. Where frames are fabricated in sections, provide alignment plates or angles at each joint, fabricated of metal of same or greater thickness as frames.
 - 1. Sidelite and Transom Bar Frames: Provide closed tubular members with no visible face seams or joints, fabricated from same material as door frame. Fasten members at crossings and to jambs by welding.
 - 2. Provide countersunk, flat- or oval-head exposed screws and bolts for exposed fasteners unless otherwise indicated.
 - 3. Grout Guards: Formed from same material as frames, not less than 0.016 inch thick (26-gage). Weld guards to frame at back of hardware mortises in frames to be grouted.
 - 4. Door Silencers: Except on weather-stripped frames, drill stops to receive door silencers as follows. Keep holes clear during construction.

- a. Single-Door Frames: Drill stop in strike jamb to receive three door silencers.
 - b. Double-Door Frames: Drill stop in head jamb to receive two door silencers.
- 5. Terminated Stops (Hospital Stops): Where indicated, on interior door frames terminate stops 6 inches above finish floor with a 45-degree angle cut, and close open end of stop with steel sheet closure. Cover opening in extension of frame with welded-steel filler plate, with welds ground smooth and flush with frame.
- C. Hardware Preparation: Factory prepare hollow-metal doors and frames to receive templated mortised hardware, and electrical wiring; include cutouts, reinforcement, mortising, drilling, and tapping according to ANSI/SDI A250.6, the Door Hardware Schedule, and templates.
 - 1. Reinforce doors and frames to receive nontemplated, mortised, and surface-mounted door hardware.
 - 2. Comply with BHMA A156.115 for preparing hollow-metal doors and frames for hardware.
 - 3. Attack-Resistance-Rated Door Assemblies: Comply with hollow-metal manufacturer's requirements.
- D. Glazed Lites: Provide stops and moldings around glazed lites where indicated. Form corners of stops and moldings with butted or mitered hairline joints.
 - 1. Provide stops and moldings flush with face of door, and with square stops unless otherwise indicated.
 - 2. Multiple Glazed Lites: Provide fixed and removable stops and moldings so that each glazed lite is capable of being removed independently.
 - 3. Provide fixed frame moldings on outside of exterior and on secure side of interior doors and frames. Provide loose stops and moldings on inside of hollow-metal doors and frames.
 - 4. Coordinate rabbet width between fixed and removable stops with glazing and installation types indicated.
 - 5. Provide stops for installation with countersunk flat- or oval-head machine screws spaced uniformly not more than 9 inches o.c. and not more than 2 inches o.c. from each corner.
 - a. For attack-resistance-rated door assemblies, provide fasteners spaced in accordance with door and glazing manufacturers' written instructions.

2.9 STEEL FINISHES

- A. Prime Finish: Clean, pretreat, and apply manufacturer's standard primer.
 - 1. Shop Primer: Manufacturer's standard, fast-curing, lead- and chromate-free primer complying with ANSI/SDI A250.10; recommended by primer manufacturer for substrate; compatible with substrate and field-applied coatings despite prolonged exposure.

2.10 LOUVERS

- A. Provide louvers for interior doors, where indicated, which comply with SDI 111, with blades or baffles formed of 0.042-inch-thick (18-gage), cold-rolled steel sheet set into 0.042-inch-thick (18-gage) steel frame.
 - 1. Sightproof Louver: Stationary louvers constructed with inverted-V or inverted-Y blades.
- B. Form corners of moldings with hairline joints. Provide fixed frame moldings on outside of exterior and on secure side of interior doors and frames.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, areas, and conditions, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.
- B. Examine roughing-in for embedded and built-in anchors to verify actual locations before frame installation.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.
- D. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 PREPARATION

- A. Remove shipping spreaders installed at factory. Restore exposed finish by grinding, filling, and dressing, as required to make restored area smooth, flush, and invisible on exposed faces. Touch up factory-applied finishes where spreaders are removed.
- B. Drill and tap doors and frames to receive nontemplated, mortised, and surface-mounted door hardware.

3.3 INSTALLATION

- A. Install hollow-metal doors and frames plumb, rigid, properly aligned, and securely fastened in place. Comply with approved Shop Drawings and with manufacturer's written instructions.
- B. Hollow-Metal Frames: Comply with ANSI/SDI A250.11.
 - 1. Set frames accurately in position; plumbed, aligned, and braced securely until permanent anchors are set. After wall construction is complete, remove temporary braces without damage to completed Work.
 - a. Where frames are fabricated in sections, field splice at approved locations by welding face joint continuously; grind, fill, dress, and make splice smooth, flush, and invisible on exposed faces. Touch-up finishes.
 - b. Install frames with removable stops located on secure side of opening.

- c. Field apply corrosion-resistant coating to backs of frames that will be filled with grout containing antifreezing agents.
 - d. Install door silencers in frames before grouting.
- 2. Fire-Rated Openings: Install frames according to NFPA 80.
- 3. Floor Anchors: Secure with postinstalled expansion anchors.
 - a. Floor anchors may be set with power-actuated fasteners instead of postinstalled expansion anchors if so indicated and approved on Shop Drawings.
- 4. Metal-Stud Partitions: Solidly pack mineral-fiber insulation inside frames.
- 5. Masonry Walls: Coordinate installation of frames to allow for solidly filling space between frames and masonry with grout or mortar where indicated; at remaining locations, solidly fill space between frames and masonry with mineral-fiber insulation.
 - a. For grouted frames, brace or fasten frames in such a manner that will prevent the pressure of grout from deforming the frame members. Hand trowel grout into place. Grout mixed to a thinner, "pumpable" consistency is not acceptable.
- 6. Concrete Walls: Solidly fill space between frames and concrete with mineral-fiber insulation.
- 7. In-Place Concrete or Masonry Construction: Secure frames in place with postinstalled expansion anchors. Countersink anchors, and fill and make smooth, flush, and invisible on exposed faces.
- 8. Installation Tolerances: Adjust hollow-metal frames to the following tolerances:
 - a. Squareness: Plus or minus 1/16 inch, measured at door rabbet on a line 90 degrees from jamb perpendicular to frame head.
 - b. Alignment: Plus or minus 1/16 inch, measured at jambs on a horizontal line parallel to plane of wall.
 - c. Twist: Plus or minus 1/16 inch, measured at opposite face corners of jambs on parallel lines, and perpendicular to plane of wall.
 - d. Plumbness: Plus or minus 1/16 inch, measured at jambs at floor.
- C. Hollow-Metal Doors: Fit and adjust hollow-metal doors accurately in frames, within clearances specified below.
 - 1. Non-Fire-Rated Steel Doors: Comply with ANSI/SDI A250.8.
 - 2. Fire-Rated Doors: Install doors with clearances according to NFPA 80.
 - 3. Smoke-Control Doors: Install doors according to NFPA 105.
- D. Glazing: Comply with installation requirements in Division 08 Section "Glazing" and with hollow-metal manufacturer's written instructions.

3.4 FIELD QUALITY CONTROL

- A. Inspection Agency: Engage a qualified inspector to perform inspections and to furnish reports to Architect.
- B. Inspections:
 - 1. Fire-Rated Door Inspections: Inspect each fire-rated door according to NFPA 80, Section 5.2.
- C. Correct or remove and replace installations where inspections indicate that they do not comply with specified requirements.
- D. Reinspect corrected or replaced installations to determine if replaced or corrected door assembly installations comply with specified requirements.
- E. Prepare and submit separate inspection report for each fire-rated door assembly indicating compliance with each item listed in NFPA 80.

3.5 RESTORATION

- A. Remove and replace defective work, including hollow-metal work that is warped, bowed, or otherwise unacceptable.
- B. Prime-Coat Touchup: Immediately after erection, sand smooth rusted or damaged areas of prime coat and apply touchup of compatible air-drying, rust-inhibitive primer.
- C. Metallic-Coated Surface Touchup: Clean abraded areas and restore with galvanizing touch-up paint according to manufacturer's written instructions.

END OF SECTION 08 11 13

SECTION 08 14 16 - FLUSH WOOD DOORS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Five-ply flush wood veneer-faced doors for transparent finish.
 - 2. Factory finishing flush wood doors.
 - 3. Factory fitting flush wood doors to frames and factory machining for hardware.

1.3 SUBMITTALS, GENERAL

- A. General: Submit all action submittals required by this Section and by Division 08 Sections "Door Hardware" and "Glazing" concurrently.

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of product, including the following:
 - 1. Door core materials and construction.
 - 2. Door edge construction.
 - 3. Door face type and characteristics.
 - 4. Door louvers.
 - 5. Door trim for openings.
 - 6. Factory-finishing specifications.
- B. Shop Drawings: Indicate location, size, and hand of each door; elevation of each type of door; construction details not covered in Product Data; and the following:
 - 1. Door schedule indicating door location, type, size, fire protection rating, and swing.
 - 2. Door elevations, dimension and locations of hardware, light and louver cutouts, and glazing thicknesses.
 - 3. Details of electrical raceway and preparation for electrified hardware, access control systems, and security systems.
 - 4. Dimensions and locations of blocking for hardware attachment.
 - 5. Dimensions and locations of mortises and holes for hardware.
 - 6. Clearances and undercuts.
 - 7. Requirements for veneer matching.
 - 8. Doors to be factory finished and application requirements.

C. Samples:

1. Factory finishes applied to actual door face materials, approximately 8 by 10 inches, for each material and finish. For each wood species and transparent finish, provide set of three Samples showing typical range of color and grain to be expected in finished Work.

D. Sample Warranty: For special warranty.

1.5 INFORMATIONAL SUBMITTALS

- A. Field quality-control reports.

1.6 CLOSEOUT SUBMITTALS

- A. Special warranties.
- B. Record Documents: For fire-rated doors, list of door numbers and applicable room name and number to which door accesses.

1.7 DELIVERY, STORAGE, AND HANDLING

- A. Comply with requirements of referenced standard and manufacturer's written instructions.
- B. Package doors individually in plastic bags or cardboard cartons.
- C. Mark each door on bottom rail with opening number used on Shop Drawings.

1.8 FIELD CONDITIONS

- A. Environmental Limitations: Do not deliver or install doors until spaces are enclosed and weathertight, wet-work in spaces is complete and dry, and temperature and relative humidity are maintained at levels designed for building occupants for the remainder of construction period.

1.9 WARRANTY

- A. Special Warranty: Manufacturer agrees to correct or replace doors that fail in materials or workmanship within specified warranty period.

1. Failures include, but are not limited to, the following:
 - a. Delamination of veneer.
 - b. Warping (bow, cup, or twist) more than 1/4 inch in a 42-by-84-inch section.
 - c. Telegraphing of core construction in face veneers exceeding 0.01 inch in a 3-inch span.
2. Warranty shall also include installation and finishing that may be required due to correction or replacement of defective doors.
3. Warranty Period for Solid-Core Interior Doors: Life of installation.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Fire-Rated Wood Door Assemblies: Assemblies complying with NFPA 80 that are listed and labeled by a qualified testing agency acceptable to authorities having jurisdiction, for fire-protection ratings and temperature-rise limits indicated on Drawings, based on testing at positive pressure in accordance with UL 10C or NFPA 252.
 - 1. Temperature-Rise Limit: At vertical exit enclosures and exit passageways, provide doors that have a maximum transmitted temperature end point of not more than 450 deg F above ambient after 30 minutes of standard fire-test exposure.
- B. Smoke- and Draft-Control Door Assemblies: Listed and labeled for smoke and draft control by a qualified testing agency acceptable to authorities having jurisdiction, based on testing in accordance with UL 1784 and installed in compliance with NFPA 105.

2.2 FLUSH WOOD DOORS, GENERAL

- A. Quality Standard: In addition to requirements specified, comply with ANSI/WDMA I.S. 1A.
 - 1. The Contract Documents contain requirements that may be more stringent than the referenced quality standard. Comply with the Contract Documents in addition to those of the referenced quality standard.

2.3 SOLID-CORE FIVE-PLY FLUSH WOOD VENEER-FACED DOORS FOR TRANSPARENT FINISH

- A. Interior Doors:
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to:
 - a. Marshfield-Algoma by Masonite Architectural.
 - b. Oshkosh Door Company.
 - c. VT Industries, Inc.
 - 2. Performance Grade: ANSI/WDMA I.S. 1A Extra Heavy Duty.
 - 3. ANSI/WDMA I.S. 1A Grade: Custom.
 - 4. Faces: Single-ply, wood veneer not less than 1/50 inch thick.
 - a. Species: Walnut.
 - b. Cut: Plain sliced (flat sliced).
 - c. Match between Veneer Leaves: Book match.
 - d. Assembly of Veneer Leaves on Door Faces: Running match.
 - e. Pair and Set Match: Provide for doors hung in same opening or separated only by mullions.

5. Exposed Vertical and Top Edges: Same species as faces - Architectural Woodwork Standards edge Type A.
 - a. Fire-Rated Single Doors: Provide edge construction with intumescent seals concealed by outer stile. Comply with specified requirements for exposed vertical edges.
 - b. Fire-Rated Pairs of Doors: Provide fire-retardant stiles that are listed and labeled for applications indicated without formed-steel edges and astragals. Provide stiles with concealed intumescent seals. Comply with specified requirements for exposed edges.
 - c. Fire-Rated Pairs of Doors: Provide formed-steel edges and astragals with intumescent seals.
 - 1) Finish steel edges and astragals same color as doors.
 - d. Mineral-Core Doors: At hinge stiles, provide laminated-edge construction with improved screw-holding capability and split resistance. Comply with specified requirements for exposed edges.
 - 1) Screw-Holding Capability: 550 lbf in accordance with WDMA T.M. 10.
6. Core for Non-Fire-Rated Doors:
 - a. WDMA I.S. 10 structural composite lumber.
 - 1) Screw Withdrawal, Door Face: 550 lbf.
 - 2) Screw Withdrawal, Vertical Door Edge: 550 lbf.
7. Core for Fire-Rated Doors: As required to achieve fire-protection rating indicated on Drawings.
 - a. Blocking for Mineral-Core Doors: Provide composite blocking with improved screw-holding capability approved for use in doors of fire-protection ratings indicated on Drawings as needed to eliminate through-bolting hardware.
8. Construction: Five plies, hot-pressed bonded (vertical and horizontal edging is bonded to core), with entire unit abrasive planed before veneering.

2.4 LIGHT FRAMES AND LOUVERS

- A. Wood Beads for Light Openings in Wood Doors: Provide manufacturer's standard wood beads unless otherwise indicated.
 1. Wood Species: Same species as door faces.
 2. Profile: Flush rectangular beads.
 3. At wood-core doors with 20-minute fire-protection ratings, provide wood beads and metal glazing clips approved for such use.

- B. Wood-Veneered Beads for Light Openings in Fire-Rated Doors: Manufacturer's standard wood-veneered noncombustible beads matching veneer species of door faces and approved for use in doors of fire-protection rating indicated on Drawings. Include concealed metal glazing clips where required for opening size and fire-protection rating indicated.
- C. Metal Louvers:
 - 1. Blade Type: Vision-proof, inverted Y.
 - a. Metal and Finish: Cold-rolled steel, 0.048-inch-thick (18 gage) frame and not less than 0.030-inch thick (22 gage) blades, factory primed for paint finish.

2.5 FABRICATION

- A. Factory fit doors to suit frame-opening sizes indicated.
 - 1. Comply with clearance requirements of referenced quality standard for fitting unless otherwise indicated.
 - 2. Comply with NFPA 80 requirements for fire-rated doors.
- B. Factory machine doors for hardware that is not surface applied.
 - 1. Locate hardware to comply with DHI-WDHS-3.
 - 2. Comply with final hardware schedules, door frame Shop Drawings, ANSI/BHMA-156.115-W, and hardware templates.
 - 3. Coordinate with hardware mortises in metal frames, to verify dimensions and alignment before factory machining.
 - 4. For doors scheduled to receive electrified locksets, provide factory-installed raceway and wiring to accommodate specified hardware.
 - 5. Metal Astragals: Factory machine astragals and formed-steel edges for hardware for pairs of fire-rated doors.
- C. Openings: Factory cut and trim openings through doors.
 - 1. Light Openings: Trim openings with moldings of material and profile indicated.
 - 2. Glazing: Factory install glazing in doors indicated to be factory finished. Comply with applicable requirements in Division 08 Section "Glazing."
 - 3. Louvers: Factory install louvers in prepared openings.

2.6 FACTORY FINISHING

- A. Comply with referenced quality standard for factory finishing.
 - 1. Complete fabrication, including fitting doors for openings and machining for hardware that is not surface applied, before finishing.
 - 2. Finish faces, all four edges, edges of cutouts, and mortises.
 - 3. Stains and fillers may be omitted on bottom edges, edges of cutouts, and mortises.
- B. Factory finish doors.

C. Transparent Finish:

1. ANSI/WDMA I.S. 1A Grade: Custom.
2. Finish: ANSI/WDMA I.S. 1A TR-8 UV Cured Acrylated Polyester/Urethane
3. Staining: As selected by Architect from manufacturer's full range.
4. Effect: Semifilled finish, produced by applying an additional finish coat to partially fill the wood pores.
5. Sheen: Satin.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine doors and installed door frames, with Installer present, before hanging doors.
1. Verify that installed frames comply with indicated requirements for type, size, location, and swing characteristics and have been installed with level heads and plumb jambs.
 2. Reject doors with defects.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.
- C. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 INSTALLATION

- A. Hardware: For installation, see Division 08 Section "Door Hardware."
- B. Install doors to comply with manufacturer's written instructions and referenced quality standard, and as indicated.
1. Install fire-rated doors in accordance with NFPA 80.
 2. Install smoke- and draft-control doors in accordance with NFPA 105.
- C. Factory-Fitted Doors: Align in frames for uniform clearance at each edge.
- D. Factory-Finished Doors: Restore finish before installation if fitting or machining is required at Project site.

3.3 FIELD QUALITY CONTROL

- A. Inspection Agency: Engage a qualified inspector to perform inspections and to furnish reports to Architect.
- B. Inspections:
1. Fire-Rated Door Inspections: Inspect each fire-rated door in accordance with NFPA 80, Section 5.2.

- C. Correct or remove and replace installations where inspections indicate that they do not comply with specified requirements.
- D. Reinspect corrected or replaced installations to determine if replaced or corrected door assembly installations comply with specified requirements.
- E. Prepare and submit separate inspection report for each fire-rated door assembly indicating compliance with each item listed in NFPA 80.

3.4 ADJUSTING

- A. Operation: Rehang or replace doors that do not swing or operate freely.
- B. Finished Doors: Replace doors that are damaged or that do not comply with requirements. Doors may be corrected or refinished if Work complies with requirements and shows no evidence of correction or refinishing.

END OF SECTION 08 14 16

SECTION 08 31 13 - ACCESS DOORS AND FRAMES**PART 1 - GENERAL****1.1 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes access doors and frames for walls and ceilings.

1.3 SUBMITTALS, GENERAL

- A. General: Submit all action submittals required by this Section concurrently.

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of product. Include construction details, fire ratings, material descriptions, dimensions of individual components and profiles, and finishes.
 - 1. Flush access doors with exposed flanges.
 - 2. Flush access doors with concealed flanges in gypsum board.
- B. Product Schedule: For access doors and frames. Use same designations indicated on Drawings.

1.5 INFORMATIONAL SUBMITTALS

- A. Field quality control reports.

1.6 CLOSEOUT SUBMITTALS

- A. Record Documents: For fire-rated doors, list of applicable room name and number in which access door is located.

PART 2 - PRODUCTS**2.1 PERFORMANCE REQUIREMENTS**

- A. Fire-Rated Access Doors and Frames: Assemblies complying with NFPA 80 that are listed and labeled by a qualified testing agency, for fire-protection ratings indicated, according to NFPA 252 or UL 10B.

2.2 ACCESS DOORS AND FRAMES

A. Flush Access Doors with Exposed Flanges

1. Products: Subject to compliance with requirements, available products that may be incorporated in the Work, include, but are not limited to:
 - a. Karp Associates, Inc.; Model DSC-214M Universal Flush Access Door.
 - b. Milcor Company; Series M – Architectural Grade Flush Steel Access Door.
 - c. Nystrom, Inc.; NT Architectural Access Door.
2. Description: Face of door flush with frame, with exposed flange and concealed hinge.
3. Locations: Walls, where indicated on Drawings and, if not indicated, as follows:
 - a. Concealed locations not exposed to view (i.e., above lay-in ceilings and in mechanical and other utility rooms).
4. Uncoated Steel Sheet for Door: Nominal 0.075 inch (14 gage), factory primed.
5. Frame Material: Same material and finish as door; nominal 0.060 inch (16 gage).
6. Latch and Lock: Cam latch, screwdriver operated with interior release.

B. Flush Access Doors with Concealed Flanges in Gypsum Board <KA161, KA162, KA167>:

1. Products: Subject to compliance with requirements, available products that may be incorporated in the Work, include, but are not limited to:
 - a. Karp Associates, Inc.; Model KDW Flush Drywall Access Door.
 - b. Milcor Company; Series DW – Standard Flush Access Door.
 - c. Nystrom, Inc.; NW Architectural Access Door.
2. Description: Face of door flush with frame; with concealed flange for gypsum board installation and concealed hinge. Provide edge trim for gypsum panels securely attached to perimeter of frames.
3. Locations: Walls and ceilings, where indicated on Drawings and, if not indicated, as follows:
 - a. In painted gypsum board exposed to view.
4. Door Size: 18' x 18'.
5. Uncoated Steel Sheet for Door: Not less than nominal 0.060 inch (16 gage), factory primed.
6. Frame Material: Same material and finish as door; nominal 0.060 inch (16 gage).
7. Latch and Lock: Cam latch, screwdriver operated with interior release.

2.3 MATERIALS

- A. Steel Plates, Shapes, and Bars: ASTM A36/A36M.
- B. Steel Sheet: Uncoated or electrolytic zinc coated, ASTM A879/A879M, with cold-rolled steel sheet substrate complying with ASTM A1008/A1008M, Commercial Steel (CS), exposed.
- C. Frame Anchors: Same material as door face.
- D. Inserts, Bolts, and Anchor Fasteners: Hot-dip galvanized steel according to ASTM A153/A153M or ASTM F2329.

2.4 FABRICATION

- A. General: Provide access door and frame assemblies manufactured as integral units ready for installation.
- B. Metal Surfaces: For metal surfaces exposed to view in the completed Work, provide materials with smooth, flat surfaces without blemishes. Do not use materials with exposed pitting, seam marks, roller marks, rolled trade names, or roughness.
- C. Doors and Frames: Grind exposed welds smooth and flush with adjacent surfaces. Furnish mounting holes, attachment devices and fasteners of type required to secure access doors to types of supports indicated.
- D. Recessed Access Doors: Form face of panel to provide recess for application of applied finish. Reinforce panel as required to prevent buckling. Provide access sleeves for each latch operator and install in holes cut through finish.
- E. Latch and Lock Hardware:
 - 1. Quantity: Furnish number of latches and locks required to hold doors tightly closed.
 - 2. Keys: Furnish two keys per lock and key all locks alike.

2.5 FINISHES

- A. Comply with NAAMM's "Metal Finishes Manual for Architectural and Metal Products" for recommendations for applying and designating finishes.
- B. Protect mechanical finishes on exposed surfaces from damage by applying a strippable, temporary protective covering before shipping.
- C. Appearance of Finished Work: Noticeable variations in same piece are not acceptable. Variations in appearance of adjoining components are acceptable if they are within the range of approved Samples and are assembled or installed to minimize contrast.
- D. Painted Finishes: Comply with coating manufacturer's written instructions for cleaning, conversion coating, and applying and baking finish.
 - 1. Factory Primed: Apply manufacturer's standard, baked-enamel or powder-coat primer immediately after surface preparation and pretreatment.

E. Stainless Steel Finishes:

1. Surface Preparation: Remove tool and die marks and stretch lines, or blend into finish.
2. Intermediate Polished Finish: ASTM A480/A480M No. 3.
3. Polished Finish: ASTM A480/A480M No. 4 finish. Grind and polish surfaces to produce uniform finish, free of cross scratches.
 - a. Run grain of directional finishes with long dimension of each piece.
 - b. When polishing is completed, passivate and rinse surfaces. Remove embedded foreign matter and leave surfaces chemically clean.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.
- C. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 INSTALLATION

- A. Comply with manufacturer's written instructions for installing access doors and frames.

3.3 FIELD QUALITY CONTROL

- A. Inspection Agency: Engage a qualified inspector to perform inspections and to furnish reports to Architect.
- B. Inspections.
- C. Correct or remove and replace installations where inspections indicate that they do not comply with specified requirements.
- D. Reinspect corrected or replaced installations to determine if replaced or corrected door assembly installations comply with specified requirements.
- E. Prepare and submit separate inspection report for each fire-rated access door indicating compliance with each item listed in NFPA 80.

3.4 ADJUSTING

- A. Adjust doors and hardware, after installation, for proper operation.

END OF SECTION 08 31 13

SECTION 08 33 23 - OVERHEAD COILING DOORS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Service doors.
 - 2. Insulated service doors.
 - 3. Fire-rated service doors.
- B. Products Installed but not Furnished under This Section:
 - 1. Steel support framing.

1.3 SUBMITTALS, GENERAL

- A. General: Submit all action submittals and informational submittals (except field quality control reports) required by this Section concurrently.

1.4 ACTION SUBMITTALS

- A. Product Data: For each type and size of overhead coiling door and accessory.
 - 1. Include construction details, material descriptions, dimensions of individual components, profiles for slats, and finishes.
 - 2. Include rated capacities, operating characteristics, electrical characteristics, and furnished accessories.
 - 3. Include description of automatic-closing device and testing and resetting instructions.
- B. Shop Drawings: For each installation and for special components not dimensioned or detailed in manufacturer's product data.
 - 1. Include plans, elevations, sections, mounting details, and attachments to other work.
 - 2. Include details of equipment assemblies, and indicate dimensions, required clearances, method of field assembly, components, and location and size of each field connection.
 - 3. Include points of attachment and their corresponding static and dynamic loads imposed on structure.
 - 4. For exterior components, include details of provisions for assembly expansion and contraction and for excluding and draining moisture to the exterior.

5. Show locations of controls, locking devices, detectors, and other accessories.
 6. Include diagrams for power, signal, and control wiring.
- C. Samples: Manufacturer's finish charts showing full range of colors and textures available for units with factory-applied finishes.
 - D. Delegated Design Submittal: For overhead coiling doors including analysis data signed and sealed by the qualified professional engineer responsible for their preparation.
 - E. Sample Warranty: For special warranty.

1.5 INFORMATIONAL SUBMITTALS

- A. Oversize Construction Certification: For door assemblies required to be fire-rated and that exceed size limitations of labeled assemblies.
- B. Field quality-control reports.

1.6 CLOSEOUT SUBMITTALS

- A. Maintenance Data: For overhead coiling doors to include in maintenance manuals.
- B. Warranty: Executed special warranty.
- C. Record Documents: For fire-rated doors, list of door numbers and applicable room name and number to which door accesses.

1.7 QUALITY ASSURANCE

- A. Installer Qualifications: An entity that employs installers and supervisors who are trained and approved by manufacturer for installation of units required for this Project.

1.8 WARRANTY

- A. Special Warranty: Manufacturer agrees to correct or replace components of doors that fail in materials or workmanship within specified warranty period.
 1. Failures include, but are not limited to, the following:
 - a. Structural failures including, but not limited to, excessive deflection.
 - b. Failure of components or operators before reaching required number of operation cycles.
 - c. Faulty operation of hardware.
 - d. Deterioration of metals, metal finishes, and other materials beyond normal weathering and use; rust through.
 - e. Delamination of exterior or interior facing materials.
 2. Warranty Period: 2 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Source Limitations: Obtain overhead coiling doors from single source from single manufacturer.
 - 1. Obtain operators and controls from overhead coiling-door manufacturer.

2.2 PERFORMANCE REQUIREMENTS

- A. Fire-Rated Door Assemblies: Complying with NFPA 80; listed and labeled by qualified testing agency, for fire-protection ratings indicated, based on testing at as close to neutral pressure as possible according to NFPA 252 or UL 10B.
 - 1. Smoke Control: In corridors and smoke barriers, provide doors that are listed and labeled with the letter "S" on the fire-rating label by a qualified testing agency for smoke- and draft-control based on testing according to UL 1784; with maximum air-leakage rate of 3.0 cfm/sq. ft. of door opening at 0.10 inch wg for both ambient and elevated temperature tests.
- B. Accessibility Standard: Comply with applicable provisions in the USDOJ's "2010 ADA Standards for Accessible Design," ICC A117.1, and building Code in effect for Project.
- C. Delegated Design: Engage a qualified professional engineer, as defined in Division 01 Section "Quality Requirements," to design exterior overhead coiling doors.
- D. Structural Performance, Exterior Doors: Capable of withstanding the following design wind loads:
 - 1. Design Wind Load: As indicated on Drawings.
 - 2. Testing: According to ASTM E330/E330M.
 - 3. Deflection Limits: Design overhead coiling doors to withstand design wind load without evidencing permanent deformation or disengagement of door components.

2.3 SERVICE DOOR ASSEMBLY

- A. Service Door: Overhead coiling door formed with curtain of interlocking metal slats.
 - 1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Clopay Building Products Co.; Model CESD10 Standard Heavy-Duty Service Door.
 - b. CornellCookson, LLC; Roll Up Service Door Model ESD10.
 - c. Wayne Dalton; Model 800 Rolling Service Door.

- B. Operation Cycles: Door components and operators capable of operating for not less than 20,000 operation cycles. One operation cycle is complete when a door is opened from the closed position to the fully open position and returned to the closed position.
- C. Door Curtain Material: Aluminum.
- D. Door Curtain Slats: Flat profile slats of 2-7/16- to 2-5/8-inch center-to-center height.
 - 1. Thickness: Not less than 0.050 inch aluminum; and as required to meet performance requirements.
- E. Bottom Bar: Two angles, each not less than 1-1/2 by 1-1/2 by 1/8 inch thick; fabricated from aluminum extrusions and finished to match door.
- F. Curtain Jamb Guides: Stainless steel with exposed finish matching curtain slats.
- G. Hood: Stainless steel.
 - 1. Thickness: Not less than 0.025 inch (24 gage) stainless steel.
 - 2. Mounting: Face of wall.
- H. Electric Door Operator:
 - 1. Usage Classification: Standard duty, up to 25 cycles per hour and up to 90 cycles per day.
 - 2. Operator Location: Top of hood.
 - 3. Safety: Listed according to UL 325 by a qualified testing agency for commercial or industrial use; moving parts of operator enclosed or guarded if exposed and mounted at 8 ft. or lower.
 - 4. Motor Exposure: Interior.
 - 5. Motor Electrical Characteristics:
 - a. Horsepower: 1/2 hp.
 - b. Voltage: 115 V ac, single phase, 60 Hz.
 - 6. Emergency Manual Operation: Chain type.
 - 7. Obstruction-Detection Device: Automatic electric sensor edge on bottom bar; self-monitoring type.
 - 8. Control Station(s): Where indicated on Drawings.
 - 9. Other Equipment: Audible and visual signals.
- I. Door Finish:
 - 1. Aluminum Finish: Anodized color as selected by Architect from full range of industry colors and color densities.

2.4 INSULATED SERVICE DOOR ASSEMBLY

- A. Insulated Service Door: Overhead coiling door formed with curtain of interlocking metal slats.
 - 1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Clopay Building Products Co.; Model CESD20 Insulated Heavy-Duty Service Door.
 - b. CornellCookson, LLC; Thermiser Insulated Rolling Service Door Model ESD20.
 - c. Wayne Dalton; Model 800C Insulated Rolling Service Door.
- B. Operation Cycles: Door components and operators capable of operating for not less than 20,000 operation cycles. One operation cycle is complete when a door is opened from the closed position to the fully open position and returned to the closed position.
- C. Air Infiltration: Maximum rate of 1.0 cfm/sq. ft. when tested according to ASTM E283 at 1.57 psf.
- D. Insulated Door Curtain R-Value: Not less than 7.7 deg F x h x sq. ft./Btu.
- E. Door Curtain Material: Aluminum.
- F. Door Curtain Slats: Flat profile slats of 2-7/16- to 3-inch center-to-center height.
 - 1. Thickness: Not less than 0.040 inch aluminum; and as required to meet performance requirements.
 - 2. Insulated-Slat Interior Facing: Metal matching exterior slat face; not less than 0.0201 inch aluminum.
- G. Bottom Bar: Two angles, each not less than 1-1/2 by 1-1/2 by 1/8 inch thick; fabricated from aluminum extrusions and finished to match door.
- H. Curtain Jamb Guides: Aluminum with exposed finish matching curtain slats.
- I. Hood: Aluminum.
 - 1. Thickness: Not less than 0.0253 inch aluminum.
 - 2. Mounting: Face of wall.
- J. Electric Door Operator:
 - 1. Usage Classification: Standard duty, up to 25 cycles per hour and up to 90 cycles per day.
 - 2. Operator Location: Top of hood.
 - 3. Safety: Listed according to UL 325 by a qualified testing agency for commercial or industrial use; moving parts of operator enclosed or guarded if exposed and mounted at 8 ft. or lower.
 - 4. Motor Exposure: Interior.

- 5. Motor Electrical Characteristics:
 - a. Horsepower: 1/2 hp.
 - b. Voltage: 115 V ac, single phase, 60 Hz.
- 6. Emergency Manual Operation: Chain type.
- 7. Obstruction-Detection Device: Automatic electric sensor edge on bottom bar; self-monitoring type.
- 8. Control Station(s): Where indicated on Drawings.
- 9. Other Equipment: Audible and visual signals.
- K. Curtain Accessories: Equip door with weatherseals.
- L. Door Finish:
 - 1. Aluminum Finish: Anodized color as selected by Architect from full range of industry colors and color densities.
- M. Interior Curtain-Slat Facing: Finish as selected by Architect from manufacturer's full range.

2.5 FIRE-RATED SERVICE DOOR ASSEMBLY

- A. Fire-Rated Service Door: Overhead fire-rated coiling door formed with curtain of interlocking metal slats.
 - 1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Clopay Building Products Co.; Model CERD10 Standard Heavy-Duty Fire-Rated Door.
 - b. CornellCookson, LLC; Roll Up Fire Resistant Door Model ERD11.
 - c. Wayne Dalton; Model 700 Rolling Steel Fire Door – FireStar.
- B. Operation Cycles: Door components and operators capable of operating for not less than 20,000 operation cycles. One operation cycle is complete when a door is opened from the closed position to the fully open position and returned to the closed position.
- C. Fire Rating: 1-1/2 hours and with smoke control.
- D. Door Curtain Material: Galvanized steel.
- E. Door Curtain Slats: Flat profile slats of 2-7/16- to 2-5/8-inch center-to-center height.
 - 1. Thickness: Not less than nominal sheet thickness (coated) 0.052 inch (18 gage) galvanized steel; and as required to meet performance requirements.
- F. Bottom Bar: Two angles, each not less than 1-1/2 by 1-1/2 by 1/8 inch thick; fabricated from hot-dip galvanized steel and finished to match door.

- G. Curtain Jamb Guides: Galvanized steel with exposed finish matching curtain slats.
- H. Hood: Galvanized steel.
 - 1. Thickness: Not less than nominal sheet thickness (coated) 0.028 inch (24 gage) galvanized steel.
 - 2. Mounting: Face of wall.
- I. Electric Door Operator:
 - 1. Usage Classification: Standard duty, up to 25 cycles per hour and up to 90 cycles per day.
 - 2. Operator Location: Top of hood.
 - 3. Safety: Listed according to UL 325 by a qualified testing agency for commercial or industrial use; moving parts of operator enclosed or guarded if exposed and mounted at 8 ft. or lower.
 - 4. Motor Exposure: Interior.
 - 5. Motor Electrical Characteristics:
 - a. Horsepower: 1/2 hp.
 - b. Voltage: 115 V ac, single phase, 60 Hz.
 - 6. Emergency Manual Operation: Chain type.
 - 7. Obstruction-Detection Device: Automatic electric sensor edge on bottom bar; self-monitoring type.
 - 8. Control Station(s): Where indicated on Drawings.
 - 9. Other Equipment: Audible and visual signals.
- J. Door Finish:
 - 1. Powder-Coated Finish: Color as selected by Architect from manufacturer's full range.

2.6 MATERIALS, GENERAL

- A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

2.7 DOOR CURTAIN MATERIALS AND CONSTRUCTION

- A. Door Curtains: Fabricate overhead coiling-door curtain of interlocking metal slats, designed to withstand wind loading indicated, in a continuous length for width of door without splices. Unless otherwise indicated, provide slats of thickness and mechanical properties recommended by door manufacturer for performance, size, and type of door indicated, and as follows:

1. Steel Door Curtain Slats: Zinc-coated (galvanized), cold-rolled structural-steel sheet; complying with ASTM A653/A653M, with G90 zinc coating; nominal sheet thickness (coated) as indicated; and as required to meet performance requirements.
 2. Aluminum Door Curtain Slats: ASTM B209 sheet or ASTM B221 extrusions, alloy and temper standard with manufacturer for type of use and finish indicated; thickness as indicated; and as required to meet performance requirements.
 3. Insulation: Fill slats for insulated doors with manufacturer's standard thermal insulation complying with maximum flame-spread and smoke-developed indexes of 75 and 450, respectively, according to ASTM E84 or UL 723. Enclose insulation completely within slat faces.
 4. Metal Interior Curtain-Slat Facing: Match metal of exterior curtain-slat face, with minimum thickness as indicated.
- B. Curtain Jamb Guides: Manufacturer's standard angles or channels and angles of same material and finish as curtain slats unless otherwise indicated, with sufficient depth and strength to retain curtain, to allow curtain to operate smoothly, and to withstand loading. Slot bolt holes for guide adjustment. Provide removable stops on guides to prevent overtravel of curtain, and a continuous bar for holding windlocks.

2.8 HOODS

- A. General: Form sheet metal hood to entirely enclose coiled curtain and operating mechanism at opening head. Contour to fit end brackets to which hood is attached. Roll and reinforce top and bottom edges for stiffness. Form closed ends for surface-mounted hoods and fascia for any portion of between-jamb mounting that projects beyond wall face. Equip hood with intermediate support brackets as required to prevent sagging.
1. Galvanized Steel: Hot-dip galvanized-steel sheet with G90 zinc coating, complying with ASTM A653/A653M.
 2. Aluminum: Aluminum sheet complying with ASTM B209, of alloy and temper recommended by manufacturer and finisher for type of use and finish indicated.
 3. Include automatic drop baffle on fire-rated doors to guard against passage of smoke or flame.
- B. Removable Metal Soffit: Formed or extruded from same metal and with same finish as curtain if hood is mounted above ceiling unless otherwise indicated.

2.9 LOCKING DEVICES

- A. Chain Lock Keeper: Suitable for padlock.
- B. Safety Interlock Switch: Equip power-operated doors with safety interlock switch to disengage power supply when door is locked.

2.10 CURTAIN ACCESSORIES

- A. Smoke Seals: Equip each fire-rated door with replaceable smoke-seal perimeter gaskets or brushes for smoke and draft control as required for door listing and labeling by a qualified testing agency.
- B. Weatherseals for Exterior Doors: Equip each exterior door with weather-stripping gaskets fitted to entire exterior perimeter of door for a weather-resistant installation unless otherwise indicated.
 - 1. At door head, use 1/8-inch-thick, replaceable, continuous-sheet baffle secured to inside of hood or field-installed on the header.
 - 2. At door jambs, use replaceable, adjustable, continuous, flexible, 1/8-inch-thick seals of flexible vinyl, rubber, or neoprene or nylon brushes.
- C. Automatic-Closing Device: Equip each fire-rated door with an automatic-closing device or holder-release mechanism and governor unit complying with NFPA 80 and an easily tested and reset release mechanism. Release mechanism for motor-operated doors allows testing without mechanical release of the door. Automatic-closing device is to be designed for activation by the following:
 - 1. Building fire-detection, smoke-detection, and -alarm systems.

2.11 COUNTERBALANCE MECHANISM

- A. General: Counterbalance doors by means of manufacturer's standard mechanism with an adjustable-tension, steel helical torsion spring mounted around a steel shaft and contained in a spring barrel connected to top of curtain with barrel rings. Use grease-sealed bearings or self-lubricating graphite bearings for rotating members.
- B. Counterbalance Barrel: Fabricate spring barrel of manufacturer's standard hot-formed, structural-quality, seamless carbon-steel pipe, of sufficient diameter and wall thickness to support rolled-up curtain without distortion of slats and to limit barrel deflection to not more than 0.03 in./ft. of span under full load.
- C. Counterbalance Spring: One or more oil-tempered, heat-treated steel helical torsion springs. Size springs to counterbalance weight of curtain, with uniform adjustment accessible from outside barrel. Secure ends of springs to barrel and shaft with cast-steel barrel plugs.
 - 1. Fire-Rated Doors: Equip with auxiliary counterbalance spring and prevent tension release from main counterbalance spring when automatic-closing device operates.
- D. Torsion Rod for Counterbalance Shaft: Fabricate of manufacturer's standard cold-rolled steel, sized to hold fixed spring ends and carry torsional load.
- E. Brackets: Manufacturer's standard mounting brackets of either cast iron or cold-rolled steel plate.

2.12 ELECTRIC DOOR OPERATORS

- A. General: Electric door operator assembly of size and capacity recommended and provided by door manufacturer for door and operation-cycles requirement specified, with electric motor and factory-prewired motor controls, starter, gear-reduction unit, solenoid-operated brake, clutch, control stations, control devices, integral gearing for locking door, and accessories required for proper operation.
 - 1. Comply with NFPA 70.
 - 2. Control equipment complying with NEMA ICS 1, NEMA ICS 2, and NEMA ICS 6, with NFPA 70 Class 2 control circuit, maximum 24-V ac or dc.
- B. Usage Classification: Electric operator and components capable of operating for not less than number of cycles per hour indicated for each door.
- C. Door Operator Location(s): Operator location indicated for each door.
 - 1. Top-of-Hood Mounted: Operator is mounted to the right or left door head plate with the operator on top of the door-hood assembly and connected to the door drive shaft with drive chain and sprockets. Headroom is required for this type of mounting.
- D. Motors: Reversible-type motor with controller (disconnect switch) for motor exposure indicated for each door assembly.
 - 1. Electrical Characteristics: Minimum as indicated for each door assembly. If not indicated, large enough to start, accelerate, and operate door in either direction from any position, at a speed not less than 8 in./sec. and not more than 12 in./sec., without exceeding nameplate ratings or service factor.
 - 2. Operating Controls, Controllers, Disconnect Switches, Wiring Devices, and Wiring: Manufacturer's standard unless otherwise indicated.
 - 3. Coordinate wiring requirements and electrical characteristics of motors and other electrical devices with building electrical system and each location where installed.
- E. Limit Switches: Equip each motorized door with adjustable switches interlocked with motor controls and set to automatically stop door at fully opened and fully closed positions.
- F. Obstruction-Detection Devices: External entrapment protection consisting of indicated automatic safety sensor capable of protecting full width of door opening. For non-fire-rated doors, activation of device immediately stops and reverses downward door travel. For fire-rated doors, activation delays closing.
 - 1. Electric Sensor Edge: Automatic safety sensor edge, located within astragal or weather stripping mounted to bottom bar. Contact with sensor activates device. Connect to control circuit using manufacturer's standard take-up reel or self-coiling cable.
 - a. Self-Monitoring Type: Four-wire-configured device designed to interface with door operator control circuit to detect damage to or disconnection of sensor edge.

- G. Control Station: Three-button control station in fixed location with momentary-contact push-button controls labeled "Open" and "Stop" and sustained- or constant-pressure push-button control labeled "Close."
 - 1. Interior-Mounted Units: Full-guarded, surface-mounted, heavy-duty type, with general-purpose NEMA ICS 6, Type 1 enclosure.
 - 2. Exterior-Mounted Units: Full-guarded, standard-duty, surface-mounted, weatherproof type, NEMA ICS 6, Type 4 enclosure, key operated.
- H. Emergency Manual Operation: Equip each electrically powered door with capability for emergency manual operation. Design manual mechanism so required force for door operation does not exceed 25 lbf.
- I. Emergency Operation Disconnect Device: Equip operator with hand-operated disconnect mechanism for automatically engaging manual operator and releasing brake for emergency manual operation while disconnecting motor without affecting timing of limit switch. Mount mechanism so it is accessible from floor level. Include interlock device to automatically prevent motor from operating when emergency operator is engaged.
- J. Motor Removal: Design operator so motor may be removed without disturbing limit-switch adjustment and without affecting emergency manual operation.
- K. Audible and Visual Signals: Audible alarm and visual indicator lights in compliance with the accessibility standard.

2.13 GENERAL FINISH REQUIREMENTS

- A. Comply with NAAMM/NOMMA 500 for recommendations for applying and designating finishes.
- B. Appearance of Finished Work: Noticeable variations in same piece are not acceptable. Variations in appearance of adjoining components are acceptable if they are within the range of approved Samples and are assembled or installed to minimize contrast.

2.14 ALUMINUM FINISHES

- A. Color Anodic Finish: AAMA 611, AA-M12C22A42/A44, Class I, 0.018 mm or thicker.

2.15 STEEL AND GALVANIZED-STEEL FINISHES

- A. Powder-Coat Finish: Manufacturer's standard baked-on finish consisting of prime coat and thermosetting topcoat. Comply with coating manufacturer's written instructions for cleaning, pretreatment, application, and minimum dry film thickness.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates areas and conditions, with Installer present, for compliance with requirements for substrate construction and other conditions affecting performance of the Work.
- B. Examine locations of electrical connections.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.
- D. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 INSTALLATION, GENERAL

- A. Install overhead coiling doors and operating equipment complete with necessary hardware, anchors, inserts, hangers, and equipment supports; according to manufacturer's written instructions and as specified.
- B. Install overhead coiling doors, hoods, controls, and operators at the mounting locations indicated for each door.
- C. Accessibility: Install overhead coiling doors, switches, and controls along accessible routes in compliance with the accessibility standard.
- D. Fire-Rated Doors: Install according to NFPA 80.
- E. Smoke-Control Doors: Install according to NFPA 80 and NFPA 105.
- F. Power-Operated Doors: Install according to UL 325.

3.3 FIELD QUALITY CONTROL

- A. Testing Agency: Engage a qualified testing agency to perform tests and inspections and to furnish reports to Architect.
- B. Perform the following tests and inspections:
 - 1. Test door release, closing, and alarm operations when activated by smoke detector or building's fire-alarm system. Test manual operation of closed door. Reset door-closing mechanism after successful test.
 - 2. Fire-Rated Door Inspections: Inspect each fire-rated door in accordance with NFPA 80, Section 5.2.
- C. Correct or remove and replace installations where inspections indicate that they do not comply with specified requirements.
- D. Reinspect corrected or replaced installations to determine if replaced or corrected door assembly installations comply with specified requirements.

- E. Prepare and submit separate inspection report for each fire-rated door assembly indicating compliance with each item listed in NFPA 80.

3.4 STARTUP SERVICE

- A. Engage a factory-authorized service representative to perform startup service.
 - 1. Complete installation and startup checks according to manufacturer's written instructions.
 - 2. After electrical circuitry has been energized, operate doors to confirm proper motor rotation and door performance.
 - 3. Test and adjust controls and safety devices. Replace damaged and malfunctioning controls and equipment.

3.5 ADJUSTING

- A. Adjust hardware and moving parts to function smoothly so that doors operate easily, free of warp, twist, or distortion.
 - 1. Adjust exterior doors and components to be weather resistant.
- B. Lubricate bearings and sliding parts as recommended by manufacturer.
- C. Adjust seals to provide tight fit around entire perimeter.

3.6 DEMONSTRATION

- A. Engage a factory-authorized service representative to train Owner's maintenance personnel to adjust, operate, and maintain overhead coiling doors.

END OF SECTION 08 33 23

SECTION 08 41 13 - ALUMINUM-FRAMED ENTRANCES AND STOREFRONTS**PART 1 - GENERAL****1.1 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Aluminum-framed storefront systems.
 - 2. Entrance door systems.

1.3 PREINSTALLATION MEETINGS

- A. Preinstallation Conference: Conduct conference at Project site.
 - 1. Review and discuss the finishing of aluminum storefront that is required to be coordinated with the finishing of other aluminum work for color and finish matching.
 - 2. Inspect and discuss the condition of substrate and other preparatory work performed by other trades.

1.4 SUBMITTALS, GENERAL

- A. General: Submit all action submittals and informational submittals required by this Section and by Division 08 Sections "Door Hardware" and "Glazing".

1.5 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes.
 - 1. Entrance door hardware.
 - 2. Accessories.
 - 3. Nonthermal framing.
 - 4. Thermal entrance doors.
 - 5. Nonthermal entrance doors.
- B. Shop Drawings: For aluminum-framed entrances and storefronts. Include plans, elevations, sections, full-size details, and attachments to other work.
 - 1. Include details of provisions for assembly expansion and contraction and for draining moisture occurring within the assembly to the exterior.

2. Show connection to and continuity with adjacent thermal, weather, air, and vapor barriers.
 3. Show provisions for coordination with door hardware, electrically operated door hardware, and access control and security systems.
- C. Samples: For each type of exposed finish required, in manufacturer's standard sizes.
- D. Delegated Design Submittal: For aluminum-framed entrances and storefronts including analysis data signed and sealed by the qualified professional engineer responsible for their preparation.
1. Delegated Design only applies to the following storefront types as shown on sheet KA602 – Curtain Wall, Storefront, and Window types:
 - a. S12
 - b. S13
- E. Sample Warranties: For special warranties.

1.6 INFORMATIONAL SUBMITTALS

- A. Energy Performance Certificates: For aluminum-framed entrances and storefronts, accessories, and components, from manufacturer.
1. Basis for Certification: NFRC-certified energy performance values for each aluminum-framed entrance and storefront.
- B. Performance Reports: For fiberglass reinforced polyester (FRP) face sheet doors, showing compliance with fire-performance and door construction requirements.

1.7 CLOSEOUT SUBMITTALS

- A. Maintenance Data: For aluminum-framed entrances and storefronts to include in maintenance manuals.
- B. Warranties: Executed special warranties.

1.8 QUALITY ASSURANCE

- A. Installer Qualifications: An entity that employs installers and supervisors who are trained and approved by manufacturer.
- B. Product Options: Information on Drawings and in Specifications establishes requirements for aesthetic effects and performance characteristics of assemblies. Aesthetic effects are indicated by dimensions, arrangements, alignment, and profiles of components and assemblies as they relate to sightlines, to one another, and to adjoining construction.
1. Do not change intended aesthetic effects, as judged solely by Architect, except with Architect's approval. If changes are proposed, submit comprehensive explanatory data to Architect for review.

1.9 WARRANTY

- A. Special Warranty: Manufacturer agrees to correct or replace components of aluminum-framed entrances and storefronts that do not comply with requirements or that fail in materials or workmanship within specified warranty period.
 - 1. Failures include, but are not limited to, the following:
 - a. Structural failures, including, but not limited to, excessive deflection.
 - b. Noise or vibration created by wind and thermal and structural movements.
 - c. Deterioration of metals and other materials beyond normal weathering.
 - d. Water penetration through fixed glazing and framing areas.
 - e. Failure of operating components.
 - 2. Warranty Period: 2 years from date of Substantial Completion.
- B. Special Finish Warranty, Anodized Finishes: Standard form in which manufacturer agrees to restore finishes or replace aluminum that shows evidence of deterioration of anodized finishes within specified warranty period.
 - 1. Deterioration includes, but is not limited to, the following:
 - a. Color fading more than 5 Delta E units when tested in accordance with ASTM D 2244.
 - b. Chalking in excess of a No. 8 rating when tested in accordance with ASTM D 4214.
 - c. Cracking, peeling, or chipping.
 - 2. Warranty Period: 10 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Source Limitation: Obtain all components of aluminum-framed entrance and storefront system, including framing and accessories, and entrance doors when available, from single manufacturer.

2.2 PERFORMANCE REQUIREMENTS

- A. Delegated Design: Engage a qualified professional engineer, as defined in Division 01 Section "Quality Requirements," to design aluminum-framed entrances and storefronts.
- B. General Performance: Comply with performance requirements specified, as determined by testing of aluminum-framed entrances and storefronts representing those indicated for this Project without failure due to defective manufacture, fabrication, installation, or other defects in construction.

1. Aluminum-framed entrances and storefronts shall withstand movements of supporting structure, including, but not limited to, twist, column shortening, long-term creep, and deflection from uniformly distributed and concentrated live loads.
 2. Failure also includes the following:
 - a. Thermal stresses transferring to building structure.
 - b. Glass breakage.
 - c. Noise or vibration created by wind and thermal and structural movements.
 - d. Loosening or weakening of fasteners, attachments, and other components.
 - e. Failure of operating units.
- C. Structural Loads:
1. Wind Loads: As indicated on Drawings.
 2. Other Design Loads: As indicated on Drawings.
- D. Deflection of Framing Members Supporting Glass: At design wind load, as follows:
1. Deflection Normal to Wall Plane: Limited to 1/175 of clear span for spans of up to 13 feet 6 inches and to 1/240 of clear span plus 1/4 inch for spans greater than 13 feet 6 inches.
 2. Deflection Parallel to Glazing Plane: Limited to amount not exceeding that which reduces glazing bite to less than 75 percent of design dimension and that which reduces edge clearance between framing members and glazing or other fixed components to less than 1/8 inch.
 - a. Operable Units: Provide a minimum 1/16-inch clearance between framing members and operable units.
- E. Structural: Test in accordance with ASTM E330/E330M as follows:
1. When tested at positive and negative wind-load design pressures, storefront assemblies, including entrance doors, do not evidence deflection exceeding specified limits.
 2. When tested at 150 percent of positive and negative wind-load design pressures, storefront assemblies, including entrance doors and anchorage, do not evidence material failures, structural distress, or permanent deformation of main framing members exceeding 0.2 percent of span.
 3. Test Durations: As required by design wind velocity, but not less than 10 seconds.
- F. Water Penetration under Static Pressure: Test in accordance with ASTM E331 as follows:
1. No evidence of water penetration through fixed glazing and framing areas, including entrance doors, when tested in accordance with a minimum static-air-pressure differential of 20 percent of positive wind-load design pressure, but not less than 10 lbf/sq. ft..

G. Energy Performance: Certified and labeled by manufacturer for energy performance as follows:

1. Thermal Transmittance (U-factor):

- a. Thermally Broken Fixed Glazing and Framing Areas: U-factor for the system of not more than 0.3 Btu/sq. ft. x h x deg F as determined in accordance with NFRC 100.
- b. Thermal Entrance Doors: U-factor of not more than 0.77 Btu/sq. ft. x h x deg F as determined in accordance with NFRC 100.
- c. Flush Entrance Doors: U-factor of not more than 0.37 Btu/sq. ft. x h x deg F as determined according to NFRC 100.

2. Solar Heat-Gain Coefficient (SHGC):

- a. Thermally Broken Fixed Glazing and Framing Areas: SHGC for the system of not more than 0.38 as determined in accordance with NFRC 200.
- b. Thermal Entrance Doors: SHGC of not more than [0.40] [0.38] [**0.36**] as determined in accordance with NFRC 200.

3. Air Leakage:

- a. Thermally Broken Fixed Glazing and Framing Areas: Air leakage for the system of not more than 0.06 cfm/sq. ft. at a static-air-pressure differential of 6.24 lbf/sq. ft. when tested in accordance with ASTM E283 or NFRC 400.
- b. Thermal Entrance Doors: Air leakage of not more than 1.0 cfm/sq. ft. at a static-air-pressure differential of 1.57 lbf/sq. ft.

4. Condensation Resistance Factor (CRF):

- a. Thermally Broken Fixed Glazing and Framing Areas: CRF for the system of not less than 69 as determined in accordance with AAMA 1503.
- b. Thermal Entrance Doors: CRF of not less than 40 as determined in accordance with AAMA 1503.

H. Thermal Movements: Allow for thermal movements resulting from ambient and surface temperature changes.

- 1. Temperature Change: 120 deg F, ambient; 180 deg F, material surfaces.

2.3 STOREFRONT SYSTEMS, GENERAL

A. Framing Members: Manufacturer's extruded- or formed-aluminum framing members of thickness required and reinforced as required to support imposed loads.

- 1. Interior Framing Construction: Nonthermal.
- 2. Glazing System: Retained mechanically with gaskets on four sides.
- 3. Glazing Plane: Center.

4. Finish: Clear anodic finish.
 5. Fabrication Method: Field-fabricated stick system.
 6. Aluminum: Alloy and temper recommended by manufacturer for type of use and finish indicated.
 7. Steel Reinforcement: As required by manufacturer.
- B. Backer Plates: Manufacturer's standard, continuous backer plates for framing members, if not integral, where framing abuts adjacent construction.
- C. Brackets and Reinforcements: Manufacturer's standard high-strength aluminum with nonstaining, nonferrous shims for aligning system components.
- D. Insulated Spandrel Panels: Comply with Division 08 Section "Glazing."

2.4 STOREFRONT SYSTEM TYPES

- A. Types: Provide the following types in locations indicated on Drawings:
1. Nonthermal framing.

2.5 NONTHERMAL FRAMING

- A. Products: Subject to compliance with requirements, available products that may be incorporated in the Work include, but are not limited to:
1. EFCO Corporation; System 402 Flush-Glazed Storefront.
 2. Kawneer; Trifab VersaGlaze 450 (2-inch Sightline) Framing System.
 3. Special-Lite, Inc.; SL- 245 FG Flush Glazed Tube Framing.
 4. YKK AP America Inc.; YES 45 FI Storefront System.
- B. Framing Size: 2-inch by 4-1/2-inch.

2.6 ENTRANCE DOOR SYSTEMS, GENERAL

- A. Entrance Doors: Manufacturer's standard glazed and flush entrance doors for manual-swing or automatic operation.
- B. Door Construction:
1. Thermal Entrance Door Construction: Glazed entrance doors with extruded-aluminum tubular rail and stile members. Mechanically fasten corners with reinforcing brackets that are deeply penetrated and fillet welded or that incorporate concealed tie rods.
 - a. Thermal Construction: High-performance plastic connectors separate aluminum members exposed to the exterior from members exposed to the interior.

2. Nonthermal Entrance Door Construction: Glazed entrance doors with extruded-aluminum tubular rail and stile members. Mechanically fasten corners with reinforcing brackets that are deeply penetrated and fillet welded or that incorporate concealed tie rods.
 - a. Aluminum Face Sheet: 0.062- to 0.090-inch-thick smooth aluminum.
3. Flush Entrance Door Construction: Fiberglass reinforced polyester (FRP) face sheet with poured-in-place or frothed-in-place urethane insulation and interlocked into extruded-aluminum rail and stile members to conceal edges of face sheets.
 - a. Fiberglass Reinforced Polyester (FRP) Face Sheet: 0.120-inch-thick pebble-textured FRP.
 - 1) FRP door construction must comply with IBC 2603.4.1.7 or have special approval per IBC 2603.9.
 - 2) Surface-Burning Characteristics: For FRP face sheets facing the interior, surface-burning characteristics as follows when tested by a qualified testing agency according to ASTM E 84. Identify products with appropriate markings of applicable testing agency.
 - a) Flame-Spread Index: 25 or less.
 - b) Smoke-Developed Index: 450 or less.
4. Glazing Stops and Gaskets: Square, snap-on, extruded-aluminum stops and preformed gaskets.
 - a. Provide nonremovable glazing stops on outside of door.
5. Finish: Match adjacent storefront framing finish, unless otherwise indicated.

2.7 ENTRANCE DOOR TYPES

- A. Types: Provide the following entrance door types in locations indicated on Drawings:
 1. Thermal entrance doors.
 2. Nonthermal entrance doors.
 3. Flush entrance doors.

2.8 THERMAL ENTRANCE DOORS

- A. Products: Subject to compliance with requirements, available products that may be incorporated in the Work include, but are not limited to:
 1. EFCO Corporation; Series D302 Medium Stile ThermaStile Entrances.
 2. Kawneer; 350T Insulpour Thermal Entrances.
 3. YKK AP America Inc.; MegaTherm 35XT Medium Stile Entrances.
- B. Depth: 2- to 2-3/8-inch.

- C. Door Design: Wide stile, 5-inch nominal width.
- D. Bottom Rail: Height to comply with accessibility requirements.

2.9 NONTHERMAL ENTRANCE DOORS

- A. Products: Subject to compliance with requirements, available products that may be incorporated in the Work include, but are not limited to:
 - 1. EFCO Corporation; Series D500 Wide Stile Entrance Door.
 - 2. Kawneer; 500 Wide Stile Standard Entrance.
 - 3. YKK AP America Inc.; Series 50D Wide Stile Swing Doors.
- B. Depth: 1-3/4-inch.
- C. Door Design: Wide stile, 5-inch nominal width.
- D. Bottom Rail: Height to comply with accessibility requirements.

2.10 FLUSH ENTRANCE DOORS

- A. Products: Subject to compliance with requirements, available products that may be incorporated in the Work include, but are not limited to:
 - 1. Fiberglass Reinforced Polyester (FRP) Face Sheet Doors:
 - a. FRP Architectural Doors Inc.; FD25 Heavy Duty FRP Faced Door.
 - b. Special-Lite, Inc.; SL-17 Pebble Grain FRP/Aluminum Hybrid Door.
- B. Depth: 1-3/4-inch.
- C. Color: As selected by Architect from manufacturer's full range.

2.11 ENTRANCE DOOR HARDWARE

- A. Entrance Door Hardware: Hardware not specified in this Section is specified in Division 08 Section "Door Hardware."
- B. General: Provide entrance door hardware and entrance door hardware sets indicated in door and frame schedule for each entrance door, to comply with requirements in this Section.
 - 1. Opening-Force Requirements:
 - a. Egress Doors: Not more than 15 lbf to release the latch and not more than 30 lbf to set the door in motion and not more than 15 lbf to open the door to its minimum required width.
 - b. Accessible Interior Doors: Not more than 5 lbf to fully open door.

- C. Removable Mullions: BHMA A156.3 extruded aluminum.
 - 1. When used with panic exit devices, provide keyed removable mullions listed and labeled by a testing and inspecting agency acceptable to authorities having jurisdiction, for panic protection, based on testing in accordance with UL 305. Use only mullions that have been tested with exit devices to be used.
- D. Weather Stripping: Manufacturer's standard replaceable components.
 - 1. Compression Type: Made of ASTM D2000 molded neoprene or ASTM D2287 molded PVC.
 - 2. Sliding Type: AAMA 701/702, made of wool, polypropylene, or nylon woven pile with nylon-fabric or aluminum-strip backing.
- E. Weather Sweeps: Manufacturer's standard exterior-door bottom sweep with concealed fasteners on mounting strip.
- F. Thresholds: BHMA A156.21 raised thresholds beveled with a slope of not more than 1:2, with maximum height of 1/2 inch.

2.12 GLAZING

- A. Glazing: Comply with Division 08 Section "Glazing."
- B. Glazing Gaskets: Manufacturer's standard sealed-corner pressure-glazing system of black, resilient elastomeric glazing gaskets, setting blocks, and shims or spacers.
- C. Glazing Sealants: As recommended by manufacturer.

2.13 MATERIALS

- A. Sheet and Plate: ASTM B209.
- B. Extruded Bars, Rods, Profiles, and Tubes: ASTM B221.
- C. Structural Profiles: ASTM B308/B308M.
- D. Steel Reinforcement:
 - 1. Structural Shapes, Plates, and Bars: ASTM A36/A36M.
 - 2. Cold-Rolled Sheet and Strip: ASTM A1008/A1008M.
 - 3. Hot-Rolled Sheet and Strip: ASTM A1011/A1011M.
- E. Steel Reinforcement Primer: Manufacturer's standard zinc-rich, corrosion-resistant primer complying with SSPC-PS Guide No. 12.00; applied immediately after surface preparation and pretreatment. Select surface preparation methods in accordance with recommendations in SSPC-SP COM, and prepare surfaces in accordance with applicable SSPC standard.

2.14 ACCESSORIES

- A. Automatic Door Operators: Comply with Division 08 Section "Automatic Door Operators."
- B. Fasteners and Accessories: Manufacturer's standard corrosion-resistant, nonstaining, nonbleeding fasteners and accessories compatible with adjacent materials.
 - 1. Use self-locking devices where fasteners are subject to loosening or turning out from thermal and structural movements, wind loads, or vibration.
 - 2. Reinforce members as required to receive fastener threads.
- C. Anchors: Three-way adjustable anchors with minimum adjustment of 1 inch that accommodate fabrication and installation tolerances in material and finish compatible with adjoining materials and recommended by manufacturer.
 - 1. Concrete and Masonry Inserts: Hot-dip galvanized cast-iron, malleable-iron, or steel inserts complying with ASTM A123/A123M or ASTM A153/A153M requirements.
- D. Concealed Flashing: Manufacturer's standard corrosion-resistant, nonstaining, nonbleeding flashing compatible with adjacent materials.
- E. Bituminous Paint: Cold-applied asphalt-mastic paint containing no asbestos, formulated for 30-mil thickness per coat.

2.15 FABRICATION

- A. Form or extrude aluminum shapes before finishing.
- B. Weld in concealed locations to greatest extent possible to minimize distortion or discoloration of finish. Remove weld spatter and welding oxides from exposed surfaces by descaling or grinding.
- C. Fabricate components that, when assembled, have the following characteristics:
 - 1. Profiles that are sharp, straight, and free of defects or deformations.
 - 2. Accurately fitted joints with ends coped or mitered.
 - 3. Physical and thermal isolation of glazing from framing members.
 - 4. Accommodations for thermal and mechanical movements of glazing and framing to maintain required glazing edge clearances.
 - 5. Provisions for field replacement of glazing from interior.
 - 6. Fasteners, anchors, and connection devices that are concealed from view to greatest extent possible.
- D. Mechanically Glazed Framing Members: Fabricate for flush glazing without projecting stops.
- E. Entrance Door Frames: Reinforce as required to support loads imposed by door operation and for installing entrance door hardware.
 - 1. At interior and exterior doors, provide compression weather stripping at fixed stops. Blade-type stops are not acceptable.

- F. Entrance Doors: Reinforce doors as required for installing entrance door hardware.
 - 1. At pairs of exterior doors, provide sliding-type weather stripping retained in adjustable strip and mortised into door edge.
 - 2. At exterior doors, provide weather sweeps applied to door bottoms.
- G. Entrance Door Hardware Installation: Factory install entrance door hardware to the greatest extent possible. Cut, drill, and tap for factory-installed entrance door hardware before applying finishes.
- H. After fabrication, clearly mark components to identify their locations in Project in accordance with Shop Drawings.

2.16 ALUMINUM FINISHES

- A. Clear Anodic Finish: AAMA 611, AA-M12C22A41, Class I, 0.018 mm or thicker.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine areas, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.
- C. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 INSTALLATION, GENERAL

- A. Comply with manufacturer's written instructions.
- B. Do not install damaged components.
- C. Fit joints to produce hairline joints free of burrs and distortion.
- D. Rigidly secure nonmovement joints.
- E. Install anchors with separators and isolators to prevent metal corrosion and electrolytic deterioration and to prevent impeding movement of moving joints.
- F. Seal perimeter and other joints watertight unless otherwise indicated.
- G. Metal Protection:
 - 1. Where aluminum is in contact with dissimilar metals, protect against galvanic action by painting contact surfaces with materials recommended by manufacturer for this purpose or by installing nonconductive spacers.

2. Where aluminum is in contact with concrete or masonry, protect against corrosion by painting contact surfaces with bituminous paint.
- H. Set continuous sill members and flashing in full sealant bed, as specified in Division 07 Section "Joint Sealants," to produce weathertight installation.
- I. Install joint filler behind sealant as recommended by sealant manufacturer.
- J. Install components plumb and true in alignment with established lines and grades.

3.3 INSTALLATION OF GLAZING

- A. Install glazing as specified in Division 08 Section "Glazing."

3.4 INSTALLATION OF ALUMINUM-FRAMED ENTRANCE DOORS

- A. Install entrance doors to produce smooth operation and tight fit at contact points.
 1. Exterior Doors: Install to produce weathertight enclosure and tight fit at weather stripping.
 2. Field-Installed Entrance Door Hardware: Install surface-mounted entrance door hardware in accordance with entrance door hardware manufacturers' written instructions using concealed fasteners to greatest extent possible.

3.5 ERECTION TOLERANCES

- A. Install aluminum-framed entrances and storefronts to comply with the following maximum tolerances:
 1. Plumb: 1/8 inch in 10 feet; 1/4 inch in 40 feet.
 2. Level: 1/8 inch in 20 feet; 1/4 inch in 40 feet.
 3. Alignment:
 - a. Where surfaces abut in line or are separated by reveal or protruding element up to 1/2 inch wide, limit offset from true alignment to 1/16 inch.
 - b. Where surfaces are separated by reveal or protruding element from 1/2 to 1 inch wide, limit offset from true alignment to 1/8 inch.
 - c. Where surfaces are separated by reveal or protruding element of 1 inch wide or more, limit offset from true alignment to 1/4 inch.
 4. Location: Limit variation from plane to 1/8 inch in 12 feet; 1/2 inch over total length.

3.6 MAINTENANCE SERVICE

A. Entrance Door Hardware Maintenance:

1. Maintenance Tools and Instructions: Furnish a complete set of specialized tools and maintenance instructions as needed for Owner's continued adjustment, maintenance, and removal and replacement of entrance door hardware.

END OF SECTION 08 41 13

SECTION 08 44 13 - GLAZED ALUMINUM CURTAIN WALLS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Glazed aluminum curtain wall systems:
 - a. Conventionally glazed.

1.3 PREINSTALLATION MEETINGS

- A. Preinstallation Conference: Conduct conference at Project site.
 - 1. Review and discuss the finishing of glazed aluminum curtain walls that is required to be coordinated with the finishing of other aluminum work for color and finish matching.
 - 2. Review, discuss, and coordinate the interrelationship of glazed aluminum curtain walls with other exterior wall components. Include provisions for anchoring, flashing, weeping, sealing perimeters, and protecting finishes.
 - 3. Review and discuss the sequence of work required to construct a watertight and weathertight exterior building envelope.
 - 4. Inspect and discuss the condition of substrate and other preparatory work performed by other trades.

1.4 SUBMITTALS, GENERAL

- A. General: Submit all action submittals and informational submittals required by this Section and by Division 08 Section "Glazing" concurrently.

1.5 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes.
 - 1. Accessories.
 - 2. Conventionally glazed aluminum curtain walls.

- B. Shop Drawings: For glazed aluminum curtain walls. Include plans, elevations, sections, full-size details, and attachments to other work.
 - 1. Include details of provisions for assembly expansion and contraction and for draining moisture occurring within the assembly to the exterior.
 - 2. Show connection to and continuity with adjacent thermal, weather, air, and vapor barriers.
- C. Samples: For each type of exposed finish required, in manufacturer's standard sizes.
- D. Delegated-Design Submittal: For glazed aluminum curtain walls, including analysis data signed and sealed by the qualified professional engineer responsible for their preparation.
- E. Sample Warranties: For special warranties.

1.6 INFORMATIONAL SUBMITTALS

- A. Energy Performance Certificates: For glazed aluminum curtain walls, accessories, and components from manufacturer.
 - 1. Basis for Certification: NFRC-certified energy performance values for each glazed aluminum curtain wall.
- B. Field quality-control reports.

1.7 CLOSEOUT SUBMITTALS

- A. Maintenance Data: For glazed aluminum curtain walls to include in maintenance manuals.
- B. Warranties: Executed special warranties.

1.8 QUALITY ASSURANCE

- A. Installer Qualifications: An entity that employs installers and supervisors who are trained and approved by manufacturer.
- B. Product Options: Information on Drawings and in Specifications establishes requirements for aesthetic effects and performance characteristics of assemblies. Aesthetic effects are indicated by dimensions, arrangements, alignment, and profiles of components and assemblies as they relate to sightlines, to one another, and to adjoining construction.
 - 1. Do not change intended aesthetic effects, as judged solely by Architect, except with Architect's approval. If changes are proposed, submit comprehensive explanatory data to Architect for review.

1.9 WARRANTY

- A. Special Assembly Warranty: Manufacturer agrees to correct or replace components of glazed aluminum curtain wall that do not comply with requirements or that fail in materials or workmanship within specified warranty period.
 - 1. Failures include, but are not limited to, the following:
 - a. Structural failures including, but not limited to, excessive deflection.
 - b. Noise or vibration created by wind and thermal and structural movements.
 - c. Deterioration of metals and other materials beyond normal weathering.
 - d. Water penetration through fixed glazing and framing areas.
 - e. Failure of operating components.
 - 2. Warranty Period: 10 years from date of Substantial Completion.
- B. Special Finish Warranty, Anodized Finishes: Standard form in which manufacturer agrees to restore finishes or replace aluminum that shows evidence of deterioration of anodized finishes within specified warranty period.
 - 1. Deterioration includes, but is not limited to, the following:
 - a. Color fading more than 5 Delta E units when tested in accordance with ASTM D2244.
 - b. Chalking in excess of a No. 8 rating when tested in accordance with ASTM D4214.
 - c. Cracking, peeling, or chipping.
 - 2. Warranty Period: 10 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Source Limitations: Obtain all components of curtain-wall system, including framing, venting windows, accessories, and entrance doors from single manufacturer

2.2 PERFORMANCE REQUIREMENTS

- A. Delegated Design: Engage a qualified professional engineer, as defined in Division 01 Section "Quality Requirements," to design glazed aluminum curtain walls.
- B. General Performance: Comply with performance requirements specified, as determined by testing of glazed aluminum curtain walls representing those indicated for this Project without failure due to defective manufacture, fabrication, installation, or other defects in construction.
 - 1. Glazed aluminum curtain walls shall withstand movements of supporting structure, including, but not limited to, story drift, twist, column shortening, long-term creep, and deflection from uniformly distributed and concentrated live loads.

2. Failure also includes the following:
 - a. Thermal stresses transferring to building structure.
 - b. Glass breakage.
 - c. Noise or vibration created by wind and thermal and structural movements.
 - d. Loosening or weakening of fasteners, attachments, and other components.
 - e. Failure of operating units.

C. Structural Loads:

1. Wind Loads: As indicated on Drawings.
2. Other Design Loads: As indicated on Drawings.

D. Deflection of Framing Members Supporting Glass: At design wind load, as follows:

1. Deflection Normal to Wall Plane: Limited to 1/175 of clear span for spans of up to 13 feet 6 inches and to 1/240 of clear span plus 1/4 inch for spans of greater than 13 feet 6 inches.
2. Deflection Parallel to Glazing Plane: Limited to amount not exceeding that which reduces glazing bite to less than 75 percent of design dimension and that which reduces edge clearance between framing members and glazing or other fixed components to less than 1/8 inch.
 - a. Operable Units: Provide a minimum 1/16-inch clearance between framing members and operable units.
3. Cantilever Deflection: Where framing members overhang an anchor point, as follows:
 - a. Perpendicular to Plane of Wall: No greater than 1/240 of clear span plus 1/4-inch for spans of greater than 6 feet 9 inches or 1/175 times span, for spans of less than 6 feet 9 inches.

E. Structural: Test in accordance with ASTM E330/E330M as follows:

1. When tested at positive and negative wind-load design pressures, assemblies do not evidence deflection exceeding specified limits.
2. When tested at 150 percent of positive and negative wind-load design pressures, assemblies, including anchorage, do not evidence material failures, structural distress, or permanent deformation of main framing members exceeding 0.2 percent of span.
3. Test Durations: As required by design wind velocity, but not less than 10 seconds.

F. Water Penetration under Static Pressure: Test in accordance with ASTM E331 as follows:

1. No evidence of water penetration through fixed glazing and framing areas when tested in accordance with a minimum static-air-pressure differential of 20 percent of positive wind-load design pressure, but not less than 15 lbf/sq. ft.

- G. Interstory Drift: Accommodate design displacement of adjacent stories indicated.
1. Design Displacement: 0.5 inches per story.
 2. Test Performance: Complying with criteria for passing based on building occupancy type when tested in accordance with AAMA 501.4 at design displacement and 1.5 times the design displacement.
- H. Seismic Performance: Glazed aluminum curtain walls shall withstand the effects of earthquake motions determined in accordance with ASCE/SEI 7.
1. Seismic Drift Causing Glass Fallout: Complying with criteria for passing based on building occupancy type when tested in accordance with AAMA 501.6 at design displacement and 1.5 times the design displacement.
 2. Vertical Interstory Movement: Complying with criteria for passing based on building occupancy type when tested in accordance with AAMA 501.7 at design displacement and 1.5 times the design displacement.
- I. Energy Performance: Certified and labelled by manufacturer for energy performance as follows:
1. Thermal Transmittance (U-factor):
 - a. Fixed Glazing and Framing Areas: U-factor for the system of not more than 0.38 Btu/sq. ft. x h x deg F as determined in accordance with NFRC 100.
 2. Solar Heat Gain Coefficient (SHGC):
 - a. Fixed Glazing and Framing Areas: SHGC for the system of not more than 0.38 as determined in accordance with NFRC 200.
 3. Air Leakage:
 - a. Fixed Glazing and Framing Areas: Air leakage for the system of not more than 0.06 cfm/sq. ft. at a static-air-pressure differential of 6.24 lbf/sq. ft. when tested in accordance with ASTM E283 or NFRC 400.
- J. Condensation Resistance Factor (CRF):
1. Fixed Glazing and Framing Areas: CRF for the system of not less than 67 as determined in accordance with AAMA 1503.
- K. Thermal Movements: Allow for thermal movements resulting from ambient and surface temperature changes:
1. Temperature Change: 120 deg F, ambient; 180 deg F, material surfaces.

2.3 GLAZED ALUMINUM CURTAIN WALL SYSTEMS, GENERAL

- A. Framing Members: Manufacturer's extruded- or formed-aluminum framing members of thickness required and reinforced as required to support imposed loads.
 - 1. Construction: Thermally broken.
 - 2. Glazing System: Retained mechanically with gaskets on four sides.
 - 3. Glazing Plane: Front.
 - 4. Finish: High-performance organic finish.
 - 5. System: Stick system.
 - 6. Aluminum: Alloy and temper recommended by manufacturer for type of use and finish indicated.
 - 7. Steel Reinforcement: As required by manufacturer.
- B. Pressure Caps: Manufacturer's standard low-conductance components that mechanically retain glazing.
 - 1. Include snap-on aluminum trim that conceals fasteners.
- C. Brackets and Reinforcements: Manufacturer's standard high-strength aluminum with nonstaining, nonferrous shims for aligning system components.
- D. Insulated Spandrel Panels: Comply with Division 08 Section "Glazing."
- E. Venting Windows: As specified in Division 08 Section "Aluminum Windows."
- F. Entrance Door Systems: Comply with Division 08 Section "Aluminum-Framed Entrances and Storefronts".

2.4 GLAZED ALUMINUM CURTAIN WALL SYTEM TYPES

- A. Types: Provide the following glazed aluminum curtain wall system types in locations indicated on Drawings:
 - 1. Conventionally glazed aluminum curtain wall systems.

2.5 CONVENTIONALLY GLAZED ALUMINUM CURTAIN WALL SYSTEMS

- A. Products: Subject to compliance with requirements, available products that may be incorporated in the Work include, but are not limited to:
 - 1. EFCO Corporation: System 5600 Thermal Curtain Wall with Fiberglass Pressure Plate.
 - 2. Kawneer Company, Inc.; 1600UT (Ultra Thermal) System 1 Curtain Wall System (with fiberglass pressure plates).
 - 3. YKK AP America Inc.; YCW 750 OGP Aluminum Curtain Wall System.
- B. Framing Size: 2-1/2-inch by 6-inch.

2.6 GLAZING

- A. Glazing: Comply with Division 08 Section "Glazing."
- B. Glazing Gaskets: ASTM C509 or ASTM C864. Manufacturer's standard.
 - 1. Color: Black.
- C. Glazing Sealants: As recommended by manufacturer.

2.7 MATERIALS

- A. Sheet and Plate: ASTM B209.
- B. Extruded Bars, Rods, Profiles, and Tubes: ASTM B221.
- C. Structural Profiles: ASTM B308/B308M.
- D. Steel Reinforcement:
 - 1. Structural Shapes, Plates, and Bars: ASTM A36/A36M.
 - 2. Cold-Rolled Sheet and Strip: ASTM A1008/A1008M.
 - 3. Hot-Rolled Sheet and Strip: ASTM A1011/A1011M.
- E. Steel Reinforcement Primer: Manufacturer's standard zinc-rich, corrosion-resistant primer complying with SSPC-PS Guide No. 12.00; applied immediately after surface preparation and pretreatment. Select surface preparation methods in accordance with recommendations in SSPC-SP COM, and prepare surfaces in accordance with applicable SSPC standard.

2.8 ACCESSORIES

- A. Fasteners and Accessories: Manufacturer's standard corrosion-resistant, nonstaining, nonbleeding fasteners and accessories compatible with adjacent materials.
 - 1. Use self-locking devices where fasteners are subject to loosening or turning out from thermal and structural movements, wind loads, or vibration.
 - 2. Reinforce members as required to receive fastener threads.
- B. Anchors: Three-way adjustable anchors with minimum adjustment of 1 inch that accommodate fabrication and installation tolerances in material and finish compatible with adjoining materials and recommended by manufacturer.
 - 1. Concrete and Masonry Inserts: Hot-dip galvanized cast-iron, malleable-iron, or steel inserts complying with ASTM A123/A123M or ASTM A153/A153M requirements.
- C. Concealed Flashing: Manufacturer's standard corrosion-resistant, nonstaining, nonbleeding flashing compatible with adjacent materials.
- D. Bituminous Paint: Cold-applied asphalt-mastic paint containing no asbestos, formulated for 30-mil thickness per coat.

2.9 FABRICATION

- A. Form or extrude aluminum shapes before finishing.
- B. Weld in concealed locations to greatest extent possible to minimize distortion or discoloration of finish. Remove weld spatter and welding oxides from exposed surfaces by descaling or grinding.
- C. Fabricate components that, when assembled, have the following characteristics:
 - 1. Profiles that are sharp, straight, and free of defects or deformations.
 - 2. Accurately fitted joints with ends coped or mitered.
 - 3. Physical and thermal isolation of glazing from framing members.
 - 4. Accommodations for thermal and mechanical movements of glazing and framing to maintain required glazing edge clearances.
 - 5. Provisions for field replacement of glazing from exterior.
 - 6. Fasteners, anchors, and connection devices that are concealed from view to greatest extent possible.
- D. Fabricate components to resist water penetration as follows:
 - 1. Pressure-equalized system or double barrier design with primary air and vapor barrier at interior side of glazed aluminum curtain wall and secondary seal weeped and vented to exterior.
- E. Curtain-Wall Framing: Fabricate components for assembly using manufacturer's standard assembly method.
- F. After fabrication, clearly mark components to identify their locations in Project in accordance with Shop Drawings.

2.10 ALUMINUM FINISHES

- A. High-Performance Organic Finish, Two-Coat PVDF: Fluoropolymer finish complying with AAMA 2605 and containing not less than 70 percent PVDF resin by weight in color coat.
 - 1. Prepare, pretreat, and apply coating to exposed metal surfaces to comply with coating and resin manufacturers' written instructions.
 - 2. Color and Gloss: As selected by Architect from manufacturer's full range.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine areas, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.
- C. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 INSTALLATION, GENERAL

- A. Comply with manufacturer's written instructions.
- B. Do not install damaged components.
- C. Fit joints to produce hairline joints free of burrs and distortion.
- D. Rigidly secure nonmovement joints.
- E. Install anchors with separators and isolators to prevent metal corrosion and electrolytic deterioration and to prevent impeding movement of moving joints.
- F. Where welding is required, weld components in concealed locations to minimize distortion or discoloration of finish. Protect glazing surfaces from welding.
- G. Seal joints watertight unless otherwise indicated.
- H. Metal Protection:
 - 1. Where aluminum is in contact with dissimilar metals, protect against galvanic action by painting contact surfaces with primer, applying sealant or tape, or installing nonconductive spacers as recommended by manufacturer for this purpose.
 - 2. Where aluminum is in contact with concrete or masonry, protect against corrosion by painting contact surfaces with bituminous paint.
- I. Install components to drain water passing joints, condensation occurring within framing members, and moisture migrating within glazed aluminum curtain wall to exterior.
- J. Install components plumb and true in alignment with established lines and grades.

3.3 INSTALLATION OF OPERABLE UNITS

- A. Install operable units level and plumb, securely anchored, and without distortion. Adjust weather-stripping contact and hardware movement to produce proper operation.

3.4 INSTALLATION OF GLAZING

- A. Install glazing as specified in Division 08 Section "Glazing."

3.5 ERECTION TOLERANCES

- A. Install glazed aluminum curtain walls to comply with the following maximum tolerances:
 - 1. Plumb: 1/8 inch in 10 feet; 1/4 inch in 40 feet.
 - 2. Level: 1/8 inch in 20 feet; 1/4 inch in 40 feet.

3. Alignment:
 - a. Where surfaces abut in line or are separated by reveal or protruding element up to 1/2 inch wide, limit offset from true alignment to 1/16 inch.
 - b. Where surfaces are separated by reveal or protruding element from 1/2 to 1 inch wide, limit offset from true alignment to 1/8 inch.
 - c. Where surfaces are separated by reveal or protruding element of 1 inch wide or more, limit offset from true alignment to 1/4 inch.
4. Location: Limit variation from plane to 1/8 inch in 12 feet; 1/2 inch over total length.

3.6 FIELD QUALITY CONTROL

- A. Testing Agency: Engage a qualified testing agency to perform following tests and inspections.
- B. Glazed aluminum curtain walls will be considered defective if they do not pass tests and inspections.
- C. Prepare test and inspection reports.

END OF SECTION 08 44 13

SECTION 08 51 13 - ALUMINUM WINDOWS**PART 1 - GENERAL****1.1 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes aluminum windows for exterior locations.

1.3 PREINSTALLATION MEETINGS

- A. Preinstallation Conference: Conduct conference at Project site.
 - 1. Review and discuss the finishing of aluminum windows that is required to be coordinated with the finishing of other aluminum work for color and finish matching.
 - 2. Review, discuss, and coordinate the interrelationship of aluminum windows with other exterior wall components. Include provisions for anchoring, flashing, weeping, sealing perimeters, and protecting finishes.
 - 3. Review and discuss the sequence of work required to construct a watertight and weathertight exterior building envelope.
 - 4. Inspect and discuss the condition of substrate and other preparatory work performed by other trades.

1.4 SUBMITTALS, GENERAL

- A. General: Submit all action submittals and informational submittals required by this Section and by Division 08 Section "Glazing" concurrently.

1.5 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated. Include construction details, material descriptions, glazing and fabrication methods, dimensions of individual components and profiles, and finishes.
 - 1. Hardware.
 - 2. Accessories.
 - 3. Insect screens.
 - 4. Hopper windows.
 - 5. Fixed windows.

6. Single hung windows.
7. Horizontal sliding windows.

B. Shop Drawings: For aluminum windows.

1. Include plans, elevations, sections, hardware, accessories, insect screens, operational clearances, and details of installation, including anchor, flashing, and sealant installation.
2. Include details of provisions for assembly expansion and contraction and for draining moisture occurring within the assembly to the exterior.
3. Show connection to and continuity with adjacent thermal, weather, air, and vapor barriers.

C. Samples: For each type of exposed finish required, in manufacturer's standard sizes.

D. Product Schedule: For aluminum windows. Use same designations indicated on Drawings.

E. Sample Warranties: For special warranties.

1.6 INFORMATIONAL SUBMITTALS

A. Energy Performance Certificates: For aluminum windows, from manufacturer.

1. Basis for Certification: Energy performance values for each aluminum window meeting specified NFRC requirements.

B. Product Certificates: For rescue windows, certifying clear opening complies with specified minimum clear opening requirements.

1.7 CLOSEOUT SUBMITTALS

A. Maintenance Data: For aluminum windows to include in maintenance manuals.

B. Warranties: Executed special warranties.

1.8 QUALITY ASSURANCE

A. Installer Qualifications: An installer acceptable to aluminum window manufacturer for installation of units required for this Project.

1.9 WARRANTY

A. Special Warranty: Manufacturer agrees to correct or replace aluminum windows that do not comply with requirements or that fail in materials or workmanship within specified warranty period.

1. Failures include, but are not limited to, the following:
 - a. Failure to meet performance requirements.

- b. Structural failures including excessive deflection, water leakage, condensation, and air infiltration.
 - c. Faulty operation of movable sash and hardware.
 - d. Deterioration of materials and finishes beyond normal weathering.
 - e. Failure of insulating glass.
 - 2. Warranty Period: 10 years from date of Substantial Completion.
- B. Special Finish Warranty, Factory-Applied Finishes: Standard form in which manufacturer agrees to restore finishes or replace aluminum that shows evidence of deterioration of factory-applied finishes within specified warranty period.
- 1. Deterioration includes, but is not limited to, the following:
 - a. Color fading more than 5 Delta E units when tested according to ASTM D2244.
 - b. Chalking in excess of a No. 8 rating when tested according to ASTM D4214.
 - c. Cracking, checking, peeling, or failure of paint to adhere to bare metal.
 - 2. Warranty Period: 20 years from date of Substantial Completion.
- C. Special Finish Warranty, Anodized Finishes: Standard form in which manufacturer agrees to restore finishes or replace aluminum that shows evidence of deterioration of anodized finishes within specified warranty period.
- 1. Deterioration includes, but is not limited to, the following:
 - a. Color fading more than 5 Delta E units when tested according to ASTM D 2244.
 - b. Chalking in excess of a No. 8 rating when tested according to ASTM D 4214.
 - c. Cracking, peeling, or chipping.
 - 2. Warranty Period: 10 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Source Limitations: Obtain all components of aluminum windows, including accessories, from single manufacturer.

2.2 PERFORMANCE REQUIREMENTS

- A. Product Standard: Comply with AAMA/WDMA/CSA 101/I.S.2/A440 for definitions and minimum standards of performance, materials, components, accessories, and fabrication unless more stringent requirements are indicated.
- B. Performance Class and Grade: AAMA/WDMA/CSA 101/I.S.2/A440 as indicated.
- C. Water Infiltration: No uncontrolled water leakage when tested in accordance with ASTM E331 and ASTM E547 at a static air pressure difference of 10 lbf/sq. ft.

- D. Energy Performance: Certified and labeled by manufacturer for energy performance as follows:
1. Thermal Transmittance: NFRC 100 maximum whole-window U-factor as follows:
 - a. For operable windows: 0.45 Btu/sq. ft. x h x deg F.
 - b. For fixed windows: 0.38 Btu/sq. ft. x h x deg F.
 2. Solar Heat-Gain Coefficient (SHGC): NFRC 200 maximum whole-window SHGC of 0.38.
 3. Air Infiltration: Maximum air leakage rate of 0.3 cfm/sq. ft. when tested in accordance with AAMA/WDMA/CSA 101/I.S.2/A440 at 6.24 psf.
- E. Condensation-Resistance Performance: Provide aluminum windows tested for thermal performance according to either of the following:
1. AAMA 1503, showing a minimum Condensation-Resistance Factor (CRF) of 61, or
 2. NFRC 500, showing a minimum Condensation Resistance (CR) of 51.
- F. Thermal Movements: Provide aluminum windows, including anchorage, that allow for thermal movements resulting from the following maximum change (range) in ambient and surface temperatures by preventing buckling, opening of joints, overstressing of components, failure of joint sealants, failure of connections, and other detrimental effects. Base engineering calculation on surface temperatures of materials due to both solar heat gain and nighttime-sky heat loss.
1. Temperature Change: 120 deg F ambient; 180 deg F material surfaces.
- G. Minimum Clear Opening: Where indicated as "Rescue Window", provide windows with a minimum clear opening of 6 square feet, and a minimum clear dimension in either direction of 24 inches.
- H. Accessibility Requirements: For window hardware, comply with the USDOJ's "2010 ADA Standards for Accessible Design," ICC A117.1, and building Code in effect for Project.
1. Provide operating devices that do not require tight grasping, pinching, or twisting of the wrist and that operate with a force of not more than 5 lbf.

2.3 ALUMINUM WINDOWS, GENERAL

- A. Frames and Sashes: Aluminum extrusions complying with AAMA/WDMA/CSA 101/I.S.2/A440.
1. Thermally Broken Construction: Fabricate frames, sashes, and muntins with an integral, concealed, low-conductance thermal barrier located between exterior materials and window members exposed on interior side in a manner that eliminates direct metal-to-metal contact.
- B. Weather Stripping: Provide full-perimeter weather stripping for each operable sash unless otherwise indicated.

- C. Fasteners: Noncorrosive and compatible with window members, trim, hardware, anchors, and other components.

- 1. Exposed Fasteners: Do not use exposed fasteners to greatest extent possible. For application of hardware, use fasteners that match finish hardware being fastened.

2.4 ALUMINUM WINDOW TYPES

- A. Types: Provide the following aluminum window types in locations indicated on Drawings:

- 1. Projected, hopper.
 - 2. Single hung.
 - 3. Horizontal sliding.

2.5 PROJECTED, HOPPER WINDOWS

- A. Products: Subject to compliance with requirements, available products that may be incorporated in the Work include, but are not limited to:

- 1. EFCO Corporation; Series PX32 Thermal Project-In.
 - 2. Kawneer Company, Inc.; Series AA 4325 Ultra Thermal Windows – Project-In Windows.

- B. Overall Unit Depth: 3-1/4 inches.

- C. Minimum Performance Class and Grade: AW-PG80-AP.

2.6 SINGLE HUNG WINDOWS

- A. Products: Subject to compliance with requirements, available products that may be incorporated in the Work include, but are not limited to:

- 1. EFCO Corporation; Series HX32 Thermal Single Hung (Tilt-Sash).

- B. Overall Unit Depth: 3-1/4 inches.

- C. Minimum Performance Class and Grade: AW-PG60-H.

2.7 HORIZONTAL SLIDING WINDOWS

- A. Products: Subject to compliance with requirements, available products that may be incorporated in the Work include, but are not limited to:

- 1. EFCO Corporation; Series SX45 Thermal Horizontal Sliding.
 - 2. Graham Architectural Products; GT0200 Series Horizontal Sliding.
 - 3. Kawneer Company, Inc.; Series AA 5450 Ultra Thermal Horizontal Sliding Window.

- B. Overall Unit Depth: 4 to 4-5/8 inches.
- C. Minimum Performance Class and Grade: AW-PG40-HS.

2.8 WINDOW HARDWARE

- A. General: Provide manufacturer's standard hardware fabricated from aluminum, stainless steel, carbon steel complying with AAMA 907, or other corrosion-resistant material compatible with adjacent materials; designed to smoothly operate, tightly close, and securely lock windows, and sized to accommodate sash weight and dimensions.
 - 1. Exposed Hardware Color and Finish: As selected by Architect from manufacturer's full range.
 - 2. Provide latches with single-handed operation at rescue window locations.
 - a. Hardware locations at rescue windows to be installed at maximum 54" above the finish floor.
- B. Projected Window Hardware:
 - 1. Gear-Type Rotary Operators: Complying with AAMA 901 when tested according to ASTM E405, Method A. Provide operators that function without requiring the removal of interior screens or using screen wickets.
 - a. Type and Style: As selected by Architect from manufacturer's full range of types and styles.
 - 2. Hinges: Non-friction type, not less than two per sash.
 - 3. Lock: Concealed multipoint lock operated by single lever handle or lift-type throw.
 - 4. Limit Devices: Concealed support arms with adjustable, limited, hold-open limit devices designed to restrict sash opening.
 - a. Limit clear opening to 4 inches for ventilation; with custodial key release.
- C. Hung Window Hardware:
 - 1. Counterbalancing Mechanism: Complying with AAMA 902, concealed, of size and capacity to hold sash stationary at any open position.
 - 2. Locks and Latches: Allow unobstructed movement of the sash across adjacent sash in direction indicated and operated from the inside only.
 - 3. Tilt Latch: Releasing latch allows sash to pivot about horizontal axis to facilitate cleaning exterior surfaces from the interior.
- D. Horizontal-Sliding Window Hardware:
 - 1. Sill Cap/Track: Manufacturer's standard of dimensions and profile indicated; designed to comply with performance requirements indicated and to drain to the exterior.

2. Locks and Latches: Allow unobstructed movement of the sash across adjacent sash in direction indicated and operated from the inside only.
3. Roller Assemblies: Low-friction design.

2.9 GLAZING

- A. Glass: Comply with Division 08 Section "Glazing."
- B. Glazing System: Manufacturer's standard factory-glazing system that produces weathertight seal.

2.10 ACCESSORIES

- A. Subsills: Thermally broken, extruded-aluminum subsills in configurations indicated on Drawings.
 1. Provide extruded-aluminum sill extensions in configurations indicated on Drawings.
- B. Column Covers: Extruded-aluminum profiles in sizes and configurations indicated on Drawings.
- C. Interior Trim: Extruded-aluminum profiles in sizes and configurations indicated on Drawings.
- D. Panning Trim: Extruded-aluminum profiles in sizes and configurations indicated on Drawings.
- E. Receptor System: Two-piece, snap-together, thermally broken, extruded-aluminum receptor system that anchors windows in place.
- F. Rescue Window Labels: Provide the following labels on the interior side of designated rescue windows in each space of pupil occupancy.
 1. Color: Bright yellow background with black letters.
 2. Size: 3 inches by 6 inches.
 3. Text: "RESCUE WINDOW", readable from each side of window.
 - a. Add label with window operating instructions if not readily apparent.
 - b. Provide additional rescue window label at window locations with shades, such that label is visible when shade is closed.

2.11 INSECT SCREENS

- A. General: Fabricate insect screens to integrate with window frame. Provide screen for each operable exterior sash. Screen wickets are not permitted.
 1. Type and Location:
 - a. Full, outside for projected, hopper.
 - b. Half, outside for single-hung.
 - c. Full, outside for sliding sashes.

2. At rescue windows, provide hinged screens operable from the interior with one hand and without the use of a key or other device.
 - a. Provide continuous aluminum piano hinge with finish to match window framing.
 - b. Provide sill and jamb clips to allow proper closure of screen.
- B. Aluminum Frames: Manufacturer's standard aluminum alloy complying with SMA 1004 or SMA 1201. Fabricate frames with mitered or coped joints or corner extrusions, concealed fasteners, and removable PVC spline/anchor concealing edge of frame.
 1. Tubular Framing Sections and Cross Braces: Roll formed from aluminum sheet.
- C. Aluminum Wire Fabric: 18-by-16 mesh of 0.011-inch-diameter, coated aluminum wire.
 1. Wire-Fabric Finish: Charcoal gray.

2.12 FABRICATION

- A. Fabricate aluminum windows in sizes indicated. Include a complete system for assembling components and anchoring windows.
- B. Glaze aluminum windows in the factory.
- C. Weather strip each operable sash to provide weathertight installation.
- D. Weep Holes: Provide weep holes and internal passages to conduct infiltrating water to exterior.
- E. Provide water-shed members above side-hinged sashes and similar lines of natural water penetration.
- F. Complete fabrication, assembly, finishing, hardware application, and other work in the factory to greatest extent possible. Disassemble components only as necessary for shipment and installation.

2.13 ALUMINUM FINISHES

- A. Clear Anodic Finish: AAMA 611, AA-M12C22A41, Class I, 0.018 mm or thicker.
- B. High-Performance Organic Finish, Two-Coat PVDF: Fluoropolymer finish complying with AAMA 2605 and containing not less than 70 percent PVDF resin by weight in color coat.
 1. Prepare, pretreat, and apply coating to exposed metal surfaces to comply with coating and resin manufacturers' written instructions.
 2. Color and Gloss: As selected by Architect from manufacturer's full range.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine openings, substrates, structural support, anchorage, and conditions, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.
- B. Verify rough opening dimensions, levelness of sill plate, and operational clearances.
- C. Examine wall flashings, vapor retarders, water and weather barriers, and other built-in components to ensure weathertight window installation.
- D. Proceed with installation only after unsatisfactory conditions have been corrected.
- E. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 INSTALLATION

- A. Comply with manufacturer's written instructions for installing windows, hardware, accessories, and other components. For installation procedures and requirements not addressed in manufacturer's written instructions, comply with installation requirements in ASTM E2112.
- B. Install windows level, plumb, square, true to line, without distortion or impeding thermal movement, anchored securely in place to structural support, and in proper relation to wall flashing and other adjacent construction to produce weathertight construction.
- C. Install windows and components to drain condensation, water penetrating joints, and moisture migrating within windows to the exterior.
- D. Separate aluminum and other corrodible surfaces from sources of corrosion or electrolytic action at points of contact with other materials.

3.3 ADJUSTING, CLEANING, AND PROTECTION

- A. Adjust operating sashes and hardware for a tight fit at contact points and weather stripping for smooth operation and weathertight closure.
- B. Clean exposed surfaces immediately after installing windows. Avoid damaging protective coatings and finishes. Remove excess sealants, glazing materials, dirt, and other substances.
 - 1. Keep protective films and coverings in place until final cleaning.
- C. Remove and replace glass that has been broken, chipped, cracked, abraded, or damaged during construction period.

- D. Protect window surfaces from contact with contaminating substances resulting from construction operations. If contaminating substances do contact window surfaces, remove contaminants immediately according to manufacturer's written instructions.

END OF SECTION 08 51 13

SECTION 08 56 53 – SLIDING SECURITY WINDOWS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Prefabricated bullet resistant horizontal sliding aluminum frame windows with cash transaction tray.
- B. Related Requirements:
 - 1. Section 08 80 00 "Glazing"

1.3 COORDINATION

- A. Coordinate installation of anchorages for security windows. Furnish setting drawings, templates, and directions for installing anchorages, including sleeves, anchor bolts, and items with integral anchors, that are to be embedded in adjacent construction. Deliver such items to Project site in time for installation.

1.4 SUBMITTALS, GENERAL

- A. General: Submit all action submittals and informational submittals required by this Section concurrently.

1.5 ACTION SUBMITTALS

- A. Product Data: For each type of product. Include construction details, material descriptions, dimensions of individual components and profiles, weights and finishes for window units.
 - 1. Prefabricated bullet resistant horizontal sliding aluminum frame windows with cash transaction tray.
- B. Shop Drawings: For security windows.
 - 1. Include plans, elevations, sections, and attachment details.
 - 2. Hardware for sliding window units.
 - 3. Glazing details.
- C. Samples: For frame members with factory-applied finishes.

1.6 INFORMATIONAL SUBMITTALS

- A. Bullet-Resistance-Rated Performance Certification: For each type of bullet-resistance-rated security window assembly for tests performed by a qualified testing agency indicating compliance with performance requirements.
- B. Warranty: Sample of finish warranty.

1.7 WARRANTY

- A. Workmanship Warranty: All materials shall be warranted against defects for a period of [1] year for the date of substantial completion. Provide certificates of manufacturer's standard limited warranty with closeout documents.
- B. Finish Warranty: Manufacturer's warranty against deterioration of factory finishes for the period of 5 years from the date of Substantial Completion.

1.8 DELIVERY, STORAGE, AND HANDLING

- A. Pack security windows in wood crates for shipment.
- B. Label security window packaging with drawing designation.
- C. Store crated security windows on raised blocks to prevent moisture damage.

1.9 FIELD CONDITIONS

- A. Field Measurements: Verify actual dimensions of openings by field measurements before fabrication.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Basis-of-Design Product: Subject to compliance with requirements, provide product TW_GCP_5.5_ALUM_HORZ_SLD manufactured by Total Security Solutions or comparable product.

2.2 TRANSACTION SECURITY WINDOWS

- A. Provide, transaction security window with horizontal sliding action and speak-thru.
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include.
- B. Configuration: One fixed-glazed panel with one horizontal sliding glazed panel over deal tray.
- C. Operation: Manual operating horizontal sliding glazed panel window.

- D. Framing: Fabricate perimeter framing, mullions, and glazing stops from aluminum.
1. Clear Anodic Finish: Architectural Class I, clear coating AA-M10C22A41 Mechanical Finish Chemical Finish: etched, medium matte; 0.70 mils minimum complying with AAMA 611 "Voluntary Specification for Anodized Architectural Aluminum"
- E. Deal Window Hardware: Provide manufacturer's standard vertical-sliding glazed panel with manual latch. Provide manufacturers standard speak-thru.
- F. Glazing and Glazing Materials: Comply with requirements in Division 08 Section " Glazing" and as follows:
1. Fire-resistance-rated laminated-glass security glazing.
 2. Refer to specification section 088000 for additional requirements.
- G. Cash Tray:
1. Finish: Brushed stainless steel #4 finish.
 2. Material: 18 Gauge stainless steel.
 3. Dimensions: 16"x8" from outside edge of flanges with a clear opening.
 4. Provide a shelf 1-1/2" thick by full width of window to accommodate recessed cash tray. The countertop shall be 1'6" deep and centered under the window.
- H. Materials:
1. Mild Steel Plates, Shapes, and Bars: ASTM A36/A36M.
 2. Metallic-Coated Steel Sheet: ASTM A653/A653M, CS (Commercial Steel), Type B; with G60 zinc (galvanized) or A60 zinc-iron-alloy (galvannealed) coating designation.
 3. Stainless-Steel Sheet, Strip, Plate, and Flat Bars: ASTM A666 or ASTM A240/A240M, austenitic stainless steel, Type 304.
 4. Aluminum Extrusions: ASTM B221. Provide alloy and temper recommended by manufacturer for strength, corrosion resistance, and application of required finish, but not less than 22,000-psi ultimate tensile strength.
 5. Aluminum Sheet and Plate: ASTM B209.

2.3 FABRICATION

- A. General: Fabricate security windows to provide a complete system for assembly of components and anchorage of window units.
1. Provide units that are reglazable from the secure side without dismantling the attack side of framing.
- B. Framing: Miter or cope corners the full depth of framing; weld and dress smooth.
1. Fabricate framing with manufacturer's standard, internal opaque armoring in thicknesses required for security windows to comply with bullet-resistance performance indicated.

- C. Glazing Stops: Finish glazing stops to match security window framing.
 - 1. Attack-Side (Exterior) Glazing Stops: Welded or integral to framing.
 - 2. Secure-Side (Interior) Glazing Stops: Removable, coordinated with glazing indicated.
- D. Metal Protection: Separate dissimilar metals to protect against galvanic action by painting contact surfaces with primer or by applying sealant or tape recommended by manufacturer for this purpose.
- E. Preglazed Fabrication: Preglaze window units at factory, where required for applications indicated. Installation orientation of glazing to meet performance requirements. Comply with requirements in Division 08 Section "Glazing."

2.4 GENERAL FINISH REQUIREMENTS

- A. Comply with NAAMM/NOMMA 500 for recommendations for applying and designating finishes.
- B. Protect mechanical finishes on exposed surfaces from damage by applying a strippable, temporary protective covering before shipping.
- C. Appearance of Finished Work: Noticeable variations in same piece are not acceptable. Variations in appearance of adjoining components are acceptable if they are within the range of approved Samples and are assembled or installed to minimize contrast.

2.5 ALUMINUM FINISHES

- A. Clear Anodic Finish: AAMA 611, AA-M12C22A41, Class I, 0.018 mm or thicker.

2.6 ACCESSORIES

- A. Concealed Bolts: ASTM A307, Grade A unless otherwise indicated.
- B. Embedded Plate Anchors: Fabricated from mild steel shapes and plates, minimum 3/16 inch thick; with minimum 1/2-inch-diameter, headed studs welded to back of plate.
- C. Anchors, Clips, and Window Accessories: Stainless steel; hot-dip, zinc-coated steel or iron, complying with ASTM B633; provide sufficient strength to withstand design pressures indicated.
- D. Bituminous Paint: Cold-applied asphalt emulsion complying with ASTM D1187/D1187M.
- E. Sealants: For sealants required within fabricated security windows, provide type recommended by manufacturer for joint size and movement.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, areas, and conditions, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of security windows.
- B. Examine roughing-in for embedded and built-in anchors to verify actual locations of security window connections before security window installation.
- C. Inspect built-in and cast-in anchor installations, before installing security windows, to verify that anchor installations comply with requirements.
 - 1. Remove and replace anchors where inspections indicate that they do not comply with specified requirements. Reinspect after repairs or replacements are made.
 - 2. Perform additional inspections to determine compliance of replaced or additional work.
- D. For factory-installed glazing materials whose orientation (secure or attack side) is critical for performance, verify installation orientation.
- E. Proceed with installation only after unsatisfactory conditions have been corrected.
- F. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 INSTALLATION

- A. Fastening to In-Place Construction: Provide anchorage devices and fasteners where necessary for securing security windows to in-place construction. Include threaded fasteners for inserts, security fasteners, and other connectors.
- B. Fasteners: Install security windows using fasteners recommended by manufacturer with head style appropriate for installation requirements, strength, and finish of adjacent materials. Provide stainless-steel fasteners.
- C. Sealants: Comply with requirements in Division 07 Section "Joint Sealants" for installing sealants, fillers, and gaskets.
- D. Metal Protection: Where dissimilar metals will contact each other, protect against galvanic action by painting contact surfaces with primer or by applying sealant or tape recommended in writing by manufacturer for this purpose. Where aluminum will contact concrete or masonry, protect against corrosion by painting contact surfaces with bituminous paint.

3.3 ADJUSTING

- A. Adjust horizontal-sliding, transom security windows to provide a tight fit at contact points for smooth operation and a secure enclosure.
- B. Remove and replace defective work, including security windows that are warped, bowed, or otherwise unacceptable.

3.4 CLEANING AND PROTECTION

- A. Clean surfaces promptly after installation of security windows. Take care to avoid damaging the finish. Remove excess sealant, dirt, and other substances.
 - 1. Lubricate sliding security window hardware.
- B. Clean glass of preglazed security windows promptly after installation. Comply with requirements in Division 08 Section " Glazing" for cleaning and maintenance.
- C. Provide temporary protection to ensure that security windows are without damage at time of Substantial Completion.

3.5 DEMONSTRATION

- A. Train Owner's maintenance personnel to adjust, operate, and maintain operable security windows.

END OF SECTION 08 56 53

SECTION 08 62 00 - UNIT SKYLIGHTS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Unit skylights.
 - 2. Fall protection cages.
 - 3. Isolation barrier membrane.

1.3 PREINSTALLATION MEETINGS

- A. Preinstallation Conference: Conduct conference at Project site.

1.4 SUBMITTALS, GENERAL

- A. General: Submit all action submittals and informational submittals required by this Section concurrently.

1.5 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated. Include product dimensions, construction details, material descriptions, dimensions and profiles of components, and finishes.
 - 1. Fasteners.
 - 2. Unit skylights.
 - 3. Fall protection safety cages.
 - 4. Isolation barrier membrane.
- B. Shop Drawings:
 - 1. Include plans, elevations, sections, mounting, and attachment details and methods of structural support.
- C. Samples: For each product, as follows:
 - 1. Glazing: In manufacturer's standard size and of same thickness indicated for the final Work.

2. Finishes: For each type and color of factory-applied exposed finish required, in manufacturer's standard size.

D. Sample Warranties: For special warranties.

1.6 INFORMATIONAL SUBMITTALS

A. Energy Performance Certificates: For unit skylights from manufacturer.

1. Basis for Certification: Energy performance values for each item meeting specified NFRC requirements.

B. Product Certificates: For unit skylights indicating compliance with requirements for fall protection.

1.7 CLOSEOUT SUBMITTALS

A. Maintenance Data: For products and accessories to include in maintenance manuals.

B. Warranties: Executed special warranties.

1.8 WARRANTY

A. Special Warranty: Manufacturer agrees to correct or replace components of products that fail in materials or workmanship within specified warranty period.

1. Failures include, but are not limited to, the following:

- a. Failure to meet performance requirements.
- b. Water leakage not controlled by drainage features.
- c. Deterioration of materials beyond normal weathering.
- d. Yellowing of acrylic glazing.
- e. Breakage of polycarbonate glazing.

2. Warranty Period:

- a. Unit Skylights: 5 years from date of Substantial Completion.

B. Special Aluminum Finish Warranty: Standard form in which manufacturer agrees to restore finishes or replace aluminum that shows evidence of finish deterioration within specified warranty period.

1. Deterioration includes, but is not limited to, the following:

- a. Color fading more than 5 Delta E units when tested according to ASTM D2244.
- b. Chalking in excess of a No. 8 rating when tested according to ASTM D4214.
- c. Cracking, peeling, checking, or chipping.

2. Warranty Period: 5 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Performance Standard: Comply with AAMA/WDMA/CSA 101/1.S.2/A440 for definitions and minimum standards of performance, materials, components, accessories, and fabrication unless more stringent requirements are indicated.
 - 1. Minimum Performance Grade: PG 30.
 - 2. Label Requirements: Label each product with names of manufacturer and labeling agency and AAMA/WDMA/CSA 101/1.S.2/A440 product designation, performance grade, and test specimen size equal to or greater than the size of the product.
 - 3. Certification Requirements: Provide AAMA or WDMA certified products, with label attached to each.
- B. Thermal Transmittance:
 - 1. Unit Skylights: NFRC 100 maximum U-factor of 0.36 Btu/sq. ft. x h x deg F.
- C. Solar Heat-Gain Coefficient (SHGC): NFRC 200 maximum SHGC of 0.40.
- D. Air Infiltration: Maximum air leakage rate of 0.3 cfm/sq. ft. when tested in accordance with AAMA/WDMA/CSA 101/1.S.2/A440 or NFRC 400.
- E. Plastic Glazing:
 - 1. Self-Ignition Temperature: 650 deg F or more for plastic sheets in thickness indicated when tested in accordance with ASTM D1929.
 - 2. Smoke-Production Characteristics: Smoke-developed index of 450 or less when tested in accordance with ASTM E84, and smoke density of 75 or less when tested in accordance with ASTM D2843.
 - 3. Combustibility Characteristics: Tested in accordance with ASTM D635 and classified for burning rate of nominal thickness of 0.060 inch or thickness of plastic glazing indicated for use as follows:
 - a. Class CC1: Burning rate of 1 inch per minute or less.
 - b. Class CC2: Burning rate of 2-1/2 inches per minute or less.
- F. Fall-Protection Performance: Installed assemblies are capable of safely supporting the greater of 400 lbs or twice the weight of employees, equipment, and materials that may be imposed on any 1 sq. foot of the assembly at any time.

2.2 UNIT SKYLIGHTS

- A. Factory-Assembled Skylight: Deck-mounted unit that includes glazing, extruded-aluminum glazing retainers, gaskets, inner frame, and integral curb.

1. Products: Subject to compliance with requirements, available products that may be incorporated in the Work, include, but are not limited to:
 2. Basis-of-Design Product: Subject to compliance with requirements, provide Velux Commercial (Wasco); EcoSky3 (double acrylic dome—white outer, clear inner dome; polycarbonate-insulating-panel with aerogel) Model CLD3, or comparable product.
 - a. Acrylic Double-Glazing Profile: Dome, 25 percent rise.
 - 1) Thicknesses of Each Glazing Layer: Not less than thickness required to meet specified requirements.
 - 2) Outer Glazing Color: White, translucent; Acrylite Satin Sky 2.
 - 3) Inner Glazing Color: Colorless, transparent.
 - b. Polycarbonate-Insulating-Panel Glazing:
 - 1) Thickness: 10 mm.
 - 2) Color: Colorless.
 - 3) Fill spaces with aerogel.
- B. Product Type: AAMA/WDMA/CSA 101/1.S.2/A440 SKP, unit skylight - plastic glazed.
1. Provide fixed (nonoperable) units.
- C. Unit Shape and Size: As indicated.
- D. Acrylic Glazing: ASTM D4802, thermoformable, monolithic sheet, category as standard with manufacturer, Finish 1 (smooth or polished), Type UVF (formulated with UV absorber); and Class CC2 based on testing in accordance with ASTM D635.
- E. Polycarbonate Glazing: Thermoformable, extruded monolithic sheets, UV resistant, burglar-resistance rated in accordance with UL 972; with average impact strength of 12 to 16 ft-lb/in. of width when tested in accordance with ASTM D256, Test Method A (Izod); and Class CC1 based on testing in accordance with ASTM D635.
- F. Polycarbonate-Insulating-Panel Glazing: Manufacturer's standard polycarbonate sheet with cellular cross section that provides isolated airspaces, coextruded with a UV-protective layer, and Class CC1 based on testing in accordance with ASTM D635. Fill airspaces with aerogel.
- G. Glazing Gaskets: Manufacturer's standard.
- H. Retainer Frame: Aluminum, clear anodic finish.
- I. Curb Frame: PVC or clear anodic finish aluminum.
- J. Integral Curb: Formed- or extruded-aluminum, ASTM B221, alloy and temper to suit structural and finish requirements but with not less than the strength and durability of Alloy 6063-T52, self-flashing type.
1. Height: 12 inches.
 2. Construction: Double wall, thermally-broken.

- 3. Insulation: Manufacturer's standard rigid or semirigid type.
 - a. R-Value: Not less than 5.7 according to ASTM C1363.
 - b. Exposed Insulation: Cover face of insulation otherwise exposed to interior of building with aluminum liner.
- 4. Finish:
 - a. Exterior Finish: Mill.
 - b. Interior Finish: Baked-enamel or powder-coat WHITE.
- K. Condensation Control: Fabricate unit skylights with integral internal gutters and nonclogging weeps to collect and drain condensation to the exterior.
- L. Thermal Break: Fabricate unit skylights with thermal break separating exterior and interior metal framing.
- M. Accessories:
 - 1. Fall-Protection: Provide safety cage of welded galvanized or stainless-steel wire mesh, 4-inch by 4-inch spacing, for exterior mounting over skylight.
- N. Aluminum Finishes:
 - 1. Clear Anodic Finish: AAMA 611, AA-M12C22A41, Class I, 0.018 mm or thicker.
 - 2. Baked-Enamel or Powder-Coat Finish: AAMA 2603 except with a minimum dry film thickness of 1.5 mils. Comply with coating manufacturer's written instructions for cleaning, conversion coating, and applying and baking finish.
 - a. Color: WHITE.

2.3 ACCESSORY MATERIALS

- A. Fasteners: Same metal as metal being fastened, nonmagnetic stainless steel, or other noncorrosive metal that is compatible with the materials being fastened and as recommended in writing by manufacturer. Finish exposed fasteners to match material being fastened.
 - 1. Fasteners for Aluminum Sheet: Series 300 stainless steel.
 - 2. Where removal of exterior exposed fasteners might allow access to building, provide nonremovable fastener heads.
- B. Isolation Barrier Membrane: Composite, self-adhesive, flashing product consisting of a pliable, butyl rubber compound, bonded to a polypropylene film to produce an overall thickness of not less than 0.014 inch.
 - 1. Basis-of-Design Product: Subject to compliance with requirements, provide GCP Applied Technologies, Inc.; Vycor PRO, or comparable product.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine openings, substrates, structural support, anchorage, and conditions, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.
- C. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 INSTALLATION

- A. Coordinate installation of products and accessories with installation of substrates, vapor retarders, roof insulation, roofing membrane, and flashing as required to ensure that each element of the Work performs properly and that combined elements are waterproof and weathertight.
- B. Install products and accessories to comply with recommendations in AAMA 1607 and with manufacturer's written installation instructions.
- C. Install products true to line and without distortion.
- D. Anchor products securely to supporting substrates.
- E. Where metal surfaces of products will contact other metal or corrosive substrates, such as preservative-treated wood, apply isolation barrier membrane on concealed metal surfaces or provide other approved permanent separation recommended in writing by manufacturer.
- F. Install indicated fall protection.

3.3 CLEANING AND ADJUSTING

- A. Clean exposed product surfaces in accordance with manufacturer's written instructions. Touch up damaged metal coatings and finishes.
- B. Remove excess sealants, glazing materials, dirt, and other substances.
- C. Remove and replace glazing that has been broken, chipped, cracked, abraded, or damaged during construction period.
- D. Protect product surfaces from contact with contaminating substances resulting from construction operations.

END OF SECTION 08 62 00

SECTION 08 71 00 - DOOR HARDWARE

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes:
 - 1. Mechanical door hardware for the following:
 - a. Swinging doors.
 - 2. Cylinders for door hardware specified in other Sections.
 - 3. Electrified door hardware.

1.3 SUBMITTALS, GENERAL

- A. General: Submit all action submittals (except Samples for Verification) and informational submittals required by this Section concurrently.

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated. Include construction and installation details, material descriptions, dimensions of individual components and profiles, and finishes.
 - 1. Hinges.
 - 2. Continuous hinges.
 - 3. Bored locks.
 - 4. Manual flush bolts.
 - 5. Exit devices and auxiliary items.
 - 6. Lock cylinders.
 - 7. Construction cores.
 - 8. Keying system/keys.
 - 9. Key control cabinet.
 - 10. Cross-index system.
 - 11. Operating trim.
 - 12. Surface closers.
 - 13. Wall- and floor-mounted stops.
 - 14. Electromagnetic door holders.
 - 15. Overhead stops and holders.
 - 16. Door gasketing.
 - 17. Thresholds.
 - 18. Metal protective trim units.
 - 19. Auxiliary hardware.

La Grange Middle School

- B. Shop Drawings: Details of electrified door hardware, indicating the following:
 - 1. Wiring Diagrams: For power, signal, and control wiring and including the following:
 - a. Details of interface of electrified door hardware and building safety and security systems.
 - 2. Operation Narrative: Describe the operation of doors controlled by electrified door hardware.
- C. Samples for Verification: For exposed door hardware of each type required, in each finish specified, prepared on Samples of size indicated below. Tag Samples with full description for coordination with the door hardware schedule.
 - 1. Sample Size: Full-size units or minimum 2-by-4-inch Samples for sheet and 4-inch long Samples for other products.
- D. Door Hardware Schedule: Prepared by or under the supervision of Installer, detailing fabrication and assembly of door hardware, as well as installation procedures and diagrams. Coordinate final door hardware schedule with doors, frames, and related work to ensure proper size, thickness, hand, function, and finish of door hardware.
 - 1. Format: Use same scheduling sequence and format and use same door numbers as in the Contract Documents.
 - 2. Content: Include the following information:
 - a. Identification number, location, hand, fire rating, size, and material of each door and frame.
 - b. Locations of each door hardware set, cross-referenced to Drawings on floor plans and to door and frame schedule.
 - c. Complete designations, including name and manufacturer, type, style, function, size, quantity, function, and finish of each door hardware product.
 - d. Description of electrified door hardware sequences of operation and interfaces with other building control systems.
 - e. Fastenings and other pertinent information.
 - f. Explanation of abbreviations, symbols, and codes contained in schedule.
 - g. Mounting locations for door hardware.
- E. Keying Schedule: Prepared by or under the supervision of Installer, detailing Owner's final keying instructions for locks. Include schematic keying diagram and index each key set to unique door designations that are coordinated with the Contract Documents.
- F. Warranty: Sample of special warranty specified in this Section.

1.5 INFORMATIONAL SUBMITTALS

- A. Product Certificates: For electrified door hardware, from the manufacturer.
 - 1. Certify that door hardware approved for use on types and sizes of labeled fire-rated doors complies with listed fire-rated door assemblies.

1.6 CLOSEOUT SUBMITTALS

- A. Maintenance Data: For each type of door hardware to include in maintenance manuals. Include final hardware and keying schedule.
- B. Warranty: Executed special warranty specified in this Section.

1.7 QUALITY ASSURANCE

- A. Installer Qualifications: Supplier of products and an employer of workers trained and approved by product manufacturers and an Architectural Hardware Consultant who is available during the course of the Work to consult with Contractor, Architect, and Owner about door hardware and keying.
 - 1. Scheduling Responsibility: Preparation of door hardware and keying schedules.
 - 2. Engineering Responsibility: Preparation of data for electrified door hardware, including Shop Drawings, based on testing and engineering analysis of manufacturer's standard units in assemblies similar to those indicated for this Project.
- B. Architectural Hardware Consultant Qualifications: A person who is experienced in providing consulting services for door hardware installations that are comparable in material, design, and extent to that indicated for this Project and who has a factory direct purchasing agreement with the specified masterkey system manufacturer and is currently or has been certified by DHI as follows:
 - 1. For door hardware, an Architectural Hardware Consultant (AHC).
- C. Source Limitations: Obtain each type of door hardware from a single manufacturer.
- D. Fire-Rated Door Assemblies: Where fire-rated door assemblies are indicated, provide door hardware rated for use in assemblies complying with NFPA 80 that are listed and labeled by a qualified testing agency, for fire-protection ratings indicated, based on testing at positive pressure according to NFPA 252 or UL 10C, unless otherwise indicated.
- E. Smoke- and Draft-Control Door Assemblies: Where smoke- and draft-control door assemblies are required, provide door hardware that meet requirements of assemblies tested according to UL 1784 and installed in compliance with NFPA 105.
 - 1. Air Leakage Rate: Maximum air leakage of 0.3 cfm/sq. ft. at the tested pressure differential of 0.3-inch wg of water.
- F. Electrified Door Hardware: Listed and labeled as defined in NFPA 70, Article 100, by a testing agency acceptable to authorities having jurisdiction.
- G. Means of Egress Doors: Latches do not require more than 15 lbf to release the latch. Locks do not require use of a key, tool, or special knowledge for operation.
- H. Accessibility Requirements: For door hardware on doors in an accessible route, comply with the U.S. Architectural & Transportation Barriers Compliance Board's ADA-ABA Accessibility Guidelines, ICC/ANSI A117.1 and building code in effect for Project.
 - 1. Provide operating devices that do not require tight grasping, pinching, or twisting of the wrist and that operate with a force of not more than 5 lbf.
 - 2. Comply with the following maximum opening-force requirements:
 - a. Interior, Non-Fire-Rated Hinged Doors: 5 lbf applied perpendicular to door.
 - b. Fire Doors: Minimum opening force allowable by authorities having jurisdiction.
 - 3. Bevel raised thresholds with a slope of not more than 1:2. Provide thresholds not more than 1/2 inch high.
 - 4. Adjust door closer sweep periods so that, from an open position of 70 degrees, the door will take at least 3 seconds to move to a point 3 inches from the latch, measured to the leading edge of the door.
- I. Preinstallation Conference: Conduct conference at Project site.
 - 1. Inspect and discuss preparatory work performed by other trades.
 - 2. Inspect and discuss electrical roughing-in for electrified door hardware.

La Grange Middle School

3. Review sequence of operation for each type of electrified door hardware.

1.8 DELIVERY, STORAGE, AND HANDLING

- A. Inventory door hardware on receipt and provide secure lock-up for door hardware delivered to Project site.
- B. Tag each item or package separately with identification coordinated with the final door hardware schedule, and include installation instructions, templates, and necessary fasteners with each item or package.

1.9 COORDINATION

- A. Installation Templates: Distribute for doors, frames, and other work specified to be factory prepared. Check Shop Drawings of other work to confirm that adequate provisions are made for locating and installing door hardware to comply with indicated requirements.
- B. At existing doors called to receive additional overhead stops, hardware Supplier to field confirm and provide all necessary brackets and shims for proper installation and coordination with auto operators and existing door closers.
- C. Electrical System Roughing-In: Coordinate layout and installation of electrified door hardware with connections to power supplies and building safety and security systems.
- D. Opening specific point-to-point electrical schematics indicating all electrified hardware components at each particular opening without exception. Failure to provide electrical schematics can result in back charges to the Hardware Supplier by the door hardware installer or system control integrator.
- E. Existing Openings: Where hardware components are scheduled for application to existing construction or where modifications to existing door hardware are required, hardware supplier is to field verify existing conditions and coordinate installation of door hardware to suit opening conditions and to provide proper door operation.
- F. Security entrances shall be operable by remote lock and unlock push buttons and relays provided by access control system integrator. Electrical schematics shall include these items with hook up verification by integrator.

1.10 WARRANTY

- A. Special Warranty: Manufacturer's standard form in which manufacturer agrees to repair or replace components of door hardware that fail in materials or workmanship within specified warranty period.
 1. Failures include, but are not limited to, the following:
 - a. Structural failures including excessive deflection, cracking, or breakage.
 - b. Faulty operation of doors and door hardware.
 - c. Deterioration of metals, metal finishes, and other materials beyond normal weathering and use.
 2. Warranty Period: Three years from date of Substantial Completion, unless otherwise indicated.
 - a. Hinges, Continuous Hinges, Locksets, Closers: Lifetime

1.11 MAINTENANCE SERVICE

- A. Maintenance Tools and Instructions: Furnish a complete set of specialized tools and maintenance instructions for Owner's continued adjustment, maintenance, and removal and replacement of door hardware.

PART 2 - PRODUCTS

2.1 SCHEDULED DOOR HARDWARE

- A. Provide door hardware for each door as scheduled in Part 3 "Door Hardware Schedule" Article to comply with requirements in this Section.
 - 1. Door Hardware Sets: Provide quantity, item, size, finish or color indicated, and named manufacturers' products or products equivalent in function and comparable in quality to named products.
 - 2. Sequence of Operation: Provide electrified door hardware function, sequence of operation, and interface with other building control systems indicated.
 - 3. Electric Locking Hardware: Exit hardware shall always remain fully operational manually regardless of the status of electric latch.
- B. Designations: Requirements for design, grade, function, finish, size, and other distinctive qualities of each type of door hardware are indicated in Part 3 "Door Hardware Schedule" Article. Products are identified by using door hardware designations, as follows:
 - 1. Named Manufacturers' Products: Manufacturer and product designation are listed for each door hardware type required for the purpose of establishing minimum requirements. Manufacturers' names are abbreviated in Part 3 "Door Hardware Schedule" Article.
 - 2. References to BHMA Designations: Provide products complying with these designations and requirements for description, quality, and function.

2.2 HINGES

- A. Hinges: BHMA A156.1. Provide template-produced hinges for hinges installed on hollow-metal doors and hollow-metal frames.
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ABH
 - b. Best
 - c. Hager

2.3 CONTINUOUS HINGES

- A. Continuous Hinges: BHMA A156.26; minimum 0.120-inch-thick, hinge leaves with minimum overall width of 4 inches; fabricated to full height of door and frame and to template screw locations; with components finished after milling and drilling are complete.
- B. Continuous, Gear-Type Hinges: Extruded-aluminum, pinless, geared hinge leaves joined by a continuous extruded-aluminum channel cap; with concealed, self-lubricating thrust bearings. Machine for bearings prior to anodizing.
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ABH
 - b. Best
 - c. Select

La Grange Middle School

2.4 MECHANICAL LOCKS AND LATCHES

- A. Lock Functions: As indicated in door hardware schedule.
- B. Provide Best 45H series locksets with M escutcheon and 15 lever to match existing. At corridors and areas where all locks visible are to be replaced, provide Best 14N trim. At existing frames, Supplier to field confirm existing strike prep and notify Contractor and Installer of conflicts.
 - 1. Manufacturer:
 - a. Best Lock, District Standard

2.5 AUTOMATIC OPERATORS

- A. Provide low kinetic operators with hydraulically controlled backcheck, closing speed and latch speed. At electric strike applications provide integral power supply by manufacturer. Electrical schematic for operator shall indicate remote push button and access control relays (by Security). Security shall have ability to isolate actuators.
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. LCN 4820 Auto Equalizer
 - b. Precision D4990

2.6 POWER TRANSFERS

- A. Provide concealed rigid telescoping power transfer units as indicated.
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ABH Manufacturing
 - b. Precision
 - c. Von Duprin

2.7 MANUAL FLUSH BOLTS

- A. Manual Flush Bolts: BHMA A156.16; minimum 3/4-inch throw; designed for mortising into door edge.
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ABH Manufacturing
 - b. Rockwood
 - c. Trimco

2.8 EXIT DEVICES

A. Exit Devices and Auxiliary Items: BHMA A156.3.

1. Hardware Supplier to field confirm existing aluminum doors and existing exit device type which are to be replaced with Precision devices as there are configurations where mortise device had previously been installed. Wherever practical, reuse existing pulls to minimize door penetrations. Provide power supplies as required by applications.
2. Manufacturer:
 - a. Best Precision, District Standard

2.9 LOCK CYLINDERS

A. Lock Cylinders: Provide a new Best Coremax core and keying system. Provide new cylinders at all existing doors.

2.10 KEYING

A. Keying System: Factory registered, complying with guidelines in BHMA A156.28, Appendix A. Incorporate decisions made in keying conference.

1. Master Key System: Change keys and a master key operate cylinders.
2. Grand Master Key System: Change keys, a master key, and a grand master key operate cylinders.
3. Existing System:
 - a. Master key or grand master key locks to Owner's new system as indicated.
 - b. Re-key Owner's existing master key system into new keying system.

B. Keys: Nickel silver.

1. Stamping: Permanently inscribe each key with a visual key control number and include the following notation:
 - a. Notation: "ACSD DO NOT DUPLICATE."
2. Quantity: In addition to one extra key blank for each lock, provide the following:
 - a. Cylinder Change Keys: Three.
 - b. Master Keys: Five.
 - c. Grand Master Keys: Five.

2.11 KEY CONTROL SYSTEM

- A. Key Control Cabinet: Provide one key cabinet per school location. BHMA A156.5; expandable cabinet with containing key-holding hooks, labels, 2 sets of key tags with self-locking key holders, key-gathering envelopes, and temporary and permanent markers; with key capacity of 150 percent of the number of locks.
- B. Provide one set of Best key tracking software. Supplier shall pre-load as much information based on approved submittals and key schedule as possible.

La Grange Middle School

- C. Cross-Index System: Single-index system for recording key information. Include three receipt forms for each key-holding hook. Set up by Hardware Supplier.
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Best
 - b. Lund
 - c. Key Systems Incorporated.

2.12 SURFACE CLOSERS

- A. Surface Closers: BHMA A156.4; rack-and-pinion cast iron hydraulic type with adjustable sweep and latch speeds controlled by key-operated valves, forged-steel main arm and 1-1/2" piston. Comply with manufacturer's written recommendations for size of door closers depending on size of door, exposure to weather, and anticipated frequency of use. Provide factory-sized closers, adjustable to meet field conditions and requirements for opening force.
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Best QDC100 Series
 - b. LCN 4040, 4011, 4111 Series
 - c. Sargent 281 Series

2.13 MECHANICAL STOPS AND HOLDERS

- A. Wall- and Floor-Mounted Stops: BHMA A156.16; polished cast brass, bronze, or aluminum base metal.
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ABH Manufacturing
 - b. Rockwood
 - c. Trimco

2.14 ELECTROMAGNETIC STOPS AND HOLDERS

- A. Electromagnetic Door Holders: BHMA A156.15, Grade 1; wall-mounted electromagnetic single unit with strike plate attached to swinging door; coordinated with fire detectors and interface with fire alarm system for labeled fire-rated door assemblies.
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ABH
 - b. Dormakaba
 - c. Rixson

2.15 OVERHEAD STOPS AND HOLDERS

A. Overhead Stops and Holders: BHMA A156.8.

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ABH Manufacturing

2.16 DOOR GASKETING

A. Door Gasketing: BHMA A156.22; air leakage not to exceed 0.50 cfm per foot of crack length for gasketing other than for smoke control, as tested according to ASTM E 283; with resilient or flexible seal strips that are easily replaceable and readily available from stocks maintained by manufacturer.

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. National Guard Products.
 - b. Pemko Manufacturing Co.; an ASSA ABLOY Group company.
 - c. Reese Enterprises, Inc.
 - d. Zero International.

2.17 THRESHOLDS

A. Thresholds: BHMA A156.21; fabricated to full width of opening indicated.

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. National Guard Products.
 - b. Pemko Manufacturing Co.; an ASSA ABLOY Group company.
 - c. Reese Enterprises, Inc.
 - d. Zero International.

2.18 METAL PROTECTIVE TRIM UNITS

A. Metal Protective Trim Units: BHMA A156.6; fabricated from 0.050-inch-thick stainless steel; with manufacturer's standard machine or self-tapping screw fasteners.

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. ABH Manufacturing
 - b. Trimco
 - c. Rockwood

2.19 FABRICATION

A. Manufacturer's Nameplate: Do not provide products that have manufacturer's name or trade name displayed in a visible location except in conjunction with required fire-rated labels and as otherwise approved by Architect.

La Grange Middle School

1. Manufacturer's identification is permitted on rim of lock cylinders only.
- B. Base Metals: Produce door hardware units of base metal indicated, fabricated by forming method indicated, using manufacturer's standard metal alloy, composition, temper, and hardness. Furnish metals of a quality equal to or greater than that of specified door hardware units and BHMA A156.18.
- C. Fasteners: Provide door hardware manufactured to comply with published templates prepared for machine, wood, and sheet metal screws. Provide screws that comply with commercially recognized industry standards for application intended, except aluminum fasteners are not permitted. Provide Phillips flat-head screws with finished heads to match surface of door hardware, unless otherwise indicated.
 1. Concealed Fasteners: For door hardware units that are exposed when door is closed, except for units already specified with concealed fasteners. Do not use through bolts for installation where bolt head or nut on opposite face is exposed unless it is the only means of securely attaching the door hardware. Where through bolts are used on hollow door and frame construction, provide sleeves for each through bolt.
 2. Fire-Rated Applications:
 - a. Wood or Machine Screws: For the following:
 - 1) Hinges mortised to doors or frames: use threaded-to-the-head wood screws for wood doors.
 - 2) Strike plates to frames.
 - 3) Closers to doors and frames.
 - b. Steel Through Bolts: For the following unless door blocking is provided:
 - 1) Surface hinges to doors.
 - 2) Closers to doors and frames.
 - 3) Surface-mounted exit devices.
 3. Spacers or Sex Bolts: For through bolting of hollow-metal doors.
 4. Fasteners for Wood Doors: Comply with requirements in DHI WDHS.2, "Recommended Fasteners for Wood Doors."
 5. Gasketing Fasteners: Provide noncorrosive fasteners for exterior applications and elsewhere as indicated.

2.20 FINISHES

- A. Provide finishes complying with BHMA A156.18 as indicated in door hardware schedule.
- B. Protect mechanical finishes on exposed surfaces from damage by applying a strippable, temporary protective covering before shipping.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine doors and frames, with Installer present, for compliance with requirements for installation tolerances, labeled fire-rated door assembly construction, wall and floor construction, and other conditions affecting performance.
- B. Examine roughing-in for electrical power systems to verify actual locations of wiring connections before electrified door hardware installation.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.

La Grange Middle School

- D. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 PREPARATION

- A. Steel Doors and Frames: For surface applied door hardware, drill and tap doors and frames according to ANSI/SDI A250.6.
- B. Wood Doors: Comply with DHI WDHS.5 "Recommended Hardware Reinforcement Locations for Mineral Core Wood Flush Doors."

3.3 INSTALLATION

- A. Mounting Heights: Mount door hardware units at heights to comply with the following unless otherwise indicated or required to comply with governing regulations.
 - 1. Custom Steel Doors and Frames: HMMA 831.
 - 2. Wood Doors: DHI WDHS.3, "Recommended Locations for Architectural Hardware for Wood Flush Doors."
- B. Install each door hardware item to comply with manufacturer's written instructions. Where cutting and fitting are required to install door hardware onto or into surfaces that are later to be painted or finished in another way, coordinate removal, storage, and reinstallation of surface protective trim units with finishing work specified in Division 09 Sections. Do not install surface-mounted items until finishes have been completed on substrates involved.
 - 1. Set units level, plumb, and true to line and location. Adjust and reinforce attachment substrates as necessary for proper installation and operation.
 - 2. Drill and countersink units that are not factory prepared for anchorage fasteners. Space fasteners and anchors according to industry standards.
- C. Hinges: Install types and in quantities indicated in door hardware schedule but not fewer than the number recommended by manufacturer for application indicated or one hinge for every 30 inches of door height, whichever is more stringent.
- D. Lock Cylinders: Install construction cores to secure building and areas during construction period.
 - 1. Replace construction cores with permanent cores as indicated in keying schedule.
- E. Key Control System: Tag keys and place them on markers and hooks in key control system cabinet, as determined by final keying schedule.
- F. Boxed Power Supplies: Locate power supplies as indicated or, if not indicated, above accessible ceilings. Verify location with Architect.
- G. Thresholds: Set thresholds for exterior doors and other doors indicated in full bed of sealant complying with requirements specified in Division 07 Section "Joint Sealants."
- H. Stops: Provide wall stops for doors unless other type stops are indicated in door hardware schedule. Do not mount floor stops where they will impede traffic.
- I. Perimeter Gasketing: Apply to head and jamb, forming seal between door and frame.
- J. Meeting Stile Gasketing: Fasten to meeting stiles, forming seal when doors are closed.
- K. Door Bottoms: Apply to bottom of door, forming seal with threshold when door is closed.

La Grange Middle School

3.4 ADJUSTING

- A. Initial Adjustment: Adjust and check each operating item of door hardware and each door to ensure proper operation or function of every unit. Replace units that cannot be adjusted to operate as intended. Adjust door control devices to compensate for final operation of heating and ventilating equipment and to comply with referenced accessibility requirements.
1. Auto Operator: Adjust switching, cycling, closing as acceptable to the architect and owner.
 2. Door Closers: Adjust sweep period to comply with accessibility requirements and requirements of authorities having jurisdiction.
- B. Occupancy Adjustment: Approximately six months after date of Substantial Completion, Installer's Architectural Hardware Consultant shall examine and readjust each item of door hardware, including adjusting operating forces, as necessary to ensure function of doors, door hardware, and electrified door hardware.

3.5 CLEANING AND PROTECTION

- A. Clean adjacent surfaces soiled by door hardware installation.
- B. Clean operating items as necessary to restore proper function and finish.
- C. Provide final protection and maintain conditions that ensure that door hardware is without damage or deterioration at time of Substantial Completion.

3.6 DEMONSTRATION

- A. Engage a factory-authorized service representative to train Owner's maintenance personnel to adjust, operate, and maintain door hardware and door hardware finishes. Refer to Division 01 Section "Demonstration and Training."

3.7 DOOR HARDWARE SCHEDULE

- A. General Note: All openings allow for free egress from secured side.

Set #1

Doors: 106A/2, 111/1, 142/1, 143/1, 144/1, 145/1, 149/1, 169F/2, 226/1, 231/1, 234/1, 235/1, 236/1, 238/1, 239/1, 240/1, 241/1, 244/1, 245/1, C5/3, 122/1, 132/1, 137/1, 138/1, 139/1, 140/1, 141/1, 148/1

3	Butt Hinge	CB1900R 4.5" x 4.5"	652	BE
1	Lockset	45H-7AB14N PATD	630AM	BE
1	Door Closer	QDC111	689	BE
1	Kick Plate	K0050 8"	630	TR
1	Wall Bumper	1270CVSV	626	TR
1	Gasketing	2525 C		NA

Set #2

Doors: 241/2, 241/3

3	Butt Hinge	CB1900R 4.5" x 4.5"	652	BE
1	Lockset	45H-7AB14N PATD	630AM	BE
1	Overhead Stop	N 4023	630	AB
1	Gasketing	2525 C		NA

La Grange Middle School

Set #E3 - Hold Open

Doors: C3/1, S5/3, S6/1, S6/3, C15/2, C2/1, C2/2, S2/1, S3/1

2	Continuous Hinge	A240HD SP7848	652	AB
2	Exit Device	FL 2208 X 4908D LBR	630AM	PR
2	Rim Cylinder	12E-72 PATD	626	BE
2	Electromagnetic Door Holder	2100 RS	630	AB
2	Door Closer	QDC111	689	BE
2	Kick Plate	K0050 8"	630	TR
1	Gasketing	2525 C		NA

Note: Confirm door material on Door Schedule.

Set #4

Doors: 162/1, 164/1, C15/1, 133/1, 136/1

3	Butt Hinge	CB1900R 4.5" x 4.5"	652	BE
1	Passage Set	45H-0N14M	630AM	BE
1	Closer	QDC111 DA	689	BE
1	Kick Plate	K0050 8"	630	TR
1	Mop Plate	KM050 4"	630	TR
1	Wall Bumper	1270CVSV	626	TR
1	Gasketing	2525 C		NA

Set #5

Doors: 111C/1, 111D/1, 229/1, 242/1, 243/1

3	Butt Hinge	CB1900R 4.5" x 4.5"	652	BE
1	Privacy Set	45H-0L14M VIN	630AM	BE
1	Door Closer	QDC112	689	BE
1	Kick Plate	K0050 8"	630	TR
1	Mop Plate	KM050 4"	630	TR
1	Wall Bumper	1270CVSV	626	TR
3	Silencer	1229A	GREY	TR

Set #6

Doors: 225/1, 232/1, 168/1, 104/2

3	Butt Hinge	CB1900R 4.5" x 4.5"	652	BE
1	Lockset	45H-7AB14N PATD	630AM	BE
1	Door Closer	QDC111 x PLATE	689	BE
1	Overhead Stop	N 4020	630	AB
1	Kick Plate	K0050 8"	630	TR
1	Gasketing	2525 C		NA

Set #7

Doors: 227/1, 230/1, 134/1

3	Butt Hinge	CB1900R 4.5" x 4.5"	652	BE
1	Lockset	45H-7R14N PATD	630AM	BE
1	Door Closer	QDC112	689	BE
1	Kick Plate	K0050 8"	630	TR
1	Mop Plate	KM050 4"	630	TR
1	Wall Bumper	1270CVSV	626	TR
1	Gasketing	2525 C		NA

Set #8

Doors: 186/1, 187/1, 188/1, 228/1

3	Butt Hinge	CB1900R 4.5" x 4.5"	652	BE
1	Lockset	45H-7R14N PATD	630AM	BE
1	Door Closer	QDC111 DA	689	BE
1	Kick Plate	K0050 8"	630	TR
1	Mop Plate	KM050 4"	630	TR
1	Wall Bumper	1270CVSV	626	TR
1	Gasketing	2525 C		NA

La Grange Middle School

Set #9 - Hold Open

Doors: C14/1, C14/2				
2	Continuous Hinge	A240HD SP7848	628	AB
2	Exit Device	FL 2208 LBR	630AM	PR
2	Rim Cylinder	12E-72 PATD	626	BE
2	Electromagnetic Door Holder	2100 RS	630	AB
2	Door Closer	QDC117	689	BE
4	Kick Plate	K0050 8"	630	TR
2	Gasketing	2525 C		NA
NOTE: Astragal by door manufacturer.				

Set #10 - Roof

Doors: 241A, 132A/1, 291/1				
1	Continuous Hinge	662HD	628	BE
1	Lockset	45H-7D14N PATD	630AM	BE
1	Door Closer	QDC114	689	BE
1	Weatherstrip	700 ES 252"		NA
1	Door Sweep	C627 A		NA
NOTE: Provide bulkhead threshold as required. Terminate roof flashing under threshold.				

Set #11

Doors: 183C/1, 210E/1, 213A/1, 183C/1				
3	Butt Hinge	CB1900R 4.5" x 4.5"	652	BE
1	Lockset	45H-7R14N PATD	630AM	BE
1	Overhead Stop	N 4023	630	AB
3	Silencer	1229A	GREY	TR

Set #12

Doors: 106A/1, 106B/1, 106C/1, 106D/1, 106E/1, 106F/1, 106G/1, 106H/1, 111F/1, 111G/1, 111J/1, 111K/1, 169C/1, 180C/1, 210A/1, 210B/1, 210C/1, 210D/1, 213C/1				
3	Butt Hinge	CB1900R 4.5" x 4.5"	652	BE
1	Lockset	45H-7AB14N PATD	630AM	BE
1	Wall Bumper	1270CVSV	626	TR
1	Gasketing	2525 C		NA
1	Auto Door Bottom	220NA		NA
Note: Coordinate hardware with door material at 213C/1				

Set #13

Doors: 213/1, 213/3				
2	Continuous Hinge	662HD	628	BE
2	Exit Device	FL 2208 X 4908D LBR	630AM	PR
2	Rim Cylinder	12E-72 PATD	626	BE
2	Door Closer	QDC113 DA	689	BE
2	Kick Plate	K0050 8"	630	TR
2	Gasketing	2525 C		NA

Set #E14 – Exterior, Aluminum

Doors: S6/2, V4/3, V4/4, V5/2, V3/3, S5/2				
2	Continuous Hinge	662HD	628	BE
1	Power Transfer	EPT1000	689	AB
1	Removable Mullion	KR822	689	PR
1	Exit Device	ELR 2401 CD DS	630AM	PR
1	Exit Device	2403 CD DS	630AM	PR
1	Rim Cylinder	12E-72 PATD	626	BE
2	Mortise Cylinder	1E-74 PATD	626	BE
2	Pull	ABAP314 24"	630AM	AB
1	Card Reader	BY OWNERS SECURITY VENDOR		
2	Door Closer	QDC111 TOP JAMB	689	BE
2	Overhead Stop	N 1020 A	630	AB
1	Lockdown Hardware	LDH100-PHI	626	TR
1	Power Supply	ELR151	600	PR

La Grange Middle School

2	Door Sweep	C627 A		NA
1	Threshold	896 S 36"	628	NA

Set #E15

Doors: 150/1

3	Butt Hinge	CB1900R 4.5" x 4.5"	652	BE
1	Keypad Lock	45HZ-7DV14KP PATD	626AM	BE
1	Door Closer	QDC111	689	BE
1	Overhead Stop	N 4023	630	AB
1	Gasketing	2525 C		NA

Set #16

Doors: 151/1, 167/1, 185/1, 131/1, 241A/1

3	Butt Hinge	CB1900R 4.5" x 4.5"	652	BE
1	Lockset	45H-7D14N PATD	630AM	BE
1	Door Closer	QDC111	689	BE
1	Kick Plate	K0050 8"	630	TR
1	Wall Bumper	1270CVSV	626	TR
1	Gasketing	2525 C		NA

Set #E17 - Hold Open

Doors: C11/1, C5/1, C5/2, C7/1, V5/5, S5/1, V3/1, V4/5, 161B/1, 161B/3

2	Continuous Hinge	A240HD SP7848	628	AB
2	Exit Device	FL 2808 X 4908D LBR	630AM	PR
2	Rim Cylinder	12E-72 PATD	626	BE
2	Floor Door Holder	2100 RS OR 2600 RS AS REQUIRED	630	AB
2	Door Closer	QDC117	689	BE
2	Kick Plate	K0050 8"	630	TR
1	Gasketing	2525 C		NA

Set #E18 - Card Reader, Remote Release

Doors: 155/1

1	Continuous Hinge	662HD	628	BE
1	Electric Strike	F2164	32D	RC
1	Card Reader	CARD READER BY OWNER'S SECURITY VENDOR		BY
1	Lockset	45H-7R14N PATD	630AM	BE
1	Door Position Switch	1078 CW		SENT
1	Door Closer	QDC111	689	BE
1	Kick Plate	K0050 8"	630	TR
1	Wall Bumper	1270CVSV	626	TR
1	Gasketing	2525 C		NA

NOTE: Remote release by card reader supplier.

Set #19 - Elevated Stage

Doors: 154/1

2	Continuous Hinge	662HD	628	BE
2	Exit Device	FL 2208 X 4908D LBR	630AM	PR
2	Rim Cylinder	12E-72 PATD	626	BE
2	Door Closer	QDC113	689	BE
2	Kick Plate	K0050 8"	630	TR
2	Gasketing	2525 C		NA

NOTE: Knurl lever. da

Set #20 - Vestibule, Non-Locking, Aluminum

Doors: V5/1

2	Continuous Hinge	662HD	628	BE
2	Dummy Touchbar	N673DR-3	630AM	PR
2	Pull	ABAP314 24"	630AM	AB
2	Door Closer	QDC114	689	BE
2	Auto Door Bottom	320 S 36"		NA

NOTE: SL82 flush pull by door manufacture.

La Grange Middle School

Set #21 - Overhead

Doors: 176/3, 180/5, 183/3, 184/3

1	Padlock	41B-772T PATD M1	RED	BE
1	Mortise Cylinder	1E-74 PATD	626	BE

Set #22 - Exterior, Push Button Lock, FRP

Doors: 184/2

1	Continuous Hinge	662HD	628	BE
1	Keypad Lock	45HZ-7DV14KP PATD	626AM	BE
1	Door Closer	QDC114	689	BE
1	Armor Plate	KA050 34"	630	TR
2	Frame Protector	FG8000-36	630	TR
1	Weatherstrip	700 ES 252"		NA
1	Door Sweep	C627 A		NA
1	Threshold	896 S 36"	628	NA

Set #23 - FRP

Doors: 183/2, 183/4

1	Continuous Hinge	662HD	628	BE
1	Exit Device	2403 CD	630AM	PR
1	Rim Cylinder	12E-72 PATD	626	BE
1	Mortise Cylinder	1E-74 PATD	626	BE
1	Pull	ABAP314 24"	630AM	AB
1	Door Closer	QDC114	689	BE
1	Lockdown Hardware	LDH100-PHI	626	TR
1	Weatherstrip	700 ES 252"		NA
1	Door Sweep	C627 A		NA
1	Auto Door Bottom	320 S 36"		NA
1	Threshold	896 S 36"	628	NA

Set #24

Doors: 147A, 183A/1, 183B/1

3	Butt Hinge	CB1900R 4.5" x 4.5"	652	BE
1	Lockset	45H-7R14N PATD	630AM	BE
1	Wall Bumper	1270CVSV	626	TR
3	Silencer	1229A	GREY	TR

Set #25

Doors: 140A/1, 184/1

2	Continuous Hinge	662HD	628	BE
1	Coordinator	3700 SERIES	600	AB
1	Self-Latching Flush Bolts	1863P	630	AB
1	Dust Proof Strike	1870	630	AB
1	Lockset	45H-7AB14N PATD	630AM	BE
2	Door Closer	QDC113	689	BE
2	Kick Plate	K0050 8"	630	TR
1	Gasketing	2525 C		NA
NOTE: Astragal by door manufacturer.				

Set #26

Doors: 180B/1, 180E/1

3	Butt Hinge	CB1900R 4.5" x 4.5"	652	BE
1	Push/Pull Classroom Set	6656 AM	630	AB
1	Kick Plate	K0050 8"	630	TR
1	Mop Plate	KM050 4"	630	TR
1	Wall Bumper	1270CVSV	626	TR
3	Silencer	1229A	GREY	TR
NOTE: 6500				

La Grange Middle School

Set #27

Doors: 180D/1

1	Continuous Hinge	662HD	628	BE
1	Push/Pull Passage Set	6610 AM	630	AB
1	Door Closer	QDC112	689	BE
1	Kick Plate	K0050 8"	630	TR
1	Mop Plate	KM050 4"	630	TR
1	Wall Bumper	1270CVSV	626	TR
3	Silencer	1229A	GREY	TR

Set #E28 - Hold Open

Doors: 176/2, 176/4, 180/2, 180/4

1	Continuous Hinge	A240HD SP7848	628	AB
1	Push/Pull Classroom Set	6656 AM	630	AB
1	Mortise Cylinder	1E-74 PATD	626	BE
1	Electromagnetic Door Holder	2100 RS	630	AB
1	Door Closer	QDC111	689	BE
1	Kick Plate	K0050 8"	630	TR
1	Mop Plate	KM050 4"	630	TR
1	Gasketing	2525 C		NA

Set #E29 - Hold Open

Doors: 176/1, 176/5, 1801/1, 180/3

2	Continuous Hinge	A240HD SP7848	628	AB
1	Self-Latching Flush Bolts	1863P	630	AB
1	Dust Proof Strike	1870	630	AB
1	Push/Pull Classroom Set	6656 AM	630	AB
1	Mortise Cylinder	1E-74 PATD	626	BE
1	Electromagnetic Door Holder	2100 RS	630	AB
1	Coordinator	3700 SERIES	600	AB
2	Door Closer	QDC117	689	BE
2	Kick Plate	K0050 8"	630	TR
2	Mop Plate	KM050 4"	630	TR
1	Gasketing	2525 C		NA
NOTE: Astragal by door manufacturer.				

Set #E30 - Exterior, Aluminum, Card Reader

Doors: V3/2

1	Continuous Hinge	662HD	628	BE
1	Power Transfer	PT1000	689	AB
1	Exit Device	ELR 2403 CD DS	630AM	PR
1	Mortise Cylinder	1E-74 PATD	626	BE
1	Pull	ABAP314	630AM	AB
1	Card Reader	BY OWNERS SECURITY VENDOR		
1	Door Closer	QDC111 x TJ PLATE	689	BE
1	Overhead Stop	N 1020 A	630	AB
1	Power Supply	ELR151	600	pr
1	Door Sweep	C627 A		NA
1	Threshold	896 S 36"	628	NA
NOTE: Coordinate electrified components with security drawings				

Set #31

Doors: 104/1

3	Butt Hinge	CB1900R 4.5" x 4.5"	652	BE
1	Exit Device	FL 2308 X M4908D	630AM	PR
1	Mortise Cylinder	1E-74 PATD	626	BE
1	Door Closer	QDC113	689	BE
1	Kick Plate	K0050 8"	630	TR
1	Gasketing	2525 C		NA

La Grange Middle School

Set #32

Doors: 106J/1, 169D/1, 169E/1, 146/1, 147/1

3	Butt Hinge	CB1900R 4.5" x 4.5"	652	BE
1	Privacy Set	45H-0L14M	630AM	BE
1	Wall Bumper	1270CVSV	626	TR
3	Silencer	1229A	GREY	TR

Set #33

Doors: 169A/1, 169B/1

3	Butt Hinge	CB1900R 4.5" x 4.5"	652	BE
1	Passage Set	45H-0N14M	630AM	BE
1	Wall Bumper	1270CVSV	626	TR
3	Silencer	1229A	GREY	TR

Set #34

Doors: 106/1, 165/1, 169/1

3	Butt Hinge	CB1900R 4.5" x 4.5"	652	BE
1	Lockset	45H-7AB14N PATD	630AM	BE
1	Door Closer	QDC113	689	BE
1	Kick Plate	K0050 8"	630	TR
1	Gasketing	2525 C		NA

Set #E35 - Exterior, Aluminum, Automatic, Card Reader

Doors: V2/4

2	Continuous Hinge	662HD	628	BE
2	Power Transfer	PT1000	689	PR
2	Exit Device	ELR TDS 2603 CD DS LBR	630AM	PR
2	Rim Cylinder	12E-72 PATD	626	BE
2	Mortise Cylinder	1E-74 PATD	626	BE
2	Pull	ABAP311 24"	630AM	AB
2	Low Energy Operator	D-4990		BE
2	Overhead Stop	N 1020 A	630	AB
1	Card Reader	CARD READER BY OWNER'S SECURITY VENDOR		BY
1	Power Supply	ELR152		PR
2	Door Sweep	C627 A		NA
1	Threshold	896 S	628	NA

NOTE: Provide hands free actuators as required.

Set #E36 - Exterior, Remote Locking/Unlocking, Aluminum

Doors: V2/1, V2/2, V2/3

1	Continuous Hinge	662HD	628	BE
1	Exit Device	ELR 2401 CD DS	630AM	PR
1	Mortise Cylinder	1E-74 PATD	626	BE
1	Door Closer	QDC111	689	BE
1	Overhead Stop	N 1020 A	630	AB
1	Power Supply	ELR150 SERIES		PR
1	Power Transfer	PT1000	US28	AB
1	Door Sweep	C627 A		NA
1	Threshold	896 S	628	NA

NOTE: Remote push button by card reader supplier

La Grange Middle School

Set #E37 - Exterior, Card Reader, Automatic, Aluminum

Doors: V2/8				
2	Continuous Hinge	662HD	628	BE
2	Exit Device	ELR TDS 2603 CD DS LBR	630AM	PR
2	Rim Cylinder	12E-72 PATD	626	BE
2	Mortise Cylinder	1E-74 PATD	626	BE
2	Pull	ABAP311 24"	630AM	AB
2	Low Energy Operator	D-4990		BE
2	Overhead Stop	N 1020 A	630	AB
1	Card Reader	CARD READER BY OWNER'S SECURITY VENDOR		BY
1	Power Supply	ELR152		PR
2	Power Transfer	PT1000	US28	AB
2	Door Sweep	C627 A		NA
1	Threshold	896 S	628	NA

NOTE: Provide hands free actuators as required.

Set #E38 - Security Vestibule, Card Reader, Automatic, Aluminum

Doors: V2/5, V2/6, V2/7				
1	Continuous Hinge	662HD	628	BE
1	Exit Device	ELR TS 2402 CD DS	630AM	PR
1	Mortise Cylinder	1E-74 PATD	626	BE
1	Pull	ABAP314 24"	630AM	AB
1	Low Energy Operator	D-4990		BE
1	Overhead Stop	N 1023	630	AB
1	Lockdown Hardware	LDH100-PHI	626	TR
1	Card Reader	CARD READER BY OWNER'S SECURITY VENDOR		BY
1	Power Transfer	PT1000	US28	AB

Set #E39

Doors: 111H/1, 111H/2				
1	Continuous Hinge	662HD	628	BE
1	Lockset	45H-7AB14N PATD	630AM	BE
1	Electric Strike	F2164	32D	RC
1	Door Closer	QDC112	689	BE
1	Kick Plate	K0050 8"	630	TR
1	Wall Bumper	1270CVSV	626	TR
1	Card Reader	CARD READER BY OWNER'S SECURITY VENDOR		BY
1	Door Position Switch	1078 CW SENT		

Set #40 - Push Button Lockset

Doors: 167B/1				
3	Butt Hinge	CB1900R 4.5" x 4.5"	652	BE
1	Keypad Lock	45HZ-7DV14KP PATD	626AM	BE
1	Door Closer	QDC111 DA	689	BE
1	Kick Plate	K0050 8"	630	TR
1	Wall Bumper	1270CVSV	626	TR
1	Gasketing	2525 C		N

Set #41

Doors: 163/1, 135/1				
3	Butt Hinge	CB1900R 4.5" x 4.5"	652	BE
1	Privacy Set	45H-0L14M VIN	630AM	BE
1	Door Closer	QDC111	689	BE
1	Kick Plate	K0050 8"	630	TR

La Grange Middle School

1	Mop Plate	KM050 4"	630	TR
1	Wall Bumper	1270CVSV	626	TR
1	Gasketing	2525 C		NA

Set #42

Doors: 160A/1, 160/1

3	Butt Hinge	CB1900R 4.5" x 4.5"	652	BE
1	Lockset	45H-7R14N PATD	630AM	BE
1	Door Closer	QDC111 DA	689	BE
1	Kick Plate	K0050 8"	630	TR
1	Mop Plate	KM050 4"	630	TR
1	Wall Stop	1270CVSV	626	TR
1	Gasketing	2525 C		NA

Set #43

Doors: 213B/1

2	Continuous Hinge	662HD	628	BE
1	Self-Latching Flush Bolts	1863P	630	AB
1	Dust Proof Strike	1870	630	AB
1	Passage Latchset	45H-0N14M	630AM	BE
1	Coordinator	3700 SERIES X FILLER X BRACKETS	600	AB
2	Door Closer	QDC114	689	BE
2	Kick Plate	K0050 8"	630	TR
1	Gasketing	2525 C		NA

NOTE: Astragal by door manufacturer.

Set #44

Doors: 155/2

2	Continuous Hinge	662HD	628	BE
1	Self-Latching Flush Bolts	1863P	630	AB
1	Dust Proof Strike	1870	630	AB
1	Passage Latchset	45H-0N14M	630AM	BE
1	Coordinator	3700 SERIES X FILLER X BRACKETS	600	AB
2	Door Closer	QDC114	689	BE
2	Kick Plate	K0050 8"	630	TR
1	Gasketing	700 ES		NA
2	Auto Door Bottom	2220 S		NA

NOTE: Astragal by door manufacturer.

Set #E45 - Hold Open

Doors: 161B/2, 161B/4

1	Continuous Hinge	A240HD SP7848	628	AB
1	Exit Device	FL2308 4908D	630AM	PR
1	Mortise Cylinder	1E-74 PATD	626	BE
1	Electromagnetic Door Holder	2100 RS	630	AB
1	Door Closer	QDC111	689	BE
1	Kick Plate	K0050 8"	630	TR
1	Gasketing	2525 C		NA

Set #46 – Exterior, Aluminum

Doors: V3/4, V4/1, V4/2

2	Continuous Hinge	662HD	628	BE
1	Removable Mullion	KR822	689	PR
1	Exit Device	2401 CD DS	630AM	PR
1	Exit Device	2403 CD DS	630AM	PR
1	Rim Cylinder	12E-72 PATD	626	BE
2	Mortise Cylinder	1E-74 PATD	626	BE
2	Pull	ABAP314 24"	630AM	AB
2	Door Closer	QDC11 TOP JAMB	689	BE
2	Overhead Stop	N 1020 A	630	AB

La Grange Middle School

2	Lockdown Hardware	LDH100-PHI	626	TR
2	Door Sweep	C627 A		NA
1	Threshold	896 S 36"	628	NA

Set #47 - Exterior, Aluminum, Card Reader

Doors: V3/5

1	Continuous Hinge	662HD	628	BE
1	Exit Device	2403 CD DS	630AM	PR
1	Rim Cylinder	12E-72 PATD	626	BE
1	Mortise Cylinder	1E-74 PATD	626	BE
1	Pull	ABAP314	630AM	AB
1	Door Closer	QDC111 x TJ PLATE	689	BE
1	Overhead Stop	N 1020 A	630	AB
1	Door Sweep	C627 A		NA
1	Threshold	896 S 36"	628	NA

INTENTIONALLY BLANK

SECTION 08 71 13 - AUTOMATIC DOOR OPERATORS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Power door operators for swinging doors.
 - 2. Low-energy door operators for swinging doors.

1.3 DEFINITIONS

- A. AAADM: American Association of Automatic Door Manufacturers.
- B. Activation Device: A control that, when actuated, sends an electrical signal to the door operator to open the door.
- C. Safety Device: A control that, to avoid injury, prevents a door from opening or closing.
- D. For automatic door terminology, see BHMA A156.19 for definitions of terms.

1.4 COORDINATION

- A. Templates: Distribute for doors, frames, and other work specified to be factory prepared and reinforced for installing automatic door operators.
- B. Coordinate hardware for doors with operators to ensure proper size, thickness, hand, function, and finish.
- C. Electrical System Roughing-in: Coordinate layout and installation of automatic door operators with connections to power supplies and access-control system.

1.5 PREINSTALLATION MEETINGS

- A. Preinstallation Conference: Conduct conference at Project site.

1.6 SUBMITTALS, GENERAL

- A. General: Submit all action submittals and informational submittals required by this Section concurrently.

1.7 ACTION SUBMITTALS

- A. Product Data: For each type of product. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes for automatic door operators. Include rated capacities, operating characteristics, electrical characteristics, and furnished specialties and accessories.
 - 1. Power door operators.
 - 2. Low-energy door operators.
 - 3. Controls.
 - 4. Accessories.
- B. Shop Drawings: For automatic door operators.
 - 1. Include plans, elevations, sections, hardware mounting heights, and attachment details.
 - 2. Indicate dimensions, weights, loads, required clearances, method of field assembly, components, and location and size of each field connection.
 - 3. Indicate locations of activation and safety devices.
 - 4. Include diagrams for power, signal, and control wiring.
- C. Samples: For each exposed product and for each color and texture specified, manufacturer's standard size.
- D. Sample Warranties: For manufacturer's special warranties.

1.8 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For Installer.
- B. Field quality-control reports.

1.9 CLOSEOUT SUBMITTALS

- A. Maintenance Data: For automatic door operators, safety devices, and control systems, to include in maintenance manuals.
- B. Executed Warranties: For manufacturer's special warranties.

1.10 QUALITY ASSURANCE

- A. Installer Qualifications: An authorized representative who is trained and approved by manufacturer for installation and maintenance of units required for this Project.
 - 1. Maintenance Proximity: Not more than two hours' normal travel time from Installer's place of business to Project site.
- B. Certified Inspector Qualifications: Certified by AAADM.

1.11 WARRANTY

- A. Special Warranty: Manufacturer agrees to repair or replace components of automatic door operators that fail in materials or workmanship within specified warranty period.
 - 1. Failures include, but are not limited to, the following:
 - a. Faulty or sporadic operation of automatic door operator, including controls.
 - b. Deterioration of metals, metal finishes, and other materials beyond normal weathering or use.
 - 2. Warranty Period: Two years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1. Besam Entrance Solutions; Subsidiary of ASSA ABLOY Entrance Systems.
 - 2. DORMA Automatics; Div. of DORMA Group North America.
 - 3. Horton Automatics; a division of Overhead Door Corporation.
 - 4. Stanley Access Technologies, LLC; Div. of Stanley Security Solutions.
- B. Source Limitations: Obtain automatic door operators, including activation and safety devices, from single source from single manufacturer.

2.2 AUTOMATIC DOOR OPERATORS, GENERAL

- A. General: Provide operators of size recommended by manufacturer for door size, weight, and movement; for condition of exposure; and for long-term, maintenance-free operation under normal traffic load for occupancy type indicated; and according to UL 325. Coordinate operator mechanisms with door operation, hinges, and activation and safety devices.
- B. Electromechanical Operating System: Self-contained unit powered by permanent-magnet dc motor; with closing speed controlled mechanically by gear train and dynamically by braking action of electric motor, connections for power and activation- and safety-device wiring, and manual operation including spring closing when power is off.
- C. Hinges: See Section 08 71 00 "Door Hardware" for hinge type for each door that door operator shall accommodate.
- D. Housing for Overhead Concealed Operators: Fabricated from minimum 0.125-inch-thick, extruded or formed aluminum and extending full width of door opening including door jambs to conceal door operators and controls. Provide hinged or removable access panels for service and adjustment of door operators and controls. Secure panels to prevent unauthorized access.

- E. Cover for Surface-Mounted Operators: Fabricated from 0.125-inch-thick, extruded or formed aluminum; manufacturer's standard width; with enclosed end caps, provision for maintenance access, and fasteners concealed when door is in closed position.
- F. Brackets and Reinforcements: Fabricated from aluminum with nonstaining, nonferrous shims for aligning system components.
- G. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

2.3 POWER DOOR OPERATORS

- A. Standard: BHMA A156.10.
- B. Performance Requirements:
 - 1. Opening Force:
 - a. Power-Operated Doors: Not more than 50 lbf required to manually set door in motion if power fails; not more than 15 lbf required to open door to minimum required width.
 - b. Power-Operated Swinging Doors: Not more than 30 lbf required to manually open door if power fails.
 - 2. Entrapment-Prevention Force: Not more than 40 lbf required to prevent stopped door in the last 10 degrees of opening from moving in the direction of opening; not more than 30 lbf required to prevent stopped door from moving in direction of closing.
- C. Configuration: Operator to control single swinging door.
 - 1. Traffic Pattern: Two way.
 - 2. Operator Mounting: Surface.
- D. Operation: Power opening and[**power-assisted**] spring closing. Provide time delay for door to remain open before initiating closing cycle as required by BHMA A156.10.
- E. Operating System: Electromechanical.
- F. Microprocessor Control Unit: Solid-state controller.
- G. Features:
 - 1. Adjustable opening and closing speed.
 - 2. Adjustable opening and closing force.
 - 3. Adjustable backcheck.
 - 4. Adjustable hold-open time from zero to 30 seconds.
 - 5. Adjustable time delay.
 - 6. Adjustable acceleration.
 - 7. Adjustable limit switch.
 - 8. Obstruction recycle.

9. Automatic door re-open if stopped while closing.
 10. On-off/hold-open switch to control electric power to operator.
- H. Controls: Activation and safety devices as indicated on Drawings and according to BHMA standards.
1. Activation Device: Push-plate switch on each side of door to activate door operator.
 2. Safety Device: Presence sensor mounted on horizontal door muntin to detect pedestrians in presence zone and to prevent door from closing.
- I. Exposed Finish: Finish matching door hardware.

2.4 LOW-ENERGY DOOR OPERATORS

- A. Standard: BHMA A156.19.
- B. Performance Requirements:
1. Opening Force if Power Fails: Not more than 15 lbf required to release latch if provided, not more than 30 lbf required to manually set door in motion, and not more than 15 lbf required to fully open door.
 2. Entrapment-Prevention Force: Not more than 15 lbf required to prevent stopped door from closing or opening.
- C. Configuration: Operator to control single swinging door.
1. Traffic Pattern: Two way.
 2. Operator Mounting: Surface.
- D. Operation: Power opening and power-assisted spring closing. Provide time delay for door to remain open before initiating closing cycle as required by BHMA A156.19. When not in automatic mode, door operator shall function as manual door closer, with or without electrical power.
- E. Operating System: Electromechanical.
- F. Microprocessor Control Unit: Solid-state controller.
- G. Features:
1. Adjustable opening and closing speed.
 2. Adjustable opening and closing force.
 3. Adjustable backcheck.
 4. Adjustable hold-open time from zero to 30 seconds.
 5. Adjustable time delay.
 6. Adjustable acceleration.
 7. Obstruction recycle.
 8. On-off/hold-open switch to control electric power to operator.

- H. Activation Device: Push-plate switch on each side of door to activate door operator.
- I. Exposed Finish: Finish matching door hardware.

2.5 MATERIALS

- A. Aluminum: Alloy and temper recommended by manufacturer for type of use and finish indicated.
 - 1. Extrusions: ASTM B 221.
 - 2. Sheet: ASTM B 209.
- B. Fasteners and Accessories: Corrosion-resistant, nonstaining, nonbleeding fasteners and accessories compatible with adjacent materials.

2.6 CONTROLS

- A. General: Provide controls, including activation and safety devices, according to BHMA standards; for condition of exposure; and for long-term, maintenance-free operation under normal traffic load for occupancy type indicated. Coordinate activation and safety devices with door operation and door operator mechanisms.
- B. Presence Sensors: Self-contained, active-infrared scanner units; adjustable to provide detection field sizes and functions required by BHMA A156.10. Sensors shall remain active at all times.
- C. Push-Plate Switch: Momentary-contact door control switch with flat push-plate actuator with contrasting-colored, engraved message.
 - 1. Configuration: Square push plate with 4-by-4-inch junction box.
 - a. Mounting: As indicated on Drawings.
 - 2. Push-Plate Material: Stainless steel as selected by Architect from manufacturer's full range.
 - 3. Message: International symbol of accessibility.
- D. Electrical Interlocks: Unless units are equipped with self-protecting devices or circuits, provide electrical interlocks to prevent activation of operator when door is locked, latched, or bolted.

2.7 FABRICATION

- A. Factory fabricate automatic door operators to comply with indicated standards.
- B. Form aluminum shapes before finishing.
- C. Fabricate exterior components to drain condensation and water passing joints within operator enclosure to the exterior.
- D. Use concealed fasteners to greatest extent possible. Where exposed fasteners are required, use countersunk Phillips flat-head machine screws, finished to match operator.

2.8 ACCESSORIES

- A. Signage: As required by cited BHMA standard for type of door and its operation.
 - 1. Application Process: Operator manufacturer's standard process.
 - 2. Provide sign materials with instructions for field application when operators are installed.

2.9 GENERAL FINISH REQUIREMENTS

- A. Protect mechanical finishes on exposed surfaces from damage by applying strippable, temporary protective covering before shipping.
- B. Apply organic and anodic finishes to formed metal after fabrication unless otherwise indicated.
- C. Appearance of Finished Work: Noticeable variations in same piece are not acceptable. Variations in appearance of adjoining components are acceptable if they are within range of approved Samples and are assembled or installed to minimize contrast.

2.10 ALUMINUM FINISHES

- A. Clear Anodic Finish: AAMA 611, AA-M12C22A31, Class II, 0.010 mm or thicker.
- B. Color Anodic Finish: AAMA 611, AA-M12C22A42/A44, Class I, 0.018 mm or thicker.
- C. Baked-Enamel or Powder-Coat Finish: AAMA 2603 except with a minimum dry film thickness of 1.5 mils. Comply with coating manufacturer's written instructions for cleaning, conversion coating, and applying and baking finish.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine conditions, with Installer present, for compliance with requirements for installation tolerances, door and frame preparation and reinforcements, and other conditions affecting performance of automatic door operators.
- B. Examine roughing-in for electrical systems to verify actual locations of power connections before automatic door operator installation.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.
- D. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 INSTALLATION

- A. General: Install automatic door operators according to manufacturer's written instructions and cited BHMA standard for type of door operation and direction of pedestrian travel, including signage, controls, wiring, remote power units if any, and connection to building's power supply.
 - 1. Do not install damaged components. Fit joints to produce hairline joints free of burrs and distortion.
 - 2. Install operators true in alignment with established lines and door geometry without warp or rack. Anchor securely in place.
- B. Controls: Install activation and safety devices according to manufacturer's written instructions and cited BHMA standard for operator type and direction of pedestrian travel. Connect control wiring according to Section 26 05 19 "Low-Voltage Electrical Power Conductors and Cables."
- C. Install low voltage control cables between each control device and door operator and provide operations programming as directed by Owner for the complete functionality of the system.
- D. Access-Control System: Connect operators to access-control system as specified in Section 28 13 00 "Access Control."
- E. Signage: Apply on both sides of each door as required by cited BHMA standard for type of door operator and direction of pedestrian travel.

3.3 FIELD QUALITY CONTROL

- A. Certified Inspector: Engage a Certified Inspector to test and inspect components, assemblies, and installations, including connections.
- B. Perform the following tests and inspections:
 - 1. Test and inspect each automatic door operator installation, using AAADM inspection forms, to determine compliance of installed systems with applicable BHMA standards.
- C. Automatic door operators will be considered defective if they do not pass tests and inspections.
- D. Prepare test and inspection reports.

3.4 ADJUSTING

- A. Adjust automatic door operators to function smoothly, and lubricate as recommended by manufacturer; comply with requirements of applicable BHMA standards.
 - 1. Adjust operators on exterior doors for weathertight closure.
- B. After completing installation of automatic door operators, inspect exposed finishes on doors and operators. Repair damaged finish to match original finish.
- C. Readjust automatic door operators and controls after repeated operation of completed installation equivalent to three days' use by normal traffic (100 to 300 cycles).

- D. Occupancy Adjustment: When requested within 12 months of date of Substantial Completion, provide on-site assistance in adjusting system to suit actual occupied conditions. Provide up to two visits to Project during other-than-normal occupancy hours for this purpose.

3.5 MAINTENANCE SERVICE

- A. Initial Maintenance Service: Beginning at Substantial Completion, maintenance service shall include 12 months' full maintenance by skilled employees of automatic door operator Installer. Include quarterly preventive maintenance, repair or replacement of worn or defective components, lubrication, cleaning, and adjusting as required for proper door operation. Parts and supplies shall be manufacturer's authorized replacement parts and supplies.
 - 1. Engage a Certified Inspector to perform safety inspection after each adjustment or repair and at end of maintenance period. Furnish completed inspection reports to Owner.
 - 2. Perform maintenance, including emergency callback service, during normal working hours.

3.6 DEMONSTRATION

- A. Engage a factory-authorized service representative to train Owner's maintenance personnel to adjust, operate, and maintain automatic door operators.

END OF SECTION 08 71 13

SECTION 08 80 00 - GLAZING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Glass products.
 - 2. Laminated glass.
 - 3. Fire-protection-rated glazing.
 - 4. Security glazing.
 - 5. Insulating glass.
 - 6. Insulated spandrel panels.
 - 7. Security glazing attachment system.

1.3 DEFINITIONS

- A. Fire-Protection-Rated Glazing: Glazing in rated doors and openings up to 45 minutes (with certain exceptions), limited in size, and not capable of blocking radiant heat.
- B. Glazing Manufacturers: Firms that produce primary glazing, fabricated glazing, or both, as defined in referenced glazing publications.
- C. Glass Thicknesses: Indicated by thickness designations in millimeters in accordance with ASTM C1036.
- D. IBC: International Building Code.
- E. Interspace: Space between lites of an insulating-glass unit.
- F. SHGC: Solar Heat Gain Coefficient.

1.4 COORDINATION

- A. Coordinate glazing channel dimensions to provide necessary bite on glazing, minimum edge and face clearances, and adequate sealant thicknesses, with reasonable tolerances to achieve proper safety margins for glazing retention under each design load case, load case combination, and service condition.
 - 1. Coordinate framing types to provide proper framing fire rating.
 - 2. Coordinate framing types to provide proper framing forced-entry-resistance rating.

1.5 PREINSTALLATION MEETINGS

- A. Preinstallation Conference: Conduct conference at Project site.
 - 1. Review and finalize construction schedule and verify availability of materials, Installer's personnel, equipment, and facilities needed to make progress.
 - 2. Review, discuss, and coordinate the interrelationship of glazing with other components, including framing.
 - 3. Review temporary protection requirements for glazing during and after installation.

1.6 SUBMITTALS, GENERAL

- A. General: Submit all action submittals and informational submittals required by this Section and by Division 08 Sections "Hollow Metal Doors and Frames", "Flush Wood Doors", "Fire-Rated Glazed Opening Assemblies", "Aluminum-Framed Entrances and Storefronts", "Glazed Aluminum Curtain Walls", "Aluminum Windows", "Sliding Security Windows", and "Metal-Framed Skylights" concurrently.

1.7 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated.
 - 1. Spandrel glass.
 - 2. Laminated glass.
 - 3. Insulating glass.
 - 4. Insulated spandrel panels.
- B. Sustainable Design Submittals:
 - 1. Product Data: For sealants, indicating VOC content.
- C. Samples: For each type of the following products; 12 inches square.
 - 1. Spandrel glass.
 - 2. Laminated glass.
 - 3. Fire-protection-rated glazing.
 - 4. Security glazing.
 - 5. Insulating glass.
 - 6. Insulated spandrel panels.
- D. Glazing Schedule: List glazing types and thicknesses for each size opening and location. Use same designations indicated on Drawings.
- E. Delegated Design Submittal: For glazing indicated to comply with performance requirements and design criteria, including analysis data signed and sealed by qualified professional engineer responsible for their preparation.
- F. Sample Warranties: For special warranties.

1.8 INFORMATIONAL SUBMITTALS

- A. Forced-Entry-Resistance-Rated Certification: For each type of forced-entry-resistance-rated security glazing for tests performed by a qualified testing agency indicating compliance with performance requirements.
- B. Bullet-Resistance-Rated Performance Certification: For each type of bullet-resistance-rated security glazing for tests performed by a qualified testing agency indicating compliance with performance requirements.
- C. Preconstruction adhesion and compatibility test report.

1.9 CLOSEOUT SUBMITTALS

- A. Maintenance Data: For glazing to include in maintenance manuals.
- B. Warranties: Executed special warranties.

1.10 PRECONSTRUCTION TESTING

- A. Preconstruction Adhesion and Compatibility Testing: Test each glazing product, tape sealant, gasket, glazing accessory, and framing member for adhesion to and compatibility with elastomeric glazing sealants.
 - 1. Testing is not required if data are submitted based on previous testing of current sealant products and glazing materials matching those submitted.
 - 2. Use ASTM C1087 to determine whether priming and other specific joint-preparation techniques are required to obtain rapid, optimum adhesion of glazing sealants to glazing, tape sealants, gaskets, and glazing channel substrates.
 - 3. Test no fewer than eight Samples of each type of material, including joint substrates, shims, sealant backings, secondary seals, and miscellaneous materials.
 - 4. Schedule enough time for testing and analyzing results.
 - 5. For materials failing tests, submit sealant manufacturer's written instructions for corrective measures including use of specially formulated primers.

1.11 DELIVERY, STORAGE, AND HANDLING

- A. Protect glazing materials in accordance with manufacturer's written instructions. Prevent damage to glass and glazing materials from condensation, temperature changes, direct exposure to sun, or other causes.
- B. Maintain protective coverings on glazing to avoid exposures to abrasive substances, excessive heat, and other sources of possible deterioration.

1.12 FIELD CONDITIONS

- A. Environmental Limitations: Do not proceed with glazing when ambient and substrate temperature conditions are outside limits permitted by glazing material manufacturers and when glazing channel substrates are wet from rain, frost, condensation, or other causes.
 - 1. Do not install glazing sealants when ambient and substrate temperature conditions are outside limits permitted by sealant manufacturer or are below 40 deg F.

1.13 WARRANTY

- A. Manufacturer's Special Warranty for Coated-Glass Products: Manufacturer or manufacturer/fabricator, as applicable, agrees to replace coated-glass units that deteriorate within specified warranty period. Deterioration of coated glass is defined as defects developed from normal use that are not attributed to glass breakage or to maintaining and cleaning coated glass contrary to manufacturer's written instructions. Defects include peeling, cracking, and other indications of deterioration in coating.
 - 1. Warranty Period: 10 years from date of Substantial Completion.
- B. Manufacturer's Special Warranty for Laminated Glass: Manufacturer or manufacturer/fabricator, as applicable, agrees to replace laminated-glass units that deteriorate within specified warranty period. Deterioration of laminated glass is defined as defects developed from normal use that are not attributed to glass breakage or to maintaining and cleaning laminated glass contrary to manufacturer's written instructions. Defects include edge separation, delamination materially obstructing vision through glass, and blemishes exceeding those allowed by referenced laminated-glass standard. "Laminated Glass", as used in this paragraph, includes clear laminated glass, fire-protection-rated laminated ceramic glass, fire-protection-rated laminated glass with intumescent interlayer,.
 - 1. Warranty Period: 5 years from date of Substantial Completion.
- C. Manufacturer's Special Warranty on Tempered Glazing Units with Clear Intumescent Interlayer: Manufacturer or manufacturer/fabricator, as applicable, agrees to replace units that deteriorate within specified warranty period. Deterioration of tempered glazing units with clear intumescent interlayer is defined as failure of hermetic seal under normal use that is not attributed to glass breakage or to maintaining and cleaning glass contrary to manufacturer's written instructions. Evidence of failure is air bubbles within units, or obstruction of vision by contamination or deterioration of intumescent interlayer.
 - 1. Warranty Period: 5 years from date of Substantial Completion.
- D. Manufacturer's Special Warranty for Laminated-Glass Security Glazing: Manufacturer or manufacturer/fabricator, as applicable, agrees to replace laminated-glass security glazing units that deteriorate within specified warranty period. Deterioration of laminated glass security glazing is defined as defects developed from normal use that are not attributed to glass breakage or to maintaining and cleaning laminated glass security glazing contrary to manufacturer's written instructions. Defects include edge separation, delamination materially obstructing vision through glass, and blemishes exceeding those allowed by referenced laminated-glass standard. "Laminated-Glass Security Glazing", as used in this paragraph, includes clear laminated-glass security glazing.

1. Warranty Period: 5 years from date of Substantial Completion.
- E. Manufacturer's Special Warranty for Insulating Glass: Manufacturer or manufacturer/fabricator, as applicable, agrees to replace insulating-glass units that deteriorate within specified warranty period. Deterioration of insulating glass is defined as failure of hermetic seal under normal use that is not attributed to glass breakage or to maintaining and cleaning insulating glass contrary to manufacturer's written instructions. Evidence of failure is obstruction of vision by dust, moisture, or film on interior surfaces of glass.
1. Where laminated glass is used as a component in an insulating-glass unit, deterioration of the laminated glass itself is covered by the paragraphs "Manufacturer's Special Warranty for Laminated Glass" and "Manufacturer's Special Warranty for Laminated-Glass Security Glazing" above, and deterioration of the insulating glass due to failure of hermetic seal is covered by this paragraph "Manufacturer's Special Warranty for Insulating Glass."
 2. Warranty Period: 10 years from date of Substantial Completion.
- F. Manufacturer's Special Warranty for Aluminum and Glass-Faced Insulated Spandrel Panels: Manufacturer agrees to replace insulated spandrel panels that deteriorate within specified warranty period.
1. Deterioration includes, but is not limited to, the following:
 - a. Delamination of components or other failures of bond.
 - b. Warping of components.
 2. Warranty Period: 25 years from date of Substantial Completion.
- G. Manufacturer's Special Finish Warranty for Insulated Spandrel Panels: Manufacturer agrees to restore finishes or replace insulated spandrel panels that deteriorate within specified warranty period.
1. Deterioration includes, but is not limited to, the following:
 - a. Color fading more than 5 Delta E units when tested according to ASTM D2244.
 - b. Chalking in excess of a No. 8 rating when tested according to ASTM D4214.
 - c. Cracking, checking, peeling, or failure of paint to adhere to bare metal.
 2. Warranty Period: 20 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Source Limitations for Glazing: For each glazing type, obtain from single manufacturer.
- B. Source Limitations for Glazing Accessories: For each product and installation method, obtain from single manufacturer.

2.2 PERFORMANCE REQUIREMENTS

- A. General: Installed glazing systems shall withstand normal thermal movement and wind and impact loads (where applicable) without failure, including loss or glass breakage attributable to defective manufacture, fabrication, or installation; failure of sealants or gaskets to remain watertight and airtight; deterioration of glazing materials; or other defects in construction.
 - 1. Installed security glazing shall withstand security-related loads and forces without damage to the glazing beyond that allowed by referenced standards.
- B. Structural Performance: Glazing shall withstand the following design loads within limits and under conditions indicated determined in accordance with the IBC and ASTM E1300:
 - 1. Wind Loads: As indicated on Drawings.
 - 2. Maximum Lateral Deflection: For glazing supported on all four edges, limit center-of-glass deflection at design wind pressure to not more than 1/50 times the short-side length or 1 inch, whichever is less. Maintain engagement of the glazing edge with an appropriate margin of safety under all conditions.
 - 3. Thermal Loads: Design glazing to resist thermal stress breakage induced by differential temperature conditions and limited air circulation within individual glass lites and insulated glazing units.
- C. Safety Glazing: Where safety glazing is indicated, provide glazing that complies with 16 CFR 1201, Category II.
- D. Security Glazing: Installed security glazing shall withstand security-related loads and forces without damage to the glazing beyond that allowed by referenced standards.
- E. Thermal and Optical Performance Properties: Provide glazing with performance properties specified, as indicated in manufacturer's published test data, based on procedures indicated below:
 - 1. For monolithic-glass lites, properties are based on units with lites 6 mm thick.
 - 2. For laminated-glass lites, properties are based on products of construction indicated.
 - 3. For insulating-glass units, properties are based on units of thickness indicated for overall unit and for each lite.
 - 4. U-Factors: Center-of-glazing values, in accordance with NFRC 100 and based on most current non-beta version of LBL's WINDOW computer program, expressed as Btu/sq. ft. x h x deg F.
 - 5. SHGC and Visible Transmittance: Center-of-glazing values, in accordance with NFRC 200 and based on most current non-beta version of LBL's WINDOW computer program.

2.3 GLAZING PRODUCTS, GENERAL

- A. Glazing Publications: Comply with published recommendations of glazing product manufacturers and organizations below unless more stringent requirements are indicated. See these publications for glazing terms not otherwise defined in this Section or in referenced standards.
1. NGA Publications: "Laminated Glazing Reference Manual," and "Glazing Manual."
 2. FGIA Publications: AAMA GDSG-1, "Glass Design for Sloped Glazing," and AAMA TIR A7, "Sloped Glazing Guidelines."
 3. FGIA Publication for Sloped Glazing: IGMA TB-3001, "Guidelines for Sloped Glazing."
 4. FGIA Publication for Insulating Glass: IGMA TM-3000, "North American Glazing Guidelines for Sealed Insulating Glass Units for Commercial and Residential Use."
 5. American Bird Conservancy (ABC) Publication: "Bird-Friendly Building Design."
- B. Safety Glazing Labeling: Where safety glazing is indicated, permanently mark glazing with certification label of the SGCC or another certification agency acceptable to authorities having jurisdiction. Label shall indicate manufacturer's name, type of glazing, thickness, and safety glazing standard with which glazing complies.
- C. Fire-Protection-Rated Glazing Labeling: Permanently mark fire-protection-rated glazing with certification label of a testing agency acceptable to authorities having jurisdiction. Label shall indicate manufacturer's name; test standard; whether glazing is permitted to be used in doors or openings; if permitted in openings, whether glazing has passed hose-stream test; whether glazing meets 450 deg F temperature-rise limitation; and fire-resistance rating in minutes.
- D. Fire-Resistance-Rated Glazing Labeling: Permanently mark fire-resistance-rated glazing with certification label of a testing agency acceptable to authorities having jurisdiction. Label shall indicate manufacturer's name, test standard, that glazing is approved for use in walls, and fire-resistance rating in minutes.
- E. Insulating-Glass Certification Program: Permanently marked either on spacers or on at least one component lite of units with appropriate certification label of the IGCC.
- F. Thickness: Where glazing thickness is indicated, it is a minimum. Provide glazing that complies with performance requirements and is not less than thickness indicated.
1. Minimum Glass Thickness for Exterior Lites: 6 mm.
 2. Thickness of Tinted Glass: Provide same thickness for each tint color indicated throughout Project.
- G. Strength: Where heat-strengthened float glass is indicated, provide heat-strengthened float glass as needed to comply with "Performance Requirements" Article. Where fully tempered float glass is indicated, provide fully tempered float glass.

2.4 GLASS PRODUCTS

- A. Clear Annealed Float Glass: ASTM C1036, Type I, Class 1 (clear), Quality-Q3.

- B. Low-Iron Annealed Float Glass: ASTM C1036, Type I, Class I (clear), Quality-Q3; and with visible light transmission of not less than 91 percent.
- C. Tinted Annealed Float Glass: ASTM C1036, Type I, Class 2 (tinted), Quality-Q3.
- D. Fully Tempered Float Glass: ASTM C1048, Kind FT (fully tempered), Condition A (uncoated) unless otherwise indicated, Type I, Class 1 (clear) or Class 2 (tinted) as indicated, Quality-Q3.
 - 1. Fabrication Process: By horizontal (roller-hearth) process with roll-wave distortion horizontally parallel to bottom edge of glass as installed unless otherwise indicated.
 - 2. Clear Glass:
 - a. Type **FC**: Fully tempered clear float glass.
 - 1) Products: Subject to compliance with requirements, available products that may be incorporated in the Work, include, but are not limited to:
 - a) AGC Glass Company North America, Inc.; Clear Float.
 - b) Guardian Glass, LLC; Clear Float.
 - c) Vitro Architectural Glass; Clear.
 - 2) Minimum Thickness: 6 mm.
 - 3) Safety glazing required.
 - b. Type **FCE**: Fully tempered clear float glass with low-e coating, ASTM C1376.
 - 1) Products: Subject to compliance with requirements, available products that may be incorporated in the Work, include, but are not limited to:
 - a) AGC Glass Company North America, Inc.; Energy Select 28.
 - b) Guardian Glass, LLC; SunGuard SNX 62/27 on Clear Float.
 - c) Vitro Architectural Glass; Solarban 70.
 - 2) Minimum Thickness: 6 mm.
 - 3) Safety glazing required.
- E. Tempered Full-Surface Acid-Etched Translucent Glass: ASTM C1048, Kind FT (fully tempered), Type II, Class 1 (clear), Form 3; finish, acid-etched pattern, and quality as indicated.
 - 1. Type **FCAE**: Fully tempered translucent full-surface acid-etched glass.
 - a. Products: Subject to compliance with requirements, available products that may be incorporated in the Work, include, but are not limited to:
 - 1) Guardian Glass, LLC; Guardian SatinDeco®.
 - 2) Pilkington North America; Acid-Etched Translucent Glass.
 - 3) Translucent interlayer with similar properties.
 - b. Minimum Thickness: 6 mm. Opacity

- c. Opacity: As selected by Architect from manufacturer's full range of acid-etched densities.
 - d. Safety glazing required.
- F. Heat-Strengthened Float Glass: ASTM C1048, Kind HS (heat strengthened), Type I, Condition A (uncoated) unless otherwise indicated, Type I, Class 1 (clear), Quality-Q3.
 - 1. Fabrication Process: By horizontal (roller-hearth) process with roll-wave distortion horizontally parallel to bottom edge of glass as installed unless otherwise indicated.

2.5 LAMINATED GLASS

- A. Laminated Glass: ASTM C1172. Use materials that have a proven record of no tendency to bubble, discolor, or lose physical and mechanical properties after fabrication and installation.
 - 1. Construction: Laminate glass with polyvinyl butyral interlayer to comply with interlayer manufacturer's written instructions.
 - 2. Interlayer Thickness: Provide thickness not less than 0.060 inch and as needed to comply with requirements.
 - 3. Interlayer Color: Clear.
 - 4. Appearance: Provide laminated glass without haze and with visual clarity and transparency indistinguishable from clear fully tempered float glass.
 - 5. Type **HCL**: Clear laminated glass (two plies of clear heat-strengthened float glass laminated).
 - a. Minimum Thickness of Each Ply: 4 mm.
 - b. Safety glazing required.

2.6 FIRE-PROTECTION-RATED GLAZING

- A. Fire-Protection-Rated Glazing: Listed and labeled by a testing agency acceptable to authorities having jurisdiction, for fire-protection ratings indicated, based on positive-pressure testing according to NFPA 257 or UL 9, including hose-stream test, and shall comply with NFPA 80.
- B. Appearance: Provide fire-protection-rated glazing without haze and with visual clarity and transparency indistinguishable from clear fully tempered float glass.
- C. Fire-Protection-Rated Tempered Glass: Fire-protection-rated tempered glass; complying with 16 CFR 1201, Category II.
 - 1. Type **FP**: Fire-protection-rated tempered glass, exempted from the hose-stream test.
 - a. Products: Subject to compliance with requirements, available products that may be incorporated in the Work include, but are not limited to:

- 1) Safti First Fire Rated Glazing Solutions; SuperLite I.
 - 2) Technical Glass Products; Fireglass 20.
 - 3) Vetrotech Saint-Gobain; Pyroswiss 20.
- b. Rating: 20 minutes.
 - c. Thickness: 6 mm.
 - d. Safety glazing required.
- D. Fire-Protection-Rated Laminated Ceramic Glazing: Laminated glass made from two plies of clear, ceramic glass; complying with 16 CFR 1201, Category II.
1. Type **FPC**: Fire-protection-rated laminated ceramic glazing.
 - a. Products: Subject to compliance with requirements, available products that may be incorporated in the Work include, but are not limited to:
 - 1) Safti First Fire Rated Glazing Solutions; Pyran Platinum L.
 - 2) Technical Glass Products; FireLite Plus.
 - b. Rating: As indicated on Drawings.
 - c. Thickness: 8-9 mm.
 - d. Safety glazing required.

2.7 FIRE-RESISTANCE-RATED GLAZING

- A. Fire-Resistance-Rated Glazing: Listed and labeled by a testing agency acceptable to authorities having jurisdiction, for fire-resistance ratings indicated, based on testing according to ASTM E 119 or UL 263.
- B. Fire-Resistance-Rated Laminated Glass with Intumescent Interlayers: Laminated glass made from multiple plies of uncoated, ultraclear (low-iron) float glass; with intumescent interlayers; complying with 16 CFR 1201, Category II.
1. Type **FRI**: Fire-resistance-rated laminated glass with intumescent interlayer.
 - a. Products: Subject to compliance with requirements, available products that may be incorporated in the Work include, but are not limited to:
 - 1) Safti First Fire Rated Glazing Solutions; SuperLite II-XLM 120.
 - 2) Technical Glass Products; Pilkington Pyrostop.
 - 3) Vetrotech Saint-Gobain; Contraflam 120.
 - b. Rating: 120 minutes
 - c. Thickness: As required for rating.
 - d. Safety glazing required.

2.8 SECURITY GLAZING

- A. Laminated-Glass Security Glazing: ASTM C1172. Use materials that have a proven record of no tendency to bubble, discolor, or lose physical and mechanical properties after fabrication and installation. Laminated glass made from multiple plies of uncoated, ultraclear (low-iron) float glass and complying with 16 CFR 1201, Category II.

1. Type **SCL**: Clear laminated-glass security glazing.
 - a. Products: Subject to compliance with requirements, available products that may be incorporated in the Work include, but are not limited to:
 - 1) Global Security Glazing; Childgard 2118.
 - 2) LTI Smart Glass, Inc.; SG5 by School Guard Glass.
 - 3) Oldcastle BuildingEnvelope, a CRH Company; ArmorGarde Plus.
 - b. Forced-Entry Resistance:
 - 1) Class 1.4 according to ASTM F1233.
 - 2) H. P. White 5-aa1 assault test-rated for not less than 12 minutes, as a continuous attack.
 - a) Withstand a minimum of 5 shots from a military-style assault rifle with a minimum caliber of 7.62 mm.
 - b) Withstand a minimum of abuse as applied by a single assailant at full force, including strikes with bricks, hammers, baseball bats, and sledgehammers.
 - c. Nominal Overall Thickness: 7/16- to 9/16-inch.
 - d. Interlayer Thickness: As required for performance indicated.
 - e. Interlayer Color: Clear.
 - f. Appearance: Provide clear laminated-glass security glazing without haze and with visual clarity and transparency indistinguishable from clear fully tempered float glass.
 - g. Safety glazing required.
2. Type **SFRL**: Fire-resistance-rated laminated-glass security glazing.
 - a. Basis-of-Design Product: Subject to compliance with requirements, provide Technical Glass Products; Pilkington Pyrostop laminated to LTI Smart Glass, Inc., SG5 by School Guard Glass, or comparable product.
 - b. Forced-Entry Resistance:
 - 1) Class 1.4 according to ASTM F1233.

- 2) H. P. White 5-aal assault test-rated for not less than 12 minutes, as a continuous attack.
 - a) Withstand a minimum of 5 shots from a military-style assault rifle with a minimum caliber of 7.62 mm.
 - b) Withstand a minimum of abuse as applied by a single assailant at full force, including strikes with bricks, hammers, baseball bats, and sledgehammers.
- c. Rating: 90 minutes
- d. Thickness: As required for rating and performance indicated.
- e. Interlayer Color: Clear.
- f. Appearance: Provide fire-resistance-rated laminated-glass security glazing without haze and with visual clarity and transparency indistinguishable from clear fully tempered float glass.
- g. Safety glazing required.

2.9 INSULATING GLASS

- A. Insulating-Glass Units: Factory-assembled units consisting of sealed lites of glass separated by a dehydrated interspace, qualified in accordance with ASTM E2190.
 1. Sealing System: Dual seal, with manufacturer's standard primary and secondary sealants.
 2. Perimeter Spacer: Manufacturer's standard Warm Edge Technology (WET) spacer material and construction.
 3. Desiccant: Molecular sieve or silica gel, or a blend of both.
 4. Interspace Content: Argon (90 percent)/air (10 percent) mix.
- B. Insulating Vision Glass:
 1. Type **FCE/FC**: Low-e-coated, clear insulating glass.
 - a. Overall Unit Thickness: 1 inch.
 - b. Outdoor Lite: Fully tempered clear float glass with low-e coating, Type FCE.
 - c. Low-E Coating: Sputtered on second surface.
 - d. Interspace Content: Argon.
 - e. Indoor Lite: Fully tempered clear float glass, Type FC.
 - f. Glass Unit Performance Values:
 - 1) Winter Nighttime U-Factor: 0.24 Btu/sq. ft. x h x deg F maximum.
 - 2) SHGC: 0.28 maximum.
 - 3) Visible Light Transmittance: 62 percent minimum.

2. Type **FCAE/FC**: Low-e-coated, translucent, insulating glass.
 - a. Overall Unit Thickness: 1 inch.
 - b. Outdoor Lite: Fully tempered translucent full-surface acid-etched glass, Type FCAE.
 - c. Acid-etched Coating: Sputtered on first surface.
 - d. Low-E Coating: Sputtered on second surface.
 - e. Interspace Content: Argon.
 - f. Indoor Lite: Fully tempered clear float glass, Type FC.
 - g. Glass Unit Performance Values:
 - 1) Winter Nighttime U-Factor: 0.24 Btu/sq. ft. x h x deg F maximum.
 - 2) SHGC: 0.28 maximum.
 - 3) Visible Light Transmittance: 62 percent minimum.

C. Insulating Spandrel Glass:

1. Type **FCE/HCS**: Ceramic-coated, low-e-coated insulating spandrel glass.
 - a. Overall Unit Thickness: 1 inch.
 - b. Outdoor Lite: Fully tempered clear float glass with low-e coating, Type FCE.
 - c. Low-E Coating: Sputtered on second surface.
 - d. Interspace Content: Argon.
 - e. Indoor Lite: Fully tempered clear float glass, ceramic-coated spandrel glass; Type FCS.
 - f. Opaque Coating Location: Fourth surface.
 - g. Glass Unit Performance Values:
 - 1) Winter Nighttime U-Factor: 0.24 Btu/sq. ft. x h x deg F maximum.

D. Insulating Laminated Glass:

1. Type **FCE/HCL**: Low-e-coated, clear insulating laminated glass.
 - a. Overall Unit Thickness: 1 inch.
 - b. Outdoor Lite: Fully tempered clear float glass with low-e coating, Type FCE.
 - c. Low-E Coating: Sputtered on second surface.
 - d. Interspace Content: Argon.

- e. Indoor Lite: Clear laminated glass with two plies of heat-strengthened float glass, HCL.
 - f. Glass Unit Performance Values:
 - 1) Winter Nighttime U-Factor: 0.24 Btu/sq. ft. x h x deg F maximum.
 - 2) SHGC: 0.27 maximum.
 - 3) Visible Light Transmittance: 61 percent minimum.
2. Type **FCE/SCL**: Low-e-coated, laminated-glass security insulating glass.
- a. Overall Unit Thickness: 1 inch.
 - b. Outdoor Lite: Fully tempered clear float glass with low-e coating, Type FCE.
 - c. Low-E Coating: Sputtered on second surface.
 - d. Interspace Content: Argon.
 - e. Indoor Lite: Clear laminated-glass security glazing, Type SCL.
 - f. Glass Unit Performance Values:
 - 1) Winter Nighttime U-Factor: 0.24 Btu/sq. ft. x h x deg F maximum.
 - 2) SHGC: 0.28 maximum.
 - 3) Visible Light Transmittance: 57 percent minimum.
- E. Insulating Skylight Glass:
1. Type **TGU**: Low-e-coated, translucent insulating glass.
- a. Basis-of-Design Product: Subject to compliance with requirements, provide Advanced Glazings Limited; Solera S R5 + Aerogel, or comparable product by Okalux North America LLC.
 - b. Overall Unit Thickness: 1.375 inches maximum.
 - c. Outdoor Light: Fully tempered clear float glass with low-e coating, Type FCE.
 - d. Low-E Coating: Sputtered on second surface.
 - e. Translucent Veil 1: Bonded on second surface.
 - f. Insulating Core: Aerogel.
 - g. Interspace Content: Air, or argon, as standard with manufacturer.
 - h. Translucent Veil 2: Bonded on third surface.
 - i. Indoor Lite: Clear laminated glass with two plies of heat-strengthened float glass, HCL, minimum 4 mm each ply.

- j. Glass Unit Performance Values:
 - 1) Winter Nighttime U-Factor: 0.25 Btu/sq. ft. x h x deg F maximum.
 - 2) SHGC: 0.37 maximum.
 - 3) Visible Light Transmittance: 35 percent minimum.

2.10 INSULATED SPANDREL PANELS

- A. Insulated Spandrel Panels: Laminated, rabbeted, aluminum, and glass-faced flat panels with no deviations in plane exceeding 0.8 percent of panel dimension in width or length.
 - 1. Basis-of-Design Product: Subject to compliance with requirements, provide Mapes Industries, Inc.; Mapes-R+ 8-ply, or comparable product, including, but not limited to, products by:
 - a. Nudo Products.
 - 2. Overall Panel Thickness: 2-inch (including 1-inch glazing leg).
 - 3. Exterior Skin: Aluminum.
 - a. Thickness: 0.032-inch.
 - b. Finish: Color anodic finish.
 - c. Texture: Smooth.
 - d. Backing Sheet: 0.157-inch-thick, cement board.
 - 4. Exterior Skin: Heat-strengthened clear float glass, ceramic-coated spandrel glass.
 - a. Thickness: 0.25-inch.
 - b. Opaque Coating Location: Second surface.
 - c. Coating Color: As selected by Architect from manufacturer's full range.
 - 5. Glazing Leg Core: Same as thermal insulation core, with smooth aluminum skin.
 - 6. Thermal Insulation Core: Manufacturer's standard rigid, closed-cell, polyisocyanurate board.
 - 7. Interior Skin: Aluminum.
 - a. Thickness: 0.032-inch.
 - b. Finish: Clear anodic finish.
 - c. Texture: Smooth.
 - d. Backing Sheet: 1/2-inch-thick, gypsum board with proprietary fire-resistance-rated core.
 - 8. Overall U-factor: 0.24 Btu/sq. ft. x h x deg F maximum.

9. Surface Burning Characteristics: Comply with ASTM E 84; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.
 - a. Flame Spread Index: 25 or less.
 - b. Smoke-Developed Index: 450 or less.

2.11 GLAZING SEALANTS

A. General:

1. Compatibility: Compatible with one another and with other materials they contact, including glazing products, seals of insulating-glass units, and glazing channel substrates, under conditions of service and application, as demonstrated by sealant manufacturer based on testing and field experience.
2. Suitability: Comply with sealant and glazing manufacturers' written instructions for selecting glazing sealants suitable for applications indicated and for conditions existing at time of installation.
3. Sealant shall have a VOC content of 250 g/L or less.
4. Colors of Exposed Glazing Sealants: As selected by Architect from manufacturer's full range of industry colors.

2.12 SECURITY GLAZING ATTACHMENT SYSTEM

A. Attachment System: Structural sealant wet glaze adhesive, moisture curable, weatherable, UV-resistant, attachment system.

1. Basis-of-Design Product: Subject to compliance with requirements, provide Dow Chemical Company (The); DOWSIL995 Silicone Structural Sealant, or comparable product approved by security glass manufacturer in writing.
 - a. Color: As selected by Architect.
2. Material Properties, as Supplied:
 - a. Typical Cure Time: 7 to 14 days at 25 degrees C, 50 percent RH.
 - b. Full Adhesion: 14 to 21 days.
 - c. Tack-Free Time, per ASTM D5895: 65 minutes at 25 degrees C, 50 percent RH.
 - d. Flow, Sag or Slump, per ASTM D2202: 0.1 inches.
 - e. Working Time: 10 to 20 minutes at 25 degrees C, 50 percent RH.
 - f. Specific Gravity: 1.4.
 - g. VOC Content: 30 g/l.
3. Material Properties, as Cured – 21 days at 25 degrees C, 50 percent RH:
 - a. Ultimate Tensile Strength, per ASTM D412: 170 psi.
 - b. Ultimate Elongation, per ASTM D412: 525%.

- c. Durometer Hardness, Shore A, per ASTM D2240: 40 points.
 - d. Tear Strength, Die B, per ASTM D624: 49 ppi.
- 4. Uniform consistency and appearance, with no clumping.
- 5. Impact Resistance and Pressure Cycling:
 - a. As part of a security glass system, glazing attachment demonstrates ability to withstand Medium Large Missile C and Small Missile A impact, with subsequent pressure cycling, per ASTM E1996 and ASTM E1886 at +/- 75 psf design pressure.
 - b. As part of a security glass system, glazing attachment demonstrates ability to withstand structural load requirements of ASTM E330 when tested at +/- 100 psf design pressure.

2.13 GLAZING TAPES

- A. Back-Bedding Mastic Glazing Tapes: Preformed, butyl-based, 100 percent solids elastomeric tape; nonstaining and nonmigrating in contact with nonporous surfaces; with or without spacer rod as recommended in writing by tape and glazing manufacturers for application indicated; and complying with ASTM C1281 and AAMA 800 for products indicated below:
 - 1. AAMA 806.3 tape, for glazing applications in which tape is subject to continuous pressure.
 - 2. AAMA 807.3 tape, for glazing applications in which tape is not subject to continuous pressure.
- B. Expanded Cellular Glazing Tapes: Closed-cell, PVC foam tapes; factory coated with adhesive on both surfaces; and complying with AAMA 800 for the following types:
 - 1. AAMA 810.1, Type 1, for glazing applications in which tape acts as primary sealant.
 - 2. AAMA 810.1, Type 2, for glazing applications in which tape is used in combination with a full bead of liquid sealant.

2.14 MISCELLANEOUS GLAZING MATERIALS

- A. General: Provide products of material, size, and shape complying with referenced glazing standard, recommended in writing by manufacturers of glass and other glazing materials for application indicated, including security applications, and with a proven record of compatibility with surfaces contacted in installation.
- B. Cleaners, Primers, and Sealers: Types recommended by sealant or gasket manufacturer.
- C. Setting Blocks:
 - 1. Elastomeric material with Shore A durometer hardness of 85, plus or minus 5.
 - 2. Type recommended in writing by sealant or glazing manufacturer.

D. Spacers:

1. Elastomeric blocks or continuous extrusions of hardness required by glazing manufacturer to maintain glazing lites in place for installation indicated.
2. Type recommended in writing by sealant or glazing manufacturer.

E. Edge Blocks:

1. Elastomeric material with Shore A durometer hardness per manufacturer's written instructions.
2. Type recommended in writing by sealant or glazing manufacturer.

F. Cylindrical Glazing Sealant Backing: ASTM C1330, Type O (open-cell material), of size and density to control glazing sealant depth and otherwise produce optimum glazing sealant performance.

2.15 GLAZING ACCESSORIES FOR FIRE-RATED GLAZING PRODUCTS

- A. Provide glazing gaskets, glazing sealants, glazing tapes, setting blocks, spacers, edge blocks, and other glazing accessories that are compatible with glazing products and each other and are approved by testing agencies that listed and labeled fire-rated glazing products with which products are used for applications and fire ratings indicated.
- B. Glazing Sealants for Fire-Rated Glazing Products: Neutral-curing silicone glazing sealant complying with ASTM C920, Type S, Grade NS, Class 50, Use NT. Comply with sealant and glass manufacturers' written instructions for selecting glazing sealants suitable for applications indicated.
1. Colors of Exposed Glazing Sealants: As selected by Architect from manufacturer's full range.
- C. Perimeter Insulation for Fire-Rated Glazing: Product that is approved by testing agency that listed and labeled fire-rated glazing product with which it is used for application and fire rating indicated.

2.16 FABRICATION OF GLAZING UNITS

- A. Fabricate glazing units in sizes required to fit openings indicated for Project, with edge and face clearances, edge and surface conditions, and bite complying with written instructions of product manufacturer and referenced glazing publications, to comply with system performance requirements.
1. Allow for thermal movements from ambient and surface temperature changes acting on framing members and glazing components.
 - a. Temperature Change: 120 deg F, ambient; 180 deg F, material surfaces.
- B. Clean-cut or flat-grind vertical edges of butt-glazed monolithic lites to produce square edges with slight chamfers at junctions of edges and faces.
- C. Grind smooth and polish exposed glass edges and corners.

2.17 ALUMINUM FINISHES

- A. Clear Anodic Finish: AAMA 611, AA-M12C22A41, Class I, 0.018 mm or thicker.
- B. Color Anodic Finish: AAMA 611, AA-M12C22A42/A44, Class I, 0.018 mm or thicker.
 - 1. Color: As selected by Architect from full manufacturer's range.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine framing, glazing channels, and stops, with Installer present, for compliance with the following:
 - 1. Manufacturing and installation tolerances, including those for size, squareness, and offsets at corners.
 - 2. Presence and functioning of weep systems.
 - 3. Minimum required face and edge clearances.
 - 4. Minimum required bite.
 - 5. Effective sealing between joints of framing members.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.
- C. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 PREPARATION

- A. Clean glazing channels and other framing members receiving glazing immediately before glazing. Remove coatings not firmly bonded to substrates.
- B. Examine glazing units to locate exterior and interior surfaces. Label or mark units as needed so that exterior and interior surfaces are readily identifiable. Do not use materials that leave visible marks in the completed Work.
- C. For fire-rated glazing units, examine glazing units to locate fire side and protected side. Label or mark units as needed so that fire side and protected side are readily identifiable. Do not use materials that leave visible marks in the completed Work.
- D. For laminated-glass security glazing, examine glazing units to locate attack or threat side and protected side. Label or mark units as needed so that attack or threat side and protected side are readily identifiable. Do not leave visible marks in the completed Work.

3.3 GLAZING, GENERAL

- A. Comply with combined written instructions of manufacturers of glazing, sealants, gaskets, and other glazing materials, unless more stringent requirements are indicated, including those in referenced glazing publications.

- B. Protect glazing edges from damage during handling and installation. Remove damaged glazing from Project site and legally dispose of off Project site. Damaged glazing includes glazing with edge damage or other imperfections that, when installed, could weaken glazing, impair performance, or impair appearance.
- C. Apply primers to joint surfaces where required for adhesion of sealants, as determined by preconstruction testing.
- D. Install setting blocks in sill rabbets, sized and located to comply with referenced glazing publications, unless otherwise required by glazing manufacturer. Set blocks in thin course of compatible sealant suitable for heel bead.
- E. Do not exceed edge pressures stipulated by glazing manufacturers for installing glazing lites.
- F. Provide spacers for glazing lites where length plus width is larger than 50 inches.
 - 1. Locate spacers directly opposite each other on both inside and outside faces of glazing. Install correct size and spacing to preserve required face clearances, unless gaskets and glazing tapes are used that have demonstrated ability to maintain required face clearances and to comply with system performance requirements.
 - 2. Provide 1/8-inch-minimum bite of spacers on glazing and use thickness equal to sealant width. With glazing tape, use thickness slightly less than final compressed thickness of tape.
- G. Provide edge blocking where indicated or needed to prevent glazing lites from moving sideways in glazing channel, as recommended in writing by glazing manufacturer and in accordance with requirements in referenced glazing publications.
- H. Set glazing lites in each series with uniform pattern, draw, bow, and similar characteristics.
- I. Set glazing lites with proper orientation so that coatings face exterior or interior as specified.
- J. For fire-resistant glazing, set glass lites with proper orientation so that surfaces face fire side or protected side as specified.
- K. For security glazing, set glazing lites with proper orientation so that surfaces face attack or threat side or protected side as specified.
 - 1. Install attachment system continuous in glazing pocket between security glazing and frame on safe side in accordance with security glazing manufacturer's instructions and recommendations. System to be concealed below standard gasketing unless security glazing manufacturer's requirements indicate otherwise.
- L. Where wedge-shaped gaskets are driven into one side of channel to pressurize sealant or gasket on opposite side, provide adequate anchorage so gasket cannot walk out when installation is subjected to movement.

- M. Square cut wedge-shaped gaskets at corners and install gaskets in a manner recommended by gasket manufacturer to prevent corners from pulling away; seal corner joints and butt joints with sealant recommended in writing by gasket manufacturer.

3.4 TAPE GLAZING

- A. Position tapes on fixed stops so that, when compressed by glazing, their exposed edges are flush with or protrude slightly above sightline of stops.
- B. Install tapes continuously, but not necessarily in one continuous length. Do not stretch tapes to make them fit opening.
- C. Cover vertical framing joints by applying tapes to heads and sills first, then to jambs. Cover horizontal framing joints by applying tapes to jambs, then to heads and sills.
- D. Place joints in tapes at corners of opening with adjoining lengths butted together, not lapped. Seal joints in tapes with compatible sealant approved by tape manufacturer.
- E. Do not remove release paper from tape until right before each glazing unit is installed.
- F. Apply heel bead of elastomeric sealant.
- G. Center glazing lites in openings on setting blocks, and press firmly against tape by inserting dense compression gaskets formed and installed to lock in place against faces of removable stops. Start gasket applications at corners and work toward centers of openings.
- H. Apply cap bead of elastomeric sealant over exposed edge of tape.

3.5 GASKET GLAZING (DRY)

- A. Cut compression gaskets to lengths recommended by gasket manufacturer to fit openings exactly, with allowance for stretch during installation.
- B. Insert soft compression gasket between glazing and frame or fixed stop so it is securely in place with joints miter cut and bonded together at corners.
- C. Installation with Drive-in Wedge Gaskets: Center glazing lites in openings on setting blocks, and press firmly against soft compression gasket by inserting dense compression gaskets formed and installed to lock in place against faces of removable stops. Start gasket applications at corners and work toward centers of openings. Compress gaskets to produce a weathertight seal without developing bending stresses in glass. Seal gasket joints with sealant recommended in writing by gasket manufacturer.
- D. Installation with Pressure-Glazing Stops: Center glazing lites in openings on setting blocks, and press firmly against soft compression gasket. Install dense compression gaskets and pressure-glazing stops, applying pressure uniformly to compression gaskets. Compress gaskets to produce a weathertight seal without developing bending stresses in glass. Seal gasket joints with sealant recommended in writing by gasket manufacturer.
- E. Install gaskets so they protrude past face of glazing stops.

3.6 SEALANT GLAZING (WET)

- A. Install continuous spacers, or spacers combined with cylindrical sealant backing, between glazing lites and glazing stops to maintain glazing face clearances and to prevent sealant from extruding into glazing channel and blocking weep systems until sealants cure. Secure spacers or spacers and backings in place and in position to control depth of installed sealant relative to edge clearance for optimum sealant performance.
- B. Force sealants into glazing channels to eliminate voids and to ensure complete wetting or bond of sealant to glazing and channel surfaces.
- C. Tool exposed surfaces of sealants to provide a substantial wash away from glazing.

3.7 CLEANING AND PROTECTION

- A. Immediately after installation, remove nonpermanent labels and clean surfaces.
- B. Protect glazing from contact with contaminating substances resulting from construction operations. Examine glazing surfaces adjacent to or below exterior concrete and other masonry surfaces at frequent intervals during construction, but not less than once a month, for buildup of dirt, scum, alkaline deposits, or stains.
 - 1. If, despite such protection, contaminating substances do contact with glazing, remove substances immediately as recommended in writing by glazing manufacturer. Remove and replace glazing that cannot be cleaned without damage to coatings.
- C. Remove and replace glazing that is damaged during construction period.
- D. Wash glazing on both exposed surfaces not more than four days before date scheduled for inspections that establish date of Substantial Completion. Wash glazing as recommended in writing by glazing manufacturer.

END OF SECTION 08 80 00

SECTION 09 21 16.23 - GYPSUM BOARD SHAFT WALL ASSEMBLIES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Gypsum board shaft wall assemblies.

1.3 SUBMITTALS, GENERAL

- A. General: Submit all action submittals required by this Section concurrently.

1.4 ACTION SUBMITTALS

- A. Product Data: For each component of gypsum board shaft wall assembly.
 - 1. Studs and tracks.
- B. As-Specified Data: If the product to be incorporated into Project is as specified by manufacturer name and product designation in Part 2 of this Specification Section, submit the “**As-Specified Verification Form**” (attached to Division 01 Section “Submittal Procedures”) for each item listed below, otherwise submit full Product Data for the following:
 - 1. Gypsum shaftliner board.

1.5 DELIVERY, STORAGE, AND HANDLING

- A. Store materials inside under cover and keep them dry and protected against weather, condensation, direct sunlight, construction traffic, and other potential causes of damage. Stack panels flat and support them on risers on a flat platform to prevent sagging.

1.6 FIELD CONDITIONS

- A. Environmental Limitations: Comply with gypsum-shaftliner-board manufacturer's written instructions.
- B. Do not install finish panels until installation areas are enclosed and conditioned.

- C. Do not install panels that are wet, moisture damaged, or mold damaged.
 - 1. Indications that panels are wet or moisture damaged include, but are not limited to, discoloration, sagging, and irregular shape.
 - 2. Indications that panels are mold damaged include, but are not limited to, fuzzy or splotchy surface contamination and discoloration.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Fire-Resistance-Rated Assemblies: For fire-resistance-rated assemblies, provide materials and construction identical to those tested in assembly indicated according to ASTM E119 by an independent testing agency.
- B. STC-Rated Assemblies: Provide materials and construction identical to those of assemblies tested according to ASTM E90 and classified according to ASTM E413 by a testing and inspecting agency.

2.2 GYPSUM BOARD SHAFT WALL ASSEMBLIES

- A. STC Rating: 47
- B. Gypsum Shaftliner Board:
 - 1. Moisture- and Mold-Resistant Type X: ASTM C1396/C1396M; manufacturer's proprietary fire-resistive liner panels with ASTM D3273 mold-resistance score of 10 as rated according to ASTM D3274, 1 inch thick, and with double beveled long edges.
 - a. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - 1) CertainTeed Gypsum, Saint-Gobain; M2Tech Shaftliner Type X Gypsum Board.
 - 2) National Gypsum Company; Gold Bond Brand 1" Fire-Shield Shaftliner XP.
 - 3) USG Corporation; Sheetrock Brand Mold Tough Gypsum Liner Panels.
- C. Non-Load-Bearing Steel Framing, General: Complying with ASTM C645 requirements for metal unless otherwise indicated and complying with requirements for fire-resistance-rated assembly indicated.
 - 1. Protective Coating: ASTM A653/A653M, G40, hot-dip galvanized unless otherwise indicated.
- D. Studs: Manufacturer's standard profile for repetitive, corner, and end members as follows:
 - 1. Depth: As indicated on Drawings.
 - 2. Minimum Base-Metal Thickness: 0.033 inch.

- E. Runner Tracks: Manufacturer's standard J-profile track with manufacturer's standard long-leg length, but at least 2 inches long and matching studs in depth.

- 1. Minimum Base-Metal Thickness: 0.033 inch.

2.3 AUXILIARY MATERIALS

- A. Provide auxiliary materials that comply with shaft wall manufacturer's written instructions.
- B. Trim Accessories: Cornerbead, edge trim, and control joints of material and shapes as specified in Division 09 Section "Gypsum Board" that comply with gypsum board shaft wall assembly manufacturer's written instructions for application indicated.
- C. Steel Drill Screws: ASTM C1002 unless otherwise indicated.
- D. Track Fasteners: Power-driven fasteners of size and material required to withstand loading conditions imposed on shaft wall assemblies without exceeding allowable design stress of track, fasteners, or structural substrates in which anchors are embedded.
 - 1. Expansion Anchors: Fabricated from corrosion-resistant materials, with allowable load or strength design capacities calculated according to ICC-ES AC193 and ACI 318 greater than or equal to the design load, as determined by testing per ASTM E488/E488M conducted by a qualified testing agency.
 - 2. Power-Actuated Anchors: Fastener system of type suitable for application indicated, fabricated from corrosion-resistant materials, with allowable load capacities calculated according to ICC-ES AC70, greater than or equal to the design load, as determined by testing per ASTM E1190 conducted by a qualified testing agency.
- E. Reinforcing: Galvanized-steel reinforcing strips with 0.0538-inch minimum thickness of base metal (uncoated).
- F. Acoustical Sealant: Division 07 Section "Joint Sealants."
- G. Gypsum Board Cants:
 - 1. Gypsum Board Panels: As specified in Division 09 Section "Gypsum Board," Type X, 5/8-inch panels.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates and conditions, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.
- B. Examine panels before installation. Reject panels that are wet, moisture damaged, or mold damaged.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.
- D. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 PREPARATION

- A. Sprayed Fire-Resistive Materials: Coordinate with gypsum board shaft wall assemblies so both elements of Work remain complete and undamaged. Patch or replace sprayed fire-resistive materials removed or damaged during installation of shaft wall assemblies to comply with requirements specified in Division 07 Section "Applied Fire Protection."
- B. After sprayed fire-resistive materials are applied, remove only to extent necessary for installation of gypsum board shaft wall assemblies and without reducing the fire-resistive material thickness below that which is required to obtain fire-resistance rating indicated. Protect remaining fire-resistive materials from damage.

3.3 INSTALLATION

- A. General: Install gypsum board shaft wall assemblies to comply with requirements of fire-resistance-rated assemblies indicated and manufacturer's written installation instructions.
- B. Install supplementary framing in gypsum board shaft wall assemblies around openings and as required for blocking, bracing, and support of gravity and pullout loads of fixtures, equipment, services, heavy trim, furnishings, wall-mounted door stops, and similar items that cannot be supported directly by shaft wall assembly framing.
 - 1. Reinforcing: Provide where items attach directly to shaft wall assembly as indicated on Drawings; accurately position and secure behind at least one layer of face panel.
 - 2. Notify Architect prior to applying panels to allow observation of framing installation.
- C. Penetrations: At penetrations in shaft wall, maintain fire-resistance rating of shaft wall assembly by installing supplementary steel framing around perimeter of penetration and fire protection behind boxes containing wiring devices, pipes, and similar items.
- D. Isolate perimeter of gypsum panels from building structure to prevent cracking of panels while maintaining continuity of fire-rated construction.
- E. Control Joints: Install control joints according to ASTM C840 and in specific locations approved by Architect while maintaining fire-resistance rating of gypsum board shaft wall assemblies.
- F. Sound-Rated Shaft Wall Assemblies: Seal gypsum board shaft walls with acoustical sealant at perimeter of each assembly where it abuts other work and at joints and penetrations within each assembly.
- G. Installation Tolerance: Install each framing member so fastening surfaces vary not more than 1/8 inch from the plane formed by faces of adjacent framing.

3.4 PROTECTION

- A. Protect installed products from damage from weather, condensation, direct sunlight, construction, and other causes during remainder of the construction period.

B. Remove and replace panels that are wet, moisture damaged, or mold damaged.

1. Indications that panels are wet or moisture damaged include, but are not limited to, discoloration, sagging, and irregular shape.
2. Indications that panels are mold damaged include, but are not limited to, fuzzy or splotchy surface contamination and discoloration.

END OF SECTION 09 21 16.23

SECTION 09 22 16 - NON-STRUCTURAL METAL FRAMING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Non-load-bearing steel framing systems for interior partitions.
 - 2. Suspension systems for interior ceilings and soffits.
 - 3. Grid suspension systems for gypsum board ceilings.

1.3 SUBMITTALS, GENERAL

- A. General: Submit all action submittals and informational submittals required by this Section concurrently.

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated.
 - 1. Steel studs and tracks.
 - 2. Slip-type head joints.
 - 3. Flat strap and backing plate.
 - 4. Cold-rolled channel bridging.
 - 5. Hat-shaped, rigid furring channels.
 - 6. Resilient furring channels.
 - 7. Cold-rolled furring channels.
 - 8. Z-shaped furring.
 - 9. Tie wire.
 - 10. Hanger attachments to concrete.
 - 11. Wire hangers.
 - 12. Carrying channels (main runners).
 - 13. Furring channels (furring members).
 - 14. Isolation strip at exterior walls.
- B. As-Specified Data: If the product to be incorporated into Project is as specified by manufacturer name and product designation in Part 2 of this Specification Section, submit the “**As-Specified Verification Form**” (attached to Division 01 Section “Submittal Procedures”) for each item listed below, otherwise submit full Product Data for the following:
 - 1. Grid suspension system for gypsum board ceilings.

1.5 INFORMATIONAL SUBMITTALS

- A. Product Certificates: For each type of code-compliance certification for studs and tracks.

1.6 QUALITY ASSURANCE

- A. Code-Compliance Certification of Studs and Tracks: Provide documentation that framing members are certified according to the product-certification program of the Certified Steel Stud Association or the Steel Framing Industry Association.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Fire-Test-Response Characteristics: For fire-resistance-rated assemblies that incorporate non-load-bearing steel framing, provide materials and construction identical to those tested in assembly indicated, according to ASTM E119 by an independent testing agency.
- B. STC-Rated Assemblies: For STC-rated assemblies, provide materials and construction identical to those tested in assembly indicated on Drawings, according to ASTM E90 and classified according to ASTM E413 by an independent testing agency.

2.2 FRAMING SYSTEMS

- A. Framing Members, General: Comply with ASTM C754 for conditions indicated.
 - 1. Steel Sheet Components: Comply with ASTM C645 requirements for steel unless otherwise indicated.
 - 2. Protective Coating: ASTM A653/A653M, G40, hot-dip galvanized unless otherwise indicated.
- B. Studs and Tracks: ASTM C645.
 - 1. Steel Studs and Tracks:
 - a. Minimum Base-Steel Thickness: 0.0329 inch.
 - b. Depth: As indicated on Drawings.
 - c. Minimum Track Leg Length: 1-1/4 inches.
- C. Slip-Type Head Joints: Where indicated, provide the following:
 - 1. Deflection Track: Steel sheet top track manufactured to prevent cracking of finishes applied to interior partition framing resulting from deflection of structure above; with minimum track leg length of 2-1/2 inches; in thickness not less than indicated for studs and in width to accommodate depth of studs.

- D. Flat Strap and Backing Plate: Steel sheet for blocking and bracing in length and width indicated.
 - 1. Minimum Base-Steel Thickness: 0.0538 inch.
- E. Cold-Rolled Channel Bridging: Steel, 0.0538-inch minimum base-steel thickness, with minimum 1/2-inch-wide flanges.
 - 1. Depth: 1-1/2 inches.
 - 2. Clip Angle: Not less than 1-1/2 by 1-1/2 inches, 0.068-inch-thick, galvanized steel.
- F. Hat-Shaped, Rigid Furring Channels: ASTM C645.
 - 1. Minimum Base-Steel Thickness: 0.0329 inch.
 - 2. Depth: 7/8 inch.
- G. Resilient Furring Channels: 1/2-inch-deep, steel sheet members designed to reduce sound transmission.
 - 1. Configuration: Asymmetrical or hat shaped.
- H. Z-Shaped Furring: With slotted or nonslotted web, face flange of 1-1/4 inches, wall attachment flange of 7/8 inch, minimum uncoated-steel thickness of 0.0179 inch, and depth required to fit insulation thickness indicated.

2.3 SUSPENSION SYSTEMS

- A. Tie Wire: ASTM A641/A641M, Class 1 zinc coating, soft temper, 0.062-inch-diameter wire, or double strand of 0.048-inch-diameter wire.
- B. Hanger Attachments to Concrete:
 - 1. Post-Installed Anchors: Fastener systems with an evaluation report acceptable to authorities having jurisdiction, based on ICC-ES AC01 AC193 AC58 or AC308 as appropriate for the substrate.
 - a. Uses: Securing hangers to structure.
 - b. Type: adhesive anchor.
 - c. Material for Interior Locations: Carbon-steel components zinc-plated to comply with ASTM B633 or ASTM F1941, Class Fe/Zn 5, unless otherwise indicated.
 - d. Material for Exterior or Interior Locations and Where Stainless Steel Is Indicated: Alloy Group 1 stainless-steel bolts, ASTM F593, and nuts, ASTM F594.
 - 2. Power-Actuated Anchors: Fastener systems with an evaluation report acceptable to authorities having jurisdiction, based on ICC-ES AC70.
- C. Wire Hangers: ASTM A641/A641M, Class 1 zinc coating, soft temper, 0.16 inch in diameter.

- D. Carrying Channels (Main Runners): Cold-rolled, commercial-steel sheet with a base-steel thickness of 0.0538 inch and minimum 1/2-inch-wide flanges.
 - 1. Depth: As indicated on Drawings.
- E. Furring Channels (Furring Members):
 - 1. Hat-Shaped, Rigid Furring Channels: ASTM C645, 7/8 inch deep.
 - a. Minimum Base-Steel Thickness: 0.0329 inch.
- F. Grid Suspension System for Gypsum Board Ceilings: ASTM C645, direct-hung system composed of main beams and cross-furring members that interlock.
 - 1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Armstrong World Industries, Inc.; Drywall Grid System.
 - b. CertainTeed Ceilings; 1-1/2" Drywall System.
 - c. USG Corporation; Drywall Suspension System.

2.4 AUXILIARY MATERIALS

- A. General: Provide auxiliary materials that comply with referenced installation standards.
 - 1. Fasteners for Steel Framing: Of type, material, size, corrosion resistance, holding power, and other properties required to fasten steel members to substrates.
- B. Isolation Strip at Exterior Walls: Provide the following:
 - 1. Foam Gasket: Adhesive-backed, closed-cell vinyl foam strips that allow fastener penetration without foam displacement, 1/8 inch thick, in width to suit steel stud size.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine areas and substrates, with Installer present, and including welded hollow-metal frames, cast-in anchors, and structural framing, for compliance with requirements and other conditions affecting performance of the Work.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.
- C. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 PREPARATION

- A. Suspended Assemblies: Coordinate installation of suspension systems with installation of overhead structure to ensure that inserts and other provisions for anchorages to building structure have been installed to receive hangers at spacing required to support the Work and that hangers will develop their full strength.
 - 1. Furnish concrete inserts and other devices indicated to other trades for installation in advance of time needed for coordination and construction.
- B. Coordination with Sprayed Fire-Resistive Materials:
 - 1. Before sprayed fire-resistive materials are applied, attach offset anchor plates or ceiling tracks to surfaces indicated to receive sprayed fire-resistive materials. Where offset anchor plates are required, provide continuous plates fastened to building structure not more than 24 inches o.c.
 - 2. After sprayed fire-resistive materials are applied, remove them only to extent necessary for installation of non-load-bearing steel framing. Do not reduce thickness of fire-resistive materials below that are required for fire-resistance ratings indicated. Protect adjacent fire-resistive materials from damage.

3.3 INSTALLATION, GENERAL

- A. Installation Standard: ASTM C754.
 - 1. Gypsum Board Assemblies: Also comply with requirements in ASTM C840 that apply to framing installation.
- B. Install framing and accessories plumb, square, and true to line, with connections securely fastened.
- C. Install supplementary framing, and blocking to support fixtures, equipment services, heavy trim, grab bars, toilet accessories, furnishings, or similar construction.
- D. Install bracing at terminations in assemblies.
- E. Do not bridge building control and expansion joints with non-load-bearing steel framing members. Frame both sides of joints independently.

3.4 INSTALLING FRAMED ASSEMBLIES

- A. Install framing system components according to spacings indicated, but not greater than spacings required by referenced installation standards for assembly types.
 - 1. Single-Layer Application: 16 inches o.c. unless otherwise indicated.
 - 2. Multilayer Application: 16 inches o.c. unless otherwise indicated.
 - 3. Tile Backing Panels: 16 inches o.c. unless otherwise indicated.

- B. Where studs are installed directly against exterior masonry walls or dissimilar metals at exterior walls, install isolation strip between studs and exterior wall.
- C. Install studs so flanges within framing system point in same direction.
- D. Install tracks at floors and overhead supports. Extend framing full height to structural supports or substrates above suspended ceilings. Continue framing around ducts that penetrate partitions above ceiling.
 - 1. Slip-Type Head Joints: Where framing extends to overhead structure, install to produce joints at tops of framing systems that prevent axial loading of finished assemblies.
 - 2. Door Openings: Screw vertical studs at jambs to jamb anchor clips on door frames; install track section (for cripple studs) at head and secure to jamb studs for opening widths less than 4 feet; install two tracks and stud head member for opening widths 4 feet and wider.
 - a. Install two studs at each jamb unless otherwise indicated.
 - 3. Other Framed Openings: Frame openings other than door openings the same as required for door openings unless otherwise indicated. Install framing below sills of openings to match framing required above door heads.
 - 4. Fire-Resistance-Rated Partitions: Install framing to comply with fire-resistance-rated assembly indicated and support closures and to make partitions continuous from floor to underside of solid structure.
 - 5. Sound-Rated Partitions: Install framing to comply with sound-rated assembly indicated.
- E. Direct Furring:
 - 1. Screw to wood framing.
 - 2. Attach to concrete or masonry with stub nails, screws designed for masonry attachment, or powder-driven fasteners spaced 24 inches o.c.
- F. Z-Shaped Furring Members:
 - 1. Erect insulation, specified in Division 07 Section "Thermal Insulation," vertically and hold in place with Z-shaped furring members spaced 24 inches o.c.
 - 2. Except at exterior corners, securely attach narrow flanges of furring members to wall with concrete stub nails, screws designed for masonry attachment, or powder-driven fasteners spaced 24 inches o.c.
 - 3. At exterior corners, attach wide flange of furring members to wall with short flange extending beyond corner; on adjacent wall surface, screw-attach short flange of furring channel to web of attached channel. At interior corners, space second member no more than 12 inches from corner and cut insulation to fit.
- G. Installation Tolerance: Install each framing member so fastening surfaces vary not more than 1/8 inch from the plane formed by faces of adjacent framing.

3.5 INSTALLING CEILING SUSPENSION SYSTEMS

- A. Install suspension system components according to spacings indicated, but not greater than spacings required by referenced installation standards for assembly types.
- B. Isolate suspension systems from building structure where they abut or are penetrated by building structure to prevent transfer of loading imposed by structural movement.
- C. Suspend hangers from building structure as follows:
 - 1. Install hangers plumb and free from contact with insulation or other objects within ceiling plenum that are not part of supporting structural or suspension system.
 - a. Splay hangers only where required to miss obstructions and offset resulting horizontal forces by bracing, countersplaying, or other equally effective means.
 - 2. Where width of ducts and other construction within ceiling plenum produces hanger spacings that interfere with locations of hangers required to support standard suspension system members, install supplemental suspension members and hangers in the form of trapezes or equivalent devices.
 - a. Size supplemental suspension members and hangers to support ceiling loads within performance limits established by referenced installation standards.
 - 3. Wire Hangers: Secure by looping and wire tying, either directly to structures or to inserts, eye screws, or other devices and fasteners that are secure and appropriate for substrate, and in a manner that will not cause hangers to deteriorate or otherwise fail.
 - 4. Flat Hangers: Secure to structure, including intermediate framing members, by attaching to inserts, eye screws, or other devices and fasteners that are secure and appropriate for structure and hanger, and in a manner that will not cause hangers to deteriorate or otherwise fail.
 - 5. Do not attach hangers to steel roof deck.
 - 6. Do not attach hangers to permanent metal forms. Furnish cast-in-place hanger inserts that extend through forms.
 - 7. Do not attach hangers to rolled-in hanger tabs of composite steel floor deck.
 - 8. Do not connect or suspend steel framing from ducts, pipes, or conduit.
- D. Fire-Resistance-Rated Assemblies: Wire tie furring channels to supports.
- E. Seismic Bracing: Sway-brace suspension systems with hangers used for support.
- F. Grid Suspension Systems: Attach perimeter wall track or angle where grid suspension systems meet vertical surfaces. Mechanically join main beam and cross-furring members to each other and butt-cut to fit into wall track.

- G. Installation Tolerances: Install suspension systems that are level to within 1/8 inch in 12 feet measured lengthwise on each member that will receive finishes and transversely between parallel members that will receive finishes.

3.6 PRE-ENCLOSURE REVIEW

- A. Notify Architect prior to installing enclosing construction to allow observation of non-structural metal framing installation, including supplementary framing and blocking.

END OF SECTION 09 22 16

SECTION 09 29 00 - GYPSUM BOARD

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Interior gypsum board.
 - 2. Tile backing panels.

1.3 SUBMITTALS, GENERAL

- A. General: Submit all action submittals required by this Section concurrently.

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of product.
 - 1. Interior trim.
 - 2. Aluminum trim.
 - 3. Joint treatment materials.
 - 4. Sound-attenuation blankets.
- B. As-Specified Data: If the product to be incorporated into Project is a specified by manufacturer name and product designation in Part 2 of this Specification Section, submit “**As-Specified Verification Form**” (attached to Division 01 Section “Submittal Procedures”) for each item listed below; otherwise submit full Product Data for the following:
 - 1. Gypsum board, Type X.
 - 2. Impact-resistant gypsum board.
 - 3. Mold-resistant gypsum board.
 - 4. Acoustically enhanced gypsum board.

1.5 DELIVERY, STORAGE AND HANDLING

- A. Store materials inside under cover and keep them dry and protected against weather, condensation, direct sunlight, construction traffic, and other potential causes of damage. Stack panels flat and supported on risers on a flat platform to prevent sagging.

1.6 FIELD CONDITIONS

- A. Environmental Limitations: Comply with ASTM C840 requirements or gypsum board manufacturer's written instructions, whichever are more stringent.
- B. Do not install paper-faced gypsum panels until installation areas are enclosed and conditioned.
- C. Do not install panels that are wet, moisture damaged, and mold damaged.
 - 1. Indications that panels are wet or moisture damaged include, but are not limited to, discoloration, sagging, or irregular shape.
 - 2. Indications that panels are mold damaged include, but are not limited to, fuzzy or splotchy surface contamination and discoloration.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Fire-Resistance-Rated Assemblies: For fire-resistance-rated assemblies, provide materials and construction identical to those tested in assembly indicated according to ASTM E119 by an independent testing agency.
- B. STC-Rated Assemblies: For STC-rated assemblies, provide materials and construction identical to those tested in assembly indicated according to ASTM E90 and classified according to ASTM E413 by an independent testing agency.

2.2 GYPSUM BOARD, GENERAL

- A. Size: Provide maximum lengths and widths available that will minimize joints in each area and that correspond with support system indicated.

2.3 INTERIOR GYPSUM BOARD

- A. Gypsum Board, Type X: ASTM C1396/C1396M.
 - 1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. CertainTeed Gypsum, Saint-Gobain; Type X Gypsum Board.
 - b. National Gypsum Company; Gold Bond Brand Fire-Shield Gypsum Board.
 - c. USG Corporation; Sheetrock Brand Firecode X Panels.
 - 2. Thickness: 5/8 inch.
 - 3. Long Edges: Tapered.

- B. Flexible Gypsum Board: ASTM C1396/C1396M. Manufactured to bend to fit radii and to be more flexible than standard regular-type gypsum board of same thickness.
1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. CertainTeed Gypsum, Saint-Gobain; Flex Gypsum Board.
 - b. National Gypsum Company; Gold Bond Brand High Flex Gypsum Board.
 - c. USG Corporation; Sheetrock Brand Flexible Gypsum Panels.
 2. Thickness: 1/4 inch.
 3. Long Edges: Tapered.
- C. Impact-Resistant Gypsum Board: ASTM C1396/C1396M gypsum board, tested according to ASTM C1629/C1629M.
1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. CertainTeed Gypsum, Saint-Gobain; Extreme Impact Board.
 - b. National Gypsum Company; Gold Bond Brand Hi-Impact XP Gypsum Board.
 2. Core: 5/8 inch, Type X.
 3. Surface Abrasion: ASTM C1629/C1629M, meets or exceeds Level 3 requirements.
 4. Indentation: ASTM C1629/C1629M, meets or exceeds Level 1 requirements.
 5. Soft-Body Impact: ASTM C1629/C1629M, meets or exceeds Level 3 requirements.
 6. Hard-Body Impact: ASTM C1629/C1629M, meets or exceeds Level 3 requirements according to test in Annex A1.
 7. Long Edges: Tapered.
 8. Mold Resistance: ASTM D3273, score of 10 as rated according to ASTM D3274.
- D. Mold-Resistant Gypsum Board: ASTM C1396/C1396M. With moisture- and mold-resistant core and paper surfaces.
1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. CertainTeed Gypsum, Saint-Gobain; M2Tech Moisture and Mold Resistant Gypsum Board Type X.
 - b. National Gypsum Company; Gold Bond Brand XP Fire-Shield Gypsum Board.
 - c. USG Corporation; Sheetrock Brand Mold Tough Panels Firecode X.
 2. Core: 5/8 inch, Type X.

3. Long Edges: Tapered.
4. Mold Resistance: ASTM D3273, score of 10 as rated according to ASTM D3274.

2.4 SPECIALTY GYPSUM BOARD

- A. Acoustically Enhanced Gypsum Board: ASTM C1396/C1396M. Multilayer products constructed of two layers of gypsum boards sandwiching a viscoelastic sound-absorbing polymer core.
 1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. CertainTeed Gypsum, Saint-Gobain; SilentFX QuickCut with M2Tech Moisture and Mold Resistant Type X.
 - b. National Gypsum Company; Gold Bond Brand SoundBreak XP 5/8".
 - c. PABCO Gypsum; QuietRock ES Mold Resistant.
 2. Core: 5/8 inch, Type X.
 3. Long Edges: Tapered.

2.5 TILE BACKING PANELS

- A. Cementitious Backer Units: ANSI A118.9 and ASTM C1288 or ASTM C1325, with manufacturer's standard edges.
 1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. National Gypsum Company; PermaBase Cement Board.
 - b. USG Corporation; Durock Brand Cement Board with EdgeGuard.
 2. Thickness: 1/2 inch.
 3. Mold Resistance: ASTM D3273, score of 10 as rated according to ASTM D3274.

2.6 TRIM ACCESSORIES

- A. Interior Trim: ASTM C1047.
 1. Material: Galvanized or aluminum-coated steel sheet or rolled zinc.
 2. Shapes:
 - a. Cornerbead.
 - b. LC-Bead: J-shaped; exposed long flange receives joint compound.
 - c. L-Bead: L-shaped; exposed long flange receives joint compound.
 - d. Expansion (control) joint.

B. Aluminum Trim: Extruded accessories of profiles and dimensions indicated.

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Fry Reglet Corporation.
 - b. Gordon, Inc.
 - c. Pittcon Industries.
2. Aluminum: Alloy and temper with not less than the strength and durability properties of ASTM B221, Alloy 6063-T5.
3. Finish: Corrosion-resistant primer compatible with joint compound and finish materials specified.

2.7 JOINT TREATMENT MATERIALS

A. General: Comply with ASTM C475/C475M.

B. Joint Tape:

1. Interior Gypsum Board: Paper.
2. Tile Backing Panels: As recommended by panel manufacturer.

C. Joint Compound for Interior Gypsum Board: For each coat, use formulation that is compatible with other compounds applied on previous or for successive coats.

1. Prefilling: At open joints and damaged surface areas, use setting-type taping compound.
2. Embedding and First Coat: For embedding tape and first coat on joints, fasteners, and trim flanges, use setting-type taping compound.
3. Fill Coat: For second coat, use drying-type, all-purpose compound.
4. Finish Coat: For third coat, use drying-type, all-purpose compound.

D. Joint Compound for Tile Backing Panels:

1. Cementitious Backer Units: As recommended by backer unit manufacturer.

2.8 AUXILIARY MATERIALS

A. General: Provide auxiliary materials that comply with referenced installation standards and manufacturer's written instructions.

B. Steel Drill Screws: ASTM C1002 unless otherwise indicated.

1. Use screws complying with ASTM C954 for fastening panels to steel members from 0.033 to 0.112 inch thick.

- C. Sound-Attenuation Blankets: ASTM C665, Type I (blankets without membrane facing) produced by combining thermosetting resins with mineral fibers manufactured from glass, slag wool, or rock wool.
 - 1. Fire-Resistance-Rated Assemblies: Comply with mineral-fiber requirements of assembly.
- D. Acoustical Sealant: As specified in Division 07 Section "Joint Sealants."
- E. Thermal Insulation: As specified in Division 07 Section "Thermal Insulation."

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine areas and substrates including welded hollow-metal frames and support framing, with Installer present, for compliance with requirements and other conditions affecting performance of the Work.
- B. Examine panels before installation. Reject panels that are wet, moisture damaged, and mold damaged.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.
- D. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 PRE-ENCLOSURE REVIEW

- A. Notify Architect prior to applying panels to allow observation of framing installation, including supplementary framing and blocking.

3.3 APPLYING AND FINISHING PANELS, GENERAL

- A. Comply with ASTM C840.
- B. Install ceiling panels across framing to minimize the number of abutting end joints and to avoid abutting end joints in central area of each ceiling. Stagger abutting end joints of adjacent panels not less than one framing member.
- C. Install panels with face side out. Butt panels together for a light contact at edges and ends with not more than 1/16 inch of open space between panels. Do not force into place.
- D. Locate edge and end joints over supports, except in ceiling applications where intermediate supports or gypsum board back-blocking is provided behind end joints. Do not place tapered edges against cut edges or ends. Stagger vertical joints on opposite sides of partitions. Do not make joints other than control joints at corners of framed openings.
- E. Form control and expansion joints with space between edges of adjoining gypsum panels.

- F. Cover both faces of support framing with gypsum panels in concealed spaces (above ceilings, etc.), except in chases braced internally.
 - 1. Unless concealed application is indicated or required for sound, fire, air, or smoke ratings, coverage may be accomplished with scraps of not less than 8 sq. ft. in area.
 - 2. Fit gypsum panels around ducts, pipes, and conduits.
 - 3. Where partitions intersect structural members projecting below underside of floor/roof slabs and decks, cut gypsum panels to fit profile formed by structural members; allow 1/4- to 3/8-inch-wide joints to install sealant.
- G. Isolate perimeter of gypsum board applied to non-load-bearing partitions at structural abutments. Provide 1/4- to 1/2-inch-wide spaces at these locations and trim edges with edge trim where edges of panels are exposed. Seal joints between edges and abutting structural surfaces with acoustical sealant.
- H. Attachment to Steel Framing: Attach panels so leading edge or end of each panel is attached to open (unsupported) edges of stud flanges first.
- I. Stud Partition Assemblies: Seal construction at perimeters, behind control joints, and at openings and penetrations with a continuous bead of acoustical sealant. Install acoustical sealant at both faces of partitions at perimeters and through penetrations. Comply with ASTM C919 and with manufacturer's written instructions for locating edge trim and closing off sound-flanking paths around or through assemblies, including sealing partitions above acoustical ceilings.
- J. Install sound attenuation blankets before installing gypsum panels unless blankets are readily installed after panels have been installed on one side.

3.4 APPLYING INTERIOR GYPSUM BOARD

- A. Install interior gypsum board in the following locations:
 - 1. Type X: All surfaces unless otherwise indicated.
 - 2. Impact-Resistant Type: As indicated on Drawings.
 - 3. Mold-Resistant Type: As indicated on Drawings.
 - 4. Acoustically Enhanced Type: As indicated on Drawings.
- B. Single-Layer Application:
 - 1. On ceilings, apply gypsum panels before wall/partition board application to greatest extent possible and at right angles to framing unless otherwise indicated.
 - 2. On partitions/walls, apply gypsum panels vertically (parallel to framing) unless otherwise indicated or required by fire-resistance-rated assembly, and minimize end joints.
 - a. Stagger abutting end joints not less than one framing member in alternate courses of panels.

- b. At stairwells and other high walls, install panels horizontally unless otherwise indicated or required by fire-resistance-rated assembly.
- 3. On Z-shaped furring members, apply gypsum panels vertically (parallel to framing) with no end joints. Locate edge joints over furring members.
- 4. Fastening Methods: Apply gypsum panels to supports with steel drill screws.
- C. Multilayer Application:
 - 1. On partitions/walls, apply gypsum board indicated for base layers and face layers vertically (parallel to framing) with joints of base layers located over stud or furring member and face-layer joints offset at least one stud or furring member with base-layer joints unless otherwise indicated or required by fire-resistance-rated assembly. Stagger joints on opposite sides of partitions.
 - 2. Fastening Methods: Fasten base layers and face layers separately to supports with screws.

3.5 APPLYING TILE BACKING PANELS

- A. Cementitious Backer Units: ANSI A108.11, at locations indicated to receive tile.

3.6 INSTALLING TRIM ACCESSORIES

- A. General: For trim with back flanges intended for fasteners, attach to framing with same fasteners used for panels. Otherwise, attach trim according to manufacturer's written instructions.
- B. Control Joints: Install control joints according to ASTM C840 and in specific locations approved by Architect for visual effect.
- C. Interior Trim: Install in the following locations:
 - 1. Cornerbead: Use at outside corners unless otherwise indicated.
 - 2. LC-Bead: Use at exposed panel edges.
 - 3. L-Bead: Use where indicated.

3.7 FINISHING GYPSUM BOARD

- A. General: Treat gypsum board joints, interior angles, edge trim, control joints, penetrations, fastener heads, surface defects, and elsewhere as required to prepare gypsum board surfaces for decoration. Promptly remove residual joint compound from adjacent surfaces.
- B. Prefill open joints and damaged surface areas.
- C. Apply joint tape over gypsum board joints, except for trim products specifically indicated as not intended to receive tape.

D. Gypsum Board Finish Levels: Finish panels to levels indicated below and according to ASTM C840:

1. Level 1: Ceiling plenum areas, concealed areas, and where indicated.
2. Level 4: At panel surfaces that will be exposed to view [**unless otherwise indicated**].

3.8 PROTECTION

- A. Protect adjacent surfaces from drywall compound and promptly remove from floors and other non-drywall surfaces. Restore surfaces stained, marred, or otherwise damaged during drywall application.
- B. Protect installed products from damage from weather, condensation, direct sunlight, construction, and other causes during remainder of the construction period.
- C. Remove and replace panels that are wet, moisture damaged, and mold damaged.
 1. Indications that panels are wet or moisture damaged include, but are not limited to, discoloration, sagging, or irregular shape.
 2. Indications that panels are mold damaged include, but are not limited to, fuzzy or splotchy surface contamination and discoloration.

END OF SECTION 09 29 00

SECTION 09 30 13 – CERAMIC TILING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Ceramic tile.
 - 2. Stone thresholds.
 - 3. Waterproof membrane.
 - 4. Metal edge strips.

1.3 DEFINITIONS

- A. General: Definitions in the current ANSI A108 A118, series of tile installation standards and in the current ANSI A137.1 apply to Work of this Section unless otherwise specified.
- B. ISO 13007; Standards for Ceramic Tiles, Grouts and Adhesives

1.4 PERFORMANCE REQUIREMENTS

- A. Coefficient of Friction: For tile installed on walkway surfaces, provide products with the following values as determined by testing identical products per the DCOF AcuTest in accordance with ANSI A137.1 – 2012 standard.
 - 1. Level Surfaces: Minimum 0.42 wet.

1.5 SUBMITTALS, GENERAL

- A. General: Submit all action submittals (except Samples for Verification) and informational submittals required by this Section concurrently.

1.6 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated.
 - 1. Factory-mounted unglazed ceramic mosaic tile: CFT
 - 2. Glazed wall tile: CWT
 - 3. Glazed tile cove base: CT
 - 4. Marble thresholds.
 - 5. Chlorinated polyethylene sheet.
 - 6. Latex-portland cement.

7. Portland cement mortar (thickset) installation materials.
8. Latex-portland cement mortar (thin set).
9. Water-cleanable epoxy grout.
10. Trowelable underlayments and patching compounds.
11. Metal edge strips.

B. Shop Drawings: Show locations of each type of tile and tile pattern. Show widths, details, and locations of expansion, contraction, control, and isolation joints in tile substrates and finished tile surfaces.

1. Show base details.
2. Show locations of floor drains and sloped slabs.
3. Show threshold locations and types.
4. Show all divider strip locations control and expansion joints.

C. Samples for Verification and Initial Color Selection:

1. Full-size units of each type and composition of tile and for each color and finish required
2. Full-size units of each type of trim and accessory for each color and finish required.
3. Stone thresholds in 6-inch lengths.
4. Metal edge strips in 6-inch lengths.

1.7 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For qualified Installer.
- B. Master Grade Certificates: For each shipment, type, and composition of tile, signed by tile manufacturer and Installer.
- C. Product Certificates: For each type of product, signed by product manufacturer.

1.8 MAINTENANCE MATERIAL SUBMITTALS

- A. Furnish extra materials that match and are from same production runs as products installed and that are packaged with protective covering for storage and identified with labels describing contents.
 1. Tile and Trim Units: Furnish quantity of full-size units equal to 3 percent of amount installed for each type, composition, color, pattern, and size indicated.
 2. Grout: Furnish quantity of grout equal to 3 percent of amount installed for each type, composition, and color indicated.

1.9 QUALITY ASSURANCE

- A. Source Limitations for Tile: Obtain tile of each type and color or finish from one source or producer.
 1. Obtain tile of each type and color or finish from same production run and of consistent quality in appearance and physical properties for each contiguous area.

- B. Source Limitations for Setting and Grouting Materials: Obtain ingredients of a uniform quality for each mortar, adhesive, and grout component from one manufacturer and each aggregate from one source or producer.
- C. Source Limitations for Other Products: Obtain each of the following products specified in this Section from a single manufacturer for each product:
 - 1. Stone thresholds.
 - 2. Waterproof membrane.
 - 3. Metal edge strips.

1.10 DELIVERY, STORAGE, AND HANDLING

- A. Deliver and store packaged materials in original containers with seals unbroken and labels intact until time of use. Comply with requirements in current ANSI A137.1 for labeling tile packages.
- B. Store tile and cementitious materials on elevated platforms, under cover, and in a dry location.
- C. Store aggregates where grading and other required characteristics can be maintained and contamination can be avoided.
- D. Store liquid materials in unopened containers and protected from freezing.
- E. Handle tile that has temporary protective coating on exposed surfaces to prevent coated surfaces from contacting backs or edges of other units. If coating does contact bonding surfaces of tile, remove coating from bonding surfaces before setting tile.

1.11 PROJECT CONDITIONS

- A. Environmental Limitations: Do not install tile until construction in spaces is complete and ambient temperature and humidity conditions are maintained at the levels indicated in referenced standards and manufacturer's written instructions.

PART 2 - PRODUCTS

2.1 PRODUCTS, GENERAL

- A. ANSI Ceramic Tile Standard: Provide tile that complies with most current ANSI A137.1 for types, compositions, and other characteristics indicated.
 - 1. Provide tile complying with Standard grade requirements unless otherwise indicated.
- B. ANSI Standards for Tile Installation Materials: Provide materials complying with most current ANSI A108.02, ANSI standards referenced in other Part 2 articles, ANSI standards referenced by TCNA installation methods specified in tile installation schedules, and other requirements specified.
- C. ISO 13007 Standards for Ceramic Tiles, Grouts and Adhesives: Provide materials complying with ISO 13007-1, 13007-2, 13007-3, 13007-4.

- D. Factory Blending: For tile exhibiting color variations within ranges, blend tile in factory and package so tile units taken from one package show same range in colors as those taken from other packages and match approved Samples.
- E. Mounting: For factory-mounted tile, provide back- or edge-mounted tile assemblies as standard with manufacturer unless otherwise indicated.

2.2 TILE PRODUCTS

- A. Tile Type CFT: Factory-mounted unglazed ceramic mosaic tile.
 - 1. Basis-of-Design Product: Subject to compliance with requirements, provide Mosa; Global Collection, unglazed floor tile; or approved equal.
 - 2. Composition: Unglazed, dry-pressed porcelain tiles.
 - 3. Module Size: 6 by 6 inch,
 - 4. Thickness: 5/16 inch.
 - 5. Face: Plain with cushion edges.
 - 6. Tile Color and Pattern: As selected by Architect
 - 7. Grout Color: As selected by Architect from manufacturer's full range.
- B. Tile Type CWT: Glazed wall tile - 6" x 6"
 - 1. Basis-of-Design Product: Subject to compliance with requirements, provide Mosa; Global Collection, glazed wall tile; or approved equal.
 - 2. Module Size: 6" x 6"
 - 3. Thickness: 5/16 inch.
 - 4. Face: Plain with cushion edges.
 - 5. Finish: Gloss
 - 6. Tile Color: As selected by Architect from manufacturer's full range, as follows:
 - a. Field tile color subject to toilet room designation.
 - 7. Tile Color and Pattern: As selected by Architect, as follows:
 - a. Field Wall Tile: Mosa mural collection; one (1) color.
 - b. Accent Wall Tile: Mosa mural collection; up to three (3) colors.
 - c. Pattern: As indicated on drawings, stacked.
 - 8. Grout Color: As selected by Architect from manufacturer's full range.
 - 9. Trim Units: Coordinated with sizes and coursing of adjoining flat tile where applicable and matching characteristics of adjoining flat tile. Provide shapes as follows and as indicated on drawings, selected from manufacturer's standard shapes:
 - a. Wall base: Coved, module size 3 by 6 inches.

- b. Bullnose cap: 12 by 2.8 inches; Bullnose shape with radius of at least 3/4 inch unless otherwise indicated.
- c. External Corners: Bullnose shape with radius of at least 3/4 inch unless otherwise indicated.
- d. Internal Corners: Field-butt square corners. For coved base and cap use angle pieces designed to fit with stretcher shapes.

2.3 THRESHOLDS

- A. General: Fabricate to sizes and profiles indicated or required to provide transition between adjacent floor finishes.
 - 1. Bevel edges at 1:2 slope, with lower edge of bevel aligned with or up to 1/16 inch above adjacent floor surface. Finish bevel to match top surface of threshold. Limit height of threshold to 1/2 inch or less above adjacent floor surface.
- B. Marble Thresholds: ASTM C 503, with a minimum abrasion resistance of 12 per ASTM C 1353 or ASTM C 241 and with honed finish.
 - 1. Description: As selected by Architect from manufacturer's full range.

2.4 WATERPROOF MEMBRANE

- A. General: Manufacturer's standard product, selected from the following, that complies with ANSI A118.10 and is recommended by the manufacturer for the application indicated. Include reinforcement and accessories recommended by manufacturer.
- B. Cement Based Waterproofing and Crack Isolation Membrane: Flexible mortar consisting of cement-based mix and latex additive.
 - 1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. C-Cure; UltraCure 971.
 - b. MAPEI Corporation; Mapelastic 315.
 - c. TEC; a subsidiary of H. B. Fuller Company; Triple Flex Waterproofing, Crack Isolation Membrane & Mortar.
- C. Latex Based Waterproofing and Crack Isolation Membrane: fast setting, flexible, thin, load-bearing, waterproofing membrane system consisting of a premixed, quick-drying liquid latex, for installation under ceramic tile or complying with ANSI A118.10 and ANSI A118.12; and having IAMPO certification as a shower pan liner
 - 1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. MAPEI Corporation; Mapelastic AquaDefense
 - b. Custom Building Products; RedGard

2.5 SETTING MATERIALS

A. Portland Cement Mortar (Thickset) Installation Materials: ANSI A108.02.

1. Cleavage Membrane: Asphalt felt, ASTM D 226, Type I (No. 15); or polyethylene sheeting, ASTM D 4397, 4.0 mils thick.
2. Reinforcing Wire Fabric: Galvanized, welded wire fabric, 2 by 2 inches by 0.062-inch diameter; comply with ASTM A 185 and ASTM A 82 except for minimum wire size.
3. Expanded Metal Lath: Diamond-mesh lath complying with ASTM C 847.
 - a. Base Metal and Finish for Interior Applications: Uncoated or zinc-coated (galvanized) steel sheet, with uncoated steel sheet painted after fabrication into lath.
 - b. Configuration over Solid Surfaces: Self furring.
 - c. Weight: 3.4 lb/sq. yd.
4. Latex Additive: Manufacturer's standard acrylic resin water emulsion, serving as replacement for part or all of gaging water, of type specifically recommended by latex-additive manufacturer for use with field-mixed portland cement and aggregate mortar bed.
 - a. Basis-of-Design Product: Subject to compliance with requirements, provide MAPEI Corporation; Planicrete AC or comparable product by one of the following:
 - 1) Laticrete International, Inc.
 - 2) TEC; a subsidiary of H. B. Fuller Company.
 - 3) Custom Building Products

B. Latex-Portland Cement Mortar (Thin Set): ISO 13007; C2ES2P2 and ANSI A118.4.

1. Basis-of-Design Product: Subject to compliance with requirements, provide MAPEI Corporation; Kerabond/Keralastic System or comparable product by one of the following:
 - a. Laticrete International, Inc.
 - b. TEC; a subsidiary of H. B. Fuller Company.
 - c. Custom Building Products
2. Provide prepackaged, dry-mortar mix containing dry, redispersible, vinyl acetate or acrylic additive to which only water must be added at Project site.
3. For wall applications, provide mortar that complies with requirements for nonsagging mortar in addition to the other requirements in ANSI A118.4.

2.6 GROUT MATERIALS

A. Water-Cleanable Epoxy Grout: ISO 13007; RG and ANSI A118.3.

1. Basis-of-Design Product: Subject to compliance with requirements, provide MAPEI Corporation; Opticolor Stain-Free Epoxy Grout or comparable product by one of the following:
 - a. Laticrete International, Inc.
 - b. TEC; a subsidiary of H. B. Fuller Company.
 - c. Custom Building Products

2.7 MISCELLANEOUS MATERIALS

A. Trowelable Underlayments and Patching Compounds: Latex-modified, portland cement-based formulation provided or approved by manufacturer of tile-setting materials for installations indicated.

B. Metal Edge Strips: Angle or L-shape, height to match tile and setting-bed thickness, metallic or combination of metal , designed specifically for flooring applications; nickel, silver stainless-steel, ASTM A 666, 300 Series exposed-edge material.

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Schluter Systems L.P.

C. Tile Cleaner: A neutral cleaner capable of removing soil and residue without harming tile and grout surfaces, specifically approved for materials and installations indicated by tile and grout manufacturers.

2.8 MIXING MORTARS AND GROUT

A. Mix mortars and grouts to comply with referenced standards and mortar and grout manufacturers' written instructions.

B. Add materials, water, and additives in accurate proportions.

C. Obtain and use type of mixing equipment, mixer speeds, mixing containers, mixing time, and other procedures to produce mortars and grouts of uniform quality with optimum performance characteristics for installations indicated.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, areas, and conditions where tile will be installed, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of installed tile.
 - 1. Verify that substrates for setting tile are firm, dry, clean, free of coatings that are incompatible with tile-setting materials including curing compounds and other substances that contain soap, wax, oil, or silicone; and comply with flatness tolerances required by current ANSI A108.01 for installations indicated.
 - 2. Verify that concrete substrates for tile floors installed with mortar comply with surface finish requirements in ANSI A108.01 for installations indicated.
 - a. Verify that surfaces that received a steel trowel finish have been mechanically scarified.
 - b. Verify that protrusions, bumps, and ridges have been removed by sanding or grinding.
 - 3. Verify that installation of grounds, anchors, recessed frames, electrical and mechanical units of work, and similar items located in or behind tile has been completed.
 - 4. Verify that joints and cracks in tile substrates are coordinated with tile joint locations; if not coordinated, adjust joint locations in consultation with Architect.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.
- C. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 PREPARATION

- A. Fill cracks, holes, and depressions in concrete substrates for tile installed with ~~thin-set mortar~~ with suitable products made to be trowelable with trowelable leveling and patching compound specifically recommended by tile-setting material manufacturer.
- B. Where indicated, prepare substrates to receive waterproofing by applying a reinforced mortar bed that complies with current ANSI A108.1A and is sloped 1/4 inch per foot toward drains.
- C. Blending: For tile exhibiting color variations, verify that tile has been factory blended and packaged so tile units taken from one package show same range of colors as those taken from other packages and match approved Samples. If not factory blended, either return to manufacturer or blend tiles at Project site before installing.

3.3 TILE INSTALLATION

- A. Comply with current TCNA's "Handbook for Ceramic Tile Installation" for current TCNA installation methods specified in tile installation schedules. Comply with parts of the current ANSI A108 Series "Specifications for Installation of Ceramic Tile" that are referenced in current TCNA installation methods, specified in tile installation schedules, and apply to types of setting and grouting materials used.
 - 1. For the following installations, follow procedures in the current ANSI A108 Series of tile installation standards for providing 95 percent mortar coverage:
 - a. Tile floors in wet areas.
- B. Extend tile work into recesses and under or behind equipment and fixtures to form complete covering without interruptions unless otherwise indicated. Terminate work neatly at obstructions, edges, and corners without disrupting pattern or joint alignments.
- C. Accurately form intersections and returns. Perform cutting and drilling of tile without marring visible surfaces. Carefully grind cut edges of tile abutting trim, finish, or built-in items for straight aligned joints. Fit tile closely to electrical outlets, piping, fixtures, and other penetrations so plates, collars, or covers overlap tile.
- D. Provide manufacturer's standard trim shapes where necessary to eliminate exposed tile edges.
- E. Jointing Pattern: Lay tile in grid pattern unless otherwise indicated. Lay out tile work and center tile fields in both directions in each space or on each wall area. Lay out tile work to minimize the use of pieces that are less than half of a tile. Provide uniform joint widths unless otherwise indicated.
 - 1. For tile mounted in sheets, make joints between tile sheets same width as joints within tile sheets so joints between sheets are not apparent in finished work.
 - 2. Where adjoining tiles on floor, base, walls, or trim are specified or indicated to be same size, align joints.
 - 3. Where tiles are specified or indicated to be whole integer multiples of adjoining tiles on floor, base, walls, or trim, align joints unless otherwise indicated.
 - 4. Grout coverage for tile mounted sheets must have a minimum of 2/3, verify in field prior to installation that tile tabs are no more than 1/3 of the tile height.
- F. Joint Widths: Unless otherwise indicated, install tile with the following joint widths:
 - 1. Ceramic Mosaic Tile: 1/16 inch.
 - 2. Glazed Wall Tile: 1/16 inch.
- G. Lay out tile wainscots to dimensions indicated or to next full tile beyond dimensions indicated.
- H. Expansion Joints: Provide expansion joints and other sealant-filled joints, including control, contraction, and isolation joints, where indicated and as per all current TCNA, EJ171 standards. Form joints during installation of setting materials, mortar beds, and tile. Do not saw-cut joints after installing tiles.

1. Where joints occur in concrete substrates, locate joints in tile surfaces directly above and at same width and as per current TCNA EJ171.
- I. Stone Thresholds: Install stone thresholds in same type of setting bed as adjacent floor unless otherwise indicated.
 1. At locations where mortar bed (thickset) would otherwise be exposed above adjacent floor finishes, set thresholds in latex-portland cement mortar (thin set).
 2. Do not extend cleavage membrane/waterproofing under thresholds set in latex-portland cement mortar. Fill joints between such thresholds and adjoining tile set on cleavage membrane waterproofing with elastomeric sealant.
 - J. Metal Edge Strips: Install at locations indicated on details and drawings.

3.4 WATERPROOFING INSTALLATION

- A. Install ANSI A118.10 waterproofing to comply with ANSI A108.13 and manufacturer's written instructions to produce waterproof membrane of uniform thickness and bonded securely to substrate.
- B. Do not install tile or setting materials over waterproofing until waterproofing has cured and been tested to determine that it is watertight.

3.5 CLEANING AND PROTECTING

- A. Cleaning: On completion of placement and grouting, clean all ceramic tile surfaces so they are free of foreign matter.
 1. Remove epoxy grout residue from tile as soon as possible.
 2. Clean grout smears and haze from tile according to tile and grout manufacturer's written instructions but no sooner than 10 days after installation. Use only cleaners recommended by tile and grout manufacturers and only after determining that cleaners are safe to use by testing on samples of tile and other surfaces to be cleaned. Protect metal surfaces and plumbing fixtures from effects of cleaning. Flush surfaces with clean water before and after cleaning.
 3. Remove temporary protective coating by method recommended by coating manufacturer and that is acceptable to tile and grout manufacturer. Trap and remove coating to prevent drain clogging.
- B. Protect installed tile work with kraft paper or other heavy covering during construction period to prevent staining, damage, and wear. If recommended by tile manufacturer, apply coat of neutral protective cleaner to completed tile walls and floors.
- C. Prohibit foot and wheel traffic from tiled floors for at least seven days after grouting is completed.

- D. Before final inspection, remove protective coverings and rinse neutral protective cleaner from tile surfaces.

3.6 INTERIOR TILE INSTALLATION SCHEDULE

A. Interior Floor Installations, Concrete Subfloor:

1. Tile Installation F114-16: Cement mortar bed (thickset) with cleavage/waterproof membrane; epoxy grout; TCNA F114, ANSI A108.1B
 - a. Tile Type: CFT1.
 - b. Thin-Set Mortar for Cured-Bed Method: Latex-portland cement mortar.
 - c. Grout: Water-cleanable epoxy grout.
2. Tile Installation F122-16: Thin-set mortar on Cleavage/waterproof membrane; TCNA F122, ANSI A108.5.
 - a. Tile Type: CFT1.
 - b. Thin-Set Mortar: Latex-portland cement mortar.
 - c. Grout: Epoxy grout.

B. Interior Wall Installations:

1. Tile Installation W202-16: Thin-set mortar; TCNA W202, ANSI A108.1A
 - a. Tile Type: CWT1.
 - b. Thin-Set Mortar: Latex-portland cement mortar.
 - c. Grout: Water-cleanable epoxy.
2. Tile Installation W211-11: Cement mortar bed (thickset) bonded to substrate; TCNA W211 and ANSI A108.1C.
 - a. Tile Type: CWT1.
 - b. Bond Coat Mortar for Wet-Set Method: Latex-portland cement mortar.
 - c. Thin-Set Mortar for Cured-Bed Method: Latex-portland cement mortar.
 - d. Grout: Water-cleanable epoxy grout.
3. Tile Installation W243-16: Thin-set mortar on cementitious backer (Display cabinets); TCNA W243.
 - a. Tile Type: CWT1.
 - b. Thin-Set Mortar: Latex-portland cement mortar.
 - c. Grout: Water-cleanable epoxy grout.

END OF SECTION 09 30 13

SECTION 09 30 16 – QUARRY TILING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Quarry tile.
 - 2. Waterproof membrane.

1.3 DEFINITIONS

- A. General: Definitions in the current ANSI A108 series of tile installation standards and in the current ANSI A137.1 apply to Work of this Section unless otherwise specified.
- B. ANSI A108 Series: ANSI A108.01, ANSI A108.02, ANSI A108.1A, ANSI A108.1B, ANSI A108.1C, ANSI A108.4, ANSI A108.5, ANSI A108.6, ANSI A108.8, ANSI A108.9, ANSI A108.10, ANSI A108.11, ANSI A108.12, ANSI A108.13, ANSI A108.14, ANSI A108.15, ANSI A108.16, and ANSI A108.17, which are contained in "American National Standard Specifications for Installation of Ceramic Tile."
- C. Face Size: Actual tile size, excluding spacer lugs.

1.4 PERFORMANCE REQUIREMENTS

- A. Coefficient of Friction: For tile installed on walkway surfaces, provide products with the following values as determined by testing identical products per the DCOF AcuTest in accordance with ANSI A137.1 – 2012 standard.
 - 1. Level Surfaces: Minimum- Minimum 0.42 wet.

1.5 SUBMITTALS, GENERAL

- A. General: Submit all action submittals (except Samples for Verification) and informational submittals required by this Section concurrently.

1.6 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated.

- B. Shop Drawings: Show locations of each type of tile and tile pattern. Show widths, details, and locations of expansion, contraction, control, and isolation joints in tile substrates and finished tile surfaces.
 - 1. Show base details.
 - 2. Show locations of floor drains and sloped slabs.
 - 3. Show threshold locations and types.
- C. Samples for Verification and Initial Color Selection:
 - 1. Full-size units of each type and composition of tile and for each color and finish required.
 - 2. Full-size units of each type of trim and accessory for each color and finish required.
 - 3. Stone thresholds in 6-inch lengths.
 - 4. Metal edge strips in 6-inch lengths.

1.7 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For qualified Installer.
- B. Master Grade Certificates: For each shipment, type, and composition of tile, signed by tile manufacturer and Installer.
- C. Product Certificates: For each type of product, signed by product manufacturer.

1.8 MAINTENANCE MATERIAL SUBMITTALS

- A. Furnish extra materials that match and are from same production runs as products installed and that are packaged with protective covering for storage and identified with labels describing contents.
 - 1. Tile and Trim Units: Furnish quantity of full-size units equal to 3 percent of amount installed for each type, composition, color, pattern, and size indicated.
 - 2. Grout: Furnish quantity of grout equal to 3 percent of amount installed for each type, composition, and color indicated.

1.9 QUALITY ASSURANCE

- A. Source Limitations for Tile: Obtain tile of each type and color or finish from one source or producer.
 - 1. Obtain tile of each type and color or finish from same production run and of consistent quality in appearance and physical properties for each contiguous area.
- B. Source Limitations for Setting and Grouting Materials: Obtain ingredients of a uniform quality for each mortar and grout component from one manufacturer and each aggregate from one source or producer.
- C. Source Limitations for Other Products: Obtain each of the following products specified in this Section from a single manufacturer for each product:
 - 1. Stone thresholds.
 - 2. Waterproof membrane.

1.10 DELIVERY, STORAGE, AND HANDLING

- A. Deliver and store packaged materials in original containers with seals unbroken and labels intact until time of use. Comply with requirements in current ANSI A137.1 for labeling tile packages.
- B. Store tile and cementitious materials on elevated platforms, under cover, and in a dry location.
- C. Store aggregates where grading and other required characteristics can be maintained and contamination can be avoided.
- D. Store liquid materials in unopened containers and protected from freezing.
- E. Handle tile that has temporary protective coating on exposed surfaces to prevent coated surfaces from contacting backs or edges of other units. If coating does contact bonding surfaces of tile, remove coating from bonding surfaces before setting tile.

1.11 PROJECT CONDITIONS

- A. Environmental Limitations: Do not install tile until construction in spaces is complete and ambient temperature and humidity conditions are maintained at the levels indicated in referenced standards and manufacturer's written instructions.

PART 2 - PRODUCTS

2.1 PRODUCTS, GENERAL

- A. ANSI Ceramic Tile Standard: Provide tile that complies with most current ANSI A137.1 for types, compositions, and other characteristics indicated.
 - 1. Provide tile complying with Standard grade requirements unless otherwise indicated.
- B. Current ANSI Standards for Tile Installation Materials: Provide materials complying with ANSI A108.02, ANSI standards referenced in other Part 2 articles, ANSI standards referenced by TCA installation methods specified in tile installation schedules, and other requirements specified.
- C. Low-Emitting Materials: Tile flooring systems shall comply with the testing and product requirements of the California Department of Health Services' "Standard Practice for the Testing of Volatile Organic Emissions from Various Sources Using Small-Scale Environmental Chambers."
- D. Factory Blending: For tile exhibiting color variations within ranges, blend tile in factory and package so tile units taken from one package show same range in colors as those taken from other packages and match approved Samples.

2.2 TILE PRODUCTS

A. Tile Type QT : Unglazed square-edged quarry tile.

1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. American Olean; Division of Dal-Tile International Inc.; Quarry Naturals.
 - b. Daltile; Division of Dal-Tile International Inc.; Quarry Textures.
 - c. Summitville Tiles, Inc.; Quarry Tile.
2. Face Size: 6 by 6 inches- size to match existing.
3. Thickness: 1/2 inch.
4. Tile Color and Pattern: As selected by Architect from manufacturer's full range – to match existing.
5. Grout Color: As selected by Architect from manufacturer's full range- to match existing.
6. Trim Units: Coordinated with sizes and coursing of adjoining flat tile where applicable and matching characteristics of adjoining flat tile. Provide shapes as follows, selected from manufacturer's standard shapes:
 - a. Base: Coved with surface bullnose top edge, size – to match existing.

2.3 WATERPROOF MEMBRANE

- ### A. General: Manufacturer's standard product, selected from the following, that complies with ANSI A118.10 and is recommended by the manufacturer for the application indicated. Include reinforcement and accessories recommended by manufacturer.
- ### B. Latex-Portland Cement: Flexible mortar consisting of cement-based mix and latex additive.
1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Boiardi Products; a QEP company; Elastiment 323 Cement Based Waterproofing, Anti-Fracture/Crack Suppression Membrane.
 - b. C-Cure; UltraCure 971.
 - c. Custom Building Products
 - d. MAPEI Corporation; Mapelastic (PRP 315).
 - e. Southern Grouts & Mortars, Inc.; Southcrete 1100.
 - f. TEC; a subsidiary of H. B. Fuller Company; Triple Flex Waterproofing, Crack Isolation Membrane & Mortar.

2.4 SETTING MATERIALS

A. Latex-Portland Cement Mortar (Thin Set): ANSI A118.4.

1. Basis-of-Design Product: Subject to compliance with requirements, provide MAPEI Corporation; Kerabond/Keralastic System or comparable product by one of the following:
 - a. Laticrete International, Inc.
2. Provide prepackaged, dry-mortar mix containing dry, redispersible, vinyl acetate or acrylic additive to which only water must be added at Project site.
3. For wall applications, provide mortar that complies with requirements for non-sagging mortar in addition to the other requirements in ANSI A118.4.

2.5 GROUT MATERIALS

A. Epoxy Tile Grout: ANSI A118.3.

1. Basis-of-Design Product: Subject to compliance with requirements, provide MAPEI Corporation; Kerapoxy CQ IEG or comparable product by one of the following:
 - a. Laticrete International, Inc.

2.6 MISCELLANEOUS MATERIALS

- A. Trowelable Underlayments and Patching Compounds: Latex-modified, portland cement-based formulation provided or approved by manufacturer of tile-setting materials for installations indicated.
- B. Tile Cleaner: A neutral cleaner capable of removing soil and residue without harming tile and grout surfaces, specifically approved for materials and installations indicated by tile and grout manufacturers.

2.7 MIXING MORTARS AND GROUT

- A. Mix mortars and grouts to comply with referenced standards and mortar and grout manufacturers' written instructions.
- B. Add materials, water, and additives in accurate proportions.
- C. Obtain and use type of mixing equipment, mixer speeds, mixing containers, mixing time, and other procedures to produce mortars and grouts of uniform quality with optimum performance characteristics for installations indicated.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, areas, and conditions where tile will be installed, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of installed tile.
 - 1. Verify that substrates for setting tile are firm, dry, clean, free of coatings that are incompatible with tile-setting materials including curing compounds and other substances that contain soap, wax, oil, or silicone; and comply with flatness tolerances required by ANSI A108.01 for installations indicated.
 - 2. Verify that concrete substrates for tile floors installed with thick set or thin-set mortar comply with surface finish requirements in ANSI A108.01 for installations indicated.
 - a. Verify that surfaces that received a steel trowel finish have been mechanically scarified.
 - b. Verify that protrusions, bumps, and ridges have been removed by sanding or grinding.
 - 3. Verify that installation of grounds, anchors, recessed frames, electrical and mechanical units of work, and similar items located in or behind tile has been completed.
 - 4. Verify that joints and cracks in tile substrates are coordinated with tile joint locations; if not coordinated, adjust joint locations in consultation with Architect.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.
- C. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 PREPARATION

- A. Fill cracks, holes, and depressions in concrete substrates for tile floors installed with suitable products made to be trowelable for leveling and patching compound specifically recommended by tile-setting material manufacturer.
- B. Where indicated, prepare substrates to receive waterproofing by applying a reinforced mortar bed that complies with ANSI A108.1A and is sloped 1/4 inch per foot toward drains.
- C. Blending: For tile exhibiting color variations, verify that tile has been factory blended and packaged so tile units taken from one package show same range of colors as those taken from other packages and match approved Samples. If not factory blended, either return to manufacturer or blend tiles at Project site before installing.

3.3 TILE INSTALLATION

- A. Comply with current TCNA's "Handbook for Ceramic Tile Installation" for current TCNA's installation methods specified in tile installation schedules. Comply with parts of the ANSI A108 Series "Specifications for Installation of Ceramic Tile" that are referenced in TCNA installation methods, specified in tile installation schedules, and apply to types of setting and grouting materials used.
 - 1. For the following installations, follow procedures in the most current ANSI A108 Series of tile installation standards for providing 95 percent mortar coverage:
 - a. Tile floors in wet areas.
- B. Extend tile work into recesses and under or behind equipment and fixtures to form complete covering without interruptions unless otherwise indicated. Terminate work neatly at obstructions, edges, and corners without disrupting pattern or joint alignments.
- C. Accurately form intersections and returns. Perform cutting and drilling of tile without marring visible surfaces. Carefully grind cut edges of tile abutting trim, finish, or built-in items for straight aligned joints. Fit tile closely to electrical outlets, piping, fixtures, and other penetrations so plates, collars, or covers overlap tile.
- D. Provide manufacturer's standard trim shapes where necessary to eliminate exposed tile edges.
- E. Jointing Pattern: Lay tile in grid pattern unless otherwise indicated. Lay out tile work and center tile fields in both directions in each space or on each wall area. Lay out tile work to minimize the use of pieces that are less than half of a tile. Provide uniform joint widths unless otherwise indicated.
 - 1. Where adjoining tiles on floor, base, walls, or trim are specified or indicated to be same size, align joints.
 - 2. Where tiles are specified or indicated to be whole integer multiples of adjoining tiles on floor, base, walls, or trim, align joints unless otherwise indicated.
- F. Joint Widths: Unless otherwise indicated, install tile with the following joint widths:
 - 1. Quarry Tile: 1/4 inch – or to match existing.
- G. Lay out tile wainscots to dimensions indicated or to next full tile beyond dimensions indicated.
- H. Expansion Joints: Provide expansion joints and other sealant-filled joints, including control, contraction, and isolation joints, where indicated and as per all current TCNA, EJ171 standards. Form joints during installation of setting materials, mortar beds, and tile. Do not saw-cut joints after installing tiles.
 - 1. Where joints occur in concrete substrates, locate joints in tile surfaces directly above them at same width and as per current TCNA EJ171.

3.4 WATERPROOFING INSTALLATION

- A. Install ANSI A118.10 waterproofing to comply with ANSI A108.13 and manufacturer's written instructions to produce waterproof membrane of uniform thickness and bonded securely to substrate.
- B. Do not install tile or setting materials over waterproofing until waterproofing has cured and been tested to determine that it is watertight.

3.5 CLEANING AND PROTECTING

- A. Cleaning: On completion of placement and grouting, clean all ceramic tile surfaces so they are free of foreign matter.
 - 1. Remove latex-portland cement grout residue from tile as soon as possible.
 - 2. Clean grout smears and haze from tile according to tile and grout manufacturer's written instructions but no sooner than 10 days after installation. Use only cleaners recommended by tile and grout manufacturers and only after determining that cleaners are safe to use by testing on samples of tile and other surfaces to be cleaned. Protect metal surfaces and plumbing fixtures from effects of cleaning. Flush surfaces with clean water before and after cleaning.
- B. Protect installed tile work with kraft paper or other heavy covering during construction period to prevent staining, damage, and wear. If recommended by tile manufacturer, apply coat of neutral protective cleaner to completed tile walls and floors.
- C. Prohibit foot and wheel traffic from tiled floors for at least seven days after grouting is completed.
- D. Before final inspection, remove protective coverings and rinse neutral protective cleaner from tile surfaces.

3.6 INTERIOR QUARRY TILE INSTALLATION SCHEDULE

- A. Interior Floor Installations, Concrete Subfloor:
 - 1. Tile Installation F121: Cement mortar bed (thickset) on waterproof membrane; TCA F121 and ANSI A108.1C.
 - a. Thin-Set Mortar for Cured-Bed Method: Latex-portland cement mortar.
 - b. Grout: Polymer-modified sanded grout- to match existing
 - 2. Tile Installation F122: Thin-set mortar on waterproof membrane; TCA F122.
 - a. Thin-Set Mortar: Latex-portland cement mortar.
 - b. Grout: Polymer-modified sanded grout- to match existing.

END OF SECTION 09 30 16

SECTION 09 51 13 - ACOUSTICAL PANEL CEILINGS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes acoustical panels and exposed suspension systems for interior ceilings.

1.3 DEFINITIONS

- A. CAC: Ceiling Attenuation Class.
- B. LR: Light Reflectance.
- C. NRC: Noise Reduction Coefficient.

1.4 PREINSTALLATION MEETINGS

- A. Preinstallation Conference: Conduct conference at Project site.

1.5 SUBMITTALS, GENERAL

- A. General: Submit all action submittals and informational submittals required by this Section concurrently.

1.6 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated.
 - 1. Attachment devices.
 - 2. Wire hangers, braces and ties.
 - 3. Hanger rods.
 - 4. Flat hangers.
 - 5. Angle hangers.
 - 6. Roll-formed, sheet-metal edge moldings and trim.
 - 7. Acoustical panels for Ceiling Type A1
 - 8. Acoustical Panels for Ceiling Type A2
 - 9. Acoustical Panels for Ceiling Type A3
 - 10. Acoustical panels for Ceiling Type A4
 - 11. Acoustical panels for Ceiling Type A5
 - 12. Acoustical panels for Ceiling Type A6

13. Acoustical panels for Ceiling Type A7.
14. Metal suspension system for Ceiling Types A1, A2, A3, A4, A5, A7
15. Grid suspension system for Ceiling Type A6
16. Extruded-aluminum or roll-formed, steel sheet metal edge moldings and trim.

B. Samples for Verification: If proposing products other than those specifically named in Part 2 of this Section, for each component indicated and for each exposed finish required, prepared on Samples of sizes indicated below:

1. Acoustical Panels: Set of 6-inch-square Samples of each type, color, pattern, and texture.
2. Exposed Suspension-System Members, Moldings, and Trim: Set of 6-inch-long Samples of each type, finish, and color.

1.7 INFORMATIONAL SUBMITTALS

A. Coordination Drawings: Reflected ceiling plans, drawn to scale, on which the following items are shown and coordinated with each other, using input from installers of the items involved:

1. Ceiling suspension-system members.
2. Structural members to which suspension systems will be attached.
3. Method of attaching hangers to building structure.
4. Items penetrating finished ceiling and ceiling-mounted items including the following:
 - a. Lighting fixtures.
 - b. Diffusers.
 - c. Grilles.
 - d. Speakers.
 - e. Sprinklers.
 - f. Access panels.
 - g. Detectors.

1.8 CLOSEOUT SUBMITTALS

A. Maintenance Data: For finishes to include in maintenance manuals.

1.9 MAINTENANCE MATERIAL SUBMITTALS

A. Furnish extra materials that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.

1. Acoustical Ceiling Units: Full-size panels equal to 2 percent of quantity installed of each acoustical panel type.
2. Suspension-System Components: Quantity of each exposed component equal to 2 percent of quantity installed of each metal suspension system type.

1.10 DELIVERY, STORAGE, AND HANDLING

- A. Deliver acoustical panels, suspension-system components, and accessories to Project site and store them in a fully enclosed, conditioned space where they will be protected against damage from moisture, humidity, temperature extremes, direct sunlight, surface contamination, and other causes.
- B. Before installing acoustical panels, permit them to reach room temperature and a stabilized moisture content.

1.11 FIELD CONDITIONS

- A. Environmental Limitations: Do not install acoustical panel ceilings until spaces are enclosed and weathertight, wet-work in spaces is complete and dry, work above ceilings is complete, and ambient temperature and humidity conditions are maintained at the levels indicated for Project when occupied for its intended use.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Source Limitations: Match each type of acoustical ceiling panel with a supporting suspension system of the same manufacturer.

2.2 PERFORMANCE REQUIREMENTS

- A. Surface-Burning Characteristics: Comply with ASTM E84; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.
 - 1. Flame-Spread Index: Class A according to ASTM E1264.
 - 2. Smoke-Developed Index: 50 or less.

2.3 ACOUSTICAL PANELS, GENERAL

- A. Acoustical Panel Standard: Provide manufacturer's standard panels according to ASTM E1264 and designated by type, form, pattern, acoustical rating, and light reflectance unless otherwise indicated.
- B. Color: White, unless otherwise indicated.
- C. Antimicrobial Treatment: Manufacturer's standard broad spectrum, antimicrobial formulation that inhibits fungus, mold, mildew, and gram-positive and gram-negative bacteria and showing no mold, mildew, or bacterial growth when tested according to ASTM D3273, ASTM D3274, or ASTM G21 and evaluated according to ASTM D3274 or ASTM G21.

2.4 STANDARD ACOUSTICAL PANELS FOR WIDE-FACE SUSPENSION SYSTEMS

A. Acoustical Panels for Ceiling Type A1

1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to:
 - a. Armstrong World Industries, Inc.; Canyon 1490.
 - b. CertainTeed Ceilings; School Board FFSB-157.
 - c. USG Corporation; Touchstone Panels 5893.
2. Type and Form: Type III, mineral base with painted finish; Form 2, water felted.
3. Pattern: As indicated by manufacturer's designation.
4. Modular Size: 24 by 24 inches.
5. Thickness: 5/8 inch.
6. Edge Detail: Square.
7. NRC: Not less than 0.65.
8. CAC: Not less than 30.
9. LR: Not less than 0.80.
10. Recycled Content: Not less than 30 percent.

B. Acoustical Panels for Ceiling Type A2:

1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to:
 - a. Armstrong World Industries, Inc.; School Zone Fine Fissured 1717.
 - b. CertainTeed Ceilings; Fine Fissured High NRC HHF-454 HNRC.
 - c. USG Corporation; Radar High-NRC Panels 22121.
2. Type and Form: Type III, mineral base with painted finish; Form 2, water felted.
3. Pattern: As indicated by manufacturer's designation.
4. Modular Size: 24 by 24 inches.
5. Thickness: 3/4 inch.
6. Edge Detail: Angled tegular.
7. NRC: Not less than 0.70.
8. CAC: Not less than 35.

9. LR: Not less than 0.80.
10. Recycled Content: Not less than 55 percent.

C. Acoustical Panels for Ceiling Type A3:

1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to:
 - a. Armstrong World Industries, Inc.; Ultima Tegular 1911.
 - b. CertainTeed Ceilings; Symphony m 1222-75-1.
 - c. USG Corporation; Mars Panels 86185.
2. Type and Form: Type IV, mineral base with membrane-faced overlay; Form 2, water felted.
3. Pattern: As indicated by manufacturer's designation.
4. Modular Size: 24 by 24 inches.
5. Thickness: 3/4 inch.
6. Edge Detail: Square.
7. NRC: Not less than 0.75.
8. CAC: Not less than 35.
9. LR: Not less than 0.90.
10. Recycled Content: Not less than 60 percent.

2.5 SPECIALTY ACOUSTICAL PANELS FOR WIDE-FACE SUSPENSION SYSTEMS

A. Acoustical Panels for Ceiling Type A4:

1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to:
 - a. Armstrong World Industries, Inc.; Kitchen Zone 673.
 - b. USG Corporation; Kitchen Lay-In Panels 3210.
2. Type and Form: Type IX, mineral-base panels with scrubbable pigmented or clear finish; Form 2, water felted.
3. Pattern: As indicated by manufacturer's designation.
4. Modular Size: 24 by 24 inches.
5. Thickness: 5/8 inch.

6. Edge Detail: Square.
7. CAC: Not less than 30.
8. LR: Not less than 0.85.
9. Recycled Content: Not less than 20 percent.

B. Acoustical Panels for Ceiling Type A5:

1. Products: Subject to compliance with requirements, available products that may be incorporated into the work include, but are not limited to:
 - a. Armstrong World Industries, Inc.; DESIGNFLEX Squares & Rectangles – OPTIMA Tegalur 3250
2. Type and Form: Type XII, glass-fiber base with membrane-faced overlay; Form 2, cloth. Binder shall not contain urea formaldehyde.
3. Pattern: SR-5
4. Modular Size: 24 x24 inches, 24 by 60 inches, 24 by 48 inches, 24 by 72 inches, 24 by 96 inches
5. Thickness: 1 inch
6. Color: Select from manufacturer's full range of colors.
7. Edge Detail: Tegalur
8. CAC: Not less than 25
9. LR: Note less than 0.85
10. Recycled Content: Not less than 20 percent

C. Acoustical Panels for Ceiling Type A6:

1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to:
 - a. Armstrong World Industries, Inc.; Acoustibuilt 2604
2. Type and Form: Mineral fiber, fine. Binder shall not contain urea formaldehyde.
3. Color: White (Fine textured Finish for Acoustibuilt)
4. Modular Size: 48 by 72 inches
5. Thickness: 7/8 inch
6. Edge Detail: Tapered edges four sides

7. Dimensional Stability: Humiguard Plus
8. NRC: Not less than 0.80
9. LR: Not less than 0.85.
10. Recycled Content: Not less than 30 percent.

2.6 BLADE PANELS FOR WIDE-FACE SUSPENSION SYSTEMS

A. Acoustical Panels for Ceiling Type A7:

1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to:
 - a. Armstrong World Industries, Inc.; WoodWorks Grille – Forte Veneered Ceiling Panels item 6333.
2. Type and Form: Type AP-1 smooth surface real wood veneer on fire rated particle board.
 - a. Class A required per ASTM E84
3. Pattern: As indicated by manufacturer's designation.
4. Color:
 - a. Room 106, see sheet KA161
 - 1) NWA: Plain Slice White Ash
 - b. Room 161, see sheet KA168
 - 1) NPC: Plain Slice Cherry
 - c. Corridor C12, see sheet KA166
 - 1) NWA: Plain Slice White Ash
 - d. Room 213, see sheet KA166
 - 1) NWA: Plain Slice White Ash
5. Modular Size: 12 by 71 inches.
 - a. Number of Blades: 3 per panel spaced at 3-1/4"
6. Width: 3/4 inch.
7. Slat Height: 3"
8. Edge Detail: Square.

9. Accoustical Performance Infill:
 - a. Calla 2820BK
10. Suspension System: Prelude XL HD BL
11. CAC: Not less than 35.
12. LR: Not less than 0.85.
13. Recycled Content: Not less than 20 percent.

2.7 METAL SUSPENSION SYSTEMS, GENERAL

- A. Metal Suspension-System Standard: Provide manufacturer's standard, direct-hung, metal suspension system and accessories according to ASTM C635/C635M and designated by type, structural classification, and finish indicated.

2.8 WIDE-FACE METAL SUSPENSION SYSTEMS

- A. Wide-Face Suspension System for Ceiling Type:
 1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Armstrong World Industries, Inc.; Prelude XL 15/16-inch Exposed Tee System.
 - b. CertainTeed Ceilings; 15/16-inch EZ Stab Classic System.
 - c. USG Corporation; Donn Brand DX Acoustical Suspension System.
 2. Wide-Face, Capped, Double-Web, Steel Suspension System: Main and cross runners roll formed from cold-rolled steel sheet; hot-dip galvanized, G30 coating designation; with prefinished 15/16-inch-wide metal caps on flanges.
 3. Structural Classification:
 - a. Ceiling Types A1, A2, A3, A4, A5: Intermediate-duty system
 - b. Ceiling Type A7: Heavy-duty system.
 4. End Condition of Cross Runners: Override (stepped) type.
 5. Face Design: Flat, flush.
 6. Cap Material: Cold-rolled steel.
 7. Cap Finish: Painted white.

2.9 GRID SUSPENSION SYSTEM FOR TYPE A6

- A. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to:
 - 1. Armstrong World Industries, Inc.; Frameall Drywall Grid System
- B. Refer to Reflected Ceiling Plans and Ceiling Details for additional ceiling assembly information.

2.10 ACCESSORIES

- A. Attachment Devices: Size for five times the design load indicated in ASTM C635/C635M, Table 1, "Direct Hung," unless otherwise indicated. Comply with seismic design requirements.
 - 1. Anchors in Concrete: Anchors of type and material indicated below, with holes or loops for attaching hangers of type indicated and with capability to sustain, without failure, a load equal to five times that imposed by ceiling construction, as determined by testing according to ASTM E488/E488M or ASTM E1512 as applicable, conducted by a qualified testing and inspecting agency.
 - a. Type: Postinstalled bonded anchors.
 - b. Corrosion Protection: Carbon-steel components zinc plated according to ASTM B633, Class SC 1 (mild) service condition.
- B. Wire Hangers, Braces, and Ties: Provide wires as follows:
 - 1. Zinc-Coated, Carbon-Steel Wire: ASTM A641/A641M, Class 1 zinc coating, soft temper.
 - 2. Adjustable Trim Clip 7239 for type A7
 - 3. Size: Wire diameter sufficient for its stress at three times hanger design load (ASTM C635/C635M, Table 1, "Direct Hung") will be less than yield stress of wire, but not less than 0.106-inch- diameter wire.
- C. Hanger Rods: Mild steel, zinc coated or protected with rust-inhibitive paint.
- D. Flat Hangers: Mild steel, zinc coated or protected with rust-inhibitive paint.
- E. Angle Hangers: Angles with legs not less than 7/8 inch wide; formed with 0.04-inch-thick, galvanized-steel sheet complying with ASTM A653/A653M, G90 coating designation; with bolted connections and 5/16-inch-diameter bolts.

2.11 METAL EDGE MOLDINGS AND TRIM

- A. Roll-Formed, Sheet-Metal Edge Moldings and Trim: Type and profile indicated or, if not indicated, manufacturer's standard moldings for edges and penetrations that comply with seismic design requirements; formed from sheet metal of same material, finish, and color as that used for exposed flanges of suspension-system runners.

1. Edge moldings shall fit acoustical panel edge details and suspension systems indicated and match width and configuration of exposed runners unless otherwise indicated.
 2. For lay-in panels with reveal edge details, provide stepped edge molding that forms reveal of same depth and width as that formed between edge of panel and flange at exposed suspension member.
 3. For circular penetrations of ceiling, provide edge moldings fabricated to diameter required to fit penetration exactly.
- B. Extruded-Aluminum or Roll-Formed Steel Sheet-Metal Edge Moldings and Trim: Where indicated for ceiling clouds or fasciae, provide manufacturer's extruded-aluminum or roll-formed steel sheet-metal edge moldings and trim of profile indicated or referenced by manufacturer's designations, including splice plates, corner pieces, and attachment and other clips, complying with seismic design requirements.
1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Armstrong World Industries, Inc.; Axiom Classic Trim.
 - b. USG Corporation; Compasso Suspension Trim.
 2. Baked-Enamel or Powder-Coat Finish: Minimum dry film thickness of 1.5 mils. Comply with ASTM C635/C635M and coating manufacturer's written instructions for cleaning, conversion coating, and applying and baking finish.
 3. Size: Refer to sheets KA703 and KA704 for trim sizing.

2.12 ACOUSTICAL SEALANT

- A. Acoustical Sealant: As specified in Division 07 Section "Joint Sealants."

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, areas, and conditions, including structural framing to which acoustical panel ceilings attach or abut, with Installer present, for compliance with requirements specified in this and other Sections that affect ceiling installation and anchorage and with requirements for installation tolerances and other conditions affecting performance of acoustical panel ceilings.
- B. Examine acoustical panels before installation. Reject acoustical panels that are wet, moisture damaged, or mold damaged.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.
- D. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 PREPARATION

- A. Measure each ceiling area and establish layout of acoustical panels to balance border widths at opposite edges of each ceiling. Avoid using less-than-half-width panels at borders unless otherwise indicated, and comply with layout shown on reflected ceiling plans.
- B. Lay out openings for penetrations centered on the penetrating items.

3.3 INSTALLATION

- A. Install acoustical panel ceilings according to ASTM C636/C636M and manufacturer's written instructions.
- B. Suspend ceiling hangers from building's structural members and as follows:
 - 1. Install hangers plumb and free from contact with insulation or other objects within ceiling plenum that are not part of supporting structure or of ceiling suspension system.
 - 2. Splay hangers only where required to miss obstructions; offset resulting horizontal forces by bracing, countersplaying, or other equally effective means.
 - 3. Where width of ducts and other construction within ceiling plenum produces hanger spacings that interfere with location of hangers at spacings required to support standard suspension-system members, install supplemental suspension members and hangers in form of trapezes or equivalent devices.
 - 4. Secure wire hangers to ceiling-suspension members and to supports above with a minimum of three tight turns. Connect hangers directly to structure or to inserts, eye screws, or other devices that are secure and appropriate for substrate and that will not deteriorate or otherwise fail due to age, corrosion, or elevated temperatures.
 - 5. Secure flat, angle, channel, and rod hangers to structure by attaching to inserts, eye screws, or other devices that are secure and appropriate for both the structure to which hangers are attached and the type of hanger involved. Install hangers in a manner that will not cause them to deteriorate or fail due to age, corrosion, or elevated temperatures.
 - 6. Do not support ceilings directly from permanent metal forms or floor deck. Fasten hangers to cast-in-place hanger inserts, postinstalled mechanical or adhesive anchors, or power-actuated fasteners that extend through forms into concrete.
 - 7. When steel framing does not permit installation of hanger wires at spacing required, install carrying channels or other supplemental support for attachment of hanger wires.
 - 8. Do not attach hangers to steel deck tabs.
 - 9. Do not attach hangers to steel roof deck. Attach hangers to structural members.
 - 10. Space hangers not more than 48 inches o.c. along each member supported directly from hangers unless otherwise indicated; provide hangers not more than 8 inches from ends of each member.

11. Size supplemental suspension members and hangers to support ceiling loads within performance limits established by referenced standards.
- C. Secure bracing wires to ceiling suspension members and to supports with a minimum of four tight turns. Suspend bracing from building's structural members as required for hangers, without attaching to permanent metal forms, steel deck, or steel deck tabs. Fasten bracing wires into concrete with cast-in-place or postinstalled anchors.
- D. Install edge moldings and trim of type indicated at perimeter of acoustical ceiling area and where necessary to conceal edges of acoustical panels.
 1. Apply acoustical sealant in a continuous ribbon concealed on back of vertical legs of moldings before they are installed.
 2. Screw attach moldings to substrate at intervals not more than 16 inches o.c. and not more than 3 inches from ends. Miter corners accurately and connect securely.
 3. Do not use exposed fasteners, including pop rivets, on moldings and trim.
- E. Install suspension-system runners so they are square and securely interlocked with one another. Remove and replace dented, bent, or kinked members.
- F. Install acoustical panels with undamaged edges and fit accurately into suspension-system runners and edge moldings. Scribe and cut panels at borders and penetrations to provide precise fit.
 1. For square-edged panels, install panels with edges fully hidden from view by flanges of suspension-system runners and moldings.
 2. For reveal-edged panels on suspension-system runners, install panels with bottom of reveal in firm contact with top surface of runner flanges.
 3. For reveal-edged panels on suspension-system members with box-shaped flanges, install panels with reveal surfaces in firm contact with suspension-system surfaces and panel faces flush with bottom face of runners.
 4. Paint cut edges of panel remaining exposed after installation; match color of exposed panel surfaces using coating recommended in writing for this purpose by acoustical panel manufacturer.

3.4 FIELD QUALITY CONTROL

- A. Acoustical panel ceiling hangers, anchors, and fasteners will be considered defective if they do not pass tests and inspections.

3.5 CLEANING

- A. Clean exposed surfaces of acoustical panel ceilings, including trim, edge moldings, and suspension-system members. Comply with manufacturer's written instructions for cleaning and touchup of minor finish damage.

- B. Remove and replace ceiling components that cannot be successfully cleaned and restored to permanently eliminate evidence of damage.

END OF SECTION 09 51 13

SECTION 09 61 00 – FLOORING TREATMENT

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes flooring treatment for the following:
 - 1. Sealer/hardener/polish for concrete floors.

1.3 SUBMITTALS, GENERAL

- A. General: Submit all action submittals and informational submittals required by this Section concurrently.

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated.
 - 1. Penetrating liquid floor treatments for polished concrete finish.
- B. Manufacturer/Applicator Warranty: Provide joint agreement between floor treatment manufacturer and floor treatment applicator for not less than 10 years for materials and 10 years for labor.

1.5 INFORMATIONAL SUBMITTALS

- A. Installer Certificates: Signed by manufacturer certifying that all installers comply with specified requirements for manufactures proper procedures and installation requirements.
- B. Material Certificates: For each of the following, signed by manufacturers:
 - 1. Floor and slab treatments.

1.6 CLOSEOUT SUBMITTALS

- A. Executed Warranty: For special warranty.

1.7 QUALITY ASSURANCE

- A. Installer Qualifications: Manufacturer's authorized representative who is trained and approved for installation of flooring treatment for this Project.
- B. Mockups: Finish concrete slab to demonstrate floor treatments and standard of workmanship.
 - 1. Finish area approximately 200 sq. ft. for slab in the location indicated or, if not indicated, as directed by Architect.
 - 2. Approved mockups may become part of the completed Work if undisturbed at time of Substantial Completion.

1.8 DELIVERY, STORAGE, AND HANDLING

- A. Deliver materials in original packages and containers, with seals unbroken, bearing manufacturer's labels indicating brand name and directions for storage and mixing with other components.

1.9 PROJECT CONDITIONS

- A. Environmental Limitations: Comply with flooring manufacturer's written instructions for substrate temperature, ambient temperature, moisture, ventilation, and other conditions affecting resinous flooring application.
- B. Lighting: Provide permanent lighting or, if permanent lighting is not in place, simulate permanent lighting conditions during flooring application.
- C. Close spaces to traffic during flooring application and for not less than 24 hours after application unless manufacturer recommends a longer period.

1.10 COORDINATION AND SCHEDULING

- A. Ensure concrete has cured for not less than 45 days unless otherwise recommended by floor treatment manufacturer.
- B. Schedule application of floor treatment not less than 10 days prior to installation of equipment to be installed in spaces with floor treatment application.
- C. Close areas receiving floor treatment to traffic during floor treatment application in accordance with floor treatment manufacturer's recommendations.

1.11 WARRANTY

- A. Special Warranty: Manufacturer's standard form in which manufacturer agrees to repair or replace components that fail(s) in materials or workmanship within specified warranty period.
 - 1. Warranty Period: 10 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 LIQUID FLOOR TREATMENTS

- A. VOC Content: Liquid floor treatments shall have a VOC content of 200 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).
- B. Penetrating Liquid Floor Sealer/Hardener/Polish Treatments for Polished Concrete Finish: Clear, waterborne solution of inorganic silicate or silicate materials and proprietary components; odorless; that penetrates, hardens, and is suitable for polished concrete surfaces.
 - 1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Advanced Floor Products; Retro-Plate 99.
 - b. QC Construction Products, Madera, California.
 - c. Scofield Systems, Rutherford, New Jersey.
 - 2. Abrasion resistance (ASTM C779): Up to 300 percent increase in abrasion resistance.
 - 3. Impact strength (ASTM C805): 21 percent increase in impact strength.
 - 4. Ultra violet light and water spray (ASTM G23-81): No adverse effects to ultra violet and water spray.
 - 5. Co-efficient of friction (ASTM C1028): Levels 1 and 2, satin or semi gloss, exceed OSHA and ADA recommendations.
 - 6. Reflectivity: Minimum of 25 percent increase.
- C. Related Materials:
 - 1. Neutralizing Agent: Ammonia.
 - 2. Water: Potable.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Allow new concrete to receive floor treatment to cure not less than 45 days prior to floor treatment application unless longer period recommended by floor treatment manufacturer.
- B. Scrape or grind protrusion flush with surface. Patch voids, holes and cracks with cementitious patching compound recommended by floor treatment manufacturer and compatible with floor treatment materials.

- C. Remove curing, sealing and coating agents, oil, breaking compound residue, wax, and grease using mechanical or chemical methods acceptable to floor treatment manufacturer and compatible with floor treatment materials. Rinse and allow drying as recommended by floor treatment manufacturer.
- D. Remove dust and loose material by brushing, sweeping, vacuuming, and high-pressure air as recommended by floor treatment manufacturer.
- E. Remove paint residue with solvent/stripper without acidic pH and acceptable to floor treatment manufacturer.
- F. Treat oil spots with aggressive solvent or oil emulsifier acceptable to floor treatment manufacturer to remove oil that has penetrated below surface after absorbing excess oil on surface using oil absorber acceptable to floor treatment manufacturer.
- G. Treat tire marks or other residue in accordance with floor treatment manufacturer's recommendations, including application of treatment materials, scrubbing, and rinsing.

3.2 APPLICATION

- A. Apply floor treatment materials including acid stain, in accordance with manufacturer's instructions. Ensure technical representative of floor treatment manufacturer is present at start of floor finish application.
- B. Sealing, Hardening and Polishing of Concrete Surface
 - 1. Start application not less than 10 days prior to installation of equipment or other construction on floors receiving floor treatment.
 - 2. Apply sealer/hardener/polish materials in strict accordance with manufacturer's recommendations for applications shown on Drawings to achieve waterproofing, sealing, hardening, dustproofing, and abrasion resistance in addition to provide polished surface at sheen level of Level II.
- C. Apply components of flooring system according to manufacturer's written instructions to produce a uniform, monolithic wearing surface.

3.3 LIQUID FLOOR TREATMENTS

- A. Polished Concrete Floor Treatment: Apply polished concrete finish system to cured and prepared slabs to match accepted mockup.
 - 1. Machine grind floor surfaces to receive polished finishes level and smooth.
 - 2. Apply penetrating liquid floor treatment for polished concrete in polishing sequence and according to manufacturer's written instructions, allowing recommended drying time between successive coats.

3. Continue polishing with progressively finer grit diamond polishing pads to gloss level to match approved mockup.
4. Control and dispose of waste products produced by grinding and polishing operations.
5. Neutralize and clean polished floor surfaces.

3.4 PROTECTION OF LIQUID FLOOR TREATMENTS

- A. Protect liquid floor treatment from damage and wear during the remainder of construction period. Use protective methods and materials, including temporary covering, recommended in writing by liquid floor treatments installer.

END OF SECTION 09 61 00

SECTION 09 65 13 - RESILIENT BASE AND ACCESSORIES**PART 1 - GENERAL****1.1 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Resilient base.
 - 2. Resilient vent cove base.
 - 3. Resilient stair accessories.
 - 4. Resilient molding accessories.

1.3 SUBMITTALS, GENERAL

- A. General: Submit all action submittals (except Samples for Verification) required by this Section concurrently.

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated.
 - 1. Resilient base: rubber RB.
 - 2. Resilient vent cove base: rubber VCB.
 - 3. Resilient one-piece stair tread and riser units.
 - 4. Abrasive safety strips.
 - 5. Reducer strip for resilient floor covering.
 - 6. Carpet edge for 1/4-inch glue-down applications.
 - 7. Carpet edge for 5/16-inch glue-down applications.
 - 8. Joiner for tile and carpet.
 - 9. Trowelable leveling and patching compounds.
 - 10. Concrete slab primer.
 - 11. Adhesives.
 - 12. Stair-tread-nose filler.
- B. Samples for Verification and Initial Color Selection:
 - 1. For each type of product indicated, in manufacturer's standard-size Samples but not less than 2-1/2 inches long, of each resilient product color, texture, and pattern required.

1.5 MAINTENANCE MATERIAL SUBMITTALS

- A. Furnish extra materials that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.
 - 1. Furnish not less than 10 linear feet for every 500 linear feet or fraction thereof, of each type, color, pattern, and size of resilient product installed.

1.6 QUALITY ASSURANCE

- A. Source Limitations for Resilient Base and Accessories: Obtain each type of resilient base and accessories from a single source with resources to provide materials of consistent quality in appearance and physical properties.
- B. Fire-Test-Response Characteristics: As determined by testing identical products according to ASTM E 648 or NFPA 253 by a qualified testing agency.
 - 1. Critical Radiant Flux Classification: Class I, not less than 0.45 W/sq. cm.

1.7 DELIVERY, STORAGE, AND HANDLING

- A. Store resilient products and installation materials in dry spaces protected from the weather, with ambient temperatures maintained within range recommended by manufacturer, but not less than 55 deg F or more than 90 deg F.

1.8 PROJECT CONDITIONS

- A. Maintain ambient temperatures within range recommended by manufacturer, but not less than 70 deg F or more than 90 deg F, in spaces to receive resilient products during the following time periods:
 - 1. 48 hours before installation.
 - 2. During installation.
 - 3. 48 hours after installation.
- B. Until Substantial Completion, maintain ambient temperatures within range recommended by manufacturer, but not less than 55 deg F or more than 90 deg F.
- C. Install resilient products after other finishing operations, including painting, have been completed.

PART 2 - PRODUCTS

2.1 RESILIENT BASE: RUBBER RB

A. Resilient Base:

1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to the following:
 - a. Mannington Commercial; Premium Rubber Edge.
 - b. Johnsonite; Rubber Wall Base.
 - c. Roppe Corporation, USA; Pinnacle Series Rubber Wall Base

B. Resilient Base Standard: ASTM F 1861.

1. Material Requirement: Type TP (rubber, thermoplastic).
2. Manufacturing Method: Group I (solid, homogeneous).
3. Style: Cove (base with toe).

C. Minimum Thickness: 0.125 inch.

D. Height: 4 inches.

E. Lengths: Coils in manufacturer's standard length, not less than 100 feet.

F. Outside Corners: Job formed.

G. Inside Corners: Job formed.

H. Colors and Patterns: As selected by Architect from full range of industry colors.

2.2 RESILIENT VENT COVE BASE: RUBBER VCB

A. Resilient Vent Cove Base:

1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to the following:
 - a. Johnsonite; Rubber Wall Base.

B. Resilient Base Standard: ASTM F 1861.

1. Material Requirement: Rubber.
2. Manufacturing Method: Group I (solid, homogeneous).
3. Style: Cove (base with toe and vertical, semi-circular vents).

C. Minimum Thickness: 5/16 inch.

D. Height: 4 inches.

- E. Lengths: 4' length sections.
- F. Outside Corners: Pre-formed.
- G. Inside Corners: Job formed.
- H. Colors and Patterns: As selected by Architect from full range of industry colors.

2.3 RESILIENT STAIR ACCESSORIES: RUBBER RS

- A. Resilient One piece Stair Tread and Riser Units:
 - 1. Basis-of-Design Product: Subject to compliance with requirements, provide Johnsonite; Bamboo Surface Texture Rubber Stair Tread with Integrated Riser VIHTR or comparable product by one of the following :
 - a. Mannington Commercial.
 - b. Nora Rubber Flooring; Freudenberg Building Systems, Inc.
- B. Resilient Stair Treads Standard: ASTM F 2169.
 - 1. Material Requirement: Type TS (rubber, vulcanized thermoset).
 - 2. Surface Design:
 - a. Class 2, Pattern: Bamboo pattern, with abrasive strips, with contrasting color for the visually impaired.
- C. Nosing Style: Square.
- D. Nosing Height: 2 inches.
- E. Thickness: 0.210 inch and tapered to back edge of 0.113 inch.
- F. Size: Lengths and depths to fit each stair tread in one piece or, for treads exceeding maximum lengths manufactured, in equal-length units, with integral riser.
- G. Stringers: 0.080 inch thickness, height and length after cutting to fit risers and treads and to cover stair stringers; produced by same manufacturer as treads and recommended by manufacturer for installation with treads.
- H. Warranty : 10 year
- I. Colors and Patterns: As selected by Architect from full range of industry colors.

2.4 RESILIENT MOLDING ACCESSORY

A. Resilient Molding Accessory:

1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Reducer Strip for Resilient Floor Covering:
 - 1) Johnsonite; RR-XX-C Reducer.
 - 2) Roppe Corporation, USA; #172 Tile Reducer 1/8 inch.
 - b. Carpet Edge for 1/4-inch Glue-Down Applications:
 - 1) Johnsonite; EG-XX-H Edge Guard.
 - 2) Roppe Corporation, USA; #38 Glue-Down Carpet Edge 1/4-inch.
 - c. Carpet Edge for 5/16-inch Glue-Down Applications:
 - 1) Johnsonite; EG-XX-G Edge Guard.
 - 2) Roppe Corporation, USA; #39 Glue-Down Carpet Edge 5/16-inch.
 - d. Joiner for Tile and Carpet:
 - 1) Johnsonite; CTA-XX-A Adapter.
 - 2) Roppe Corporation, USA; #177 Tile Carpet Joiner.

B. Material: Vinyl or rubber.

C. Profile and Dimensions: As indicated.

D. Colors and Patterns: As selected by Architect from full range of industry colors.

2.5 INSTALLATION MATERIALS

- A. Trowelable Leveling and Patching Compounds: Latex-modified, portland cement based or blended hydraulic-cement-based formulation provided or approved by manufacturer for applications indicated.
- B. Concrete Slab Primer: Non-staining type recommended by resilient accessories manufacturer.
- C. Adhesives: Water-resistant type recommended by manufacturer to suit resilient products and substrate conditions indicated.
 1. Adhesives shall have a VOC content of 50 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).
 2. Adhesives shall comply with the testing and product requirements of the California Department of Health Services' "Standard Practice for the Testing of Volatile Organic Emissions from Various Sources Using Small-Scale Environmental Chambers."

- D. Stair-Tread-Nose Filler: Two-part epoxy compound recommended by resilient tread manufacturer to fill nosing substrates that do not conform to tread contours.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, with Installer present, for compliance with requirements for maximum moisture content and other conditions affecting performance of the Work.
- B. Verify that finishes of substrates comply with tolerances and other requirements specified in other Sections and that substrates are free of cracks, ridges, depressions, scale, and foreign deposits that might interfere with adhesion of resilient products.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.
- D. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 PREPARATION

- A. Prepare substrates according to manufacturer's written instructions to ensure adhesion of resilient products.
- B. Concrete Substrates for Resilient Stair Treads and Accessories: Prepare according to ASTM F 710.
 - 1. Verify that substrates are dry and free of curing compounds, sealers, and hardeners.
 - 2. Remove substrate coatings and other substances that are incompatible with adhesives and that contain soap, wax, oil, or silicone, using mechanical methods recommended by manufacturer. Do not use solvents.
 - 3. Alkalinity and Adhesion Testing: Perform tests recommended by manufacturer.
 - 4. Moisture Testing: Perform tests recommended by manufacturer and as follows. Proceed with installation only after substrates pass testing.
 - a. Perform anhydrous calcium chloride test, ASTM F 1869. Proceed with installation only after substrates have maximum moisture-vapor-emission rate of 3 lb of water/1000 sq. ft. in 24 hours.
 - b. Perform relative humidity test using in situ probes, ASTM F 2170. Proceed with installation only after substrates have maximum 75 percent relative humidity level measurement.
- C. Fill cracks, holes, and depressions in substrates with trowelable leveling and patching compound and remove bumps and ridges to produce a uniform and smooth substrate.

- D. Do not install resilient products until they are same temperature as the space where they are to be installed.
 - 1. Move resilient products and installation materials into spaces where they will be installed at least 48 hours in advance of installation.
- E. Sweep and vacuum clean substrates to be covered by resilient products immediately before installation. Following cleaning, examine substrates for moisture, alkaline salts, carbonation, or dust.

3.3 RESILIENT BASE INSTALLATION

- A. Comply with manufacturer's written instructions for installing resilient base.
- B. Apply resilient base to walls, columns, pilasters, casework and cabinets in toe spaces, and other permanent fixtures in rooms and areas where base is required.
- C. Install resilient base in lengths as long as practicable without gaps at seams and with tops of adjacent pieces aligned.
- D. Tightly adhere resilient base to substrate throughout length of each piece, with base in continuous contact with horizontal and vertical substrates.
- E. Do not stretch resilient base during installation.
- F. On masonry surfaces or other similar irregular substrates, fill voids along top edge of resilient base with manufacturer's recommended adhesive filler material.
- G. Job-Formed Corners- using manufactures approved methods and tools:
 - 1. Outside Corners: Use straight pieces of maximum lengths possible. Form without producing discoloration (whitening) at bends.
 - 2. Inside Corners: Use straight pieces of maximum lengths possible. Use scribing and cutting measures approved by base manufacturer. Inside corners that are not scribed to fit will be rejected.

3.4 RESILIENT ACCESSORY INSTALLATION

- A. Comply with manufacturer's written instructions for installing resilient accessories.
- B. Resilient Stair Accessories:
 - 1. Use stair-tread-nose filler to fill nosing substrates that do not conform to tread contours.
 - 2. Tightly adhere to substrates throughout length of each piece.
 - 3. For treads installed as separate, equal-length units, install to produce a flush joint between units.

- C. Resilient Molding Accessories: Butt to adjacent materials and tightly adhere to substrates throughout length of each piece. Install reducer strips at edges of carpet and resilient floor covering that would otherwise be exposed.

3.5 CLEANING AND PROTECTION

- A. Comply with manufacturer's written instructions for cleaning and protection of resilient products.
- B. Perform the following operations immediately after completing resilient product installation:
 - 1. Remove adhesive and other blemishes from exposed surfaces.
 - 2. Sweep and vacuum surfaces thoroughly.
 - 3. Damp-mop surfaces to remove marks and soil.
 - 4. Do not wash floor until after the period recommended by manufacturer.
- C. Protect resilient products from mars, marks, indentations, and other damage from construction operations and placement of equipment and fixtures during remainder of construction period.
- D. Cover resilient products until Substantial Completion.

END OF SECTION 09 65 13

SECTION 09 65 19 - RESILIENT TILE FLOORING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Rubber floor tile.
 - 2. Luxury vinyl tile.

1.3 SUBMITTALS, GENERAL

- A. General: Submit all action submittals (except Samples for Verification) and informational submittals required by this Section concurrently.

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated.
 - 1. Rubber floor tile: RT
 - 2. Luxury vinyl tile: LVT1, LVT2
 - 3. Trowelable leveling and patching compounds.
 - 4. Concrete slab primer.
 - 5. Adhesives.
 - 6. Floor polish.
- B. Shop Drawings: For each type of floor tile. Include floor tile layouts, edges, columns, doorways, enclosing partitions, built-in furniture, cabinets, and cutouts.
 - 1. Show details of patterns.
 - 2. Show base details.
 - 3. Show locations of divider strips, control and expansion joints.
 - 4. Show threshold locations and types.
- C. Samples for Verification and Initial Color Selection: Full-size units of each color and pattern of floor tile required.

1.5 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For qualified Installer.

1.6 CLOSEOUT SUBMITTALS

- A. Maintenance Data: For each type of floor tile to include in maintenance manuals.

1.7 MATERIALS MAINTENANCE SUBMITTALS

- A. Furnish extra materials that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.
 - 1. Floor Tile: Furnish 1 box for every 50 boxes or fraction thereof, of each type, color, and pattern of floor tile installed.

1.8 QUALITY ASSURANCE

- A. Installer Qualifications: A qualified installer who employs workers for this Project who are competent in techniques required by manufacturer for floor tile installation indicated.
 - 1. Engage an installer who employs workers for this Project who are trained or certified by manufacturer for installation techniques required.
- B. Source Limitations for Resilient Tile: Obtain each type of resilient tile from a single source with resources to provide materials of consistent quality in appearance and physical properties.
- C. Fire-Test-Response Characteristics: As determined by testing identical products according to ASTM E 648 or NFPA 253 by a qualified testing agency.
 - 1. Critical Radiant Flux Classification: Class I, not less than 0.45 W/sq. cm.
- D. Mockups: Build mockups to verify selections made under sample submittals and to demonstrate aesthetic effects and set quality standards for materials and execution.
 - 1. Build mockups for floor tile including accessories.
 - a. Size: Minimum 100 sq. ft. for each type, color, and pattern in locations directed by Architect.

1.9 DELIVERY, STORAGE, AND HANDLING

- A. Store floor tile and installation materials in dry spaces protected from the weather, with ambient temperatures maintained within range recommended by manufacturer, but not less than 55 deg F or more than 90 deg F. Store floor tiles on flat surfaces.

1.10 PROJECT CONDITIONS

- A. Maintain ambient temperatures within range recommended by manufacturer, but not less than 70 deg F or more than 90 deg F, in spaces to receive floor tile during the following time periods:
 - 1. 48 hours before installation.

2. During installation.
 3. 48 hours after installation.
- B. Until Substantial Completion, maintain ambient temperatures within range recommended by manufacturer, but not less than 55 deg F or more than 90 deg F.
 - C. Close spaces to traffic during floor tile installation.
 - D. Close spaces to traffic for 48 hours after floor tile installation.
 - E. Install floor tile after other finishing operations, including painting, have been completed.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Low-Emitting Materials: Flooring system shall comply with the testing and product requirements of the California Department of Health Services' "Standard Practice for the Testing of Volatile Organic Emissions from Various Sources Using Small-Scale Environmental Chambers."

2.2 RUBBER FLOOR TILE: RT

- A. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 1. Johnsonite; Roundel tile flooring- textured rubber tile.
- B. Tile Standard: ASTM F 1344, Class I-A, homogeneous rubber tile, solid color.
- C. Hardness: Not less than 85 as required by ASTM F 1344, measured using Shore, Type A durometer per ASTM D 2240.
- D. Wearing Surface: Smooth Textured Molded pattern.
 1. Molded-Pattern Figure: Bamboo.
- E. Thickness: 0.125 inch.
- F. Size: 24 x 24 inches.
- G. Seaming Method: Standard.
- H. Colors and Patterns: As selected by Architect from full range of industry colors.

2.3 HIGH PERFORMANCE LUXURY VINYL TILE: LVT1

- A. Basis of design product: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - 1. Interface: Level Set Collection, Natural Woodgrains 4.5 mm.
- B. Tile Standard: ASTM F 1700.
 - 1. Class: Class III, printed film vinyl tile.
 - 2. Type: Type B, embossed surface.
- C. Thickness: 4.5mm.
- D. Size: 25cm x 1 m.
- E. Colors: As selected by Architect from full range of industry colors.
- F. Patterns: As indicated on drawings.

2.4 HIGH PERFORMANCE LUXURY VINYL TILE: LVT2

- A. Basis of design product: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - 1. Interface: Brushed Lines and Drawn Lines Collection, Brushed Lines 4.5 mm.
- B. Tile Standard: ASTM F 1700.
 - 1. Class: Class III, printed film vinyl tile.
 - 2. Type: Type B, embossed surface.
- C. Thickness: 4.5mm.
- D. Size: 25cm x 1 m.
- E. Colors: As selected by Architect from full range of industry colors.
- F. Patterns: As indicated on drawings.

2.5 INSTALLATION MATERIALS

- A. Trowelable Leveling and Patching Compounds: Latex-modified, portland cement based or blended hydraulic-cement-based formulation provided or approved by manufacturer for applications indicated.
 - 1. Basis-of-Design Products: Subject to compliance with requirements, provide the following Ardex product or a comparable product:
 - a. Portland Cement-Based Flash Patching and Skim Coating: SD-F Feather Finish.

- b. Portland Cement-Based Patching: SD-P Insta Patch.
 - c. Portland Cement-Based Self-Leveling Underlayment: K-15 Self-Leveling Underlayment Concrete.
- B. Concrete Slab Primer: Non-staining type recommended by resilient tile flooring manufacturer.
- C. Adhesives: Water-resistant type recommended by manufacturer to suit floor tile and substrate conditions indicated.
 - 1. Adhesives shall comply with the following limits for VOC content when calculated according to 40 CFR 59, Subpart D (EPA Method 24):
 - a. VCT Adhesives: Not more than 50 g/L.
 - b. Rubber Floor Adhesives: Not more than 60 g/L.
 - 2. Adhesives shall comply with the testing and product requirements of the California Department of Health Services' "Standard Practice for the Testing of Volatile Organic Emissions from Various Sources Using Small-Scale Environmental Chambers."
- D. Floor Polish: Provide protective liquid floor polish products as recommended by manufacturer, containing not less than 16 to 25 percent solids.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, with Installer present, for compliance with requirements for maximum moisture content and other conditions affecting performance of the Work.
- B. Verify that finishes of substrates comply with tolerances and other requirements specified in other Sections and that substrates are free of cracks, ridges, depressions, scale, and foreign deposits that might interfere with adhesion of floor tile.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.
- D. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 PREPARATION

- A. Prepare substrates according to manufacturer's written instructions to ensure adhesion of resilient products.
- B. Concrete Substrates: Prepare according to ASTM F 710.
 - 1. Verify that substrates are dry and free of curing compounds, sealers, and hardeners.
 - 2. Remove substrate coatings and other substances that are incompatible with adhesives and that contain soap, wax, oil, or silicone, using mechanical methods recommended by manufacturer. Do not use solvents.

3. Alkalinity and Adhesion Testing: Perform tests recommended by manufacturer. Proceed with installation only after substrates pass testing.
4. Moisture Testing: Perform tests recommended by manufacturer and as follows. Proceed with installation only after substrates pass testing.
 - a. Perform anhydrous calcium chloride test, ASTM F 1869. Proceed with installation only after substrates have maximum moisture-vapor-emission rate of 3 lb of water/1000 sq. ft. in 24 hours.
 - 1) At a minimum, test concrete substrates in at least 3 locations in separate parts of the floor for applications of 2000 square feet or less; provide one additional test location for each additional 1000 square feet, or fraction thereof.
 - b. Perform relative humidity test using in situ probes, ASTM F 2170. Proceed with installation only after substrates have maximum 75 percent relative humidity level measurement.
- C. Wood Subfloors:
 1. Verify that underlayment over subfloor complies with requirements in Section 06 16 00, "Sheathing."
 2. Verify underlayment surface is free of surface irregularities and substances with potential to interfere with adhesive bond, show through surface, or stain tile.
- D. Existing Floors: Condition of existing subfloor is unknown prior to removal of existing flooring. If, after removal of existing flooring, subfloor requires leveling, patching, or filling, notify Architect in writing.
 1. Asbestos Abatement Areas: In areas where removal of existing flooring is included in asbestos abatement procedures, coordinate with entity responsible for abatement to ensure patching and repair is compatible with requirements for installation of resilient tile flooring.
- E. Comply with resilient tile manufacturer's written instructions to prepare substrates.
 1. Fill cracks, holes, and depressions in substrates with trowelable leveling and patching compound and remove bumps and ridges to produce a uniform and smooth substrate.
 2. Ensure patching and repair materials are compatible with resilient tile.
 3. Levelness Tolerances: Apply patching and repair materials to provide levelness of floor substrate within 1/4 inch in 10 feet, unless more stringent levelness is recommended or required by resilient tile manufacturer.
 4. Flash Patching and Skim Coating: Apply flash patching material to areas with 1/8 inch or less depression.
 5. Patching: Apply patching material to areas with 1/8 inch or greater depression.

6. Self-Leveling Underlayment: Apply self-leveling material to areas where flash patching and patching described above cannot provide smooth, level surface acceptable to receive resilient tile flooring.
- F. Do not install floor tiles until they are same temperature as space where they are to be installed.
 1. Move resilient products and installation materials into spaces where they will be installed at least 48 hours in advance of installation.
- G. Sweep and vacuum clean substrates to be covered by resilient products immediately before installation. Following cleaning, examine substrates for moisture, alkaline salts, carbonation, or dust.

3.3 FLOOR TILE INSTALLATION

- A. Comply with manufacturer's written instructions for installing floor tile.
- B. Lay out floor tiles from center marks established with principal walls, discounting minor offsets, so tiles at opposite edges of room are of equal width. Adjust as necessary to avoid using cut widths that equal less than one-half tile at perimeter.
 1. Lay tiles in pattern indicated.
- C. Match floor tiles for color and pattern by selecting tiles from cartons in the same sequence as manufactured and packaged, if so numbered. Discard broken, cracked, chipped, or deformed tiles.
 1. Lay tiles as follows:
 - a. Field Tile: With grain running in one direction or with grain direction alternating in adjacent tiles (basket-weave pattern) as shown on drawings, pattern of colors and sizes indicated.
 - b. Accent Tile: With grain running in one direction or with grain direction alternating in adjacent tiles (basket-weave pattern) as shown on drawings, pattern of colors and sizes indicated.
- D. Scribe, cut, and fit floor tiles to butt neatly and tightly to vertical surfaces and permanent fixtures including built-in furniture, cabinets, pipes, outlets, and door frames.
- E. Extend floor tiles into toe spaces, door reveals, closets, and similar openings. Extend floor tiles to center of door openings.
- F. Maintain reference markers, holes, and openings that are in place or marked for future cutting by repeating on floor tiles as marked on substrates. Use chalk or other nonpermanent, non-staining marking device.
- G. Install floor tiles on covers for telephone and electrical ducts, building expansion-joint covers, and similar items in finished floor areas. Maintain overall continuity of color and pattern between pieces of tile installed on covers and adjoining tiles. Tightly adhere tile edges to substrates that abut covers and to cover perimeters.

- H. Apply concrete slab primer, if recommended by resilient tile manufacturer, prior to applying adhesive. Apply according to manufacturer's written instructions.
- I. Adhere floor tiles to flooring substrates using a full spread of adhesive applied to substrate to produce a completed installation without open cracks, voids, raising and puckering at joints, telegraphing of adhesive spreader marks, and other surface imperfections.

3.4 CLEANING AND PROTECTION

- A. Comply with manufacturer's written instructions for cleaning and protection of floor tile.
- B. Perform the following operations immediately after completing floor tile installation:
 - 1. Remove adhesive and other blemishes from exposed surfaces.
 - 2. Sweep and vacuum surfaces thoroughly.
 - 3. Damp-mop surfaces to remove marks and soil.
 - 4. Do not wash floor until after the period recommended by resilient tile manufacturer.
- C. Protect floor tile products from marks, marks, indentations, and other damage from construction operations and placement of equipment and fixtures during remainder of construction period.
- D. Floor Polish: Remove soil, visible adhesive, and surface blemishes from floor tile surfaces before applying liquid floor polish.
- E. Cover floor tile until Substantial Completion.
- F. Perform the following operations in each area of Project not more than four days before date scheduled for inspections that establish date of Substantial Completion.
 - 1. Rubber Floor Tile:
 - a. Scrub floor with a neutral detergent solution at 4 oz per gallon to remove factory finish. Scrub floor using soft nylon brushes or red pad as recommended by rubber floor tile manufacturer.
 - b. Use stripping solutions at badly soiled or scratched areas, as recommended by rubber floor tile manufacturer.
 - c. Thoroughly rinse floor, wet vacuum and dry floor. Floor must be free from all dust, dirt and any particles that may become lodged in final polish application.
 - d. Apply a maintainer coat of Taski Wiwax solution as recommended by resilient tile and polish manufacturer. Dry buff using a disc rotary machine, white pad or soft nylon brush, not to exceed 300 rpm, after rubber floor tile dries.
 - 2. Vinyl Composition Floor Tile:
 - a. Scrub floor with a neutral detergent solution at 4 to 6 oz per gallon. Scrub floor using pads or brushes as recommended by vinyl composition floor tile manufacturer.

- b. Use stripping solutions at badly soiled or scratched areas, as recommended by vinyl composition floor tile manufacturer.
- c. Thoroughly rinse floor, wet vacuum and dry floor. Floor must be free from all dust, dirt and nay particles that may become lodged in final polish application.
- d. Apply five coats of commercial floor polish. Apply each coat as recommended by polish manufacturer.

END OF SECTION 09 65 19

SECTION 09 66 23 - RESINOUS MATRIX TERRAZZO FLOORING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Thin-set, epoxy-resin matrix terrazzo flooring – poured epoxy
 - 2. Epoxy-resin matrix terrazzo base - Precast.

1.3 DEFINITIONS

- A. Aggregate: Marble, Glass and Granite chips.

1.4 PREINSTALLATION MEETINGS

- A. Preinstallation Conference: Conduct conference at Project site.
 - 1. Review methods and procedures related to terrazzo including, but not limited to, the following:
 - a. Inspect and discuss condition of substrate and other preparatory work performed by other trades.
 - b. Review and finalize construction schedule and verify availability of materials, Installer's personnel, equipment, and facilities needed to make progress.
 - c. Review special terrazzo designs and patterns.

1.5 SUBMITTALS, GENERAL

- A. General: Submit all action submittals (except Samples for Verification) and informational submittals required by this Section concurrently.

1.6 ACTION SUBMITTALS

- A. Product Data: For each type of product.
 - 1. Thin-set, epoxy-resin matrix terrazzo flooring- poured epoxy.
 - 2. Epoxy- resin matrix terrazzo base- precast.
 - 3. Thin-set divider strips.

4. Heavy-top divider strips.
5. Control-joint strips.
6. Accessory strips.
7. Anchoring devices.
8. Patching and fill material.
9. Joint compound.
10. Resinous matrix terrazzo cleaner.

B. Shop Drawings: Submit set of drawings showing complete floor patterns in all areas indicated on Drawings to receive terrazzo. Submit drawings for Architect review prior to starting installation. Shop drawings are to including but not limited to:

1. Floor plans showing all patterns, precast base locations and details.
2. Layouts showing locations of divider strips, control and expansion joints.
3. Locations of all floor drains including sloped slab locations.
4. Marble threshold location.
5. Photocopies of Tetra Tech documentation not acceptable.
6. Divider strips.
7. Control-joint strips.
8. Accessory strips.
9. Precast terrazzo jointing and edge configurations.
10. Terrazzo patterns.

C. Samples for Verification and Initial Color Selection: For each type, material, color, and pattern of terrazzo and accessory required showing the full range of color, texture, and pattern variations expected. Label each terrazzo sample to identify manufacturer's matrix color and aggregate types, sizes, and proportions. Prepare Samples of same thickness and from same material to be used for the Work, in size indicated below:

1. Terrazzo: 6-inch-square Samples.
2. Precast Terrazzo: 6-inch-square Samples.
3. Accessories: 6-inch-long Samples of each exposed strip item required.
4. NTMA color plates showing the full range of colors and patterns available for each terrazzo type

1.7 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For Installer.
- B. Material Certificates: For each type of terrazzo material or product, from manufacturer.
- C. Installer Certificates: Signed by manufacturers certifying that installers comply with requirements.

1.8 CLOSEOUT SUBMITTALS

- A. Maintenance Data: For terrazzo to include in maintenance manuals.

1.9 QUALITY ASSURANCE

A. Installer Qualifications:

1. Engage an installer who is a contractor member of NTMA.
2. Engage an installer who is certified in writing by terrazzo manufacturer as qualified to install manufacturer's products.

B. Source Limitations: Obtain primary terrazzo materials from single source from single manufacturer. Provide secondary materials including patching and fill material, joint sealant, and repair materials of type and from source recommended by manufacturer of primary materials.

C. Source Limitations for Aggregates: Obtain each color, grade, type, and variety of granular materials from single source with resources to provide materials of consistent quality in appearance and physical properties.

D. Mockups: Build mockups to verify selections made under Sample submittals and to demonstrate aesthetic effects and set quality standards for materials and execution.

1. Build mockups for terrazzo including accessories.
 - a. Size: Minimum 100 sq. ft. of typical poured-in-place flooring condition for each color and pattern in locations directed by Architect.
 - b. Include base.
2. Approval of mockups does not constitute approval of deviations from the Contract Documents contained in mockups unless Architect specifically approves such deviations in writing.

1.10 DELIVERY, STORAGE, AND HANDLING

- A. Deliver materials to Project site in supplier's original wrappings and containers, labeled with source's or manufacturer's name, material or product brand name, and lot number if any.
- B. Store materials in their original, undamaged packages and containers, inside a well-ventilated area protected from weather, moisture, soiling, extreme temperatures, and humidity.

1.11 FIELD CONDITIONS

- A. Environmental Limitations: Comply with manufacturer's written instructions for substrate temperature, ambient temperature, moisture, ventilation, and other conditions affecting terrazzo installation.
- B. Field Measurements: Verify actual dimensions of construction contiguous with precast terrazzo by field measurements before fabrication.
- C. Provide permanent lighting or, if permanent lighting is not in place, simulate permanent lighting conditions during terrazzo installation.

- D. Close spaces to traffic during terrazzo application and for not less than 24 hours after application unless manufacturer recommends a longer period.
- E. Control and collect water and dust produced by grinding operations. Protect adjacent construction from detrimental effects of grinding operations.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. NTMA Standards: Comply with NTMA's "Terrazzo Specifications and Design Guide" and with written recommendations for terrazzo type indicated unless more stringent requirements are specified.

2.2 EPOXY-RESIN MATRIX TERRAZZO-POURED EPOXY

- A. Thin-set, Epoxy-Resin Matrix Terrazzo: Comply with NTMA's "Terrazzo Specifications and Design Guide" and manufacturer's written instructions for matrix and aggregate proportions and mixing.

- 1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. General Polymers Corporation; Terrazzo 1100.
 - b. Terrazzo & Marble Supply Companies; Terroxy Resin Systems.
- 2. Thickness: 3/8 inch nominal.
- 3. Formulated Mix Color and Pattern: As selected by Architect from NTMA terrazzo plates.
- 4. Custom Mix Color and Pattern: Match Architect's sample.
- 5. Aggregate and Matrix colors to be selected by architect. Matrix color to be selected from entire line of Sherwin Williams colors.

- B. Materials:

- 1. Crack Isolation Membrane with Scrim: A two component, 100 percent solid flexible epoxy membrane applied at 40 square feet per gallon, yielding 40 mils in thickness. Provide Crack Isolation Membrane over 100% of surface to be covered with epoxy flooring- all floor levels. Provide scrim over all new and existing cracks as per manufactures recommendations. For all second and third floor applications, provide scrim over 100% of surface to be covered with epoxy flooring.
 - a. Similar to "Epoflex" by General Polymers, Cincinnati Ohio.
- 2. Primer: Manufacturer's product recommended for substrate and use indicated.

3. Thin-set Epoxy-Resin Matrix-Poured Epoxy: Manufacturer's standard recommended for use indicated and in color required for mix indicated.
 - a. Physical Properties without Aggregates:
 - 1) Hardness: 60 to 85 per ASTM D 2240, Shore D.
 - 2) Minimum Tensile Strength: 3000 psi per ASTM D 638 for a 2-inch specimen made using a "C" die per ASTM D 412.
 - 3) Minimum Compressive Strength: 10,000 psi per ASTM D 695, Specimen B cylinder.
 - 4) Chemical Resistance: No deleterious effects by contaminants listed below after seven-day immersion at room temperature per ASTM D 1308.
 - a) Distilled water.
 - b) Mineral water.
 - c) Isopropanol.
 - d) Ethanol.
 - e) 0.025 percent detergent solution.
 - f) 1.0 percent soap solution.
 - g) 10 percent sodium hydroxide.
 - h) 10 percent hydrochloric acid.
 - i) 30 percent sulfuric acid.
 - j) 5 percent acetic acid.
 - b. Physical Properties with Aggregates: For resin blended with Georgia white marble, ground, grouted, and cured per requirements in NTMA's "Terrazzo Specifications and Design Guide"; comply with the following:
 - 1) Flammability: Self-extinguishing, maximum extent of burning 1/4 inch per ASTM D 635.
 - 2) Thermal Coefficient of Linear Expansion: 0.0025 inch/inch per deg F for temperature range of minus 12 to plus 140 deg F per ASTM D 696.
4. Aggregates: Comply with NTMA gradation standards for mix indicated and contain no deleterious or foreign matter.
 - a. Abrasion and Impact Resistance: Less than 40 percent loss per ASTM C 131.
 - b. 24-Hour Absorption Rate: Less than 0.75 percent.
 - c. Dust Content: Less than 1.0 percent by weight.
5. Finishing Grout: Resin based.

2.3 EPOXY-RESIN MATRIX TERRAZZO BASE- PRECAST

- A. Epoxy Resin Matrix Terrazzo Base- Precast: Minimum 3/8-inch-thick, reinforced epoxy resin matrix terrazzo base- precast cast in maximum lengths possible, but not less than 36 inches. Comply with NTMA's written recommendations for fabricating precast terrazzo base units in sizes and profiles indicated.
1. Type: Refer to details.
 2. Top Edge: Radius edge with polished top surface.
 3. Outside Corner Units: With finished returned edges at outside corner.
 4. Aggregate and Matrix colors to be selected by architect. Matrix color to be selected from entire line of Sherwin Williams colors.

2.4 STRIP MATERIALS

- A. Thin-Set Divider Strips: L-type angle, 1/4 inch deep.
1. Material: White-zinc, alloy Brass.
 2. Top Width: 1/8 inch
- B. Heavy-Top Divider Strips: L-type angle in depth required for topping thickness indicated.
1. Bottom-Section Material: Matching top-section material.
 2. Top-Section Material: White-zinc alloy, Brass.
 3. Top-Section Width: 1/4 inch.
- C. Control-Joint Strips: Separate, double L-type angles, positioned back to back, that match material and color of divider strips and in depth required for topping thickness indicated.
- D. Accessory Strips: Match divider-strip width, material, and color unless otherwise indicated. Use the following types of accessory strips as required to provide a complete installation:
1. Base-bead strips for exposed top edge of terrazzo base.
 2. Edge-bead strips for exposed edges of terrazzo.
- E. Anchoring Devices:
1. Strips: Provide mechanical anchoring devices or adhesives for strip materials as recommended by manufacturer and required for secure attachment to substrate.
 2. Precast Epoxy Resin Matrix Terrazzo: Provide mechanical anchoring devices as recommended by fabricator for proper anchorage and support of units for conditions of installation and support.
- F. Patching and Fill Material: Terrazzo manufacturer's resinous product approved and recommended by manufacturer for application indicated.
- G. Joint Compound: Terrazzo manufacturer's resinous product approved and recommended by manufacturer for application indicated.

- H. Resinous Matrix Terrazzo Cleaner: Chemically neutral cleaner with pH factor between 7 and 10 that is biodegradable, phosphate free, and recommended by sealer manufacturer for use on terrazzo type indicated.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates and areas, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.
- B. Proceed with installation only after unsatisfactory conditions, including levelness tolerances, have been corrected.
- C. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 PREPARATION

- A. Clean substrates of substances, including oil, grease, and curing compounds, that might impair terrazzo bond. Provide clean, dry, and neutral substrate for terrazzo application.
- B. Concrete Slabs:
 - 1. Provide sound concrete surfaces free of laitance, glaze, efflorescence, curing compounds, form-release agents, dust, dirt, grease, oil, and other contaminants incompatible with terrazzo.
 - a. Shot-blast surfaces with an apparatus that abrades the concrete surface, contains the dispensed shot within the apparatus, and recirculates the shot by vacuum pickup.
 - b. Repair damaged and deteriorated concrete according to terrazzo manufacturer's written recommendations.
 - c. Use patching and fill material to fill holes and depressions in substrates according to terrazzo manufacturer's written instructions.
- C. Verify that concrete substrates are dry and moisture-vapor emissions are within acceptable levels according to manufacturer's written instructions.
 - 1. Moisture Testing: Perform tests indicated below.
 - a. Calcium Chloride Test: Perform anhydrous calcium chloride test per ASTM F 1869. Proceed with installation only after substrates have maximum moisture-vapor-emission rate of 3 lb of water/1000 sq. ft. in 24 hours.
 - 1) Perform tests so that each test area does not exceed 200 sq. ft., and perform not less than two tests in each installation area and with test areas evenly spaced in installation areas.

- b. In-Situ Probe Test: Perform relative-humidity test using in-situ probes per ASTM F 2170. Proceed with installation only after substrates have a maximum 75 percent relative-humidity-level measurement.
 - c. Proceed with installation only after substrates pass testing.
 - D. Protect other work from water and dust generated by grinding operations. Control water and dust to comply with environmental protection regulations.
 - 1. Erect and maintain temporary enclosures and other suitable methods to limit water damage and dust migration and to ensure adequate ambient temperatures and ventilation conditions during installation.

3.3 EPOXY-RESIN MATRIX TERRAZZO INSTALLATION- POURED EPOXY

- A. Comply with NTMA's written recommendations for terrazzo and accessory installation.
- B. Place, rough grind, grout, cure grout, fine grind, and finish terrazzo according to manufacturer's written instructions and NTMA's "Terrazzo Specifications and Design Guide."
- C. Installation Tolerance: Limit variation in terrazzo surface from level to 1/4 inch in 10 feet; noncumulative.
- D. Ensure that matrix components and fluids from grinding operations do not stain terrazzo by reacting with divider and control-joint strips.
- E. Delay fine grinding until heavy trade work is complete and construction traffic through area is restricted.
- F. Flexible Reinforcing Membrane:
 - 1. Prepare and prefill substrate cracks with membrane material.
 - 2. Install membrane to produce full substrate coverage in areas to receive terrazzo.
 - 3. Reinforce membrane with fiberglass scrim at substrate cracks and at all slabs other than slabs-on-grade.
 - 4. Prepare membrane according to manufacturer's written instructions before applying substrate primer.
- G. Primer: Apply to terrazzo substrates according to manufacturer's written instructions.
- H. Strip Materials:
 - 1. Divider and Control-Joint Strips:
 - a. Locate divider strips in locations indicated.
 - b. Install control-joint strips back to back directly above concrete-slab control joints.
 - c. Install control-joint strips with manufacture approved gap between strips, and install sealant in gap.

- d. Install strips in adhesive setting bed without voids below strips, or mechanically anchor strips as required to attach strips to substrate, as recommended by strip manufacturer.
- 2. Accessory Strips: Install as required to provide a complete installation and in locations indicated.
- 3. Abrasive Strips: Install with surface of abrasive strip positioned 1/16 inch higher than terrazzo surface.

3.4 EPOXY RESIN MATRIX TERRAZZO INSTALLATION BASE-PRECAST.

- A. Install epoxy resin matrix terrazzo base-precaster using method recommended by NTMA and manufacturer unless otherwise indicated.
- B. Do not install base-precaster that are chipped, cracked, discolored, or not properly finished.
- C. Seal joints between base-precaster with joint compound matching precast terrazzo matrix.

3.5 REPAIR

- A. Cut out and replace terrazzo areas that evidence lack of bond with substrate. Cut out terrazzo areas in panels defined by strips and replace to match adjacent terrazzo, or repair panels according to NTMA's written recommendations, as approved by Architect.

3.6 CLEANING AND PROTECTION

- A. Cleaning:
 - 1. Remove grinding dust from installation and adjacent areas.
 - 2. Wash surfaces with cleaner according to NTMA's written recommendations and manufacturer's written instructions; rinse surfaces with water and allow them to dry thoroughly.
- B. Protection: Provide final protection and maintain conditions, in a manner acceptable to Installer, that ensure that terrazzo is without damage or deterioration at time of Substantial Completion.

END OF SECTION 09 66 23

SECTION 09 68 13 - TILE CARPETING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Carpet tile.
- B. Entry way carpet tile system.

1.3 SUBMITTALS, GENERAL

- A. General: Submit all action submittals (except Samples for Verification) and informational submittals required by this Section concurrently.

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of product. Include manufacturer's written data on physical characteristics, durability, and fade resistance. Include installation recommendations for each type of substrate.
 - 1. Carpet tile: C1
 - 2. Entry way carpet tile: C2
 - 3. Trowelable leveling and patching compounds.
 - 4. Adhesives.
 - 5. Metal edge/transition strip.
- B. Shop Drawings: Show the following:
 - 1. Columns, doorways, enclosing walls or partitions, built-in cabinets, and locations where cutouts are required in carpet.
 - 2. Carpet type, color, and dye lot.
 - 3. Seam locations, types, and methods.
 - 4. Type of subfloor.
 - 5. Type of installation.
 - 6. Pattern type, repeat size, location, direction, and starting point.
 - 7. Type, color, and location of edge, transition, and other accessory strips.
 - 8. Transition details to other flooring materials.
 - 9. Base details.

- C. Samples for Verification and Initial Color Selection: For each of the following products and for each color and texture required. Label each Sample with manufacturer's name, material description, color, pattern, and designation indicated on Drawings and in schedules.
 - 1. Carpet Tile: Full-size Sample.
 - 2. Exposed Edge, Transition, and Other Accessory Stripping: 12-inch- long Samples.
- D. Sample Warranty: For special warranty.

1.5 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For Installer.
- B. Product Test Reports: For carpet tile, for tests performed by a qualified testing agency.

1.6 CLOSEOUT SUBMITTALS

- A. Maintenance Data: For carpet tiles to include in maintenance manuals. Include the following:
 - 1. Methods for maintaining carpet tile, including cleaning and stain-removal products and procedures and manufacturer's recommended maintenance schedule.
 - 2. Precautions for cleaning materials and methods that could be detrimental to carpet tile.
- B. Warranty: Executed special warranty.

1.7 MAINTENANCE MATERIAL SUBMITTALS

- A. Furnish extra materials, from the same product run, that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.
 - 1. Carpet Tile: Full-size units equal to 5 percent of amount installed for each type indicated, but not less than 10 sq. yd.

1.8 QUALITY ASSURANCE

- A. Installer Qualifications: An experienced installer who is certified by the International Certified Floorcovering Installers Association at the Commercial II certification level.
- B. Fire-Test-Response Ratings: Where indicated, provide carpet tile identical to those of assemblies tested for fire response according to NFPA 253 by a qualified testing agency.
- C. Floor Radiant Panel Test: Flooring material meets the ASTM E -648 Radiant Panel Test, Class 1 requirements.
- D. Mockups: Build mockups to verify selections made under Sample submittals and to demonstrate aesthetic effects and set quality standards for fabrication and installation.
 - 1. Subject to compliance with requirements, approved mockups may become part of the completed Work if undisturbed at time of Substantial Completion.

1.9 DELIVERY, STORAGE, AND HANDLING

- A. Comply with CRI 104.

1.10 FIELD CONDITIONS

- A. Comply with CRI 104 for temperature, humidity, and ventilation limitations.
- B. Environmental Limitations: Do not deliver or install carpet tiles until spaces are enclosed and weathertight, wet work in spaces is complete and dry, and ambient temperature and humidity conditions are maintained at occupancy levels during the remainder of the construction period.
- C. Do not install carpet tiles over concrete slabs until slabs have cured and are sufficiently dry to bond with adhesive and concrete slabs have pH range recommended by carpet tile manufacturer.
- D. Where demountable partitions or other items are indicated for installation on top of carpet tiles, install carpet tiles before installing these items.

1.11 WARRANTY

- A. Special Warranty for Carpet Tiles: Manufacturer agrees to repair or replace components of carpet tile installation that fail in materials or workmanship within specified warranty period.
 - 1. Warranty does not include deterioration or failure of carpet tile due to unusual traffic, failure of substrate, vandalism, or abuse.
 - 2. Failures include, but are not limited to, more than 10 percent edge raveling, snags, runs, dimensional stability, loss of tuft bind strength, loss of face fiber, and delamination.
 - 3. Warranty Period: 10 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 CARPET TILE: C1

- A. Basis of design product: Subject to compliance with requirements, provide, "Ground Waves" collection by Interface, Inc. or by the following:
 - 1. Or approved equal.
- B. Color: As selected by Architect from manufacturer's full range.
- C. Pattern: As indicated on drawings.
- D. Fiber Content: 100% Recycled Content Nylon
- E. Product Construction: Tufted Textured Loop
- F. Pile Thickness: 0.13 inches.

- G. Stitches: 8 per inch.
- H. Gage: 1/12.
- I. Face Weight: 16 oz. /sq. yd.
- J. Primary Backing/Back coating: 100% Synthetic.
- K. Secondary Backing:
 - 1. Interface: GlasBac
- L. Size: 25cm x 1m
- M. Applied Soil-Resistance Treatment: Manufacturer's standard material.
- N. Antimicrobial Treatment: Manufacturer's standard material.
- O. Performance Characteristics: As follows:
 - 1. Critical Radiant Flux Classification: Not less than Class A-0.45 W/sq. cm.
 - 2. Electrostatic Propensity: Less than 3.0 kV according to AATCC 134.
 - 3. Emissions: Provide carpet tile that complies with testing and product requirements of CRI's "Green Label Plus" program.
 - 4. Emissions: Provide carpet tile that complies with the product requirements of the California Department of Health Services' "Standard Practice for the Testing of Volatile Organic Emissions from Various Sources Using Small-Scale Environmental Chambers."

2.2 ENTRY WAY CARPET TILE: C2

- A. Basis of design product: Subject to compliance with requirements, provide, "Step Repeat: SR799" collection by Interface, Inc. or comparable product by the following:
 - 1. Mannington Commercial; Liaison collection.
- B. Color: As selected by Architect from manufacturer's full range.
- C. Fiber Content: 100 percent nylon
- D. Product Construction: Tufted Textured Loop
- E. Pile Thickness: 0.14 for inches.
- F. Stitches: 10 per inch.
- G. Gage: 1/12.
- H. Face Weight: 26 oz/sq. yd.

- I. Primary Backing/Back coating: 100% Synthetic.
- J. Secondary Backing:
 - 1. Mannington: Interface: GlasBac
- K. Size: 24 by 24 inches (50 x 50 cm).
- L. Applied Soil-Resistance Treatment: Manufacturer's standard material.
- M. Performance Characteristics: As follows:
 - 1. Appearance Retention Rating: Heavy traffic, 3.0 minimum according to ASTM D 7330.
 - 2. Electrostatic Propensity: Less than 3.0 kV according to AATCC 134.
 - 3. Emissions: Provide carpet tile that complies with testing and product requirements of CRI's "Green Label Plus" program.
 - 4. Emissions: Provide carpet tile that complies with the product requirements of the California Department of Health Services' "Standard Practice for the Testing of Volatile Organic Emissions from Various Sources Using Small-Scale Environmental Chambers."

2.3 INSTALLATION ACCESSORIES

- A. Trowelable Leveling and Patching Compounds: Latex-modified, hydraulic-cement-based formulation provided or recommended by carpet tile manufacturer.
 - 1. Basis-of-Design Products: Subject to compliance with requirements, provide the following Ardex product or a comparable product:
 - a. Portland Cement-Based Flash Patching and Skim Coating: Feather Finish.
 - b. Portland Cement-Based Patching: SD-P.
 - c. Portland Cement-Based Self-Leveling Underlayment: K-15 Self-Leveling Underlayment Concrete.
- B. Adhesives: Water-resistant, mildew-resistant, nonstaining, pressure-sensitive type to suit products and subfloor conditions indicated, that complies with flammability requirements for installed carpet tile and is recommended by carpet tile manufacturer for releasable installation.
 - 1. Adhesives shall have a VOC content of 50 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).
 - 2. Adhesives shall comply with the testing and product requirements of the California Department of Health Services' "Standard Practice for the Testing of Volatile Organic Emissions from Various Sources Using Small-Scale Environmental Chambers."
- C. Metal Edge/Transition Strips: Extruded aluminum with finish selected by Architect, of profile and width shown, of height required to protect exposed edge of carpet, and of maximum lengths to minimize running joints.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, areas, and conditions, with Installer present, for compliance with requirements for maximum moisture content, alkalinity range, installation tolerances, and other conditions affecting carpet tile performance. Examine carpet tile for type, color, pattern, and potential defects.
- B. Concrete Subfloors: Verify that concrete slabs comply with ASTM F 710 and the following:
 - 1. Slab substrates are dry and free of curing compounds, sealers, hardeners, and other materials that may interfere with adhesive bond. Determine adhesion and dryness characteristics by performing bond and moisture tests recommended by carpet tile manufacturer.
 - 2. Subfloor finishes comply with requirements specified in Section 03 30 00 "Cast-in-Place Concrete" for slabs receiving carpet tile.
 - 3. Subfloors are free of cracks, ridges, depressions, scale, and foreign deposits.
 - 4. Alkalinity and Adhesion Testing: Perform tests recommended by manufacturer. Proceed with installation only after substrates pass testing.
 - 5. Moisture Testing: Perform tests recommended by manufacturer and as follows. Proceed with installation only after substrates pass testing.
 - a. Perform anhydrous calcium chloride test, ASTM F 1869. Proceed with installation only after substrates have maximum moisture-vapor-emission rate of 3 lb of water/1000 sq. ft. in 24 hours.
 - 1) At a minimum, test concrete substrates in at least 3 locations in separate parts of the floor for applications of 2000 square feet or less; provide one additional test location for each additional 1000 square feet, or fraction thereof.
 - b. Perform relative humidity test using in situ probes, ASTM F 2170. Proceed with installation only after substrates have maximum 75 percent relative humidity level measurement.
- C. For wood subfloors, verify the following:
 - 1. Underlayment over subfloor complies with requirements specified in Section 06 10 00 "Rough Carpentry."
 - 2. Underlayment surface is free of irregularities and substances that may interfere with adhesive bond or show through surface.
- D. Existing Floors: Condition of existing subfloor is unknown prior to removal of existing flooring. If, after removal of existing flooring, subfloor requires leveling, patching, or filling, notify Architect in writing.

1. Asbestos Abatement Areas: In areas where removal of existing flooring is included in asbestos abatement procedures, coordinate with entity responsible for abatement to ensure patching and repair is compatible with requirements for installation of carpet.
- E. Proceed with installation only after unsatisfactory conditions have been corrected.
- F. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 PREPARATION

- A. General: Comply with CRI 104, Section 6.2, "Site Conditions; Floor Preparation," and with carpet tile manufacturer's written installation instructions for preparing substrates indicated to receive carpet tile installation.
- B. Use trowelable leveling and patching compounds, according to manufacturer's written instructions, to fill cracks, holes, depressions, and protrusions in substrates. Fill or level cracks, holes and depressions 1/8 inch wide or wider and protrusions more than 1/32 inch unless more stringent requirements are required by manufacturer's written instructions.
 1. Ensure patching and repair materials are compatible with carpet tile.
 2. Levelness Tolerances: Apply patching and repair materials to provide levelness of floor substrate within 1/4 inch in 10 feet, unless more stringent levelness is recommended or required by carpet tile manufacturer.
 3. Flash Patching and Skim Coating: Apply flash patching material to areas with 1/8 inch or less depression.
 4. Patching: Apply patching material to areas with 1/8 inch or greater depression.
 5. Self-Leveling Underlayment: Apply self-leveling material to areas where flash patching and patching described above cannot provide smooth, level surface acceptable to receive carpet tile.
- C. Remove coatings, including curing compounds, and other substances that are incompatible with adhesives and that contain soap, wax, oil, or silicone, without using solvents. Use mechanical methods recommended in writing by carpet tile manufacturer.
- D. Broom and vacuum clean substrates to be covered immediately before installing carpet tile.

3.3 INSTALLATION

- A. Comply with CRI 104, Section 14, "Carpet Modules," and with carpet tile manufacturer's written installation instructions.
- B. Installation Method: As recommended in writing by carpet tile manufacturer.
- C. Maintain dye lot integrity. Do not mix dye lots in same area.

- D. Cut and fit carpet tile to butt tightly to vertical surfaces, permanent fixtures, and built-in furniture including cabinets, pipes, outlets, edgings, thresholds, and nosing. Bind or seal cut edges as recommended by carpet tile manufacturer.
- E. Extend carpet tile into toe spaces, door reveals, closets, open-bottomed obstructions, removable flanges, alcoves, and similar openings.
- F. Maintain reference markers, holes, and openings that are in place or marked for future cutting by repeating on finish flooring as marked on subfloor. Use nonpermanent, non-staining marking device.
- G. Install pattern parallel to walls and borders.
- H. Stagger joints of carpet tiles so carpet tile grid is offset from access flooring panel grid. Do not fill seams of access flooring panels with carpet adhesive; keep seams free of adhesive.

3.4 CLEANING AND PROTECTION

- A. Perform the following operations immediately after installing carpet tile:
 - 1. Remove excess adhesive, seam sealer, and other surface blemishes using cleaner recommended by carpet tile manufacturer.
 - 2. Remove yarns that protrude from carpet tile surface.
 - 3. Vacuum carpet tile using commercial machine with face-beater element.
- B. Protect installed carpet tile to comply with CRI 104, Section 16, "Protecting Indoor Installations."
- C. Protect carpet tile against damage from construction operations and placement of equipment and fixtures during the remainder of construction period. Use protection methods indicated or recommended in writing by carpet tile manufacturer.

END OF SECTION 09 68 13

SECTION 09 72 00 - WALL COVERINGS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. High Pressure Laminate (HPL) compact panels for Interior Architectural wall lining application with a concealed fastener assembly
- B. Related sections, Coordinate with work of other sections including the following:
 - 1. Section 079200 – Joint Sealants
 - 2. Section 092900 – Gypsum Board

1.3 SUBMITTALS, GENERAL

- A. General: Submit all action submittals (except Samples for Verification) and informational submittals required by this Section concurrently.

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated. Include data on physical characteristics, durability, fade resistance, technical data, performance values, available colors, available thicknesses, and flame-resistance characteristics. Submit Manufacturer's written recommendations for evaluating, preparing, and treating substrate and attachment to substrate and installation technique brochure.
- B. Shop Drawings: Show location and extent of each wall-covering type. Indicate seams and termination points. Show installation layouts of HPL wall panels, details of attachment, anchors for support structure, attachment system for panels, allowances for thermal expansion, trim, enclosuresm corner conditions, and accessories
- C. Samples for Verification and Initial Color Selection:
 - 1. Wall Panels: Minimum 4" x 4" or manufacturer standard sample size per color specified
 - 2. Substructure: as specified by architect provide MSNAP wall rails, panel rail/clips, closures, corner profiles, and other fasteners.

1.5 INFORMATIONAL SUBMITTALS

- A. Product Test Reports: Based on evaluation of comprehensive tests performed by a qualified testing agency, for wall covering.
- B. Installer Qualification Data: For installer, provide certification or letter signed by manufacturer certifying the installer complies with requirements to perform the work specified in this section.

1.6 CLOSEOUT SUBMITTALS

- A. Maintenance Data: For wall coverings to include in maintenance manuals.
- B. Warranty: Each product warranty.

1.7 MAINTENANCE MATERIAL SUBMITTALS

- A. Furnish extra materials that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.

1.8 QUALITY ASSURANCE

- A. Installer Qualifications: Experienced in the installation of interior HPL Compact wall panel systems who has a minimum of 2 years installing products indicated in the project, whose work has resulted in applications with a record of successful in-service performance, and who is recognized and approved by the manufacturer as suitable for the execution of the work.
- B. Source Limitations: Obtain HPL Compact interior and all auxilliary materials from a single source manufacturer who has a minimum of 35 years experience in the manufacturing of high pressure HPL Compact or an accessory Manufacturer certified by the HPL Compact interior panel Manufacturer. Panels to be manufactured in accordance with ISO9001, ISO14001, and EN 438-4.
- C. Preinstallation Conference: Conduct conference at Project site.
 - 1. Agenda: Include, at a minimum, the following items on the conference agenda:
 - a. Review all systems and materials to be used in the wall covering installation.
 - b. Review and coordinate substrate preparation and related construction.
 - c. Review sequencing of installation.

1.9 WARRANTY

- A. Manufacturer's standard 10 year limited warranty covering defects in material or manufacturing quality. Panel to be warranted against delamination for 2 years.
- B. Warranty is only available when HPL Compact panels are installed and fabricated by an installation contractor that has been approved by the Manufacturer and has followed the recommended guidelines of the Manufacturer, and has been signed and dated by the appropriate parties listed on the warranty registration form.
- C. Submittal of Warranty must be made within 6 months of substantial completion of the project.

1.10 PROJECT CONDITIONS

- A. Proceed with installation only when existing conditions permit assembly of the wall lining as performed to the Manufacturer's written installation instructions and warranty requirements.
- B. Field Measurements: Verify actual panel measurements / openings by field measurements before fabrication to accommodate site tolerances and changes in construction.
- C. Comply with Manufacturer's written material handling and storage guidelines. Do Not store panels in such a way that might cause damage by other trades, staining, scratching, or other surface damage.
- D. HPL Compact Interior installer shall notify the General Contractor or Construction Manager immediately upon discovery of any issues with the substrate, i.e. improper framing, walls out of plumb, or other conditions affecting proper on plane installation. These issues shall be appropriately addressed prior to continuation of panel system installation.

PART 2 - PRODUCTS

2.1 HIGH PRESSURE LAMINATE (HPL) COMPACT INTERIOR PANELS – SOLID COLOR

- A. General:
 - 1. Basis-of-Design Product: Subject to compliance with requirements, provide Fundermax Max Compact Interior F Quality by Fundermax GmbH, Fundermax North America, or comparable product by the following:
 - a. Gentas
 - b. Greenlam
- B. Sheet Reference: KA900 Series
- C. Panel Thickness: 10mm
- D. Panel Core: Black
- E. Panel Surface: AP (Anti-Fingerprint)
- F. Color(s): As selected by Architect from manufacturer's full range.

2.2 HIGH PRESSURE LAMINATE (HPL) COMPACT INTERIOR PANELS – WOOD GRAIN

- A. General:
 - 1. Basis of Design Product: Subject to compliance with requirements, provide Fundermax Max Compact Interior F Quality by Fundermax GmbH, Fundermax North America, or comparable product by the following:
 - a. Gentas
 - b. Greelam

- B. Sheet Reference: KA900 Series
- C. Panel Thickness: 10mm
- D. Panel Core: Black
- E. Panel Surface: FH (Fine Hammered)
- F. Woodgrain(s): As selected by Architect from Manufacturer's full range.
 - 1. Design intent is to provide a variety of 3 woodgrains.
 - 2. Coordinate with

2.3 SUB-FRAME ASSEMBLY

- A. Aluminum Zero-Lift clips as provided by Manufacturer and according to Manufacturer technical guidelines and must be designed to handle the weight per square foot of the specified panel
- B. Allow manufacturer minimum clear air space of 3/4" behind vertical attached sub-structure for ventilation of panels to prevent condensation accumulation behind wall panels
- C. Perimeter and Joint trim accessories supplied by third-party vendors shall be the following
 - 1. Monarch Metal
 - a. Monarch MSNAP EPS
 - 2. Comparable product

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates and conditions, with Installer present, for compliance with requirements for levelness, wall plumpness, maximum moisture content, and other conditions affecting performance of the Work.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.
- C. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 PREPARATION

- A. Comply with manufacturer's written instructions for surface preparation.

3.3 INSTALLATION

- A. Install vertical furring for ventilation in accordance to shop drawings. A minimum of $\frac{3}{4}$ " free air space should be created regardless of mounting sub-structure selected.
- B. If trims and reveals are being used, they shall be fitted to vertical furring prior to panel installation, per shop drawings.
 - 1. Edge Trims – Edge trims and reveals must be installed flat and level
 - 2. Corner Trims – Corner trims may be used for vertical corners, as well as transitions between doors, windows, and other openings.
- C. Install Monarch MNSAP (or comparable product) wall rails to vertical furring. Wall rails must be installed level, and in alignment with corresponding Panel Rails.
 - 1. Maximum Wall Rail spacing is based on 10mm panels and should be no more than 32"
- D. Install Monarch MSNAP (or comparable product) Panel Rails onto HPL Compact Interior wall panels ensuring alignment with wall rails attached to vertical framing.
- E. Install HPL Compact Interior wall panels according to the shop drawings and specification.
- F. Maximum fastening (fixing) distances for panels is dependent on mechanical or adhesive fastening systems .
- G. Installed panels shall have horizontal and vertical joints of equal dimension.
- H. Louvers, light fixtures, cameras, devices, and other accoutrements should be through-fastened through the panels to wood blocking behind the panels.

3.4 PROTECTION

- A. After installation the General Contractor shall protect the panels from damage from other trades until the facility is opened. The panels shall be kept free from paint, plaster, cement, scratches, or any other defective forces.

3.5 CLEANING

- A. Panels are to be cleaned per Manufacturer's recommended practices using non-abrasive cleaners.

END OF SECTION 09 72 00

SECTION 09 84 33 - SOUND-ABSORBING WALL UNITS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes shop-fabricated, fabric-wrapped panel units tested for acoustical performance, including:
 - 1. Sound-absorbing wall panels.

1.3 DEFINITIONS

- A. NRC: Noise Reduction Coefficient.

1.4 SUBMITTALS, GENERAL

- A. General: Submit all action submittals (except Samples for Verification) and informational submittals required by this Section concurrently.

1.5 ACTION SUBMITTALS

- A. Product Data: For each type of Panel face/edge, core material, and mounting indicated.
 - 1. Sound-absorbing wall panel.
 - 2. Core materials.
 - 3. Facing material.
 - 4. Mounting devices.
- B. Shop Drawings: For sound-absorbing wall units. Include mounting devices and details; details at panel head, base, joints, and corners; and details at ceiling, floor base, and wall intersections. Indicate panel edge and core materials.
 - 1. Include elevations showing panel sizes and direction of fabric weave and pattern matching.

- C. Samples for Verification and Initial Color Selection: For the following products, prepared on samples of size indicated below:
 - 1. Fabric: Full-width by approximately 36-inch-long Sample, but not smaller than required to show complete pattern repeat, from dye lot to be used for the Work, and with specified treatments applied.
 - 2. Panel – full size sample showing each edge profile, corner, and finish.
 - 3. Core Material: 12-inch-square Sample at corner.
 - 4. Mounting Devices: Full-size Samples.
- D. Warranty: Sample of special warranty.

1.6 INFORMATIONAL SUBMITTALS

- A. Coordination Drawings: Elevations and other details, drawn to scale, on which the following items are shown and coordinated with each other, using input from installers of the items involved:
 - 1. Electrical outlets, switches, and thermostats.
 - 2. Items penetrating or covered by sound-absorbing wall units including the following:
 - a. Lighting fixtures.
 - b. Speakers.
 - c. Alarms.
 - d. Access panels.
- B. Product Certificates: For each type of sound-absorbing wall unit, from manufacturer.

1.7 CLOSEOUT SUBMITTALS

- A. Maintenance Data: For sound-absorbing wall units to include in maintenance manuals. Include fabric manufacturers' written cleaning and stain-removal recommendations.
- B. Warranty: Executed special warranty.

1.8 MAINTENANCE MATERIAL SUBMITTALS

- A. Furnish extra materials from same production run that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.
 - 1. Full size Panel: Full-size units equal to 5 percent of amount installed, but no fewer than 10 devices, including unopened adhesives and mounting devices.

1.9 QUALITY ASSURANCE

- A. Source Limitations: Obtain sound-absorbing wall units from single source from single manufacturer.
- B. Fire-Test-Response Characteristics: Provide sound-absorbing wall units meeting the following as determined by testing identical products by UL or another testing and inspecting agency acceptable to authorities having jurisdiction:
 - 1. Surface-Burning Characteristics: As determined by testing per ASTM E 84.
 - a. Flame-Spread Index: 25 or less.
 - b. Smoke-Developed Index: 450 or less.

1.10 DELIVERY, STORAGE, AND HANDLING

- A. Comply with fabric and sound-absorbing wall unit manufacturers' written instructions for minimum and maximum temperature and humidity requirements for shipment, storage, and handling.
- B. Deliver materials and units in unopened bundles and store in a temperature-controlled dry place with adequate air circulation.

1.11 PROJECT CONDITIONS

- A. Environmental Limitations: Do not install sound-absorbing wall units until spaces are enclosed and weathertight, wet work in spaces is complete and dry, work at and above ceilings is complete, and ambient temperature and humidity conditions are maintained at the levels indicated for Project when occupied for its intended use.
- B. Air-Quality Limitations: Protect sound-absorbing wall units from exposure to airborne odors, such as tobacco smoke, and install units under conditions free from odor contamination of ambient air.
- C. Field Measurements: Verify locations of sound-absorbing wall units and actual dimensions of openings and penetrations by field measurements before fabrication.

1.12 WARRANTY

- A. Special Warranty: Manufacturer's standard form in which manufacturer agrees to repair or replace components of sound-absorbing wall units that fail in materials or workmanship within specified warranty period.
 - 1. Failures include, but are not limited to the following:
 - a. Acoustical performance.
 - b. Fabric sagging, distorting, or releasing from panel edge.
 - c. Warping of core.
 - 2. Warranty Period: 5 years from date of Substantial Completion.

PART 2 - PRODUCTS

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1. Conwed Designscape; an Owens Corning company.
 - 2. Kinetics Noise Control, Inc.
 - 3. Unika Vaev.
- B. General Requirements for Sound-Absorbing Wall Units: Units shall comply with the testing and product requirements of the California Department of Health Services' "Standard Practice for the Testing of Volatile Organic Emissions from Various Sources Using Small-Scale Environmental Chambers."
- C. Sound-Absorbing Wall Panel: Manufacturer's standard panel construction consisting of facing material stretched over front face of edge-framed core and bonded or attached to edges and back of frame.
 - 1. Basis-of-Design Product: Kenetics Noise Control, Hardside Acoustical Wall Panels, or approved equal.
 - 2. Mounting: Edge mounted with splines secured to substrate.
 - a. Finish Color at Exposed Edges: As selected by Architect from manufacturer's full range.
 - 3. Mounting: Back mounted with manufacturer's standard metal clips or bar hangers, secured to substrate.
 - 4. Core: glass-fiber board.
 - a. Core-Face Layer: Manufacturer's standard tackable, impact-resistant, high-density board.
 - 5. Edge Construction: Manufacturer's standard chemically hardened core with no frame.
 - 6. Edge Profile: Chamfered (beveled)
 - 7. Corner Detail in Elevation: Square with continuous edge profile indicated.
 - 8. Reveals between Panels: reveals as selected by Architect from manufacturer's full range.
 - 9. Acoustical Performance: Sound absorption NRC of not less than 0.65 according to ASTM C 423 for Type A mounting according to ASTM E 795.
 - 10. Nominal Overall Panel Thickness: 1 inch.
 - 11. Panel Width: As indicated on Drawings.
 - 12. Panel Height: As indicated on Drawings.

- D. Facing Material: Facing Material: Fabric from same dye lot; color and pattern as selected by Architect from manufacturer's full range.
1. Manufacturer: Guilford of Maine.
 2. Product Line/Pattern: Anchorage 2335.
 3. Pattern Repeat: None.
 4. Color: to be selected by architect from manufactures full range of colors.
 5. Fiber Content: 100 percent woven polyester.
 6. Width: 66 inches.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine fabric, fabricated units, substrates, areas, and conditions, for compliance with requirements, installation tolerances, and other conditions affecting performance of sound-absorbing wall units.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.
- C. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 INSTALLATION

- A. Install sound-absorbing wall units in locations indicated with vertical surfaces and edges plumb, top edges level and in alignment with other units, faces flush, and scribed to fit adjoining work accurately at borders and at penetrations.
- B. Comply with sound-absorbing wall unit manufacturer's written instructions for installation of units using type of mounting devices indicated. Mount units securely to supporting substrate.
- C. Align and level fabric pattern and grain among adjacent units.

3.3 INSTALLATION TOLERANCES

- A. Variation from Plumb and Level: Plus or minus 1/16 inch.

3.4 CLEANING

- A. Clip loose threads; remove pills and extraneous materials.
- B. Clean panels on completion of installation to remove dust and other foreign materials according to manufacturer's written instructions.

END OF SECTION 09 84 33

SECTION 09 91 00 – PAINTING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes surface preparation and application of paint systems, for the following:
 - 1. Interior applications.
 - a. Painting systems indicated on Drawings and in Schedules applied to new and existing exterior and interior surfaces and related components including but not limited to items such as hollow metal doors frames, doors, access doors, trim pieces, window sash and trim etc., unless otherwise indicated, including appropriate surface preparation for all new or existing surfaces to be painted including previously painted surfaces and surfaces with existing wall coverings
- B. Section includes surface preparation and application of wood finishes.
 - 1. Wood Refinishing as indicated on Drawings and in Schedules applied to new and existing interior surfaces and related components including but not limited to items such as door frames, doors, access doors, trim and molding pieces, window sash and trim, wood panel walls and doors etc., unless otherwise indicated, including appropriate surface preparation for all new or existing surfaces to be refinished including previously painted surfaces and surfaces with existing wall coverings.

1.3 SUBMITTALS, GENERAL

- A. General: Submit all action submittals (except Samples for Verification) and informational submittals required by this Section concurrently.

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of product for substrates indicated. Include preparation requirements and application instructions. Include all paint products under one cover sheet.
 - 1. Interior concrete, vertical surfaces.
 - 2. Interior concrete, vertical surfaces (deep tone accent colors).
 - 3. Interior CMU.
 - 4. Interior CMU (deep tone accent colors).
 - 5. Interior steel.
 - 6. Interior steel (deep tone accent colors).

7. Interior steel piping, piping supports and hangers.
8. Interior galvanized-metal.
9. Interior galvanized-metal (metal deck).
10. Interior galvanized metal (metal deck, deep tone accent colors).
11. Interior aluminum (where indicated).
12. Interior wood.
13. Interior wood (deep tone accent colors).
14. Interior plaster.
15. Interior plaster (deep tone accent colors).
16. Interior gypsum board.
17. Interior gypsum board (deep tone accent colors).
18. Interior insulation-covering.
19. Interior insulation-covering (deep tone accent colors).
20. Interior stained wood (closed or open grain).
21. Interior stained wood (closed or open grain).
22. Interior clear finish wood (closed grain).
23. Interior clear finish wood (closed grain).
24. Studio wall paint.

B. Samples for Verification and Initial Color Selection: For each type of finish system and in each color and gloss of finish indicated.

1. Submit Samples on rigid backing, 8 inches square.
 - a. For wood finishes, submit Samples on representative samples of actual wood substrates, 8 inches square.
2. Step coats on Samples to show each coat required for system.
3. Label each coat of each Sample.
4. Label each Sample for location and application area.

C. Product List: For each product indicated, include the following:

1. Cross-reference to finish system and locations of application areas. Use same designations indicated on Drawings and in schedules.
2. VOC content.

D. Coatings Maintenance Manual:

1. Upon conclusion of the project, the contractor or paint manufacture/supplier shall furnish a coatings maintenance manual such as Sherwin Williams "Custodian Project Color and Product Information" report. Manual shall include an Area Summary with finish schedule, Area Detail designating where each product/color/finish was used, product data pages, Material Safety Data Sheets, care and cleaning instructions. Touch up procedures and color samples of each color and finish used. All information contained in a self-bound 3 ring hole punched catalog.

1.5 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For applicator.

1.6 MAINTENANCE MATERIAL SUBMITTALS

- A. Furnish extra materials, from the same product run, that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.
 - 1. Paint: 10 percent, but not less than 1 gal. of each material and color applied.
 - 2. Stains and Transparent Finishes: 10 percent, but not less than 1 gal. of each material and color applied.

1.7 QUALITY ASSURANCE

- A. Applicator Qualifications: A firm or individual, experienced in applying finishes specified in this Section, who has successfully completed a minimum of five previous projects similar in nature, size, and extent to this Project; familiar with special requirements indicated; and with sufficient trained staff to apply manufacturer's products according to specified requirements.
- B. Mockups: Apply mockups of each finish system indicated to verify preliminary selections made under sample submittals and to demonstrate aesthetic effects and set quality standards for materials and execution.
 - 1. Architect will select one surface to represent surfaces and conditions for application of each finish system specified in Part 3.
 - a. Wall and Ceiling Surfaces: Provide samples of at least 100 sq. ft.
 - b. Other Items: Architect will designate items or areas required.
 - 2. Final approval of color selections will be based on mockups.
 - a. If preliminary color selections are not approved, apply additional mockups of additional colors selected by Architect at no added cost to Owner.
 - 3. Approval of mockups does not constitute approval of deviations from the Contract Documents contained in mockups unless Architect specifically approves such deviations in writing.
 - 4. Subject to compliance with requirements, approved mockups may become part of the completed Work if undisturbed at time of Substantial Completion.

1.8 DELIVERY, STORAGE, AND HANDLING

- A. Store materials not in use in tightly covered containers in well-ventilated areas with ambient temperatures continuously maintained at not less than 45 deg F.
 - 1. Maintain containers in clean condition, free of foreign materials and residue.
 - 2. Remove rags and waste from storage areas daily.

1.9 FIELD CONDITIONS

- A. Apply finishes only when temperature of surfaces to be coated and surrounding air temperatures are between 50 and 95 deg F.
- B. Do not apply finishes when relative humidity exceeds 85 percent; at temperatures less than 5 deg F above the dew point; or to damp or wet surfaces.
- C. Do not apply exterior finishes in snow, rain, fog, or mist.
- D. Lighting: Do not install finishes until a lighting level of not less than 80 fc is provided on the surfaces to receive finishing.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include the following:
 - 1. Benjamin Moore & Co.
 - 2. PPG Architectural Finishes, Inc.
 - 3. Sherwin-Williams Company (The).
- B. Submittals containing manufactures other than stated above, will require a product by product comparison for each type of paint. All Comparable equals are to be matched with corresponding Sherwin Williams specified products.
- C. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to products listed in Part 3 articles for the application indicated.

2.2 MATERIALS, GENERAL

- A. Material Compatibility:
 - 1. Provide materials for use within each finish system that are compatible with one another and substrates indicated, under conditions of service and application as demonstrated by manufacturer, based on testing and field experience.
 - 2. For each coat in a finish system, provide products recommended in writing by manufacturers of topcoat for use in finish system and on substrate indicated.
 - 3. Provide products of same manufacturer for each coat in a finish system.
- B. VOC Compliance: All paint products shall meet New York requirements for Volatile Organic Compound (VOC) and Ozone Transport Commission (OTC) regulations, January 2005.
- C. Colors: As selected by Architect from manufacturer's full range.
 - 1. 25 percent of surface area will be painted with deep tones.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates and conditions, with Applicator present, for compliance with requirements for maximum moisture content and other conditions affecting performance of the Work.
 - 1. Maximum Moisture Content of Substrates: When measured with an electronic moisture meter as follows:
 - a. Concrete: 12 percent.
 - b. Masonry (Clay and CMU): 12 percent.
 - c. Wood: 15 percent.
 - d. Gypsum Board: 12 percent.
 - e. Plaster: 8 percent.
- B. Gypsum Board Substrates: Verify that finishing compound is sanded smooth.
- C. Plaster Substrates: Verify that plaster is fully cured.
- D. Verify suitability of substrates, including surface conditions and compatibility with existing finishes and primers.
- E. Proceed with coating application only after unsatisfactory conditions have been corrected.
 - 1. Beginning coating application constitutes Contractor's acceptance of substrates and conditions.

3.2 PREPARATION

- A. Remove hardware, covers, plates, and similar items already in place that are removable and are not to be finished. If removal is impractical or impossible because of size or weight of item, provide surface-applied protection before surface preparation and finishing.
 - 1. After completing finishing operations, use workers skilled in the trades involved to reinstall items that were removed. Remove surface-applied protection.
- B. Clean substrates of substances that could impair bond of finishes, including dust, dirt, oil, grease, and incompatible paints and encapsulants.
 - 1. Remove incompatible primers and reprime substrate with compatible primers or apply tie coat as required to produce finish systems indicated.
- C. Concrete Substrates: Remove release agents, curing compounds, efflorescence, and chalk. Do not paint surfaces if moisture content or alkalinity of surfaces to be coated exceeds that permitted in manufacturer's written instructions.
- D. Masonry Substrates: Remove efflorescence and chalk. Do not paint surfaces if moisture content or alkalinity of surfaces or if alkalinity of mortar joints exceed that permitted in manufacturer's written instructions.

- E. Steel Substrates: Remove rust, loose mill scale, and shop primer if any. Clean using methods recommended in writing by paint manufacturer but not less than the following:
 - 1. SSPC-SP 3, "Power Tool Cleaning."
 - 2. SSPC-SP 11, "Power Tool Cleaning to Bare Metal."
- F. Shop-Primed Steel Substrates: Clean field welds, bolted connections, and abraded areas of shop paint, and paint exposed areas with the same material as used for shop priming to comply with SSPC-PA 1 for touching up shop-primed surfaces.
- G. Galvanized-Metal Substrates: Remove grease and oil residue from galvanized sheet metal by mechanical methods to produce clean, lightly etched surfaces that promote adhesion of subsequently applied paints.
- H. Galvanized Metal/Galvanized Deck, Factory Primed Surface-Coordinate with approved paint manufacture on compatibility of paint finish coats to factory prime surface.
- I. Aluminum Substrates: Remove loose surface oxidation.
- J. Wood Substrates:
 - 1. Scrape and clean knots. Before applying primer apply coat of knot sealer recommended in writing by topcoat manufacturer for coating system indicated.
 - 2. Apply wood filler paste to open-grain woods to produce smooth, glasslike finish.
 - 3. Sand surfaces that will be exposed to view and dust off.
 - 4. Prime edges, ends, faces, undersides, and back sides of wood.
 - 5. After priming, fill holes and imperfections in the finish surfaces with putty or plastic wood filler. Sand smooth when dried.
- K. Cotton or Canvas Insulation Covering Substrates: Remove dust, dirt, and other foreign material that might impair bond of paints to substrates.
- L. Alteration Work: Comply with applicable surface preparation requirements specified and as recommended by finish materials manufacturer for existing surfaces to receive paint or other finishes, including cleaning, sanding, and roughening as required for proper adherence of new finish material.
 - 1. Existing Woodwork: Strip existing wood finish to bare wood using commercially available solvents compatible with finish. Use in strict accordance with manufacturer's printed instructions. After stripping operation is complete and surface is dry, sand surface with sandpaper, using random orbital sanding machine.

3.3 APPLICATION

- A. Apply finishes according to manufacturer's written instructions.
 - 1. Use applicators and techniques suited for finish and substrate indicated.

2. Paint surfaces behind movable equipment and furniture same as similar exposed surfaces. Before final installation, paint surfaces behind permanently fixed equipment or furniture with prime coat only.
 3. Paint back sides of access panels, removable or hinged covers, and similar hinged items to match exposed surfaces.
 4. Do not apply paints over labels of independent testing agencies or equipment name, identification, performance rating, or nomenclature plates.
- B. Tint each undercoat a lighter shade to facilitate identification of each coat if multiple coats of the same material are to be applied. Tint undercoats to match color of finish coat, but provide sufficient difference in shade of undercoats to distinguish each separate coat.
- C. If undercoats or other conditions show through final coat, apply additional coats until cured film has a uniform coating finish, color, and appearance.
- D. Apply paints to produce surface films without cloudiness, spotting, holidays, laps, brush marks, runs, sags, ropiness, or other surface imperfections. Produce sharp glass lines and color breaks.
- E. Alterations: Finish new surfaces adjacent to unaltered existing surfaces with finish of same type and surface texture as corresponding adjacent surfaces, unless otherwise indicated. Finish patched, damaged, or extended surfaces to match existing surfaces.
- F. Painting Fire Suppression, Plumbing, HVAC, Electrical, Communication, and Electronic Safety and Security Work:
1. Paint the following work where exposed in equipment rooms:
 - a. Equipment, including panelboards and switch gear.
 - b. Uninsulated metal piping.
 - c. Uninsulated plastic piping.
 - d. Pipe hangers and supports.
 - e. Metal conduit.
 - f. Plastic conduit.
 - g. Tanks that do not have factory-applied final finishes.
 - h. Duct, equipment, and pipe insulation having cotton or canvas insulation covering or other paintable jacket material.
 2. Paint the following work where exposed in occupied spaces:
 - a. Equipment, including panelboards.
 - b. Uninsulated metal piping.
 - c. Uninsulated plastic piping.
 - d. Pipe hangers and supports.
 - e. Metal conduit.
 - f. Plastic conduit.
 - g. Duct, equipment, and pipe insulation having cotton or canvas insulation covering or other paintable jacket material.
 - h. Other items as directed by Architect.

3. Paint portions of internal surfaces of metal ducts, without liner, behind air inlets and outlets that are visible from occupied spaces.

3.4 FIELD QUALITY CONTROL

- A. Dry Film Thickness Testing: Owner will engage the services of a qualified testing and inspecting agency to inspect and test paint for dry film thickness.
 1. Contractor shall touch up and restore painted surfaces damaged by testing.
 2. If test results show that dry film thickness of applied paint does not comply with paint manufacturer's written recommendations, Contractor shall pay for testing and apply additional coats as needed to provide dry film thickness that complies with paint manufacturer's written recommendations.

3.5 CLEANING AND PROTECTION

- A. At end of each workday, remove rubbish, empty cans, rags, and other discarded materials from Project site.
- B. After completing coating application, clean spattered surfaces. Remove spattered coatings by washing, scraping, or other methods. Do not scratch or damage adjacent finished surfaces.
- C. Protect work of other trades against damage from finish operation. Correct damage by cleaning, repairing, replacing, and recoating, as approved by Architect, and leave in an undamaged condition.
- D. At completion of construction activities of other trades, touch up and restore damaged or defaced finished surfaces.

3.6 INTERIOR PAINTING SCHEDULE

- A. Concrete Substrates, Vertical Surfaces:
 1. First Coat:
 - a. Benjamin Moore & Co.; Moore's Acrylic Masonry Primer 066.
 - b. PPG Architectural Finishes; Inc.; Perma-Crete Alkali-Resistant Primer 4-603.
 - c. Sherwin-Williams Company (The); Loxon Concrete & Masonry Primer (A24W8300.)
 2. Second and Third Coats (Semi-Gloss):
 - a. Benjamin Moore & Co.; N539 Ultra Spec 500 Interior Semi-Gloss.
 - b. PPG Architectural Finishes; Inc.; Speedhide Interior Semi-Gloss Latex 6-500.
 - c. Sherwin-Williams Company (The); Pro Mar 200 Interior Latex S/G B31 Series.

B. Concrete Substrates, Vertical Surfaces (Deep Tone Accent Colors):

1. First Coat: Use tinted primer.
 - a. Benjamin Moore & Co.; Moore's Acrylic Masonry Primer 066.
 - b. PPG Architectural Finishes; Inc.; Perma-Crete Alkali-Resistant Primer 4-603.
 - c. Sherwin-Williams Company (The); Loxon Concrete & Masonry Primer (A24W8300.)
2. Second and Third Coats (Semi-Gloss): Additional coats may be required.
 - a. Benjamin Moore & Co.; Ultra Spec 500 Interior Semi-Gloss N539.
 - b. PPG Architectural Finishes; Inc.; Speedhide Interior Semi-Gloss Latex 6-500.
 - c. Sherwin-Williams Company (The); ProMar 200 Zero VOC S/G B31-2600.

C. CMU Substrates:

1. First Coat:
 - a. Benjamin Moore & Co.; Super Spec Masonry Int-Ext Hi-Build Block Filler 206-01.
 - b. PPG Architectural Finishes; Inc.; Speedhide Interior/Exterior Latex Block Filler 6-7.
 - c. Sherwin-Williams Company (The); PrepRite Block Filler B25W25
2. Second and Third Coats (Semi-Gloss):
 - a. Benjamin Moore & Co.; N539 Ultra Spec 500 Interior Semi-Gloss.
 - b. PPG Architectural Finishes; Inc.; Speedhide Interior Semi-Gloss Latex 6-500.
 - c. Sherwin-Williams Company (The); Pro Mar 200 Interior Latex S/G B31 Series.

D. CMU Substrates (Deep Tone Accent Colors):

1. First Coat: Use tinted primer.
 - a. Benjamin Moore & Co.; Super Spec Masonry Int-Ext Hi-Build Block Filler 206-01.
 - b. PPG Architectural Finishes; Inc.; Speedhide Interior/Exterior Latex Block Filler 6-7.
 - c. Sherwin-Williams Company (The); PrepRite Block Filler B25W25.
2. Second and Third Coats (Semi-Gloss): Additional coats may be required.
 - a. Benjamin Moore & Co.; Ultra Spec 500 Interior Semi-Gloss N539.
 - b. PPG Architectural Finishes; Inc.; Speedhide Interior Semi-Gloss Latex 6-500.
 - c. Sherwin-Williams Company (The); DTM Acrylic Coating S/G (B66-20 DTM Acrylic Coating S/G (B66-200 Series) or Gloss (B66-100 Series).

E. Steel Substrates:

1. First Coat:

- a. Benjamin Moore & Co.; Super Spec HP Acrylic Metal Primer P04.
- b. PPG Architectural Finishes; Inc.; Pitt-Tech Interior/Exterior Industrial DTM Primer/Finish Enamel 90-712.
- c. Sherwin-Williams Company (The); DTM Acrylic Primer Finish B66W1.

2. Second and Third Coats (Semi-Gloss):

- a. Benjamin Moore & Co.; Ultra Spec HP DTM Acrylic Semi-Gloss HP29, or Gloss HP28.
- b. PPG Architectural Finishes; Inc.; Pitt-Tech Industrial DTM Acrylic Satin 90-474.
- c. Sherwin-Williams Company (The); DTM Acrylic Coating S/G (B66-200 Series) or Gloss (B66-100 Series.)

F. Steel Substrates (Deep Tone Accent Colors):

1. First Coat: Use tinted primer.

- a. Benjamin Moore & Co.; Super Spec HP Acrylic Metal Primer P04.
- b. PPG Architectural Finishes; Inc.; Pitt-Tech Interior/Exterior Industrial DTM Primer/Finish Enamel 90-712.
- c. Sherwin-Williams Company (The); DTM Acrylic Primer Finish B66W1.

2. Second and Third Coats (Semi-Gloss): Additional coats may be required.

- a. Benjamin Moore & Co.; Ultra Spec HP DTM Acrylic Semi-Gloss HP29 or Gloss HP28.
- b. PPG Architectural Finishes; Inc.; Pitt-Tech Industrial DTM Acrylic Satin 90-474.
- c. Sherwin-Williams Company (The); DTM Acrylic Coating S/G (B66-200 Series) or Gloss (B66-100 Series.)

G. Steel Piping, Piping Supports and Hangers:

1. First Coat:

- a. Benjamin Moore & Co.; Super Spec HP Acrylic Metal Primer P04.
- b. PPG Architectural Finishes; Inc.; Pitt-Tech Interior/Exterior Industrial DTM Primer/Finish Enamel 90-712.
- c. Sherwin-Williams Company (The); DTM Acrylic Primer Finish B66W1.

2. Second and Third Coats (Semi-Gloss):

- a. Benjamin Moore & Co.; N539 Ultra Spec Interior Semi-Gloss.
- b. PPG Architectural Finishes; Inc.; Speedhide Interior Latex Semi-Gloss 6-500.
- c. Sherwin-Williams Company (The); Pro Mar 200 Interior Latex Semi-Gloss B20 Series.

H. Galvanized-Metal Substrates:

1. First Coat:

- a. Benjamin Moore & Co.; Super Spec HP Acrylic Metal Primer P04.
- b. PPG Architectural Finishes; Inc.; Pitt-Tech Interior/Exterior Industrial DTM Primer/Finish Enamel 90-712.
- c. Sherwin-Williams Company (The); DTM Acrylic Primer Finish B66W1.

2. Second and Third Coats:

- a. Benjamin Moore & Co.; Ultra Spec HP DTM Acrylic Semi-Gloss HP29.
- b. PPG Architectural Finishes; Inc.; Pitt-Tech Industrial DTM Acrylic Satin 90-474.
- c. Sherwin-Williams Company (The); A100 Exterior Latex Satin (A82) or Gloss (A8).

I. Galvanized-Metal Substrates (Metal Deck):

1. First Coat:

- a. Benjamin Moore & Co.; Coronado Super Kote 5000 Dry Fall Latex Flat 105 or Semi-Gloss 112.
- b. PPG Architectural Finishes; Inc.; Speed Super Tech Latex Dry Fog Spray Paint 6-724XI.
- c. Sherwin-Williams Company (The); Waterborne Acrylic Dry Fall Eggshell B42W2.

2. Second and Third Coats:

- a. Benjamin Moore & Co.; Coronado Super Kote 5000 Dry Latex Semi-Gloss 112.
- b. PPG Architectural Finishes; Inc.; Speed Super Tech Latex Dry Fog Spray Paint 6-724XI.
- c. Sherwin-Williams Company (The); Waterborne Acrylic Dry Fall Eg-Shell B42W2.

J. Galvanized-Metal Substrates (Metal Deck, Deep Tone Accent Colors):

1. First Coat: Use tinted primer.

- a. Benjamin Moore & Co.; Super Spec HP Acrylic Metal Primer P04.
- b. PPG Architectural Finishes; Inc.; Pitt-Tech Interior/Exterior Industrial DTM Primer/Finish Enamel 90-712.
- c. Sherwin-Williams Company (The); DTM Acrylic Primer Finish B66 Series.

2. Second and Third Coats (Semi-Gloss):

- a. Benjamin Moore & Co.; Ultra Spec HP DTM Acrylic Semi-Gloss HP29 or Gloss HP28.
- b. PPG Architectural Finishes; Inc.; Pitt-Tech Interior /Exterior Satin DTM Industrial Enamel 90-474.

- c. Sherwin-Williams Company (The); DTM Acrylic Coating S/G or Gloss B66 Series.

K. Aluminum Substrates (Where Indicated):

1. First Coat:

- a. Benjamin Moore & Co.; Super Spec HP Acrylic Metal Primer P04.
- b. PPG Architectural Finishes; Inc.; Pitt-Tech Interior/Exterior Industrial DTM Primer/Finish Enamel 90-712.
- c. Sherwin-Williams Company (The); DTM Acrylic Primer Finish B66W1.

2. Second and Third Coats (Eggshell):

- a. Benjamin Moore & Co.; Ultra Spec 500 Interior Eggshell N538.
- b. PPG Architectural Finishes; Inc.; Speedhide Interior Latex Eggshell 6-411.
- c. Sherwin-Williams Company (The); Pro Mar 200 Interior Latex Eg-Shell B20 Series.

L. Wood Substrates:

1. First Coat:

- a. Benjamin Moore & Co.; Fresh Start Multi-Purpose Latex Primer N023.
- b. PPG Architectural Finishes; Inc.; Seal Grip Latex Primer/Finish 17-951.
- c. Sherwin-Williams Company (The); Premium Interior Wall and Wood Primer B28W8111.

2. Second and Third Coats (Semi-Gloss):

- a. Benjamin Moore & Co.; N539 Ultra Spec 500 Interior Semi-Gloss.
- b. PPG Architectural Finishes; Inc.; Speedhide Interior Semi-Gloss Latex 6-500.
- c. Sherwin-Williams Company (The); Pro Mar 200 Interior Latex S/G B31 Series.

M. Wood Substrates (Deep Tone Accent Colors):

1. First Coat: Use tinted primer.

- a. Benjamin Moore & Co.; Fresh Start Multi-Purpose Latex Primer N023.
- b. PPG Architectural Finishes; Inc.; Seal Grip Latex Primer/Finish 17-951.
- c. Sherwin-Williams Company (The); Premium Interior Wall and Wood Primer B28W8111.

2. Second and Third Coats (Semi-Gloss): Additional coats may be required.

- a. Benjamin Moore & Co.; Ultra Spec 500 Interior Semi-Gloss N539.
- b. PPG Architectural Finishes; Inc.; Speedhide Interior Semi-Gloss Latex 6-500.
- c. Sherwin-Williams Company (The); DTM Acrylic Coating S/G or Gloss B66 Series.

N. Plaster Substrates:

1. First Coat:

- a. Benjamin Moore & Co.; Super Spec Int/Ext 100% Acrylic Masonry Sealer N066.
- b. PPG Architectural Finishes; Inc.; Perma-Crete Alkali-Resistant Primer 4-603.
- c. Sherwin-Williams Company (The); Loxon Concrete & Masonry Primer A24W8300.

2. Second and Third Coats (Eggshell):

- a. Benjamin Moore & Co.; N538 Ultra Spec 500 Interior Eggshell.
- b. PPG Architectural Finishes; Inc.; Speedhide Zero Interior Latex Eggshell 6-4310.
- c. Sherwin-Williams Company (The); Pro Mar 200 0 VOC Interior Latex Egg Shell (B20-2600 Series.)

O. Plaster Substrates (Deep Tone Accent Colors):

1. First Coat: Use tinted primer.

- a. Benjamin Moore & Co.; Super Spec Int/Ext 100% Acrylic Masonry Sealer N066.
- b. PPG Architectural Finishes; Inc.; Perma-Crete Alkali-Resistant Primer 4-603.
- c. Sherwin-Williams Company (The); Loxon Concrete & Masonry Primer A24W8300.

2. Second and Third Coats (Eggshell): Additional coats may be required.

- a. Benjamin Moore & Co.; N538 Ultra Spec 500 Interior Eggshell.
- b. PPG Architectural Finishes; Inc.; Speedhide Zero Interior Latex Eggshell 6-4310.
- c. Sherwin-Williams Company (The); Pro Mar 200 0 VOC Interior Latex Egg Shell (B20-2600 Series.)

P. Gypsum Board Substrates:

1. First Coat:

- a. Benjamin Moore & Co.; Fresh Start Multi-Purpose Latex N023.
- b. PPG Architectural Finishes; Inc.; Speedhide Interior Latex Primer/Sealer 6-2
- c. Sherwin-Williams Company (The); Pro Mar 200 Wall Primer (B28W8200.)

2. Second and Third Coats (Eggshell):

- a. Benjamin Moore & Co.; N538 Ultra Spec 500 Interior Eggshell.
- b. PPG Architectural Finishes; Inc.; Speedhide Interior Latex Eggshell 6-411.
- c. Sherwin-Williams Company (The); Pro Mar 200 Interior Latex Low Sheen (B20-Series.)

Q. Gypsum Board Substrates (Deep Tone Accent Colors):

1. First Coat: Use tinted primer.
 - a. Benjamin Moore & Co.; Fresh Start Multi-Purpose Latex N023.
 - b. PPG Architectural Finishes; Inc.; Speedhide Interior Latex Primer/Sealer 6-2.
 - c. Sherwin-Williams Company (The); Pro Mar 200 Wall Primer (B28W8200).
2. Second and Third Coats (Eggshell): Additional coats may be required.
 - a. Benjamin Moore & Co.; N538 Ultra Spec 500 Interior Eggshell.
 - b. PPG Architectural Finishes; Inc.; Speedhide Interior Latex Eggshell 6-411.
 - c. Sherwin-Williams Company (The); Pro Mar 200 0 VOC Interior Latex Low Sheen (B24-2600 Series).

R. Insulation-Covering Substrates:

1. First Coat:
 - a. Benjamin Moore & Co.; Fresh Start Multi-Purpose Latex N023.
 - b. PPG Architectural Finishes; Inc.; Speedhide Interior Latex Primer/Sealer 6-2.
 - c. Sherwin-Williams Company (The); Prep Rite 200 Interior Latex Primer B28W200.
2. Second and Third Coats (Semi-Gloss):
 - a. Benjamin Moore & Co.; N539 Ultra Spec 500 Interior Semi-Gloss.
 - b. PPG Architectural Finishes; Inc.; Speedhide Zero Interior Semi-Gloss Latex 6-4510.
 - c. Sherwin-Williams Company (The); Pro Mar 200 Zero VOC Semi-Gloss B31-2600.

S. Insulation-Covering Substrates (Deep Tone Accent Colors):

1. First Coat: Use tinted primer.
 - a. Benjamin Moore & Co.; Fresh Start Multi-Purpose Latex N023.
 - b. PPG Architectural Finishes; Inc.; Speedhide Interior Latex Primer/Sealer 6-2.
 - c. Sherwin-Williams Company (The); Pro Mar 200 Zero VOC Semi-Gloss Primer (B28-2600).
2. Second and Third Coats (Semi-Gloss): Additional coats may be required.
 - a. Benjamin Moore & Co.; N539 Ultra Spec 500 Interior Semi-Gloss.
 - b. PPG Architectural Finishes; Inc.; Speedhide Zero Interior Semi-Gloss Latex 6-4510.
 - c. Sherwin-Williams Company (The); Pro Mar 200 Zero VOC Interior Latex S/G (B31-2600 Series.)

T. TV Studio Wall Paint: Green Screen on Gypsum Board.

1. First Coat: Use tinted primer.
 - a. Sherwin-Williams Company (The): Pro Mar 200 Zero VOC Primer.
2. Second and Third Coats: Additional coats may be required.
 - a. Chrome–Key Paints; Chrome-Key Greene Screen Video Green.

3.7 INTERIOR WOOD-FINISH-SYSTEM SCHEDULE

A. Stained Wood (Closed or Open Grain):

1. First Coat:
 - a. Benjamin Moore & Co.; Lenmar Interior Waterborne Stain.
 - b. PPG Architectural Finishes; Inc.; Olympic Interior Low VOC Oil Stain 44500.
 - c. Sherwin-Williams Company (The); Minwax Wood Finish 250 VOC Compliant Stain (7107 Series).
2. Second and Third Coats (Eggshell/Low Lustre):
 - a. Benjamin Moore & Co.; Benwood Stays Clear Stain Acrylic Polyurethane N423.
 - b. PPG Architectural Finishes; Inc.; Olympic Interior Satin Polyurethane 43886.
 - c. Sherwin-Williams Company (The); Minwax High Build Polyurethane Satin (009919945)

B. Stained Wood (Closed or Open Grain): Apply wood grain filler to open grain wood.

1. First Coat:
 - a. Benjamin Moore & Co.; Lenmar Interior Waterborne Stain.
 - b. PPG Architectural Finishes; Inc.; Olympic Interior Low VOC Oil Stain 44500.
 - c. Sherwin-Williams Company (The); Minwax Wood Finish 250 VOC Compliant Stain (7107 Series)
2. Second and Third Coats (Semi-Gloss/High Gloss):
 - a. Benjamin Moore & Co.; Benwood Stays Clear Semi-Gloss Acrylic Polyurethane N422.
 - b. PPG Architectural Finishes; Inc.; Olympic Interior Semi-GlossSatin Polyurethane 43886.
 - c. Sherwin-Williams Company (The); Minwax High Build Polyurethane Semi-Gloss (009919937) or Gloss (009919929)

C. Clear Finish Wood (Closed Grain):

1. First Coat:

- a. Benjamin Moore & Co.; Benwood Stays Clear Acrylic Polyurethane N423.
- b. PPG Architectural Finishes; Inc.; Olympic Interior Gloss Polyurethane 43886 (Quart size only-OTC).
- c. Sherwin-Williams Company (The); Minwax High Build Polyurethane Satin (009919945).

2. Second and Third Coats (Satin/Low Lustre):

- a. Benjamin Moore & Co.; Benwood Stays Clear Satin Acrylic Polyurethane N423.
- b. PPG Architectural Finishes; Inc.; Olympic Interior Satin Polyurethane 43884 thinned (Quart size only – OTC).
- c. Sherwin-Williams Company (The); Minwax High Build Polyurethane Satin (009919945).

D. Clear Finish Wood (Closed Grain):

1. First Coat:

- a. Benjamin Moore & Co.; Benwood Stays Clear Acrylic Polyurethane N422.
- b. PPG Architectural Finishes; Inc.; Olympic Interior Gloss Polyurethane 43884 thinned (Quart size only – OTC).
- c. Sherwin-Williams Company (The); Minwax High Build Polyurethane Satin (009919945)

2. Second and Third Coats (Semi-Gloss/High Gloss):

- a. Benjamin Moore & Co.; Benwood Stays Clear Semi-Gloss Acrylic Polyurethane N422.
- b. PPG Architectural Finishes; Inc.; Olympic Interior Semi-Gloss Polyurethane 43884 (Quart size only – OTC).
- c. Sherwin-Williams Company (The); Minwax High Build Polyurethane Semi-gloss (009919945).

END OF SECTION 09 91 00

SECTION 09 96 00 – HIGH-PERFORMANCE COATINGS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes surface preparation and application of high-performance coating systems, for the following:
 - 1. Exterior applications.
 - 2. General use interior applications.

1.3 SUBMITTALS, GENERAL

- A. General: Submit all action submittals (except Samples for Verification) and informational submittals required by this Section concurrently.

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of product for substrates indicated. Include preparation requirements and application instructions. Include all paint products under one cover sheet.
 - 1. Exterior steel.
 - 2. Exterior galvanized-metal.
 - 3. Exterior wood.
 - 4. Exterior aluminum.
 - 5. Exterior urethane.
 - 6. Exterior CMU.
 - 7. Interior concrete, vertical surfaces.
 - 8. Interior CMU, smooth finish.
 - 9. Interior CMU, rough industrial finish.
 - 10. Interior gypsum board and plaster (non-wet environments).
- B. Samples for Verification and Initial Selection: For each type of coating system and in each color and gloss of topcoat indicated.
 - 1. Submit Samples on rigid backing, 8 inches square.
 - 2. Step coats on Samples to show each coat required for system.
 - 3. Label each coat of each Sample.
 - 4. Label each Sample for location and application area.

- C. Product List: For each product indicated, include the following:
 - 1. Cross-reference to paint system and locations of application areas. Use same designations indicated on Drawings and in schedules.
 - 2. VOC content.
- D. Coatings Maintenance Manual:
 - 1. Upon conclusion of the project, the contractor or paint manufacture/supplier shall furnish a coatings maintenance manual such as Sherwin Williams "Custodian Project Color and Product Information" report. Manual shall include an Area Summary with finish schedule, Area Detail designating where each product/color/finish was used, product data pages, Material Safety Data Sheets, care and cleaning instructions. Touch up procedures and color samples of each color and finish used. All information contained in a self-bound 3 ring hole punched catalog.

1.5 QUALITY ASSURANCE

- A. Qualification Data: For applicator.

1.6 MAINTENANCE MATERIAL SUBMITTALS

- A. Furnish extra materials, from the same product run, that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.
 - 1. Coatings: 10 percent, but not less than 1 gal. of each material and color applied.

1.7 QUALITY ASSURANCE

- A. Applicator Qualifications: A firm or individual, experienced in applying high performance coatings specified in this Section, who has successfully completed a minimum of five previous projects similar in nature, size, and extent to this Project; familiar with special requirements indicated; and with sufficient trained staff to apply manufacturer's products according to specified requirements.
- B. Mockups: Apply mockups of each coating system indicated to verify preliminary selections made under sample submittals and to demonstrate aesthetic effects and set quality standards for materials and execution.
 - 1. Architect will select one surface to represent surfaces and conditions for application of each coating system specified in Part 3.
 - a. Wall and Ceiling Surfaces: Provide samples of at least 100 sq. ft.
 - b. Other Items: Architect will designate items or areas required.

2. Final approval of color selections will be based on mockups.
 - a. If preliminary color selections are not approved, apply additional mockups of additional colors selected by Architect at no added cost to Owner.
3. Approval of mockups does not constitute approval of deviations from the Contract Documents contained in mockups unless Architect specifically approves such deviations in writing.
4. Subject to compliance with requirements, approved mockups may become part of the completed Work if undisturbed at time of Substantial Completion.

1.8 DELIVERY, STORAGE, AND HANDLING

- A. Store materials in tightly covered containers in well-ventilated areas with ambient temperatures continuously maintained at not less than 45 deg F.
 1. Maintain containers in clean condition, free of foreign materials and residue.
 2. Remove rags and waste from storage areas daily.

1.9 FIELD CONDITIONS

- A. Apply coatings only when temperature of surfaces to be coated and surrounding air temperatures are between 50 and 95 deg F.
- B. Do not apply coatings when relative humidity exceeds 85 percent; at temperatures less than 5 deg F above the dew point; or to damp or wet surfaces.
- C. Do not apply exterior coatings in snow, rain, fog, or mist.
- D. Lighting: Do not install high-performance coatings until a lighting level of not less than 80 fc is provided on the surfaces to receive coating.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include the following:
 1. Benjamin Moore & Co.
 2. Sherwin-Williams Company (The).
 3. Tnemec Inc.
- B. Submittals containing manufactures other than stated above, will require a product by product comparison for each type of paint. All Comparable equals are to be matched with corresponding Sherwin Williams specified products.

- C. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to products listed in Part 3 articles for the application indicated.

2.2 HIGH PERFORMANCE COATINGS, GENERAL

A. Material Compatibility:

1. Provide materials for use within each coating system that are compatible with one another and substrates indicated, under conditions of service and application as demonstrated by manufacturer, based on testing and field experience.
2. For each coat in a coating system, provide products recommended in writing by manufacturers of topcoat for use in coating system and on substrate indicated.
3. Provide products of same manufacturer for each coat in a coating system.

- B. VOC Compliance: Provide coating products complying with New York requirements for Volatile Organic Compound (VOC) and Ozone Transport Commission (OTC) regulations, January 2005.

- C. Colors: As selected by Architect from manufacturer's full range.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates and conditions, with Applicator present, for compliance with requirements for maximum moisture content and other conditions affecting performance of the Work.
 1. Maximum Moisture Content of Substrates: When measured with an electronic moisture meter as follows:
 - a. Concrete: 12 percent.
 - b. Masonry (Clay and CMU): 12 percent.
 - c. Wood: 15 percent.
 - d. Gypsum Board: 12 percent.
 - e. Plaster: 8 percent.
- B. Gypsum Board Substrates: Verify that finishing compound is sanded smooth.
- C. Plaster Substrates: Verify that plaster is fully cured.
- D. Verify suitability of substrates, including surface conditions and compatibility with existing finishes and primers.

- E. Proceed with coating application only after unsatisfactory conditions have been corrected.
 - 1. Beginning coating application constitutes Contractor's acceptance of substrates and conditions.

3.2 PREPARATION

- A. Remove hardware, covers, plates, and similar items already in place that are removable and are not to be painted. If removal is impractical or impossible because of size or weight of item, provide surface-applied protection before surface preparation and painting.
 - 1. After completing painting operations, use workers skilled in the trades involved to reinstall items that were removed. Remove surface-applied protection.
- B. Clean substrates of substances that could impair bond of coatings, including dust, dirt, oil, grease, and incompatible paints and encapsulants.
 - 1. Remove incompatible primers and re-prime substrate with compatible primers or apply tie coat as required to produce coating systems indicated.
- C. Concrete Substrates: Remove release agents, curing compounds, efflorescence, and chalk. Do not coat surfaces if moisture content or alkalinity of surfaces to be coated exceeds that permitted in manufacturer's written instructions.
- D. Concrete Floors: Prepare by diamond grinding, whip blasting, or mechanical shot blasting, as recommended by coating manufacturer.
- E. Masonry Substrates: Remove efflorescence and chalk. Do not coat surfaces if moisture content or alkalinity of surfaces or if alkalinity of mortar joints exceed that permitted in manufacturer's written instructions.
- F. Steel Substrates: Remove rust, loose mill scale, and shop primer if any. Clean using methods recommended in writing by paint manufacturer but not less than the following:
 - 1. SSPC-SP 6/NACE No. 3, "Commercial Blast Cleaning."
 - 2. SSPC-SP 10/NACE No. 2, "Near-White Blast Cleaning."
- G. Shop-Primed Steel Substrates: Clean field welds, bolted connections, and abraded areas of shop paint, and paint exposed areas with the same material as used for shop priming to comply with SSPC-PA 1 for touching up shop-primed surfaces.
- H. Galvanized-Metal Substrates: Remove grease and oil residue from galvanized sheet metal using bio-degradable detergent. Then abrasive blast with fine abrasive to produce clean, lightly etched surfaces that promote adhesion of subsequently applied coatings.
- I. Aluminum Substrates: Remove loose surface oxidation by scarification.

J. Wood Substrates:

1. Scrape and clean knots. Before applying primer apply coat of knot sealer recommended in writing by topcoat manufacturer for coating system indicated.
2. Sand surfaces that will be exposed to view and dust off.
3. Prime edges, ends, faces, undersides, and back sides of wood.
4. After priming, fill holes and imperfections in the finish surfaces with putty or plastic wood filler. Sand smooth when dried.

K. Galvanized Metal/Galvanized Deck- Factory Primed Surface: Coordinate with approved paint manufacturer on compatibility of paint finish coats to factory prime surface.

L. After removing all surface contamination, the surface should be scuff sanded or scrubbed with an abrasive cleaner to dull the surface for best adhesion.

3.3 APPLICATION

A. Apply high-performance coatings according to manufacturer's written instructions.

1. Use applicators and techniques suited for coating and substrate indicated.
2. Coat surfaces behind movable equipment and furniture same as similar exposed surfaces. Before final installation, coat surfaces behind permanently fixed equipment or furniture with prime coat only.
3. Coat back sides of access panels, removable or hinged covers, and similar hinged items to match exposed surfaces.
4. Do not apply coatings over labels of independent testing agencies or equipment name, identification, performance rating, or nomenclature plates.

B. Tint each undercoat a lighter shade to facilitate identification of each coat if multiple coats of the same material are to be applied. Tint undercoats to match color of finish coat, but provide sufficient difference in shade of undercoats to distinguish each separate coat.

C. If undercoats or other conditions show through final coat, apply additional coats until cured film has a uniform coating finish, color, and appearance.

D. Apply coatings to produce surface films without cloudiness, spotting, holidays, laps, brush marks, runs, sags, ropiness, or other surface imperfections. Produce sharp glass lines and color breaks.

3.4 FIELD QUALITY CONTROL

A. Dry Film Thickness Testing: Owner will engage the services of a qualified testing and inspecting agency to inspect and test coatings for dry film thickness.

1. Contractor shall touch up and restore coated surfaces damaged by testing.

2. If test results show that dry film thickness of applied coating does not comply with coating manufacturer's written recommendations, Contractor shall pay for testing and apply additional coats as needed to provide dry film thickness that complies with coating manufacturer's written recommendations.

3.5 CLEANING AND PROTECTION

- A. At end of each workday, remove rubbish, empty cans, rags, and other discarded materials from Project site.
- B. After completing coating application, clean spattered surfaces. Remove spattered coatings by washing, scraping, or other methods. Do not scratch or damage adjacent finished surfaces.
- C. Protect work of other trades against damage from coating operation. Correct damage by cleaning, repairing, replacing, and recoating, as approved by Architect, and leave in an undamaged condition.
- D. At completion of construction activities of other trades, touch up and restore damaged or defaced coated surfaces.

3.6 EXTERIOR HIGH-PERFORMANCE COATING SCHEDULE

- A. Steel Substrates:
 1. First Coat:
 - a. Benjamin Moore & Co. (No Zinc primers) suggest Corotech V160 Epoxy Mastic Coating @4.6-7.2 DFT.
 - b. Sherwin-Williams Company (The); Corothane 1 Gal-Va-Pac Zinc Primer B65G00010 at 3.0-4.0 mils DFT.
 - c. Tnemec Inc.; Series 90-97 Tneme-Zinc at 2.5 to 3.5 mils DFT.
 2. Second Coat:
 - a. Benjamin Moore & Co. Corotech V160 Epoxy Mastic Coating @4.6-7.2 DFT
 - b. Sherwin-Williams Company (The); Dura-Plate 235 Multi-Purpose Epoxy B67W235 at 4.0-8.0 mils DFT
 - c. Tnemec Inc.; Series N69 Hi-Build Epoxoline II at 3.0 to 5.0 mils DFT.
 3. Third Coat:
 - a. Benjamin Moore & Co. Corotech V500 Acrylic Aliphatic Urethane Coating Gloss or V510 Acrylic Aliphatic Urethane Coating Semi-Gloss at 3.2-4.6 mils DFT
 - b. Sherwin-Williams Company (The); Acolon 218 HS Polyurethane Gloss B65W611 at 3.0-6.0 DFT.
 - c. Tnemec Inc.; Series 1074 or 1075 Endura-Shield II at 2.0 to 5.0 mils DFT.

B. Galvanized-Metal Substrates:

1. First Coat:

- a. Benjamin Moore & Co. Corotech V160 Epoxy Mastic Coating @4.6-7.2 DFT
- b. Sherwin-Williams Company (The); Dura-Plate 235 Multi-Purpose Epoxy B67W235 at 4.0-8.0 mils DFT
- c. Tnemec Inc.; Series N69 Hi-Build Epoxoline II at 3.0 to 5.0 mils DFT.

2. Second Coat:

- a. Benjamin Moore & Co. Corotech V500 Acrylic Aliphatic Urethane Coating Gloss or V510 Acrylic Aliphatic Urethane Coating Semi-Gloss at 3.2-4.6 DFT
- b. Sherwin-Williams Company (The); Acolon 218 HS Polyurethane Gloss B65W611 at 3.0-6.0 DFT.
- c. Tnemec Inc.; Series 1074 or 1075 Endura-Shield II at 2.0 to 5.0 mils DFT.

C. Wood Substrates:

1. First Coat:

- a. Benjamin Moore & Co. Insul-X Aqua Lock Plus Primer
- b. Sherwin-Williams Company (The); Exterior Oil-Based Wood Primer Y24W8020 at 2.3 mils DFT
- c. Tnemec Inc.; Series V10-99W Primer

2. Second and Third Coat:

- a. Benjamin Moore & Co. Corotech V331 Acrylic DTM Enamel Semi-Gloss at 2-2.2 DFT(third coat of same)
- b. Sherwin-Williams Company (The); Sher-Cryl HPA High Performance Acrylic Semi-Gloss B66W350 at 2.5-4.0 mils DFT.
- c. Tnemec Inc.; Series 1029 Enduratone

D. Aluminum Substrates:

1. First Coat:

- a. Benjamin Moore & Co. Corotech V160 Epoxy Mastic Coating @4.6-7.2 DFT
- b. Sherwin-Williams Company (The); Macropoxy 646 Fast Cure Epoxy B58W610 at 5.0-10.0 mils DFT
- c. Tnemec Inc.; Series N69 Hi-Build Epoxoline II

2. Second Coat:

- a. Benjamin Moore & Co. Corotech V500 Acrylic Aliphatic Urethane Coating Gloss or V510 Acrylic Aliphatic Urethane Coating Semi-Gloss at 3.2-4.6 DFT
- b. Sherwin-Williams Company (The); Acrolon 218 HS Polyurethane Gloss B65W611 at 3.0-6.0 mils DFT.
- c. Tnemec Inc.; Series 1074 or 1075 Endura-Shield II

E. Urethane Substrates:

1. First Coat:

- a. Benjamin Moore & Co. Insl-X Stix XSA 110 Bonding Primer
- b. Sherwin-Williams Company (The); Multi-Purpose Interior/Exterior Latex Primer/Sealer B51-450 Series at 1.4 mils DFT.
- c. Tnemec Inc.; Series 151-1051 Elasto-Grip F.C. at 1.0 to 2.0 mils DFT.

2. Second and Third Coat:

- a. Benjamin Moore & Co. Corotech V331 Acrylic DTM Enamel Semi-Gloss at 2-2.2 DFT(third coat of same)
- b. Sherwin-Williams Company (The); Sher-Cryl HPA High Performance Acrylic Semi-Gloss B66W350 at 2.5-4.0 mils DFT.
- c. Tnemec Inc.; Series 1029 Enduratone.

F. CMU:

1. First Coat:

- a. Benjamin Moore & Co. Super Spec Masonry 100% Acrylic Elastomeric 0056 Flat @9. DFT
- b. Sherwin-Williams Company (The) Con-Flex XL High Build Coating A05W451 at 6.0-7.5 mils DFT.
- c. Tnemec Inc.; Series 156 Color Enviro-Crete @102-136 sq ft per gallon (use Tnemec-Tape for cracks larger than 1/64"wide)

2. Second Coat:

- a. Benjamin Moore & Co. Super Spec Masonry 100% Acrylic Elastomeric 0055 Low Luster @9. DFT
- b. Sherwin-Williams Company (The); Con-Flex XL High Build Coating A05W451 at 6.0-7.5 mils DFT.
- c. Tnemec Inc.; Series 156 Color Enviro-Crete @102-136 sq ft per gallon

3.7 INTERIOR HIGH PERFORMANCE COATING SCHEDULE: GENERAL USE

A. Concrete Substrates, Vertical Surfaces:

1. First Coat:

- a. Benjamin Moore & Co. Super Spec Masonry Interior/Exterior Acrylic High Build Primer, N068 1.0 DFT
- b. Sherwin-Williams Company (The); Loxon Concrete and Masonry Primer A24W8300 at 3.2-2.1 mils DFT.
- c. Tnemec Inc.; Series 1029 Enduratone at 2.5 to 3.0 mils DFT.

2. Second and Third Coats:

- a. Benjamin Moore & Co. Corotech V331 Acrylic DTM Enamel Semi-Gloss at 2-2.2 DFT(third coat of same)
- b. Sherwin-Williams Company (The); Sher-Cryl HPA High Performance Acrylic Semi-Gloss B66W350 at 2.5-5.0 mils DFT.
- c. Tnemec Inc.; Series 1029 Enduratone at 2.5 to 3.0 mils DFT each.

B. CMU Substrates, Smooth Finish:

1. First Coat: Apply at 60 to 80 sq. ft. per gallon.

- a. Benjamin Moore & Co. Corotech V114 Block Filler at 8-16 DFT
- b. Sherwin-Williams Company (The); Cement-Plex 875 Acrylic Block Filler B42W00200/B42V201 at 13-25 mils DFT.
- c. Tnemec Inc.; Series 130-6602 Envirofill.

2. Second Coat:

- a. Benjamin Moore & Co. Corotech V330 Acrylic DTM Enamel Gloss
- b. Sherwin-Williams Company (The); Pro Industrial Multi-Surface Acrylic Gloss B66W501 at 1.5-2.0 mils DFT
- c. Tnemec Inc.; Series 1028 Enduratone at 2.5 to 3.0 mils DFT.

3. Third Coat:

- a. Benjamin Moore & Co. Corotech V330 Acrylic DTM Enamel Gloss
- b. Sherwin-Williams Company (The); Pro Industrial Multi-Surface Acrylic Gloss B66W501 at 1.5-2.0 mils DFT
- c. Tnemec Inc.; Series 1028 Enduratone at 2.5 to 3.0 mils DFT.

C. CMU Substrates, Rough Industrial Finish:

1. First Coat: Apply at 60 to 80 sq. ft. per gallon.

- a. Benjamin Moore & Co. Corotech V114 Block Filler at 8-16 DFT
- b. Sherwin-Williams Company (The); Heavy Duty Block Filler B42W46 at 10.0-18.0 mils DFT
- c. Tnemec Inc.; Series 130-6602 Envirofill.

2. Second Coat:

- a. Benjamin Moore & Co. Corotech V331 Acrylic DTM Enamel at 1.9-2.1 DFT
- b. Sherwin-Williams Company (The); Sher-Cryl HPA High Performance Acrylic Semi-Gloss B66-W350 at 2.5-5.0 mils DFT.
- c. Tnemec Inc.; Series 1029 Enduratone at 2.5 to 3.0 mils DFT.

3. Third Coat:

- a. Benjamin Moore & Co. Corotech V331 Acrylic DTM Enamel at 1.9-2.1 DFT
- b. Sherwin-Williams Company (The); Sher-Cryl HPA High Performance Acrylic Semi-Gloss B66-W350 at 2.5-5.0 mils DFT.
- c. Tnemec Inc.; Series 1029 Enduratone at 2.5 to 3.0 mils DFT.

D. Gypsum Board and Plaster Substrates (Non-Wet Environments):

1. First Coat: 1.0 to 2.0 mils DFT.

- a. Benjamin Moore & Co. Coronado Superkote 5000 Latex Primer Sealer
- b. Sherwin-Williams Company (The); ProMar 200 Zero VOC Interior Latex Primer B28W2600 at 1.0 mils DFT.
- c. Tnemec Inc.; Series 51 PVA Sealer

2. Second and Third Coat:

- a. Benjamin Moore & Co. Corotech V331 Acrylic DTM Enamel at 1.9-2.1DFT
- b. Sherwin-Williams Company (The); Sher-Cryl HPA High Performance Acrylic Semi-Gloss B66W350 at 2.5-5.0 mils DFT.
- c. Tnemec Inc.; Series 1029 Enduratone at 2.5 to 3.0 mils DFT.

END OF SECTION 09 96 00

SECTION 10 11 00 - VISUAL DISPLAY SURFACES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Markerboards.
 - 2. Tackboards.

1.3 DEFINITIONS

- A. Tackboard: Framed or unframed, tackable, visual display board assembly.
- B. Visual Display Board Assembly: Visual display surface that is factory fabricated into composite panel form, either with or without a perimeter frame; includes chalkboards, markerboards, and tackboards.
- C. Visual Display Surface: Surfaces that are used to convey information visually, including surfaces of chalkboards, markerboards, tackboards, and surfacing materials that are not fabricated into composite panel form but are applied directly to walls.

1.4 SUBMITTALS, GENERAL

- A. General: Submit all action submittals (except Samples for Verification) and informational submittals required by this Section concurrently.

1.5 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes for visual display surfaces. Include rated capacities and individual panel weights for sliding visual display units.
 - 1. Porcelain-enamel markerboards.
 - 2. Vinyl-fabric-faced tackboards.

- B. Shop Drawings: For visual display surfaces. Include plans, elevations, sections, details, and attachments to other work.
 - 1. Show locations of panel joints.
 - 2. Show locations of special-purpose graphics for visual display surfaces.
 - 3. Include sections of typical trim members.
 - 4. Wiring Diagrams: For power, signal, and control wiring.
- C. Samples for Verification and Initial Color Selection: For each type of visual display surface indicated, for units with factory-applied color finishes, and as follows:
 - 1. Actual sections of porcelain-enamel face sheet tackboard assembly visual display wall panel display rail.
 - 2. Fabric swatches of vinyl and polyester fabric-faced tack assemblies.
 - 3. Include accessory Samples to verify color selected.
 - 4. Visual Display Surface: Not less than 8-1/2 by 11 inches, mounted on substrate indicated for final Work. Include one panel for each type, color, and texture required.
 - 5. Trim: 6-inch-long sections of each trim profile.
 - 6. Display Rail: 6-inch-long sections.
 - 7. Modular Support System: 6-inch-long sections.
 - 8. Accessories: Full-size Sample of each type of accessory.
- D. Warranties: Sample of special warranties.

1.6 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For qualified Installer.
- B. Product Test Reports: Based on evaluation of comprehensive tests performed by a qualified testing agency, for surface-burning characteristics of fabrics.

1.7 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Data: For visual display surfaces to include in maintenance manuals.
- B. Warranties: Executed special warranties.

1.8 QUALITY ASSURANCE

- A. Installer Qualifications: Manufacturer's authorized representative who is trained and approved for installation of motor-operated, sliding visual display units required for this Project.
- B. Source Limitations: Obtain visual display surfaces from single source from single manufacturer.

- C. Surface-Burning Characteristics: As determined by testing identical products according to ASTM E 84 by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.

- 1. Flame-Spread Index: 25 or less.
- 2. Smoke-Developed Index: 450 or less.

1.9 DELIVERY, STORAGE, AND HANDLING

- A. Deliver factory-built visual display surfaces, including factory-applied trim where indicated, completely assembled in one piece without joints, where possible. If dimensions exceed maximum manufactured panel size, provide two or more pieces of equal length as acceptable to Architect. When overall dimensions require delivery in separate units, prefit components at the factory, disassemble for delivery, and make final joints at the site.
- B. Store visual display surfaces vertically with packing materials between each unit.

1.10 PROJECT CONDITIONS

- A. Environmental Limitations: Do not deliver or install visual display surfaces until spaces are enclosed and weather tight, wet work in spaces is complete and dry, work above ceilings is complete, and temporary HVAC system is operating and maintaining ambient temperature and humidity conditions at occupancy levels during the remainder of the construction period.
- B. Field Measurements: Verify actual dimensions of construction contiguous with visual display surfaces by field measurements before fabrication.
 - 1. Allow for trimming and fitting where taking field measurements before fabrication might delay the Work.

1.11 WARRANTY

- A. Special Warranty for Porcelain-Enamel Face Sheets: Manufacturer's standard form in which manufacturer agrees to repair or replace porcelain-enamel face sheets that fail in materials or workmanship within specified warranty period.
 - 1. Failures include, but are not limited to, the following:
 - a. Surfaces lose original writing and erasing qualities.
 - b. Surfaces exhibit crazing, cracking, or flaking.
 - 2. Warranty Period: 50 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 MATERIALS, GENERAL

- A. Porcelain-Enamel Face Sheet: Manufacturer's standard steel sheet with porcelain-enamel coating fused to steel; uncoated thickness indicated.
 - 1. Manufacturers: For convenience specifications and details are based on Claridge Products and Equipments, Inc. Harrison Arkansas, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. PolyVision Corporation; a Steelcase company.
 - b. Best-Rite Manufacturing.
 - 2. Matte Finish: Low reflective; chalk wipes clean with dry cloth or standard eraser.
 - 3. Gloss Finish: Gloss as indicated; dry-erase markers wipe clean with dry cloth or standard eraser.
- B. Polyester Fabric: Nondirectional weave, 100 percent polyester; weighing not less than 16 oz./sq. yd.; with surface-burning characteristics indicated.
- C. Hardboard: ANSI A135.4, tempered.
- D. Particleboard: ANSI A208.1, Grade M-1
- E. Fiberboard: ASTM C 208.
- F. Extruded Aluminum: ASTM B 221, Alloy 6063.
- G. Adhesives: Manufacturer's standard product that complies with the testing and product requirements of the California Department of Health Services' "Standard Practice for the Testing of Volatile Organic Emissions from Various Sources Using Small-Scale Environmental Chambers."

2.2 MARKERBOARD ASSEMBLIES

- A. Porcelain-Enamel Markerboards: Balanced, high-pressure, factory-laminated markerboard assembly of three-ply construction consisting of backing sheet, core material, and 0.021-inch-thick, porcelain-enamel face sheet with low gloss finish.
 - 1. Basis-of-Design Product: Subject to compliance with requirements, provide Claridge Products and Equipment, Inc. Similar to "Vitracite Porcelain Enamel Steel Chalkboards" or comparable product by one of the following:
 - a. Best-Rite Manufacturing.
 - b. PolyVision Corporation; a Steelcase company. 500 Stationary series.
 - 2. Particleboard Core: 3/8 inch thick; with 0.015-inch-thick, aluminum sheet backing.

3. Face Sheet: Min. 24 gauge steel with porcelain enamel finish suitable for use with liquid chalk markers similar to "LCS Liquid Chalk Writing System" by Claridge Products and Equipment Inc
4. Laminating Adhesive: Manufacturer's standard, moisture-resistant thermoplastic type.
5. Board units are to be magnetic.

2.3 TACKBOARD ASSEMBLIES

- A. Basis-of-Design Product: Subject to compliance with requirements, provide Claridge Products and Equipment, Inc. Similar to "Fabricork Vinyl Bulletin Boards" or comparable product by one of the following :
 1. Best-Rite Manufacturing.
 2. PolyVision Corporation; a Steelcase company.
- B. Polyester-Fabric-Faced Tackboard: 1/4-inch-thick, polyester-fabric-faced cork sheet factory laminated to 1/4-inch-thick hardboard backing.
- C. Flammability of Vinyl and Cork Materials (ASTM E-84) - Meet or exceed following requirements:
- D. Flame spread less than 25
- E. Smoke developed less than 450
- F. Assembly Weight: 1 lb./sq. ft.
- G. Assembly Thickness: Approximately 1/2-inch.
- H. TackBoard vinyl weight: min. 15 oz.

2.4 BOARD UNIT ACCESSORIES

- A. Aluminum Frames and Trim: Fabricated from not less than 0.062-inch-thick, extruded aluminum;
 1. Factory-Applied Trim: Manufacturer's standard.
- B. Chalk tray: Manufacturer's standard, continuous.
 1. Solid Type: Extruded aluminum with ribbed section with screw on chalk trough end enclosures.
 - a. Basis-of-Design Product: Subject to compliance with requirements, provide Claridge Products and Equipment, Inc.; "No. 262 Chalk Trough".

C. Map Rail: Provide the following accessories:

1. Integral Display Rail: Continuous and integral with map rail; fabricated from cork approximately 2 inches wide.
 - a. Basis-of-Design Product: Subject to compliance with requirements, provide Claridge Products and Equipment, Inc.; No. 151 Head Trim Map Rail”.
2. End Stops: Located at each end of map rail.
 - a. Basis-of-Design Product: Subject to compliance with requirements, provide Claridge Products and Equipment, Inc.; No. 74ES”.
3. Map Hooks: Two map hooks for every 48 inches of map rail or fraction thereof.
 - a. Basis-of-Design Product: Subject to compliance with requirements, provide Claridge Products and Equipment, Inc.; No. 76M Spring Clip Map Hook”.
4. Flag Holder: One for each room.
 - a. Basis-of-Design Product: Subject to compliance with requirements, provide Claridge Products and Equipment, Inc.; No.76FH Flag Holders”.

D. Special-Purpose Graphics: Fuse or paint the following graphics into surface of porcelain-enamel visual display unit:

1. Music staff lines at locations notes on drawings and schedule.

2.5 FABRICATION

- A. Porcelain-Enamel Visual Display Assemblies: Laminate porcelain-enamel face sheet and backing sheet to core material under heat and pressure with manufacturer's standard flexible, waterproof adhesive.
- B. Factory-Assembled Visual Display Units: Coordinate factory-assembled units with trim and accessories indicated. Join parts with a neat, precision fit.
 1. Make joints only where total length exceeds maximum manufactured length. Fabricate with minimum number of joints.
 2. Where size of visual display boards or other conditions require support in addition to normal trim, provide structural supports or modify trim as indicated or as selected by Architect from manufacturer's standard structural support accessories to suit conditions indicated.
- C. Aluminum Frames and Trim: Fabricate units straight and of single lengths, keeping joints to a minimum. Miter corners to a neat, hairline closure.
 1. Where factory-applied trim is indicated, trim shall be assembled and attached to visual display units at manufacturer's factory before shipment.

2.6 GENERAL FINISH REQUIREMENTS

- A. Comply with NAAMM's "Metal Finishes Manual for Architectural and Metal Products" for recommendations for applying and designating finishes.
- B. Protect mechanical finishes on exposed surfaces from damage by applying a strippable, temporary protective covering before shipping.
- C. Appearance of Finished Work: Noticeable variations in same piece are not acceptable. Variations in appearance of adjoining components are acceptable if they are within the range of approved Samples and are assembled or installed to minimize contrast.

2.7 ALUMINUM FINISHES

- A. Clear Anodic Finish: AAMA 611, AA-M12C22A31, Class II, 0.010 mm or thicker.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates and conditions, with Installer present, for compliance with requirements for installation tolerances, surface conditions of wall, and other conditions affecting performance of the Work.
- B. Examine roughing-in for electrical power systems to verify actual locations of connections before installation of motor-operated, sliding visual display units.
- C. Examine walls and partitions for proper preparation and backing for visual display surfaces.
- D. Examine walls and partitions for suitable framing depth where sliding visual display units will be installed.
- E. Proceed with installation only after unsatisfactory conditions have been corrected.
- F. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 PREPARATION

- A. Comply with manufacturer's written instructions for surface preparation.
- B. Clean substrates of substances that could impair the performance of and affect the smooth, finished surfaces of visual display boards, including dirt, mold, and mildew.
- C. Prepare surfaces to achieve a smooth, dry, clean surface free of flaking, unsound coatings, cracks, defects, projections, depressions, and substances that will impair bond between visual display surfaces and wall surfaces.

1. Prime wall surfaces indicated to receive direct-applied, visual display tack wall panels and as recommended in writing by primer/sealer manufacturer and wall covering manufacturer.
- D. Prepare recesses for sliding visual display units as required by type and size of unit.

3.3 INSTALLATION, GENERAL

- A. General: Install visual display surfaces in locations and at mounting heights indicated on Drawings. Keep perimeter lines straight, level, and plumb. Provide grounds, clips, backing materials, adhesives, brackets, anchors, trim, and accessories necessary for complete installation.

3.4 INSTALLATION OF FACTORY-FABRICATED VISUAL DISPLAY BOARDS AND ASSEMBLIES

- A. Visual Display Boards: Attach concealed clips, hangers, and grounds to wall surfaces and to visual display boards with fasteners at not more than 16 inches o.c. Secure both top and bottom of boards to walls.
1. Field-Applied Aluminum Trim: Attach trim over edges of visual display boards and conceal grounds and clips. Attach trim to boards with fasteners at not more than 24 inches o.c.
 - a. Attach chalk trays to boards with fasteners at not more than 12 inches o.c.

3.5 INSTALLATION OF VISUAL DISPLAY RAILS

- A. Display Rails: Install rails in locations and at mounting heights indicated on Drawings. Attach to wall surface with fasteners at not more than 16 inches o.c.

3.6 INSTALLATION OF MODULAR SUPPORT SYSTEM

- A. Modular Support System: Install adjustable standards in locations and at mounting heights indicated on Drawings. Install standards at 48 inches o.c., vertically aligned and plumb, and attached to wall surface with fasteners at 12 inches o.c.
1. Install single-slotted standard at each end of each run of standards and double-slotted standards at intermediate locations.
 2. Provide locking screw at top corner of visual display board at each standard.
 3. Hang visual display units on modular support system.

3.7 CLEANING AND PROTECTION

- A. Clean visual display surfaces according to manufacturer's written instructions. Attach one cleaning label to visual display surface in each room.
- B. Touch up factory-applied finishes to restore damaged or soiled areas.
- C. Cover and protect visual display surfaces after installation and cleaning.

3.8 DEMONSTRATION

- A. Engage a factory-authorized service representative to train Owner's maintenance personnel to adjust, operate, and maintain motor-operated, sliding visual display units.

END OF SECTION 10 11 00

SECTION 10 12 00 - DISPLAY CASES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Illuminated display cases.

1.3 DEFINITIONS

- A. Display Case: Glazed cabinet with visual display surface background and adjustable shelves.

1.4 SUBMITTALS, GENERAL

- A. General: Submit all action submittals (except Samples for Verification) and informational submittals required by this Section concurrently.

1.5 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes for display cases.
 - 1. Display cases.
- B. Shop Drawings: For display cases. Include plans, elevations, sections, details, and attachments to other work.
 - 1. Show location of seams and joints in visual display surfaces.
 - 2. Include sections of typical trim members.
 - 3. Wiring Diagrams: For power, signal, and control wiring.
- C. Samples for Verification and Initial Color Selection: For units with factory-applied color finishes, and as follows:
 - 1. Actual sections of visual display surfaces.
 - 2. Section of header panel for color selection.
 - 3. Visual Display Surface: Not less than 8-1/2 by 11 inches, mounted on substrate indicated for final Work. Include one panel for each type, color, and texture required.
 - 4. Trim: 6-inch-long sections of each trim profile.

1.6 INFORMATIONAL SUBMITTALS

- A. Product Test Reports: Based on evaluation of comprehensive tests performed by a qualified testing agency, for surface-burning characteristics of fabrics.

1.7 CLOSEOUT SUBMITTALS

- A. Maintenance Data: For visual display surfaces, operating hardware, and illuminated units to include in maintenance manuals.

1.8 QUALITY ASSURANCE

- A. Source Limitations: Obtain display cases from single source from single manufacturer.
- B. Surface-Burning Characteristics: As determined by testing identical products according to ASTM E 84 by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.
 - 1. Flame-Spread Index: 25 or less.
 - 2. Smoke-Developed Index: 50 or less.
- C. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
- D. Preinstallation Conference: Conduct conference at Project site.

1.9 PROJECT CONDITIONS

- A. Environmental Limitations: Do not deliver or install units until spaces are enclosed and weathertight, wet work in spaces is complete and dry, work above ceilings is complete, and temporary HVAC system is operating and maintaining ambient temperature and humidity conditions at occupancy levels during the remainder of the construction period.
- B. Field Measurements: Verify actual dimensions of openings for display cases by field measurements before fabrication.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Hardboard: ANSI A135.4, tempered.
- B. Hardwood Plywood: HPVA HP-1.
- C. Hardwood backed HPL – “Designer White”

- D. Vinyl Fabric: FS CCC-W-408D, Type II; weighing not less than 15 oz./sq. yd.; with flame-spread index of 25 or less when tested according to ASTM E 84.
- E. Extruded-Aluminum Bars and Shapes: ASTM B 221, Alloy 6063.
- F. Aluminum Tubing: ASTM B 429, Alloy 6063.
- G. Clear Tempered Glass: Glass must comply with CPSC 16 CFR- Safety standards for architectural glazing materials, ASTM C 1048, Kind FT, Condition A, Type I, Class 1, Quality Q3, with exposed edges seamed before tempering, and 5 mm thick unless otherwise indicated.
- H. Opaque Acrylic Sheet: ASTM D 4802, Category A-1 (cell-cast sheet).
- I. Fasteners: Provide screws, bolts, and other fastening devices made from same material as items being fastened. Provide types, sizes, and lengths to suit installation conditions. Use security fasteners where exposed to view.

2.2 DISPLAY CASE

- A. Basis-of-Design Product: Subject to compliance with requirements, provide Claridge Products and Equipment, Inc.; Premiere Wall Mounted Display Case or comparable product by one of the following:
 - 1. Platinum Visual Systems; a division of ABC School Equipment, Inc.
 - 2. Tablet & Ticket Co. (The).
Best-Rite Manufacturing.
- B. Recessed Cabinet: Factory-fabricated cabinet; with tackboard assembly on back inside surface, operable glazed doors at front, and trim on face to cover edge of recessed opening.
 - 1. Cabinet Box: Hardwood veneer plywood.
 - 2. Cabinet Frame and Trim: Aluminum.
 - 3. Veneer Species: Birch with transparent finish.
 - 4. Aluminum Finish: Color anodic.
 - a. Color and Gloss: As selected by Architect from manufacturer's full range.
- C. Glazed Sliding Doors: Tempered glass; compliant with CPSC 16 CFR- Safety standards for architectural glazing materials, unframed; with extruded-aluminum top and bottom track; supported on nylon or ball-bearing rollers; with plastic top guide and rubber bumpers. Equip each door with ground finger pull and adjustable cylinder lock with two keys.
 - 1. Thickness: Not less than 5 mm thick.
 - 2. Number of Doors: Two Pairs.

- D. Shelves: 3/16"-thick tempered glass; supported on adjustable shelf standards and supports.
 - 1. Shelf Width: 12 inches.
 - 2. Number of Shelves: Three.
- E. Adjustable Shelf Standards and Supports: BHMA A156.9, B04102; with shelf brackets, B04112; mounted at rear surface. Provide standards full height of display case.
- F. Tack Surface: Vinyl-fabric-faced tackboard assembly.
 - 1. Color: As selected by Architect from manufacturer's full range.
- G. Illumination System: Concealed top-lighting system consisting of low temperature, no UV and infrared radiation LED strip lights. Include lamps and internal wiring with single concealed electrical connection to building system. 120 line voltage, switch by others. Coordinate electrical characteristics with power supply provided.
- H. Width: 120".
- I. Height: 48".
- J. Depth: 16 inches.

2.3 FABRICATION

- A. Fabricate display cases to requirements indicated for dimensions, design, and thickness and finish of materials.
- B. Use metals and shapes of thickness and reinforcing to produce flat surfaces, free of oil-canning, and to impart strength for size, design, and application indicated.
- C. Fabricate cabinets and door frames with reinforced corners, mitered to a hairline fit, with no exposed fasteners.
- D. Fabricate shelf standards plumb and at heights to align shelf brackets for level shelves.

2.4 GENERAL FINISH REQUIREMENTS

- A. Comply with NAAMM's "Metal Finishes Manual for Architectural and Metal Products" for recommendations for applying and designating finishes.
- B. Protect mechanical finishes on exposed surfaces from damage by applying a strippable, temporary protective covering before shipping.
- C. Appearance of Finished Work: Noticeable variations in same piece are not acceptable. Variations in appearance of adjoining components are acceptable if they are within the range of approved Samples and are assembled or installed to minimize contrast.

2.5 ALUMINUM FINISHES

- A. Clear Anodic Finish: AAMA 611, AA-M12C22A31, Class II, 0.010 mm or thicker.

- B. Color Anodic Finish: AAMA 611, AA-M12C22A32/A34, Class II, 0.010 mm or thicker.
- C. Baked-Enamel or Powder-Coat Finish: AAMA 2603 except with a minimum dry film thickness of 1.5 mils. Comply with coating manufacturer's written instructions for cleaning, conversion coating, and applying and baking finish.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine walls, with Installer present, for compliance with requirements for installation tolerances, surface conditions of wall, and other conditions affecting performance of the Work.
- B. Examine roughing-in for electrical power system to verify actual locations of connections before installation of illuminated units.
- C. Examine walls and partitions for proper backing for display cases.
- D. Examine walls and partitions for suitable framing depth if recessed units will be installed.
- E. Proceed with installation only after unsatisfactory conditions have been corrected.
- F. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 PREPARATION

- A. Prepare recesses for display cases as required by type and size of unit.

3.3 INSTALLATION

- A. General: Install units in locations and at mounting heights indicated on Drawings. Keep perimeter lines straight, level, and plumb. Provide grounds, clips, backing materials, adhesives, brackets, anchors, trim, and accessories necessary for complete installation.
- B. Bulletin Boards: Attach units with manufacturer's standard concealed hardware.
- C. Recessed Display Cases: Attach units to wall framing with fasteners at not more than 16 inches o.c. Attach aluminum trim over edges of recessed display cases and conceal grounds and clips. Attach trim with fasteners at not more than 24 inches o.c.
- D. Comply with requirements specified elsewhere for connecting illuminated display cases.
 - 1. After installation is complete, install new fluorescent lamps.
- E. Install display case shelving level and straight.

3.4 ADJUSTING AND CLEANING

- A. Adjust doors to operate smoothly without warp or bind and so contact points meet accurately. Lubricate operating hardware as recommended by manufacturer.
- B. Touch up factory-applied finishes to restore damaged or soiled areas.

END OF SECTION 10 12 00

SECTION 10 14 00 - SIGNAGE

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Interior unframed signs.
 - 2. Identification of buildings utilizing truss type construction signs.
 - 3. Map holder signs.
 - 4. Exterior directional signs.
 - 5. Field-applied, vinyl-character signs.
- B. Scope: Provide room identification signs at all permanent rooms. Room identification signs to contain room names, room numbers, and graphics as indicated on Drawings and in Signage Schedule attached to this Section. Provide other signs as indicated on Drawings and in Signage Schedule attached to this Section.
 - 1. Provide barrier-free and tactile signage at all locations required by Code and as indicated on Drawings.

1.3 DEFINITIONS

- A. Accessible: In accordance with the accessibility standard.

1.4 PRE-INSTALLATION MEETINGS

- A. Preinstallation Conference: Conduct conference at Project site.
 - 1. Signage supplier is to provide an on-site meeting with Owner/District representative to discuss all requirements for signage selection.
 - 2. Review requirements for signage including, but not limited to, the following:
 - a. Size, configuration, and location of each sign.
 - b. Text, room name, room number, and graphics selections.
 - c. Color selections.
 - d. Sign Samples.
 - e. Sign quantities.
 - 3. Review requirements for accessible signage.
 - 4. Review requirements for mounting locations, heights, and types.

1.5 SUBMITTALS, GENERAL

- A. General: Submit all action submittals (except Samples for Verification) and informational submittals required by this Section concurrently.

1.6 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes for signs.
 - 1. Interior unframed signs.
 - 2. Identification of buildings utilizing truss type construction signs.
 - 3. Wayfinding directional signs.
 - 4. Map holder signs.
 - 5. Courtyard signs.
 - 6. Exterior directional signs.
 - 7. Field-applied, vinyl-character signs.
 - 8. Accessories.
- B. Shop Drawings: For signs.
 - 1. Include fabrication and installation details and attachments to other work.
 - 2. Show sign mounting heights, locations of supplementary supports to be provided by other installers, and accessories.
 - 3. Show message list, typestyles, graphic elements including raised characters and Braille and layout for each sign.
 - 4. Do not base Shop Drawings on reproductions of the Contract Documents or standard printed data.
- C. Samples for Initial Selection: For each type of sign assembly, exposed component, and exposed finish.
 - 1. Include representative Samples of available typestyles and graphic symbols.
- D. Samples for Verification: For each type of sign assembly showing all components and with the required finish(es), and as follows:
 - 1. Signs: Full-size Sample of interior unframed sign.
 - 2. Field-Applied, Vinyl-Character Signs: Full-size Sample of characters.
- E. Product Schedule: For signs. Use same designations indicated on Drawings or specified.
- F. Sample Warranty: For special warranty.

1.7 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For Installer.

1.8 CLOSEOUT SUBMITTALS

- A. Maintenance Data: For signs to include in maintenance manuals.
- B. Warranty: Executed special warranty.

1.9 QUALITY ASSURANCE

- A. Installer Qualifications: An entity that employs installers and supervisors who are trained and approved by manufacturer.

1.10 WARRANTY

- A. Special Warranty: Manufacturer agrees to correct or replace components of signs that fail in materials or workmanship within specified warranty period.
 - 1. Failures include, but are not limited to, the following:
 - a. Deterioration of finishes beyond normal weathering.
 - b. Deterioration of embedded graphic image.
 - c. Separation or delamination of sheet materials and components.
 - 2. Warranty Period: Five years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Accessibility Standard: Comply with applicable provisions in the USDOJ's "2010 ADA Standards for Accessible Design", ICC A117.1, and building Code in effect for Project.
- B. Surface-Burning Characteristics: Comply with ASTM E84; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.
 - 1. Flame-Spread Index: 200 or less.
 - 2. Smoke-Developed Index: 450 or less.

2.2 MANUFACTURERS

- A. Manufacturers: Subject to compliance with requirements, unless otherwise indicated, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1. ASI Sign Systems, Inc., dba ASI.
 - 2. Best Sign Systems, Inc.
 - 3. Mohawk Sign Systems.
- B. Source Limitations: Obtain signs from single source from single manufacturer.

2.3 INTERIOR UNFRAMED SIGNS

- A. Interior Unframed Sign: Sign with smooth, uniform surfaces; with message and characters having uniform faces, sharp corners, and precisely formed lines and profiles; for interior use, and as follows:
1. Basis-of-Design Product: Subject to compliance with requirements, provide ASI; EmBoss ADA-Ready Sign System, or comparable product.
 2. Sign Materials:
 - a. Mounting Panel: 0.125-inch-thick acrylic.
 - b. Face: 0.0015-inch-thick PVC/vinyl acetate bonded to mounting panel.
 3. Fabrication:
 - a. Graphics and Text: Accessible tactile copy and Grade 2 Braille (except as otherwise indicated). Color as selected by Architect from manufacturer's full range. Finish raised characters to contrast with background color, and finish Braille to match background color.
 - 1) Where "(#)" appears in Sign Type paragraph below, verify with Architect number to be used in place of "(#)".
 - 2) Where "(room name)" appears in Sign Type paragraph below, verify with Architect room name to be used in place of "(room name)".
 - b. Typeface: As selected by Architect from manufacturer's full range.
 - c. Background: Finish and color as selected by Architect from manufacturer's full range.
 4. Mounting: Manufacturer's standard method for substrates indicated with through fasteners.
- B. Sign Types:
1. Type 1: Occupancy Load Sign:
 - a. Size: 3'-8" wide by 1'-2" high.
 - b. Text Size, Color, and Content:
 - 1) 3-inch-high, 3/4-inch stroke, red lettering: MAXIMUM OCCUPANCY.
 - 2) 2-inch-high, 1/2-inch stroke, red lettering: NOT TO EXCEED.
 - 3) 3-inch-high, 3/4-inch stroke, red lettering: (#) PERSONS.
 - c. Field Color: White.
 - d. Provide in locations indicated and in compliance with requirements of authorities having jurisdiction.

2. Type 4: Stair Sign:
 - a. Size: 6 inches by 6 inches.
 - b. Text Size and Content:
 - 1) 2-inch-high lettering: FLOOR (#).
 - 2) 3/4-inch-high lettering: FLOOR (#) STAIR (#).
3. Type 5: Room Name/Number Sign:
 - a. Size: 6 inches by 6 inches.
 - b. Text Size, Font Style, and Content:
 - 1) 1-inch-high (minimum) sans serif lettering: (#).
 - 2) 5/8-inch-high (minimum) sans serif lettering: (room name).
 - c. Arrangement: Two lines where needed.
4. Type 7: Room Sign:
 - a. Size: 6 inches wide by 2 inches high.
 - b. Text Size and Content: 5/8-inch-high (minimum) lettering: (room name).
5. Type 8: Girls/Women's Restroom Sign:
 - a. Size: 6 inches by 6 inches.
 - b. Graphics: Female symbol, and wheelchair accessibility symbol if applicable.
 - c. Use with Type 7 Room Sign.
6. Type 9: Boys/Men's Restroom Sign:
 - a. Size: 6 inches by 6 inches.
 - b. Graphics: Male symbol, and wheelchair accessibility symbol if applicable.
 - c. Use with Type 7 Room Sign.
7. Type 10a: Restroom Sign:
 - a. Size: 8 inches by 8 inches.
 - b. Graphics: Gender neutral/wheelchair accessibility symbol.

2.4 CONSTRUCTION SIGNS

- A. Identification of Buildings Utilizing Truss Type Construction Sign: Sign with smooth, uniform surfaces; with message and characters having uniform faces and precisely formed lines and profiles; for interior use, complying with New York 19NYCRR Part 1264 requirements, and as follows:
 1. Basis-of-Design Product: Subject to compliance with requirements, provide Compliance Signs; Reflective New York Truss Construction Sign, or comparable product.

2. Material: Not less than 0.040-inch-thick aluminum and 6-mil-thick vinyl as indicated.
3. Fabrication:
 - a. Graphics: 6-inch outside diameter, 1/2-inch-thick reflective red circle.
 - b. Text Size, Stroke, and Color: 2-inch-high (minimum), 1/2-inch stroke, reflective red lettering.
 - c. Background: Reflective white.
 - d. Content and Arrangement: Roman alphanumeric designation of construction type of building located over the alphabetic designation of structural components designation that are of truss construction.
 - 1) Refer to code compliance drawings for construction type.

B. Sign Types:

1. Type 11: Identification of Buildings Utilizing Truss Type Construction Sign:
 - a. Size: 6-inch diameter.
 - b. Material: Aluminum.
 - c. Mounting: Manufacturer's standard method for substrates indicated with through fasteners.
2. Type 11a: Identification of Buildings Utilizing Truss Type Construction Decal:
 - a. Size: 6-inch diameter.
 - b. Material: Vinyl.
 - c. Mounting: Surface mounted with adhesive. Decal to be adhesive on side as required for installation.

2.5 WAYFINDING DIRECTIONAL SIGNS

- A. Wayfinding Directional Sign: Sign with smooth, uniform surfaces; with message and characters having uniform faces, sharp corners, and precisely formed lines and profiles; with modular, multiple message strips; for interior use and as follows:
1. Basis-of-Design Product: Subject to compliance with requirements, provide ASI; Series PMA Directional Signs, or comparable product.
 2. Sign Materials:
 - a. Mounting Panel: 0.125-inch-thick acrylic.
 - b. Face: 0.080-inch-thick acrylic.
 3. Fabrication:
 - a. Graphics and Text: Color as selected by Architect from manufacturer's full range.

- b. Typeface: As selected by Architect from manufacturer's full range.
- c. Background: Finish and color as selected by Architect from manufacturer's full range.

B. Sign Types:

1. Type 14: Wayfinding Directional Sign:

- a. Size: 1'-6" wide by 1'-3" high.
- b. Graphics: Interchangeable arrow.
 - 1) Arrow direction to be determined during the construction phase.
- c. Text: As shown on Drawings. Provide school name and up to 6 area designations as shown on Drawings.
 - 1) Final designations to be determined during the construction phase.
- d. Colors: Two field colors and up to 4 text/arrow colors per sign.
- e. Mounting: Manufacturer's standard method for substrates indicated with through fasteners.

2.6 MAP HOLDER SIGNS

A. Map Holder Sign: Sign with smooth, uniform surfaces; with precisely formed lines and profiles; for interior use, with lateral slot for paper map inserts, and as follows:

- 1. Basis-of-Design Product: Subject to compliance with requirements, provide ASI; WS Series Architectural Sign System, or comparable product.
- 2. Sign Materials:
 - a. Mounting Panel: 0.125-inch-thick acrylic.
 - b. Face: 0.080-inch-thick clear acrylic.

B. Sign Types:

1. Type 15a: Clear Map Holder Sign:

- a. Sized for 11-inch by 8-1/2-inch paper map insert.
- b. Mounting: Manufacturer's standard method for substrates indicated with through fasteners.

2. Type 15a: Fire Evacuation Map Holder Sign:

- a. Sized for 11-inch by 8-1/2-inch paper map; overall size approximately 11-1/2 inches by 11 inches.

- b. Text Size, Color, Font Style, and Content:
 - 1) 3/4-inch-high (minimum) white Helvetica Regular lettering: “FIRE EVACUATION”.
- c. Mounting: Manufacturer's standard method for substrates indicated with through fasteners.

2.7 EXTERIOR DIRECTIONAL SIGNS

- A. Exterior Directional Sign: Sign with smooth, uniform surfaces; with message and characters having uniform faces, sharp corners, and precisely formed lines and profiles; for exterior use, and as follows:
 - 1. Basis-of-Design Product: Subject to compliance with requirements, provide ASI; APJ Series, or comparable product.
 - 2. Sign Material: 0.125-inch-thick aluminum, with satin matte polyurethane coating.
 - 3. Fabrication:
 - a. Graphics and Text: Color as selected by Architect from manufacturer's full range. Characters to contrast with background color.
 - b. Typeface: As selected by Architect from manufacturer's full range.
 - c. Background: Finish and color as selected by Architect from manufacturer's full range.
 - 4. Mounting: Surface mounted to wall with through fasteners.

2.8 FIELD-APPLIED, VINYL-CHARACTER SIGNS

- A. Field-Applied, Vinyl-Character Sign: Pre-spaced characters die cut from not less than 2-mil thick, weather-resistant vinyl film with release liner on the back and carrier film on the front for on-site alignment and application, for interior or exterior use, and as follows:
 - 1. Basis-of-Design Product: Subject to compliance with requirements, provide ASI; Series LTV Digitally Cut Vinyl Letters, or comparable product.
 - 2. Character Height: As shown on Drawings.
 - 3. Font: Color as selected by Architect from manufacturer's full range.
 - 4. Content: As shown on Drawings.
 - 5. Mounting: Surface mounted with pressure sensitive adhesive.

2.9 SIGN MATERIALS

- A. Aluminum Sheet and Plate: ASTM B209, alloy and temper recommended by aluminum producer and finisher for type of use and finish indicated.

- B. Aluminum Extrusions: ASTM B221, alloy and temper recommended by aluminum producer and finisher for type of use and finish indicated.
- C. Acrylic Sheet: ASTM D4802, category as standard with manufacturer for each sign, Type UVF (UV filtering).
- D. Vinyl Film: UV-resistant vinyl film with pressure-sensitive, permanent adhesive; die cut to form characters or images as indicated on Drawings and suitable for exterior applications.
- E. Reflective Vinyl Film: Type I Engineer-Grade UV-resistant reflective vinyl film with pressure-sensitive, permanent adhesive.
- F. Paints and Coatings for Sheet Materials: Inks, dyes, and paints that are recommended by manufacturer for optimum adherence to surface and are UV and water resistant for colors and exposure indicated.

2.10 ACCESSORIES

- A. Fasteners and Anchors: Manufacturer's standard as required for secure anchorage of signs, noncorrosive and compatible with each material joined, and complying with the following:
 - 1. Furnish stainless-steel devices unless otherwise indicated.
 - 2. Exposed Metal-Fastener Components, General:
 - a. Fastener Heads: Use flathead or oval countersunk screws and bolts with tamper-resistant Allen-head or one-way-head slots unless otherwise indicated.
 - 3. Sign Mounting Fasteners:
 - a. Through Fasteners: Exposed metal fasteners matching sign finish, with type of head indicated, and installed in predrilled holes.
- B. Adhesive: As recommended by sign manufacturer.
- C. Two-Face Tape: Manufacturer's standard high-bond, foam-core tape, 0.045 inch thick, with adhesive on both sides.

2.11 FABRICATION

- A. General: Provide manufacturer's standard sign assemblies according to requirements indicated.
 - 1. Drill and tap for required fasteners. Use exposed fasteners that match sign finish.
- B. Tactile and Braille Characters: In compliance with listed accessibility standard in "Performance Requirements" Article, raised 1/32-inch minimum above background.

2.12 GENERAL FINISH REQUIREMENTS

- A. Protect mechanical finishes on exposed surfaces from damage by applying a strippable, temporary protective covering before shipping.
- B. Appearance of Finished Work: Noticeable variations in same piece are not acceptable. Variations in appearance of adjoining components are acceptable if they are within the range of approved Samples and are assembled or installed to minimize contrast.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, areas, and conditions, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.
- B. Verify that sign-support surfaces are within tolerances to accommodate signs without gaps or irregularities between backs of signs and support surfaces unless otherwise indicated.
- C. Verify that anchorage devices embedded in permanent construction are correctly sized and located to accommodate signs.
- D. Proceed with installation only after unsatisfactory conditions have been corrected.
- E. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 INSTALLATION

- A. General: Install signs using mounting methods indicated and according to manufacturer's written instructions.
 - 1. Install signs level, plumb, true to line, and at locations and heights indicated, with sign surfaces free of distortion and other defects in appearance.
 - 2. Install signs so they do not protrude or obstruct according to the accessibility standard.
 - 3. Before installation, verify that sign surfaces are clean and free of materials or debris that would impair installation.
- B. Accessibility: Install signs in locations as indicated on Drawings and according to the accessibility standard.
- C. Mounting Locations: Locate on wall adjacent to latch side of door 60 inches from center of sign to finished floor, and 2 inches from edge of door frame. Where adequate wall space adjacent to latch side of door is not available, and at double-leaf doors, place sign on nearest adjacent wall.
 - 1. Kindergarten Toilet Rooms: Mount sign 48 inches from center of sign to finished floor, and 2 inches from edge of door frame.
- D. Mounting Methods:
 - 1. Through Fasteners: Drill holes in substrate using predrilled holes in sign as template. Countersink holes in sign if required. Place sign in position and flush to surface. Install through fasteners and tighten.

2. Adhesive: Clean bond-breaking materials from substrate surface and remove loose debris. Apply linear beads or spots of adhesive symmetrically to back of sign and of suitable quantity to support weight of sign after cure without slippage. Keep adhesive away from edges to prevent adhesive extrusion as sign is applied and to prevent visibility of cured adhesive at sign edges. Place sign in position and push to engage adhesive. Temporarily support sign in position until adhesive fully sets.
 3. Two-Face Tape: Clean bond-breaking materials from substrate surface and remove loose debris. Apply tape strips symmetrically to back of sign and of suitable quantity to support weight of sign without slippage. Keep strips away from edges to prevent visibility at sign edges. Place sign in position and push to engage tape adhesive.
- E. Field-Applied, Vinyl-Character Signs: Clean and dry substrate. Align sign characters in final position before removing release liner. Remove release liner in stages and apply and firmly press characters into final position. Press from the middle outward to obtain good bond without blisters or fishmouths. Remove carrier film without disturbing applied vinyl film.
- F. Signs Mounted on Glass: Provide opaque sheet matching sign material and finish onto opposite side of glass to conceal back of sign.

3.3 ADJUSTING AND CLEANING

- A. Remove and replace damaged or deformed signs and signs that do not comply with specified requirements. Replace signs with damaged or deteriorated finishes or components that cannot be successfully corrected by finish touchup or similar minor corrective procedures.
- B. Remove temporary protective coverings and strippable films as signs are installed.
- C. On completion of installation, clean exposed surfaces of signs according to manufacturer's written instructions and touch up minor nicks and abrasions in finish. Maintain signs in a clean condition during construction and protect from damage until acceptance by Owner.

END OF SECTION 10 14 00

SECTION 10 14 19 - DIMENSIONAL LETTER SIGNAGE

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Cast dimensional characters.
 - 2. Molded-plastic dimensional characters.

1.3 PERFORMANCE REQUIREMENTS

- A. Structural Performance of Fabricated Dimensional Characters: Fabricated Dimensional Characters shall withstand the effects of loads and stresses within limits and under conditions specified in ANSI A14.3.
- B. Thermal Movements: Allow for thermal movements from ambient and surface temperature changes acting on exterior metal fabrications by preventing buckling, opening of joints, overstressing of components, failure of connections, and other detrimental effects.

1.4 SUBMITTALS, GENERAL

- A. General: Submit all action submittals (except Samples for Verification) and informational submittals required by this Section concurrently.

1.5 ACTION SUBMITTALS

- A. Product Data: For each type of product.
- B. Shop Drawings: For dimensional letter/logo signs.
 - 1. Include fabrication and installation details and attachments to other work.
 - 2. Show sign mounting heights, locations of supplementary supports to be provided by others, and accessories.
 - 3. Show message list, typestyles, graphic elements, and layout for each sign at large scale including mounting details.

- C. Samples for Verification and Initial Color Selection: For each type of sign assembly, exposed component, and exposed finish.
 - 1. Include representative Samples of available typestyles and graphic symbols.
 - 2. Dimensional Characters: Full-size Sample of each type of dimensional character.
 - 3. Color/Finish samples: Specified colors/finishes for dimensional letters/logos.
- D. Sign Schedule: Use same designations specified or indicated on Drawings or in a sign schedule.

1.6 CLOSEOUT SUBMITTALS

- A. Maintenance Data: For signs to include in maintenance manuals.

1.7 QUALITY ASSURANCE

- A. Installer Qualifications: An entity that employs installers and supervisors who are trained and approved by manufacturer.

1.8 FIELD CONDITIONS

- A. Field Measurements: Verify locations by field measurements before fabrication and indicate measurements on Shop Drawings.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Thermal Movements: For exterior fabricated channel dimensional characters, allow for thermal movements from ambient and surface temperature changes.
 - 1. Temperature Change: 120 deg F, ambient; 180 deg F, material surfaces.

2.2 DIMENSIONAL CHARACTERS

- A. Cast Characters (Letters): Characters with uniform faces, sharp corners, and precisely formed lines and profiles, and as follows:
 - 1. Basis-of-Design Product: Subject to compliance with requirements, provide ASI Sign Systems, Inc.; LC Series or comparable product by one of the following:
 - a. ASI Sign Systems, Inc.
 - b. Gemini Incorporated.
 - c. 3i Graphics & Signs.
 - 2. Letter Material: Cast aluminum.

3. Text: "ENFIELD ELEMENTARY SCHOOL"
 - a. Letter Height :12"
 4. Text: "WELCOME" and "BUS ENTRY"
 - a. Letter Height: 9"
 5. Letter Depth: 1"
 6. Profile: Slightly tapered sides.
 7. Finishes:
 - a. Integral Aluminum Finish: Clear, Bronze or Black Anodized, or Baked-Enamel or Powder-Coat Finish to be selected by Architect from manufacturer's standard range.
 - b. Overcoat: Manufacturer's standard baked-on clear coating.
 8. Mounting: Projecting stud mounted, 1/4" stainless steel and compatible with metal selected. All fasteners concealed from view.
 9. Typeface: Helvetica Regular.
- B. Molded-Plastic Characters: Injection molded or thermoformed characters having uniform faces and profiles, and as follows:
1. Basis-of-Design Product: Subject to compliance with requirements, provide ASI Sign Systems, Inc.; LM Series or comparable product by one of the following:
 - a. ACE Sign Systems, Inc.
 - b. Gemini Incorporated.
 - c. Metallic Arts.
 2. Letter Depth: 1"
 3. Profile: As selected by Architect from manufacturer's full range.
 4. Color: Manufacturer's standard integral color process, in color as selected by Architect from manufacturer's full range. Two colors to be selected.
 5. Typeface: Two fonts to be selected by Architect from manufacturer's full range.

2.3 DIMENSIONAL CHARACTER MATERIALS

- A. Cast Characters (Letters): Aluminum Castings: ASTM B 26/B 26M, alloy and temper recommended by sign manufacturer for casting process used and for type of use and finish indicated.

- B. Acrylic Sheet: ASTM D 4802, category as standard with manufacturer for each sign, Type UVF (UV filtering).
- C. Paints and Coatings for Sheet Materials: Inks, dyes, and paints that are recommended by manufacturer for optimum adherence to surface and are UV and water resistant for colors and exposure indicated.

2.4 ACCESSORIES

- A. Fasteners and Anchors: Manufacturer's standard as required for secure anchorage of signage, noncorrosive and compatible with each material joined, and complying with the following:
 - 1. Use concealed fasteners and anchors unless indicated to be exposed.
 - 2. For exterior exposure, furnish stainless-steel devices unless otherwise indicated.
 - 3. Exposed Metal-Fastener Components, General:
 - a. Fabricated from same basic metal and finish of fastened metal unless otherwise indicated.
 - 4. Sign Mounting Fasteners:
 - a. Projecting Studs: Threaded studs with sleeve spacer, welded or brazed to back of sign material, screwed into back of sign assembly, or screwed into tapped lugs cast integrally into back of cast sign material, unless otherwise indicated.
- B. Silicone Adhesives: As recommended by sign manufacturer and that comply with the testing and product requirements of the California Department of Health Services' "Standard Practice for the Testing of Volatile Organic Emissions from Various Sources Using Small-Scale Environmental Chambers."
- C. VHB Two-Face Tape: Manufacturer's standard high-bond, foam-core tape, 0.045 inch thick, with adhesive on both sides.

2.5 FABRICATION

- A. General: Provide manufacturer's standard sign assemblies according to requirements indicated.
 - 1. Preassemble signs and assemblies in the shop to greatest extent possible. Disassemble signs and assemblies only as necessary for shipping and handling limitations. Clearly mark units for reassembly and installation; apply markings in locations concealed from view after final assembly.
 - 2. Mill joints to a tight, hairline fit. Form assemblies and joints exposed to weather to resist water penetration and retention. Grind and polish all joints, corners and welds smooth.
 - 3. Comply with AWS for recommended practices in welding and brazing. Provide welds and brazes behind finished surfaces without distorting or discoloring exposed side. Clean exposed welded and brazed connections of flux, and dress exposed and contact surfaces.

4. Conceal connections if possible; otherwise, locate connections where they are inconspicuous.
5. Internally brace signs for stability and for securing fasteners.
6. Provide rebates, lugs, and brackets necessary to assemble components and to attach to existing work. Drill and tap for required fasteners. Use concealed fasteners where possible; use exposed fasteners that match sign finish.
7. Castings: Fabricate castings free of warp, cracks, blowholes, pits, scale, sand holes, and other defects that impair appearance or strength. Grind, wire brush, sandblast, and buff castings to remove seams, gate marks, casting flash, and other casting marks before finishing.

2.6 GENERAL FINISH REQUIREMENTS

- A. Protect mechanical finishes on exposed surfaces from damage by applying a strippable, temporary protective covering before shipping.
- B. Appearance of Finished Work: Noticeable variations in same piece are not acceptable. Variations in appearance of adjoining components are acceptable if they are within the range of approved Samples and are assembled or installed to minimize contrast.
- C. Directional Finishes: Run grain with long dimension of each piece and perpendicular to long dimension of finished trim or border surface unless otherwise indicated.
- D. Organic, Anodic, and Chemically Produced Finishes: Apply to formed metal after fabrication but before applying contrasting polished finishes on raised features unless otherwise indicated.

2.7 ALUMINUM FINISHES

- A. Clear, Bronze or Black Anodic Finish: AAMA 611, Class I, 0.018 mm or thicker.
- B. Baked-Enamel or Powder-Coat Finish: AAMA 2603 except with a minimum dry film thickness of 1.5 mils. Comply with coating manufacturer's written instructions for cleaning, conversion coating, and applying and baking finish.
- C. Finish/Color: To be selected by Architect from manufacturer's standard range.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, areas, and conditions, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of signage work.

- B. Verify that sign-support surfaces are within tolerances to accommodate signs without gaps or irregularities between backs of signs and support surfaces unless otherwise indicated.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.
- D. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 INSTALLATION

- A. General: All sign installations are to be performed by sign fabricator. Install signs using mounting methods indicated and according to fabricator's/manufacturer's written instructions.
 - 1. Install signs level, plumb, true to line, and at locations and heights indicated, with sign surfaces free of distortion and other defects in appearance.
 - 2. Before installation, verify that sign surfaces are clean and free of materials or debris that would impair installation.
 - 3. Corrosion Protection: Provide isolation barrier membrane between dissimilar metal materials.
- B. Mounting Methods:
 - 1. Cast Characters:
 - a. Projecting Studs: Using a template, drill holes in substrate aligning with studs on back of sign. Remove loose debris from hole and substrate surface.
 - 1) Masonry Substrates: Fill holes with adhesive. Leave recess space in hole for displaced adhesive. Place spacers on studs, place sign in position, and push until spacers are pinched between sign and substrate, embedding the stud ends in holes. Temporarily support sign in position until adhesive fully sets.
 - 2) DEFS with Plywood Substrate Board: Place spacers on studs, place sign in position with spacers pinched between sign and substrate, anchor the threaded stud ends through the DEFS into the plywood substrate board.
 - b. Back Bar and Brackets: Remove loose debris from substrate surface and install backbar or bracket supports in position so that signage is correctly located and aligned.
 - 2. Molded-Plastic Characters:
 - a. Adhesive: Clean bond-breaking materials from substrate surface and remove loose debris. Apply linear beads or spots of adhesive symmetrically to back of sign and of suitable quantity to support weight of sign after cure without slippage. Keep adhesive away from edges to prevent adhesive extrusion as sign is applied and to prevent visibility of cured adhesive at sign edges. Place sign in position and push to engage adhesive. Temporarily support sign in position until adhesive fully sets.

- b. Two-Face Tape: Clean bond-breaking materials from substrate surface and remove loose debris. Apply tape strips symmetrically to back of sign and of suitable quantity to support weight of sign without slippage. Keep strips away from edges to prevent visibility at sign edges. Place sign in position and push to engage tape adhesive.

3.3 ADJUSTING AND CLEANING

- A. Remove and replace damaged or deformed characters and signs that do not comply with specified requirements. Replace characters with damaged or deteriorated finishes or components that cannot be successfully repaired by finish touchup or similar minor repair procedures.
- B. Remove temporary protective coverings and strippable films as signs are installed.
- C. On completion of installation, clean exposed surfaces of signs according to manufacturer's written instructions and touch up minor nicks and abrasions in finish. Maintain signs in a clean condition during construction and protect from damage until acceptance by Owner.

END OF SECTION 10 14 19

SECTION 10 21 13.19 - PLASTIC TOILET COMPARTMENTS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Solid-plastic toilet compartments.

1.3 COORDINATION

- A. Coordinate requirements for blocking, reinforcing, and other supports concealed within wall to ensure that toilet compartments can be supported and installed as indicated.

1.4 SUBMITTALS, GENERAL

- A. General: Submit all action submittals (except Samples for Verification) and informational submittals required by this Section concurrently.

1.5 ACTION SUBMITTALS

- A. Product Data: Include construction details, material descriptions, dimensions of individual components and profiles, and finishes for toilet compartments.
 - 1. Door hardware and accessories.
 - 2. Overhead bracing.
 - 3. Stiffener.
 - 4. Anchorage and fasteners.
- B. As-Specified Data: If the product to be incorporated into Project is as specified by manufacturer name and product designation in Part 2 of this Specification Section, submit the “**As-Specified Verification Form**” (attached to Division 01 Section “Submittal Procedures”) for item listed below; otherwise submit full Product Data for the following:
 - 1. Solid-plastic toilet compartments:
- C. Shop Drawings:
 - 1. Include plans, elevations, sections, details, and attachment details.
 - 2. Show locations of centerlines of plumbing fixtures.
 - 3. Show locations of floor drains.

- D. Samples for Initial Selection: Manufacturer's standard color sheets, showing full range of available colors for each type of toilet compartment.
- E. Samples for Verification: Actual sample of finished products for each type of toilet compartment.
 - 1. Size: Manufacturer's standard size.
 - 2. Each type of material, color, and finish required for units, prepared on 6-inch-square Samples of same thickness and material indicated for Work.
 - 3. Each type of hardware and accessory.
- F. Sample Warranty: For special warranty.

1.6 INFORMATIONAL SUBMITTALS

- A. Product Certificates: For each type of toilet compartment by manufacturer indicating compliance with performance requirements.

1.7 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Data: For toilet compartments.
- B. Warranty: Executed special warranty

1.8 FIELD CONDITIONS

- A. Field Measurements: Verify actual locations of plumbing fixtures, walls, columns, ceilings, and other construction contiguous with toilet compartments by field measurements, and coordinate before fabrication.

1.9 WARRANTY

- A. Special Warranty: Manufacturer agrees to correct or replace components of plastic toilet compartments that fail in materials or workmanship within specified warranty period.
 - 1. Warranty Period: Not less than 25 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 SOURCE LIMITATIONS

- A. Obtain plastic toilet compartments from single source from single manufacturer.

2.2 PERFORMANCE REQUIREMENTS

- A. Fire Performance: Tested in accordance with, and pass the acceptance criteria of, NFPA 286.

B. Fire-Test-Response Characteristics:

1. Burning extent of 1 inch or less when tested according to ASTM D635 on plastic sheets in thicknesses indicated for the Work.
2. Self-ignition temperature of 650 deg F or higher when tested according to ASTM D1929 on plastic sheets in thicknesses indicated for the Work.
3. Smoke density of 75 or less when tested according to ASTM D2843 on plastic sheets in thicknesses indicated for the Work.

C. Regulatory Requirements: Comply with applicable provisions in the USDOJ's "2010 ADA Standards for Accessible Design," ICC A117.1, and building Code in effect for Project for toilet compartments designated as accessible.

2.3 SOLID-PLASTIC TOILET COMPARTMENTS

A. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:

1. ASI Global Partitions; Solid Plastic (HDPE), No Sight-55 Floor Mounted Overhead Braced.
2. General Partitions Mfg. Corp.; High Density Polymer (HDPE), Series 40-7 no sight strike Floor Supported - Headrail.
3. Scranton Products; Hiny Hiders Toilet Partitions 55 privacy type door and panel height, floor mounted overhead-braced.

B. Toilet-Enclosure Style: Overhead braced, floor anchored.

C. Urinal-Screen Style: Overhead braced, floor anchored.

D. Door, Panel, and Pilaster Construction: Solid, high-density polyethylene (HDPE) material, not less than 1 inch thick, seamless, with eased edges, and with homogenous color throughout thickness of material. Provide with no-sightline system consisting of door and pilaster lapped edges on strike side of door.

1. Door and Panel Height: Not less than 55 inches.
2. Door and Panel Mounting Height: 14 inches above finish floor.
3. Pilaster Height: Not less than 82 inches.
4. Integral Hinges: Configure doors and pilasters to receive integral hinges.
5. Heat-Sink Strip: Manufacturer's continuous, extruded-aluminum strip fastened to exposed bottom edges of solid-plastic components to hinder malicious combustion.
6. Color: One color in each room as selected by Architect from manufacturer's full range.

E. Urinal-Screen Construction: Matching panel construction.

F. Pilaster Shoes: Manufacturer's standard design; stainless steel.

G. Urinal-Screen Post: Manufacturer's standard post design of material matching the thickness and construction of pilasters; with shoe matching that on the pilaster.

H. Brackets (Fittings):

1. Full-Height (Continuous) Type: Manufacturer's standard design; extruded aluminum.

2.4 HARDWARE AND ACCESSORIES

A. Door Hardware and Accessories, Heavy Duty: Manufacturer's heavy-duty institutional operating hardware and accessories.

1. Hinges: Manufacturer's minimum 0.062-inch-thick, stainless steel paired, wraparound, self-closing type that can be adjusted to hold doors open at any angle up to 90 degrees, allowing emergency access by lifting door. Mount with through bolts.
2. Latch and Keeper: Manufacturer's heavy-duty, surface-mounted, cast stainless steel latch unit, designed to resist damage due to slamming, with combination rubber-faced door strike and keeper, and with provision for emergency access. Provide units that comply with regulatory requirements for accessibility at toilet enclosures designated as accessible. Mount with through bolts.
3. Coat Hook: Manufacturer's heavy-duty, combination cast stainless steel hook and rubber-tipped bumper, sized to prevent inswinging door from hitting compartment-mounted accessories. Mount with through bolts.
4. Door Bumper: Manufacturer's heavy-duty, rubber-tipped, cast stainless steel bumper at outswinging doors. Mount with through bolts.
5. Door Pull: Manufacturer's heavy-duty, cast stainless steel pull at outswinging doors that complies with regulatory requirements for accessibility. Provide units on both sides of doors at toilet enclosures designated as accessible. Mount with through bolts.

B. Overhead Bracing: Manufacturer's standard continuous, extruded-aluminum head rail with antigrip profile and in manufacturer's standard finish.

C. Stiffener: Manufacturer's standard continuous, aluminum stiffener in manufacturer's standard finish, where recommended by manufacturer for bracing hinge-side pilasters.

D. Anchorages and Fasteners: Manufacturer's standard exposed fasteners of stainless steel, finished to match items they are securing, with theft-resistant-type heads. Provide sex-type bolts for through-bolt applications. For concealed anchors, use stainless steel.

2.5 MATERIALS

- A. Aluminum Castings: ASTM B26/B26M.
- B. Aluminum Extrusions: ASTM B221.
- C. Stainless Steel Sheet: ASTM A240/A240M or ASTM A666, Type 304, stretcher-leveled standard of flatness.
- D. Stainless Steel Castings: ASTM A743/A743M.

2.6 FABRICATION

- A. Fabricate toilet compartment components to sizes indicated. Coordinate requirements for attachment of toilet accessories.
- B. Overhead-Braced, Floor-Anchored Units: Manufacturer's standard corrosion-resistant supports, leveling mechanism, and anchors at pilasters and walls to suit floor and wall conditions. Provide shoes at pilasters to conceal supports and leveling mechanism. Provide with continuous head rail.
 - 1. Overhead-Braced, Floor-Anchored Urinal-Screen Posts: Manufacturer's standard corrosion-resistant anchoring assemblies at posts and walls, with leveling adjustment nuts at bottoms of posts. Provide shoes at posts to conceal anchorage.
- C. Door Size and Swings: Unless otherwise indicated, provide 24-inch-wide, inswinging doors for standard toilet enclosures (centered between compartment side walls) and 36-inch-wide, outswinging doors with a minimum 32-inch-wide, clear opening for toilet enclosures designated as accessible.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine areas and conditions, with Installer present, for compliance with requirements for fastening, support, alignment, operating clearances, and other conditions affecting performance of the Work.
 - 1. Confirm location and adequacy of blocking and supports required for installation.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.
- C. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 INSTALLATION

- A. General: Comply with manufacturer's written installation instructions. Install units rigid, straight, level, and plumb. Secure units in position with manufacturer's recommended anchoring devices.
 - 1. Maximum Clearances:
 - a. Pilasters and Panels or Screens: 1/2 inch.
 - b. Panels or Screens and Walls: 1 inch.
 - 2. Full-Height (Continuous) Brackets: Secure panels or screens to walls and to pilasters with full-height brackets.
 - a. Locate bracket fasteners, so holes for wall anchors occur in masonry or tile joints.
 - b. Align brackets at pilasters with brackets at walls.

- B. Overhead-Braced, Floor-Anchored Units: Secure pilasters to floor and level, plumb, and tighten. Set pilasters with anchors penetrating not less than 1-3/4 inches into structural floor unless otherwise indicated in manufacturer's written instructions. Secure continuous head rail to each pilaster with no fewer than two fasteners. Hang doors to align tops of doors with tops of panels and adjust, so tops of doors are parallel with overhead brace when doors are in closed position.
 - 1. Overhead-Braced, Floor-Anchored Urinal Screens: Attach with anchoring devices to suit supporting structure. Set units level and plumb, rigid, and secured to resist lateral impact.

3.3 ADJUSTING

- A. Hardware Adjustment: Adjust and lubricate hardware in accordance with hardware manufacturer's written instructions for proper operation. Set hinges on inswinging doors to hold doors open approximately 30 degrees from closed position when unlatched. Set hinges on outswinging doors and doors for compartments designated as accessible to return doors to fully closed position.

END OF SECTION 10 21 13.19

SECTION 10 21 24 – SAFETY CURTAIN

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Laser Safety Curtain tracks and carriers.
 - 2. Laser Safety Curtains.

1.3 SUBMITTALS, GENERAL

- A. General: Submit all action submittals (except Samples for Verification) required by this Section concurrently.

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of product. Include durability, laundry temperature limits, fade resistance, applied curtain treatment, and fire-test-response characteristics for each type of curtain fabric indicated. Include data for each type of track.
 - 1. Extruded-steel curtain track.
 - 2. Curtain track accessories.
 - 3. Curtain carriers.
 - 4. Curtain.
 - 5. Valance
- B. Shop Drawings:
 - 1. Show layout and types of ceiling track, sizes of curtains and number of carriers, anchorage details, and conditions requiring accessories. Indicate dimensions taken from field measurements.
 - 2. Velcro securing panel to wall connection.
 - 3. Include details on blocking.

- C. Samples for Verification and Initial Selection: For each type of product required, prepared on Samples of size indicated below:

1. Laser Safety Curtain Fabric: 10-inch-square swatch or larger as required to show complete material, stitching/seams with specified treatments applied. Mark top and face of material.
2. Curtain Track: Not less than 10 inches long.
3. Curtain Carrier: Full-size unit.

1.5 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Data: For laser safety curtains, track, and hardware to include in operation and maintenance manuals.

1.6 MAINTENANCE MATERIAL SUBMITTALS

- A. Furnish extra materials described below, before installation begins, that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.
1. Curtain Carriers and Track End Caps: Full-size units equal to 5 percent of amount installed for each size indicated, but no fewer than 15 units.
 2. Curtains/Valance: One full-size unit for each size indicated.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Laser Safety Curtains: Provide curtain fabrics with the following characteristics:
1. Flame resistant and identical to those that have passed NFPA 701, UL Flammability test 214, ANSI-Z136.1 – Laser Safety Standard, ANSI-Z136.7 Laser Safety Standard. When tested by a testing and inspecting agency acceptable to authorities having jurisdiction.
 - a. Identify fabrics with appropriate markings of a qualified testing agency.

2.2 LASER SAFETY CURTAIN SUPPORT SYSTEMS

- A. Basis-of-Design Product: Subject to compliance with requirements, provide “Kentek Corporation, Pittsfield NH.” Ceiling Mount Track or comparable product by one of the following:
1. Kentek Corporation.
 2. Rockwell Laser Industries Inc.

- B. Blackout Curtains: Provide curtain fabrics with the following characteristics:
 - 1. Flame resistant and identical to those that have passed NFPA 701. When tested by a testing and inspecting agency acceptable to authorities having jurisdiction.
 - a. Identify fabrics with appropriate markings of a qualified testing agency.
- C. Laser Safety Curtain Track Accessories: Fabricate splices, end caps, connectors, end stops, coupling and joining sleeves, wall flanges, brackets, ceiling clips, and other accessories from same material and with same finish as track.
 - 1. Ceiling mounted straight, corner, “T” and 4-way ceiling connections.
 - 2. End Stop – up, down and wall straight caps.
- D. Curtain Carriers: Two nylon rollers and nylon axle with aluminum hook.
 - 1. Hook Carrier: 2 wheel all nylon, wheel assembly used with steel hooks.
- E. Exposed Fasteners: Stainless steel.
- F. Concealed Fasteners: Stainless steel.

2.3 CURTAINS

- A. Safety Curtain Fabric: Curtain manufacturer's standard, 100 percent polyester; inherently and permanently flame resistant, stain resistant, and antimicrobial.
 - 1. Basis-of-Design Product: Subject to compliance with requirements, provide “Kentek Corporation, Pittsfield NH Part number SLC –RBK(Black) ” or a comparable product by one of the following:
 - a. Kentek Corporation.
 - b. Rockwell Laser Industries Inc.
 - 2. Fabric: Laser Curtain material able to withstand 200w/cm² for 100 seconds.
 - 3. Extra heavy duty 0.044 inch thick flame retardant, non-fraying and chemical resistant flexible fabric.
- B. Curtain Grommets: Steel, non-reflective grommets placed on top – 12 inches o.c.
- C. Valance: Valance to be constructed of same material as the curtain. Valance shall be flat panel, 12” in drop length, with 1” hem on all four sides with a sewn in hook and look 1” Velcro strip. Attached Velcro and valance to track and wall connections – valance to be applied to both sides of track.

2.4 CURTAIN FABRICATION

A. Fabricate curtains as follows:

1. Width: Equal to track length from which curtain is hung plus 10 percent added fullness, but not less than 15 inches added fullness.
2. Length: Equal to floor-to-ceiling height, minus depth of track and carrier at top, and minus clearance above the finished floor as follows:
3. Lock stitch for durability and no unravel.
4. Seam ends are back-stitched to improve strength. All seams to be pucker free and shall lay flat. Critical seams are doubled-stitched and back-stitched to improve overall strength. All edges are French seamed in which the raw ends of the fabric are tucked in-creating a clean, polished, professional finish.
5. Velcro brand 1 inch black hook and loop fasteners is standard for panel and wall connections.
6. Applicable compliance labels and danger signs must be sewn into each curtain panel.
7. Provide 10% additional width for fullness.
8. Primary thread used is to be 21 pound test #138 polyester.
9. Weighted Hem- weights are sewn into the bottom hem to help with a light tight seal to the floor.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates and conditions, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.
- C. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 INSTALLATION

- A. General: Install tracks level and plumb, according to manufacturer's written instructions.
- B. Secure all surface mounting system to structure, blocking to ceiling.
- C. Surface-Track Mounting: Fasten tracks to ceilings at intervals recommended by manufacturer. Fasten tracks to structure at each splice and tangent point of each corner. Center fasteners in track to ensure unencumbered carrier operation. Attach track to ceiling as follows:

1. Mechanically fasten directly to finish ceiling with toggle bolts.
 2. Mechanically fasten to furring through suspended ceiling with screw and tube spacer.
- D. Track Accessories: Install splices, end caps, connectors, end stops, coupling and joining sleeves, and other accessories as required for a secure and operational installation.
- E. Curtain Carriers: Provide curtain carriers adequate for 6-inch spacing along full length of curtain plus an additional carrier.
- F. Curtains: Hang curtains on each curtain track. Secure with curtain tieback.

END OF SECTION 10 21 23

SECTION 10 26 00 - WALL AND DOOR PROTECTION

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Corner guards.
 - 2. Impact-resistant wall coverings.
 - 3. Decorative wall panels.

1.3 SUBMITTALS, GENERAL

- A. General: Submit all action submittals and informational submittals required by this Section concurrently.

1.4 ACTION SUBMITTALS

- A. Product Data: Include construction details, material descriptions, impact strength, fire-test-response characteristics, dimensions of individual components and profiles, and finishes for each impact-resistant wall protection unit.
- B. Shop Drawings: For each impact-resistant wall protection unit showing locations and extent. Include sections, details, and attachments to other work.
- C. Samples for Verification and Initial Color Selection: For each type of impact-resistant wall protection unit indicated.
 - 1. Corner Guards: 12 inches long. Include examples of joinery, corners, top caps, and field splices.
 - 2. Impact-Resistant Wall Covering: 6 by 6 inches square.
- D. Warranty: Sample of special warranty.

1.5 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For qualified Installer.
- B. Material Certificates: For each impact-resistant plastic material, from manufacturer.

1.6 CLOSEOUT SUBMITTALS

- A. Maintenance Data: For each impact-resistant wall protection unit to include in maintenance manuals.
 - 1. Include recommended methods and frequency of maintenance for maintaining optimum condition of plastic covers under anticipated traffic and use conditions. Include precautions against using cleaning materials and methods that may be detrimental to plastic finishes and performance.
- B. Warranty: Executed special warranty.

1.7 MAINTENANCE MATERIAL SUBMITTALS

- A. Furnish extra materials that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.
 - 1. Wall-Guard Covers: Full-size plastic covers of maximum length equal to 5 percent of each type, color, and texture of units installed, but no fewer than two, 10-foot-long units.
 - 2. Corner-Guard Covers: Full-size plastic covers of maximum length equal to 5 percent of each type, color, and texture of units installed, but no fewer than two, 5-foot-long units.
- B. Include mounting and accessory components. Replacement materials shall be from same production run as installed units.

1.8 QUALITY ASSURANCE

- A. Installer Qualifications: An employer of workers trained and approved by manufacturer.
- B. Source Limitations: Obtain impact-resistant wall protection units from single source from single manufacturer.
- C. Surface-Burning Characteristics: Provide impact-resistant, plastic wall protection units with surface-burning characteristics as determined by testing identical products per ASTM E 84, NFPA 255, or UL 723 by UL or another qualified testing agency.
- D. Regulatory Requirements: Comply with applicable provisions in the U.S. Architectural & Transportation Barriers Compliance Board's ADA-ABA Accessibility Guidelines, ICC/ANSI A117.1, and building code in effect for Project.
- E. Preinstallation Conference: Conduct conference at Project site.
- F. Mockups: Build mockups of impact-resistant wall panels to verify selections made under Sample submittals and to demonstrate aesthetic effects and set quality standards for materials, fabrication, and installation.
 - 1. Build mockup of typical wall area as directed by Architect. Include intersection of wall and ceiling, corners, and perimeters.

2. Approval of mockups does not constitute approval of deviations from the Contract Documents contained in mockups unless Architect specifically approves such deviations in writing.

1.9 DELIVERY, STORAGE, AND HANDLING

- A. Store impact-resistant wall protection units in original undamaged packages and containers inside well-ventilated area protected from weather, moisture, soiling, extreme temperatures, and humidity.
 1. Maintain room temperature within storage area at not less than 70 deg F during the period plastic materials are stored.
 2. Keep plastic sheet material out of direct sunlight.
 3. Store plastic wall protection components for a minimum of 72 hours, or until plastic material attains a minimum room temperature of 70 deg F.
 - a. Store corner-guard covers in a vertical position.
 - b. Store wall-guard covers in a horizontal position.

1.10 PROJECT CONDITIONS

- A. Environmental Limitations: Do not deliver or install impact-resistant wall protection units until building is enclosed and weatherproof, wet work is complete and dry, and HVAC system is operating and maintaining temperature at 70 deg F for not less than 72 hours before beginning installation and for the remainder of the construction period.

1.11 WARRANTY

- A. Special Warranty: Manufacturer's standard form in which manufacturer agrees to repair or replace components of impact-resistant wall protection units that fail in materials or workmanship within specified warranty period.
 1. Failures include, but are not limited to, the following:
 - a. Structural failures.
 - b. Deterioration of plastic and other materials beyond normal use.
 2. Warranty Period: Five years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Material: Engineered PETG, Class 1, High Impact, rigid sheet thickness nominal .040" (1.02mm) thickness as indicated.

1. Impact Resistance: Minimum 25.4 ft-lbf/in. of notch when tested according to ASTM D 256, Test Method A.
 2. Chemical and Stain Resistance: Tested according to ASTM D 543 or ASTM D 1308.
 3. Self-extinguishing when tested according to ASTM D 635.
 4. Flame-Spread Index: 25 or less.
 5. Smoke-Developed Index: 450 or less.
- B. Aluminum Extrusions: Alloy and temper recommended by manufacturer for type of use and finish indicated, but with not less than strength and durability properties specified in ASTM B 221 for Alloy 6063-T5.
- C. Stainless-Steel Sheet: ASTM A 240/A 240M.
- D. Particleboard: ANSI A208.1, Grade M-2, made with binder containing no urea formaldehyde.
- E. Fasteners: Aluminum, nonmagnetic stainless-steel, or other noncorrosive metal screws, bolts, and other fasteners compatible with items being fastened. Use security-type fasteners where exposed to view.
- F. Adhesive: Mildew-resistant, non-staining, as recommended by impact-resistant plastic wall protection manufacturer.
1. VOC content of [70] g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).

2.2 CORNER GUARDS

- A. Flush-Mounted, Resilient, Plastic Corner Guards: Assembly consisting of snap-on plastic cover that is flush with adjacent wall surface, installed over continuous retainer; including mounting hardware; fabricated with 90-degree turn to match wall condition; full wall height.
1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Construction Specialties, Inc.; Acrovyn Model FS-20.
 - b. Korogard Wall Protection Systems; a division of RJF International Corporation; R400 Series Corner Guard.
 - c. Pawling Corporation; Pro-Tek CG-7.
 2. Cover: Extruded rigid plastic, minimum 0.078-inch wall thickness; as follows:
 - a. Profile: Nominal 3-inch-long leg and 1/4-inch corner radius.
 - b. Color and Texture: As selected by Architect from manufacturer's full range.
 3. Retainer: Minimum 0.060-inch-thick, one-piece, extruded aluminum.
 4. Aluminum Cove Base: Nominal 4 inches high.

2.3 DECORATIVE WALL PANELS

A. Decorative Wall Panels: FRP tile grooved panels.

1. Basis of design product: Subject to compliance with requirements, provide, "Symmetric Smart Seam FRP Wall Panels by Marlite" or by the following:
 - a. Or approved equal.
2. Size: 48 by 48 inches, depending on score pattern/layout.
3. Sheet Thickness: 3/32 inch.
4. Color and Texture: As selected by Architect from manufacturer's full range of wilsonart, Pionite and Formica colors, patterns, woodgrains and textures and full range of Sherwin Williams colors including all Sherwin Williams color.
5. Height: As indicated on drawings and/or elevations.
6. Trim and Joint Moldings: Extruded PVC that matches sheet wall covering color; including outside corners, inside corners, wainscot trim, and joint molding.
7. Mounting: Adhesive; strippable.

B. Prelaminated, Impact-Resistant Wall Panels: Rigid wall panels consisting of impact-resistant plastic sheet wall covering material factory laminated to high-impact-resistant core, with moisture-resistant vapor barrier factory laminated to reverse side of panel for stability.

2.4 FABRICATION

- A. Fabricate impact-resistant wall protection units to comply with requirements indicated for design, dimensions, and member sizes, including thicknesses of components.
- B. Assemble components in factory to greatest extent possible to minimize field assembly. Disassemble only as necessary for shipping and handling.
- C. Fabricate components with tight seams and joints with exposed edges rolled. Provide surfaces free of wrinkles, chips, dents, uneven coloration, and other imperfections. Fabricate members and fittings to produce flush, smooth, and rigid hairline joints.

2.5 METAL FINISHES

- A. Comply with NAAMM's "Metal Finishes Manual for Architectural and Metal Products" for recommendations for applying and designating finishes.
 1. Remove tool and die marks and stretch lines, or blend into finish.
 2. Grind and polish surfaces to produce uniform finish, free of cross scratches.
 3. Run grain of directional finishes with long dimension of each piece.
 4. When polishing is completed, passivate and rinse surfaces. Remove embedded foreign matter and leave surfaces chemically clean.

- B. Protect finishes on exposed surfaces from damage by applying a strippable, temporary protective covering before shipping.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates and wall areas, with Installer present, for compliance with requirements for installation tolerances, fire rating, and other conditions affecting performance of work.
- B. Examine walls to which impact-resistant wall protection will be attached for blocking, grounds, and other solid backing that have been installed in the locations required for secure attachment of support fasteners.
 - 1. For impact-resistant wall protection units attached with adhesive, verify compatibility with and suitability of substrates, including compatibility with existing finishes or primers.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.
- D. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 PREPARATION

- A. Complete finishing operations, including painting, before installing impact-resistant wall protection system components.
- B. Before installation, clean substrate to remove dust, debris, and loose particles.

3.3 INSTALLATION

- A. General: Install impact-resistant wall protection units level, plumb, and true to line without distortions. Do not use materials with chips, cracks, voids, stains, or other defects that might be visible in the finished Work.
 - 1. Install impact-resistant wall protection units in locations and at mounting heights indicated on Drawings.
 - 2. Provide splices, mounting hardware, anchors, and other accessories required for a complete installation.
 - a. Provide anchoring devices to withstand imposed loads.
 - b. Where splices occur in horizontal runs of more than 20 feet, splice aluminum retainers and plastic covers at different locations along the run, but no closer than 12 inches.
 - c. Adjust end and top caps as required to ensure tight seams.

- B. Impact-Resistant Wall Covering: Install top and edge moldings, corners, and divider bars as required for a complete installation.

3.4 CLEANING

- A. Immediately after completion of installation, clean plastic covers and accessories using a standard, ammonia-based, household cleaning agent.
- B. Remove excess adhesive using methods and materials recommended in writing by manufacturer.

END OF SECTION 10 26 00

SECTION 10 28 00 - TOILET AND SHOWER ACCESSORIES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Toilet accessories.
 - 2. Shower accessories.
 - 3. Custodial accessories.

1.3 COORDINATION

- A. Coordinate accessory locations with other work to prevent interference with clearances required for access by people with disabilities, and for proper installation, adjustment, operation, cleaning, and servicing of accessories.
- B. Deliver inserts and anchoring devices set into concrete or masonry as required to prevent delaying the Work.

1.4 SUBMITTALS, GENERAL

- A. General: Submit all action submittals required by this Section concurrently.

1.5 ACTION SUBMITTALS

- A. Product Data: For each type of product.
 - 1. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes.
 - 2. Include anchoring and mounting requirements, including requirements for cutouts in other work and substrate preparation.
 - 3. Include electrical characteristics.
- B. As-Specified Data: If the product to be incorporated into Project is as specified by manufacturer name and product designation in Part 2 of this Specification Section, submit the “**As-Specified Verification Form**” (attached to Division 01 Section “Submittal Procedures”) for each item listed below, otherwise submit full Product Data for the following:
 - 1. Toilet tissue dispenser.

2. Paper towel dispenser (folded).
3. Soap dispenser, vertical type.
4. Sanitary-napkin and tampon dispenser.
5. Sanitary-napkin disposer.
6. Grab bar.
7. Mirror, glass.
8. Shelf, metal, heavy-duty.
9. Mop and broom holder.

C. Product Schedule: Indicating types, quantities, sizes, and installation locations by room of each accessory required.

1. Identify locations using room designations indicated.
2. Identify accessories using designations indicated.

D. Sample Warranty: For manufacturer's special warranty.

1.6 CLOSEOUT SUBMITTALS

- A. Maintenance Data: For accessories to include in maintenance manuals.
- B. Warranty: Executed special warranty.

1.7 WARRANTY

- A. Manufacturer's Special Warranty for Mirrors: Manufacturer agrees to repair or replace mirrors that fail in materials or workmanship within specified warranty period.
 1. Failures include, but are not limited to, visible silver spoilage defects.
 2. Warranty Period: 15 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 OWNER-FURNISHED MATERIALS

- A. Owner-Furnished Materials for Installation by Contractor:
 1. Toilet tissue dispenser.
 2. Soap dispenser.
 3. Paper towel dispenser (folded).
 4. Sanitary-napkin and tampon dispenser.
 5. Sanitary-napkin disposer.

2.2 PERFORMANCE REQUIREMENTS

- A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

2.3 TOILET ACCESSORIES

A. Source Limitations: Obtain toilet accessories from single source from single manufacturer.

B. Toilet Tissue Dispenser TTD:

1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. American Specialties, Inc.; 0030.
 - b. Bobrick Washroom Equipment, Inc.; B-2888.
 - c. Bradley Corporation; 5402.
2. Description: Roll-in-reserve dispenser with hinged front secured with tumbler lockset.
3. Mounting: Surface mounted.
4. Operation: Noncontrol delivery with theft-resistant spindle.
5. Capacity: Designed for 5-inch-diameter (or greater) tissue rolls.
6. Material and Finish: Stainless steel, ASTM A480/A480M No. 4 finish (satin).

C. Paper Towel Dispenser (Folded) PTD:

1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. American Specialties, Inc.; 0210.
 - b. Bobrick Washroom Equipment, Inc.; B-262.
 - c. Bradley Corporation; 250-15.
2. Mounting: Surface mounted.
3. Minimum Capacity: 400 C-fold or 525 multifold towels.
4. Material and Finish: Stainless steel, ASTM A480/A480M No. 4 finish (satin).
5. Lockset: Tumbler type.
6. Refill Indicator: Pierced slots at sides or front.

D. Soap Dispenser SD:

1. Vertical Type:
 - a. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - 1) American Specialties, Inc.; 0347.
 - 2) Bobrick Washroom Equipment, Inc.; B-2111.
 - 3) Bradley Corporation; 6562.

- b. Description: Designed for dispensing soap in liquid or lotion form.
- c. Mounting: Vertically oriented, surface mounted.
- d. Capacity: 40 oz.
- e. Materials: Stainless steel, ASTM A480/A480M No. 4 finish (satin), with corrosion-resistant valve.
- f. Lockset: Tumbler type.
- g. Refill Indicator: Window type.

E. Grab Bar GB:

- 1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. American Specialties, Inc.; 3800-P Series.
 - b. Bobrick Washroom Equipment, Inc.; B-6806.99 Series.
 - c. Bradley Corporation; 812-2 Series.
- 2. Mounting: Flanges with concealed fasteners.
- 3. Material: Stainless steel, 0.05 inch thick.
 - a. Finish: Smooth, ASTM A480/A480M No. 4 finish (satin) on ends and slip-resistant texture in grip area.
- 4. Outside Diameter: 1-1/2 inches.
- 5. Configuration and Length: As indicated on Drawings.

F. Sanitary-Napkin and Tampon Dispenser SNTD:

- 1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. American Specialties, Inc.; 0864-F.
 - b. Bobrick Washroom Equipment, Inc.; B-2706 C.
 - c. Bradley Corporation; 4017-11-40.
- 2. Mounting: Surface mounted.
- 3. Capacity: Minimum 20 napkins and 27 tampons.
- 4. Operation: No coin (free).
- 5. Exposed Material and Finish: Stainless steel, ASTM A480/A480M No. 4 finish (satin).
- 6. Lockset: Tumbler type with separate lock and key for coin box.

G. Sanitary-Napkin Disposer SND:

1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. American Specialties, Inc.; 0473-1A.
 - b. Bobrick Washroom Equipment, Inc.; B-254.
 - c. Bradley Corporation; 4722-15.
2. Mounting: Surface mounted.
3. Door or Cover: Self-closing, disposal-opening cover and hinged face panel with tumbler lockset.
4. Receptacle: Removable.
5. Material and Finish: Stainless steel, ASTM A480/A480M No. 4 finish (satin).

H. Mirror, Glass MG:

1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. American Specialties, Inc.; 0620-B.
 - b. Bobrick Washroom Equipment, Inc.; B-1658.
 - c. Bradley Corporation; 781-2.
2. Frame: Stainless-steel channel.
 - a. Corners: Manufacturer's standard.
3. Hangers: Produce rigid, tamper- and theft-resistant installation, using method indicated below.
 - a. Wall bracket of steel, equipped with concealed locking devices requiring a special tool to remove.
4. Mirror Glazing: Tempered clear glass.
5. Size: As indicated on Drawings.

2.4 CUSTODIAL ACCESSORIES

A. Shelf, Metal, Heavy-Duty SMHD:

1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. American Specialties, Inc.; 0692-5 24.
 - b. Bobrick Washroom Equipment, Inc.; B-295 x 24.
 - c. Bradley Corporation; 755- 24.

2. Description: With exposed edges turned down not less than 1/2 inch and supported by two triangular brackets welded to shelf underside.
3. Size: 24 inches long by 5 inches deep.
4. Material and Finish: Not less than nominal 0.05-inch-thick stainless steel, ASTM A480/A480M No. 4 finish (satin).

B. Mop and Broom Holder MBH:

1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. American Specialties, Inc.; 1315-4.
 - b. Bobrick Washroom Equipment, Inc.; B-224 x 36.
 - c. Bradley Corporation; 9984.
2. Description: Unit with shelf, hooks, holders, and rod suspended beneath shelf.
3. Length: 36 inches.
4. Hooks: Three.
5. Mop/Broom Holders: Four, spring-loaded, rubber hat, cam type.
6. Material and Finish: Stainless steel, ASTM A480/A480M No. 4 finish (satin).
 - a. Shelf: Not less than nominal 0.05-inch-thick stainless steel.
 - b. Rod: Approximately 1/4-inch-diameter stainless steel.

2.5 MATERIALS

- A. Fasteners: Screws, bolts, and other devices of same material as accessory unit and tamper-and-theft resistant where exposed, and of galvanized steel where concealed.
- B. Tempered Clear Glass Mirrors: Mirror Glazing Quality, for blemish requirements; and comply with ASTM C 1048 for Kind FT, Condition A, tempered float glass before silver coating is applied; nominal 6.0 mm thick.

2.6 FABRICATION

- A. General: Fabricate units with tight seams and joints, and exposed edges rolled. Hang doors and access panels with full-length, continuous hinges. Equip units for concealed anchorage and with corrosion-resistant backing plates.
- B. Keys: Provide universal keys for internal access to accessories for servicing and resupplying. Provide minimum of six keys to Owner.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates and conditions, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of accessories.
 - 1. Proceed with installation only after unsatisfactory conditions have been corrected.
- B. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 INSTALLATION

- A. Install accessories according to manufacturers' written instructions, using fasteners appropriate to substrate indicated and recommended by unit manufacturer. Install units level, plumb, and firmly anchored in locations and at heights indicated.
- B. Grab Bars: Install to withstand a downward load of at least 250 lbf, when tested according to ASTM F 446.

3.3 ADJUSTING AND CLEANING

- A. Adjust accessories for unencumbered, smooth operation. Replace damaged or defective items.
- B. Remove temporary labels and protective coatings.
- C. Clean and polish exposed surfaces according to manufacturer's written instructions.

END OF SECTION 10 28 00

SECTION 10 44 13 - FIRE PROTECTION CABINETS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Fire-protection cabinets for the following:
 - a. Portable fire extinguisher.

1.3 SUBMITTALS, GENERAL

- A. General: Submit all action submittals required by this Section and by Division 10 Section "Fire Extinguishers" concurrently.

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of product. Show door hardware, cabinet type, trim style, and panel style. Include roughing-in dimensions and details showing mounting method and relationships of box and trim to surrounding construction. Include accessories.
 - 1. Non-rated fire protection cabinets.
 - 2. Rated fire protection cabinets.
- B. Product Schedule: For fire-protection cabinets. Indicate whether recessed or semi-recessed. Coordinate final fire-protection cabinet schedule with fire-extinguisher schedule to ensure proper fit and function.

1.5 CLOSEOUT SUBMITTALS

- A. Maintenance Data: For fire-protection cabinets to include in maintenance manuals.

1.6 COORDINATION

- A. Coordinate size of fire-protection cabinets to ensure that type and capacity of fire extinguishers indicated are accommodated.
- B. Coordinate sizes and locations of fire-protection cabinets with wall depths.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Source Limitations: Obtain fire-protection cabinets and fire extinguishers from single source from single manufacturer.

2.2 PERFORMANCE REQUIREMENTS

- A. Fire-Rated Fire-Protection Cabinets: Listed and labeled to comply with requirements in ASTM E814 for fire-resistance rating of walls where they are installed.

2.3 NON-RATED FIRE-PROTECTION CABINET

- A. Cabinet Type: Suitable for fire extinguisher.
- B. Cabinet Construction: Nonrated.
- C. Cabinet Tub Material: Cold-rolled steel sheet.
- D. Recessed Cabinet:
 - 1. Exposed Flat Trim: One-piece combination trim and perimeter door frame overlapping surrounding wall surface, with exposed trim face and wall return at outer edge (backbend).
 - 2. Products: Subject to compliance with requirements, available products that may be incorporated in the Work include, but are not limited to:
 - a. Croker, a division of Fire-End & Croker Corporation; 1620-SS.
 - b. JL Industries, Inc., a division of the Activar Construction Products Group, Inc.;] Cosmopolitan 2035.
 - c. Larsen's Manufacturing Company; Architectural Series SS2712-R.
- E. Semi-recessed Cabinet: One-piece combination trim and perimeter door frame overlapping surrounding wall surface, with exposed trim face and wall return at outer edge (backbend).
 - 1. Rolled-Edge Trim: 2-1/2-inch backbend depth.
 - 2. Products: Subject to compliance with requirements, available products that may be incorporated in the Work include, but are not limited to:
 - a. Croker, a division of Fire-End & Croker Corporation; 1622-SS.
 - b. JL Industries, Inc., a division of the Activar Construction Products Group, Inc.; Cosmopolitan 2037.
 - c. Larsen's Manufacturing Company; Architectural Series SS2712-RL.
- F. Door and Frame Material: Stainless steel sheet.

- G. Door Style: Fully glazed panel with frame.
- H. Door Glazing: Tempered float glass (clear).
- I. Door Hardware: Manufacturer's standard door-operating hardware of proper type for cabinet type, trim style, and door material and style indicated.
 - 1. Provide projecting door pull and friction latch.
 - 2. Provide continuous hinge, of same material and finish as trim, permitting door to open 180 degrees.
- J. Accessories:
 - 1. Identification: Lettering complying with authorities having jurisdiction for letter style, size, spacing, and location. Locate as directed by Architect.
 - a. Identify fire extinguisher in fire-protection cabinet with the words "FIRE EXTINGUISHER." Lettering color and orientation as directed by Architect.
 - 2. Alarm: Alarm that actuates when fire extinguisher is removed from cabinet and that is powered by batteries.
 - a. Basis-of-Design Product: Subject to compliance with requirements, provide Safety Technology International, Inc.; Mini Theft Stopper, Model STI-6255, or comparable product.
- K. Materials:
 - 1. Cold-Rolled Steel: ASTM A1008/A1008M, Commercial Steel (CS), Type B.
 - a. Finish: Baked enamel, TGIC polyester powder coat, HAA polyester powder coat, epoxy powder coat, or polyester/epoxy hybrid powder coat, complying with AAMA 2603.
 - b. Prepare, pretreat, and apply coating to exposed metal surfaces to comply with coating and resin manufacturers' written instructions.
 - c. Color:
 - 1) Exterior: White.
 - 2) Interior: White.
 - 2. Aluminum: ASTM B221 for extruded shapes and aluminum sheet, with strength and durability characteristics of not less than Alloy 6063-T5 for aluminum sheet.
 - a. Finish: Clear anodic.
 - 3. Tempered Float Glass: ASTM C1048, Kind FT, Condition A, Type I, Quality q3, 3 mm thick, Class 1 (clear).
- L. Placement: Provide at all locations, except as otherwise indicated.

2.4 RATED FIRE-PROTECTION CABINET

- A. Cabinet Type: Suitable for fire extinguisher.
- B. Cabinet Construction: For one and two-hour rated walls.
- C. Cabinet Tub Material: Cold-rolled steel sheet.
- D. Recessed Cabinet:
 - 1. Exposed Flat Trim: One-piece combination trim and perimeter door frame overlapping surrounding wall surface, with exposed trim face and wall return at outer edge (backbend).
 - 2. Products: Subject to compliance with requirements, available products that may be incorporated in the Work include, but are not limited to:
 - a. Croker, a division of Fire-End & Croker Corporation; FR-1620-AL.
 - b. JL Industries, Inc., a division of the Activar Construction Products Group, Inc.; Academy 2025 Fire-FX2.
 - c. Larsen's Manufacturing Company; Architectural Series Flame-Shield FS AL2712-R.
- E. Semi-recessed Cabinet: One-piece combination trim and perimeter door frame overlapping surrounding wall surface, with exposed trim face and wall return at outer edge (backbend).
 - 1. Rolled-Edge Trim: 2-1/2-inch backbend depth.
 - 2. Products: Subject to compliance with requirements, available products that may be incorporated in the Work include, but are not limited to:
 - a. Croker, a division of Fire-End & Croker Corporation; FR-1622-AL.
 - b. JL Industries, Inc., a division of the Activar Construction Products Group, Inc.; Academy 2027 Fire FX-2.
 - c. Larsen's Manufacturing Company; Architectural Series Flame-Shield FS AL2712-RL
- F. Door and Frame Material: Stainless steel sheet.
- G. Door Style: Fully glazed panel with frame.
- H. Door Glazing: Tempered float glass (clear).
- I. Door Hardware: Manufacturer's standard door-operating hardware of proper type for cabinet type, trim style, and door material and style indicated.
 - 1. Provide projecting door pull and friction latch.
 - 2. Provide continuous hinge, of same material and finish as trim, permitting door to open 180 degrees.

J. Accessories:

1. Identification: Lettering complying with authorities having jurisdiction for letter style, size, spacing, and location. Locate as directed by Architect.
 - a. Identify fire extinguisher in fire-protection cabinet with the words "FIRE EXTINGUISHER." Lettering color and orientation as directed by Architect.
2. Alarm: Alarm that actuates when fire extinguisher is removed from cabinet and that is powered by batteries.
 - a. Basis-of-Design Product: Subject to compliance with requirements, provide Safety Technology International, Inc.; Mini Theft Stopper, Model STI-6255, or comparable product.

K. Materials:

1. Stainless Steel: ASTM A240/A240M or ASTM A666, Type 304.
 - a. Finish: ASTM A480/A480M No. 4 directional satin finish.
2. Tempered Float Glass: ASTM C1048, Kind FT, Condition A, Type I, Quality q3, 3 mm thick, Class 1 (clear).

L. Placement: Provide at all locations, except as otherwise indicated.

2.5 FABRICATION

- A. Fire-Protection Cabinets: Provide manufacturer's standard box (tub) with trim, frame, door, and hardware to suit cabinet type, trim style, and door style indicated.
1. Weld joints and grind smooth.
 2. Miter corners and grind smooth.
 3. Provide factory-drilled mounting holes.
- B. Cabinet Doors: Fabricate doors according to manufacturer's standards, from materials indicated and coordinated with cabinet types and trim styles.
1. Fabricate door frames with tubular stiles and rails and hollow-metal design, minimum 1/2 inch thick.
 2. Miter and weld perimeter door frames and grind smooth.
- C. Cabinet Trim: Fabricate cabinet trim in one piece with corners mitered, welded, and ground smooth.

2.6 GENERAL FINISH REQUIREMENTS

- A. Comply with NAAMM's AMP 500, "Metal Finishes Manual for Architectural and Metal Products," for recommendations for applying and designating finishes.

- B. Protect mechanical finishes on exposed surfaces of fire-protection cabinets from damage by applying a strippable, temporary protective covering before shipping.
- C. Finish fire-protection cabinets after assembly.
- D. Appearance of Finished Work: Noticeable variations in same piece are unacceptable.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine walls and partitions for suitable framing depth and blocking where recessed and semi-recessed cabinets will be installed.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.
- C. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 PREPARATION

- A. Prepare recesses for recessed and semi-recessed fire-protection cabinets as required by type and size of cabinet and trim style.

3.3 INSTALLATION

- A. General: Install fire-protection cabinets in locations and at mounting heights indicated or, if not indicated, at height indicated below:
 - 1. Fire-Protection Cabinets: 40 inches above finished floor to top of cabinet rough opening aligned with masonry coursing.
- B. Fire-Protection Cabinets: Fasten cabinets to structure, square and plumb.
 - 1. Fasten alarm to inside back surface of fire protection cabinets, located to allow fire extinguisher to rest securely on bottom of cabinet.
 - 2. Unless otherwise indicated, provide recessed fire-protection cabinets. If wall thickness is inadequate for recessed cabinets, provide semirecessed fire-protection cabinets.

3.4 ADJUSTING AND CLEANING

- A. Remove temporary protective coverings and strippable films, if any, as fire-protection cabinets are installed unless otherwise indicated in manufacturer's written installation instructions.
- B. Adjust fire-protection cabinet doors to operate easily without binding.
- C. On completion of fire-protection cabinet installation, clean interior and exterior surfaces as recommended by manufacturer.
- D. Touch up marred finishes or replace fire-protection cabinets that cannot be restored to factory-finished appearance. Use only materials and procedures recommended or furnished by fire-protection cabinet and mounting bracket manufacturers.

- E. Replace fire-protection cabinets that have been damaged or have deteriorated beyond successful correction by finish touchup or similar minor corrective procedures.

END OF SECTION 10 44 13

SECTION 10 44 16 - FIRE EXTINGUISHERS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes portable, hand-carried fire extinguishers and mounting brackets for fire extinguishers.

1.3 SUBMITTALS, GENERAL

- A. General: Submit all action submittals required by this Section and by Division 10 Section "Fire Protection Cabinets" concurrently.

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of product. Include rating and classification, material descriptions, dimensions of individual components and profiles, and finishes for fire extinguisher and mounting brackets.
 - 1. Mounting brackets.
- B. As-Specified Data: If the product to be incorporated into Project is as specified by manufacturer name and product designation in Part 2 of this Specification Section, submit the "**As-Specified Verification Form**" (attached to Division 01 Section "Submittal Procedures") for each item listed below, otherwise submit full Product Data for the following:
 - 1. Wet-chemical type (K).
 - 2. Regular dry-chemical type in steel container (BC).
 - 3. Multipurpose dry-chemical type in steel container (ABC).
 - 4. Carbon dioxide type (CO₂).
- C. Product Schedule: For fire extinguishers. Coordinate final fire-extinguisher schedule with fire-protection cabinet schedule to ensure proper fit and function.
- D. Warranty: Sample of special warranty.

1.5 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Data: For fire extinguishers to include in maintenance manuals.
- B. Warranty: Executed special warranty.

1.6 COORDINATION

- A. Coordinate type and capacity of fire extinguishers with fire-protection cabinets to ensure fit and function.

1.7 WARRANTY

- A. Special Warranty: Manufacturer's standard form in which manufacturer agrees to correct or replace fire extinguishers that fail in materials or workmanship within specified warranty period.
 - 1. Failures include, but are not limited to, the following:
 - a. Failure of hydrostatic test according to NFPA 10 when testing interval required by NFPA 10 is within the warranty period.
 - b. Faulty operation of valves or release levers.
 - 2. Warranty Period: Minimum of five years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. NFPA Compliance: Fabricate and label fire extinguishers to comply with NFPA 10, "Portable Fire Extinguishers."
- B. Fire Extinguishers: Listed and labeled for type, rating, and classification by an independent testing agency acceptable to authorities having jurisdiction.

2.2 PORTABLE, HAND-CARRIED FIRE EXTINGUISHERS

- A. Fire Extinguishers: Type, size, and capacity for each fire-protection cabinet and mounting bracket indicated.
 - 1. Source Limitations: Obtain fire extinguishers and fire-protection cabinets from single source from single manufacturer.
 - 2. Valves: Manufacturer's standard.
 - 3. Handles and Levers: Manufacturer's standard.
 - 4. Instruction Labels: Include pictorial marking system complying with NFPA 10, Appendix B.
- B. Wet-Chemical Type (K): UL-rated 2-A: K, 1.6-gal. nominal capacity, with potassium acetate/citrate/carbonate-based chemical in stainless-steel container; with pressure-indicating gage.
 - 1. Products: Subject to compliance with requirements, available products that may be incorporated in the Work include, but are not limited to:
 - a. Ansul by Johnson Controls Company; K-Guard K01-3.

- b. Croker, a division of Fire-End & Croker Corporation; 4834.
 - c. JL Industries, Inc., a division of the Activar Construction Products Group, Inc.; Saturn 15.
 - d. Larsen's Manufacturing Company; WC-6L.
- 2. Placement: On mounting bracket.
 - a. Provide in Kitchen, in locations indicated, and in compliance with requirements of authorities having jurisdiction.
- C. Regular Dry-Chemical Type in Steel Container (BC): UL-rated 60-B:C, 10-lb nominal capacity, with sodium bicarbonate-based dry chemical in enameled-steel container.
 - 1. Products: Subject to compliance with requirements, available products that may be incorporated in the Work include, but are not limited to:
 - a. Croker, a division of Fire-End & Croker Corporation; 4310.
 - b. JL Industries, Inc., a division of the Activar Construction Products Group, Inc.; Galaxy 10.
 - c. Larsen's Manufacturing Company; DC10.
 - 2. Placement: On mounting bracket.
 - a. Provide in Kitchen, in locations indicated, and in compliance with requirements of authorities having jurisdiction.
- D. Multipurpose Dry-Chemical Type in Steel Container (ABC): UL-rated 4-A:80-B:C, 10-lb nominal capacity, with monoammonium phosphate-based dry chemical in enameled-steel container.
 - 1. Products: Subject to compliance with requirements, available products that may be incorporated in the Work include, but are not limited to:
 - a. Croker, a division of Fire-End & Croker Corporation; 4010.
 - b. JL Industries, Inc., a division of the Activar Construction Products Group, Inc.; Cosmic 10E.
 - c. Larsen's Manufacturing Company; MP10.
 - 2. Placement: In fire extinguisher cabinet.
 - a. Provide in locations indicated and in compliance with requirements of authorities having jurisdiction.
- E. Carbon Dioxide Type (CO₂): UL-rated 10-B:C, 15-lb nominal capacity, with carbon dioxide in enameled-aluminum container.
 - 1. Products: Subject to compliance with requirements, available products that may be incorporated in the Work include, but are not limited to:
 - a. Croker, a division of Fire-End & Croker Corporation; 4415.

- b. JL Industries, Inc., a division of the Activar Construction Products Group, Inc.; Sentinel 15.
 - c. Larsen's Manufacturing Company; CD15.
- 2. Placement: On mounting bracket.
 - a. Provide in each Electrical Room, in locations indicated, and in compliance with requirements of authorities having jurisdiction.

2.3 MOUNTING BRACKETS

- A. Mounting Brackets: Manufacturer's standard steel, designed to secure fire extinguisher to wall or structure, of sizes required for types and capacities of fire extinguishers indicated, with plated or baked-enamel finish.

2.4 IDENTIFICATION

- A. Identification: Projecting sign complying with authorities having jurisdiction for size and location. Locate as indicated by Architect.
 - 1. Identify fire extinguishers and fire extinguisher cabinets with graphic fire extinguisher image applied to projecting mounting surface.
 - a. Basis-of-Design Product: Subject to compliance with requirements, provide Compliance Signs, Inc.; Red 3D Triangle-Mount (Graphic Only) Fire Extinguisher Sign NHE-13844Tri, or comparable product.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine fire extinguishers for proper charging and tagging.
 - 1. Remove and replace damaged, defective, or undercharged fire extinguishers.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.
- C. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 INSTALLATION

- A. General: Install fire extinguishers and mounting brackets in locations indicated and in compliance with requirements of authorities having jurisdiction.
 - 1. Mounting Brackets: Top of fire extinguisher to be at 40 inches above finished floor.

- B. Mounting Brackets: Fasten mounting brackets to surfaces, square and plumb, at locations indicated.
- C. Identification: Fasten projecting signs on wall centered above each fire extinguisher and fire extinguisher cabinet, aligning top of sign with top of adjacent door frame, unless otherwise indicated.

END OF SECTION 10 44 16

SECTION 10 51 13 - METAL LOCKERS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Welded corridor lockers.

1.3 SUBMITTALS, GENERAL

- A. General: Submit all action submittals required by this Section concurrently.

1.4 ACTION SUBMITTALS

- A. Shop Drawings: For metal lockers.
 - 1. Include plans, elevations, sections, and attachment details.
 - 2. Show locker trim and accessories.
 - 3. Include locker identification system and numbering sequence.
- B. Samples: Manufacturer's color charts showing the full range of colors available.
- C. Product Schedule: For lockers. Use same designations indicated on Drawings.
- D. Sample Warranty: For special warranty.

1.5 CLOSEOUT SUBMITTALS

- A. Maintenance Data: For adjusting, correcting, and replacing locker doors and latching mechanisms to include in maintenance manuals.
- B. Executed Warranty: For special warranty.

1.6 DELIVERY, STORAGE, AND HANDLING

- A. Do not deliver metal lockers until spaces to receive them are clean, dry, and ready for their installation.
- B. Deliver master and control keys and combination control charts to Owner by registered mail or overnight package service.

1.7 FIELD CONDITIONS

- A. Field Measurements: Verify actual dimensions of recessed openings by field measurements before fabrication.

1.8 COORDINATION

- A. Coordinate sizes and locations of bases for metal lockers.
- B. Coordinate sizes and locations of framing, blocking, furring, reinforcements, and other related units of work specified in other Sections to ensure that metal lockers can be supported and installed as indicated.

1.9 WARRANTY

- A. Special Warranty: Manufacturer agrees to correct or replace components of metal lockers that fail in materials or workmanship, excluding finish, within specified warranty period.
 - 1. Failures include, but are not limited to, the following:
 - a. Structural failures.
 - b. Faulty operation of latches and other door hardware.
 - 2. Damage from deliberate destruction and vandalism is excluded.
 - 3. Warranty Period for Welded Metal Lockers: Lifetime.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Source Limitations: For each category of metal lockers, obtain metal lockers and accessories from single source from single locker manufacturer.
 - 1. Obtain locks from single lock manufacturer.

2.2 PERFORMANCE REQUIREMENTS

- A. Accessibility Standard: For lockers indicated to be accessible, comply with applicable provisions in the USDOJ's "2010 ADA Standards for Accessible Design", ICC A117.1, and building Code in effect for Project.

2.3 WELDED CORRIDOR LOCKERS

- A. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:

1. Multipoint Latching Type:
 - a. DeBourgh Manufacturing Company; Rebel Plus Hallway Lockers.
 - b. List Industries Inc.; Superior Classmate Corridor Unibody All-Welded Lockers Premier Series.
 - c. Lyon LLC; All-Welded Extreme Lockers.
- B. Locker Configurations and Sizes: Refer to sheets KA403, KA404, KA407
 1. Non- ADA:
 - a. Tiers: Double.
 - b. Height: Double tier, each @ 36 inches.
 - c. Width: 12 inches.
 - d. Depth: 12 inches.
 2. ADA Lockers:
 - a. Tiers: Single
 - b. Height: 72 inches
 - c. Width: 12 inches
 - d. Depth: 12
- C. Doors: One piece; fabricated from 0.075-inch (14 gage) nominal-thickness steel sheet; formed into channel shape with double bend at vertical edges and with right-angle single bend at horizontal edges.
 1. Reinforcement: Manufacturer's standard reinforcing angles, channels, or stiffeners; welded to inner face of doors.
 2. Door Style: Vented panel as follows:
 - a. Louvered Vents: No fewer than six louver openings at top and bottom each for double-tier lockers, offset from reinforcement.
- D. Body: Assembled by welding body components together. Fabricate from unperforated steel sheet with thicknesses as follows:
 1. Tops, Bottoms, and Sides: 0.060-inch (16 gage) nominal thickness.
 2. Backs: 0.048-inch (18 gage) nominal thickness.
 3. Shelves: 0.060-inch (16 gage) nominal thickness, with double bend at front and single bend at sides and back.
- E. Frames: Channel formed; fabricated from 0.060-inch (16 gage) nominal-thickness steel sheet; lapped and factory welded at corners; with top and bottom main frames factory welded into vertical main frames. Form continuous, integral, full-height door strikes on vertical main frames.
 1. Cross Frames between Tiers: Channel formed and fabricated from same material as main frames; welded to vertical main frames.

- F. Hinges: Welded to door and attached to door frame with rivets spaced every 6 inches, or closer, that are completely concealed and tamper resistant when door is closed; fabricated to swing 180 degrees.
 - 1. Continuous Hinges: Manufacturer's standard, steel, full height.
- G. Recessed Door Handle and Latch: Stainless steel cup with integral door pull, recessed so locking device does not protrude beyond door face; pry and vandal resistant.
 - 1. Multipoint Latching: Finger-lift latch control designed for use with built-in combination locks or padlocks; positive automatic latching and prelocking.
 - a. Latch Hooks: Equip doors 48 inches and higher with three latch hooks and doors less than 48 inches high with two latch hooks; fabricated from manufacturer's standard thickness, but not less than 0.120-inch (11 gage) nominal-thickness steel sheet; welded to full-height door strikes; with resilient silencer on each latch hook.
 - 1) ADA Latch Hook heights at ADA Lockers must meet 2010 ADA 308.2.1 standards
 - b. Latching Mechanism: Manufacturer's standard, rattle-free latching mechanism and moving components isolated to prevent metal-to-metal contact, and incorporating a prelocking device that allows locker door to be locked while door is open and then closed without unlocking or damaging lock or latching mechanism.
- H. Locks:
 - 1. Built-In Combination Locks
 - a. Provide ADA compliant built-in combination locks at ADA lockers
 - 1) Basis of Design: Master Lock Company LLC, 1636MKADA Locker Lock
- I. Identification Plates: Manufacturer's standard, etched, embossed, or stamped aluminum plates, with numbers and letters at least 3/8 inch high.
- J. Accessible Locker Identification: Manufacturer's standard accessibility logo decal.
- K. Hooks: Manufacturer's standard ball-pointed, aluminum or steel; zinc plated.
- L. Continuous Sloping Tops: Fabricated from manufacturer's standard thickness, but not less than 0.048-inch (18 gage) nominal-thickness steel sheet, with a pitch of approximately 20 degrees.
 - 1. Closures: Vertical-end type.
- M. Filler Panels: Fabricated from manufacturer's standard thickness, but not less than 0.048-inch (18 gage) nominal-thickness steel sheet.
- N. Boxed End Panels: Fabricated from manufacturer's standard thickness, but not less than 0.060-inch (16 gage) nominal-thickness steel sheet.

O. Materials:

1. Cold-Rolled Steel Sheet: ASTM A1008/A1008M, Commercial Steel (CS), Type B, suitable for exposed applications.

P. Finish: Powder coat.

1. Color: As selected by Architect from manufacturer's full range. Multiple colors may be selected.

2.4 LOCKS

A. Built-in Combination Locks

1. Provide ADA compliant built-in combination locks at ADA lockers
 - a. Basis of Design: Master Lock Company LLC, 1636MKADA Locker Lock

2.5 FABRICATION

- A. Fabricate metal lockers square, rigid, without warp, and with metal faces flat and free of dents or distortion. Make exposed metal edges safe to touch and free of sharp edges and burrs.
1. Form body panels, doors, shelves, and accessories from one-piece steel sheet unless otherwise indicated.
 2. Provide fasteners, filler plates, supports, clips, and closures as required for complete installation.
- B. Fabricate each metal locker with an individual door and frame; individual top, bottom, and back; and common intermediate uprights separating compartments.
- C. Equipment: Provide each locker with an identification plate and the following equipment:
1. Double-Tier Units: One double-prong ceiling hook and two single-prong wall hooks.
- D. Welded Construction: Factory preassemble metal lockers by welding all joints, seams, and connections; with no bolts, nuts, screws, or rivets used in assembly of main locker groups. Factory weld main locker groups into one-piece structures. Grind exposed welds smooth and flush.
- E. Accessible Lockers: Fabricate as follows:
1. Locate bottom shelf no lower than 15 inches above the floor.
 2. Where hooks, coat rods, or additional shelves are provided, locate no higher than 48 inches above the floor.
- F. Continuous Sloping Tops: Fabricated in lengths as long as practical, without visible fasteners at splice locations; finished to match lockers.

- G. Recess Trim: Fabricated with minimum 2-1/2-inch face width and in lengths as long as practical; finished to match lockers.
- H. Filler Panels: Fabricated in an unequal leg angle shape; finished to match lockers. Provide slip-joint filler angle formed to receive filler panel.
- I. Boxed End Panels: Fabricated with 1-inch-wide edge dimension and designed for concealing fasteners and holes at exposed ends of nonrecessed metal lockers; finished to match lockers.
 - 1. Provide one-piece panels for double-row (back-to-back) locker ends.
- J. Finished End Panels: Fabricated to conceal unused penetrations and fasteners, except for perimeter fasteners, at exposed ends of nonrecessed metal lockers; finished to match lockers.
 - 1. Provide one-piece panels for double-row (back-to-back) locker ends.

2.6 ACCESSORIES

- A. Fasteners: Zinc- or nickel-plated steel, slotless-type, exposed bolt heads; with self-locking nuts or lock washers for nuts on moving parts.
- B. Anchors: Material, type, and size required for secure anchorage to each substrate.
 - 1. Provide nonferrous-metal or hot-dip galvanized anchors and inserts for corrosion resistance.
 - 2. Provide toothed-steel or lead expansion sleeves for drilled-in-place anchors.

2.7 STEEL FINISHES

- A. Factory finish steel surfaces and accessories except stainless-steel and chrome-plated surfaces.
- B. Powder-Coat Finish: Immediately after cleaning and pretreating, electrostatically apply manufacturer's baked-polymer, thermosetting powder finish. Comply with resin manufacturer's written instructions for application and baking.
 - 1. Minimum Dry-Film Thickness: As recommended by manufacturer but not less than 2 mils.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine walls and floors or support bases, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.
- C. Beginning installation constitutes Contractor's acceptance of substrates and conditions.

3.2 INSTALLATION

- A. Install lockers level, plumb, and true; shim as required, using concealed shims.
 - 1. Anchor locker runs at ends and at intervals recommended by manufacturer, but not more than 36 inches o.c. Using concealed fasteners, install anchors through backup reinforcing plates, channels, or blocking as required to prevent metal distortion.
 - 2. Anchor single rows of metal lockers to walls near top of lockers and to floor.
 - 3. Anchor back-to-back metal lockers to floor.
- B. Welded Lockers: Connect groups together with manufacturer's standard fasteners, with no exposed fasteners on face frames.
- C. Equipment:
 - 1. Attach hooks with at least two fasteners.
 - 2. Attach door locks on doors using security-type fasteners.
 - 3. Identification Plates: Identify metal lockers with identification indicated on Drawings.
 - a. Attach plates to each locker door, near top, centered, with at least two aluminum rivets.
 - 4. Accessible Locker Identification: Apply accessibility logo decals where indicated on Drawings.
- D. Trim: Fit exposed connections of trim, fillers, and closures accurately together to form tight, hairline joints, with concealed fasteners and splice plates.
 - 1. Attach recess trim to recessed metal lockers with concealed clips.
 - 2. Attach filler panels with concealed fasteners. Locate filler panels where indicated on Drawings.
 - 3. Attach sloping-top units to metal lockers, with closures at exposed ends.
 - 4. Attach boxed end panels using concealed fasteners to conceal exposed ends of nonrecessed metal lockers.

3.3 ADJUSTING

- A. Clean, lubricate, and adjust hardware. Adjust doors and latches to operate easily without binding.

3.4 PROTECTION

- A. Protect metal lockers from damage, abuse, dust, dirt, stain, or paint. Do not permit use during construction.

- B. Touch up marred finishes, or replace metal lockers that cannot be restored to factory-finished appearance. Use only materials and procedures recommended or furnished by locker manufacturer.

END OF SECTION 10 51 13